



**DFS PORTION of FCC 47 CFR PART 15 SUBPART E  
DFS PORTION of INDUSTRY CANADA RSS-247 ISSUE 1**

**CERTIFICATION TEST REPORT**

**FOR**

**FIXED OUTDOOR POINT to MULTI-POINT SYSTEM**

**MODEL NUMBER: C058900A122A**

**FCC ID: Z8H89FT0005  
IC: 109W-0005**

**REPORT NUMBER: 16N23157-E2V1**

**ISSUE DATE: MAY 6, 2016**

*Prepared for*  
**CAMBIUM NETWORKS  
3800 GOLF ROAD  
ROLLING MEADOWS, IL 60008-4023, U.S.A.**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	05/06/16	Initial Issue	Conan Cheung

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	5
4.2. SAMPLE CALCULATION .....	5
4.3. MEASUREMENT UNCERTAINTY .....	5
<b>5. DYNAMIC FREQUENCY SELECTION .....</b>	<b>6</b>
5.1. OVERVIEW .....	6
5.1.1. LIMITS .....	6
5.1.2. TEST AND MEASUREMENT SYSTEM .....	10
5.1.3. SETUP OF EUT .....	13
5.1.4. DESCRIPTION OF EUT .....	14
5.1. RESULTS FOR 40 MHz BANDWIDTH .....	15
5.1.1. TEST CHANNEL .....	15
5.1.2. RADAR WAVEFORMS AND TRAFFIC .....	15
5.1.1. CHANNEL AVAILABILITY CHECK TIME .....	24
5.1.2. OVERLAPPING CHANNEL TESTS .....	29
5.1.3. MOVE AND CLOSING TIME .....	29
5.1.1. NON-OCCUPANCY PERIOD .....	34
5.1.2. DETECTION BANDWIDTH .....	35
5.1.3. IN-SERVICE MONITORING .....	37
5.2. BRIDGE MODE RESULTS .....	44
<b>6. SETUP PHOTOS .....</b>	<b>45</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** CAMBIUM NETWORKS  
3800 GOLF ROAD  
ROLLING MEADOWS, IL 60008-4023, U.S.A.

**EUT DESCRIPTION:** FIXED OUTDOOR POINT to MULTI-POINT SYSTEM

**MODEL:** C058900A122A

**SERIAL NUMBER:** 00 04 56 CD 79 10

**DATE TESTED:** MARCH 29 to MARCH 30, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
DFS Portion of CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



CONAN CHEUNG  
PROJECT LEAD  
UL Verification Services Inc.

Prepared By:



DOUG ANDERSON  
EMC ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the DFS portion of FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, KDB 905462 D02 and D03, ANSI C63.10-2013, RSS-247 Issue 1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services, Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. DYNAMIC FREQUENCY SELECTION

### 5.1. OVERVIEW

#### 5.1.1. LIMITS

##### INDUSTRY CANADA

IC RSS-247 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-247 Issue 1

**Note:** For the band 5600–5650 MHz, no operation is permitted.

Until further notice, devices subject to this annex shall not be capable of transmitting in the band 5600–5650 MHz. This restriction is for the protection of Environment Canada weather radars operating in this band.

##### FCC

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.

**Table 1: Applicability of DFS requirements prior to use of a channel**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

**Table 2: Applicability of DFS requirements during normal operation**

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar DFS	Client (without DFS)
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
<b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks.		

**Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring**

Maximum Transmit Power	Value (see notes)
E.I.R.P. $\geq$ 200 mill watt	-64 dBm
E.I.R.P. < 200 mill watt and power spectral density < 10 dBm/MHz	-62 dBm
E.I.R.P. < 200 mill watt that do not meet power spectral density requirement	-64 dBm
<p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note 3:</b> E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.</p>	

**Table 4: DFS Response requirement values**

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds (See Note 1)
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2)
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. (See Note 3)
<p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	



**Table 5 – Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a	Roundup: $\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests.					

**Table 6 – Long Pulse Radar Test Signal**


Radar Waveform Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

**Table 7 – Frequency Hopping Radar Test Signal**

Radar Waveform Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

## 5.1.2. TEST AND MEASUREMENT SYSTEM

### CONDUCTED METHOD SYSTEM BLOCK DIAGRAM

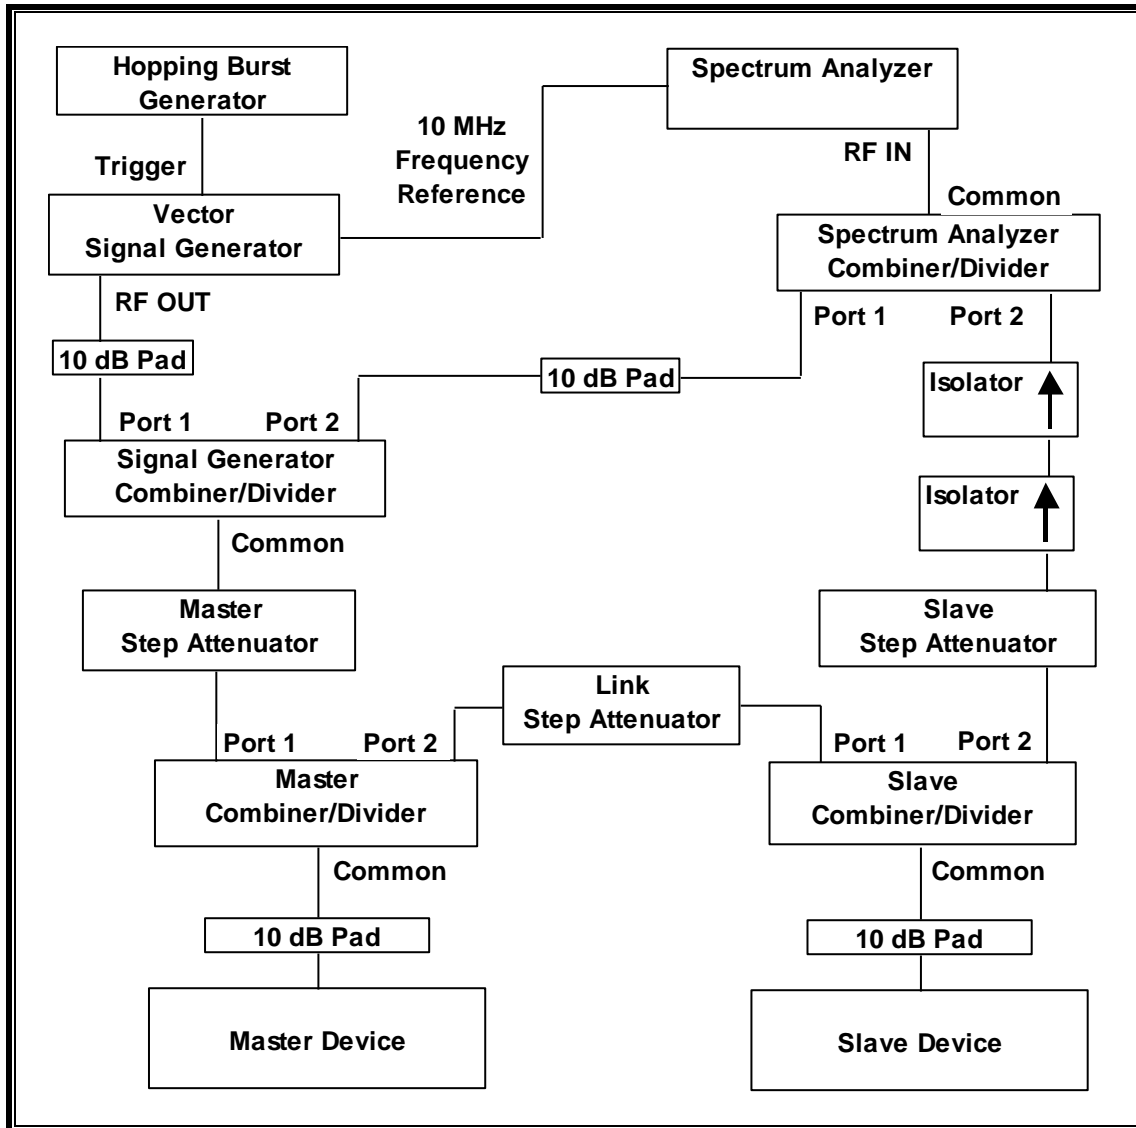

## **SYSTEM OVERVIEW**

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from  $F_L$  to  $F_H$  for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), additional combiner/dividers are inserted between the Master Combiner/Divider and the pad connected to the Master Device (and/or between the Slave Combiner/Divider and the pad connected to the Slave Device). Additional pads are utilized such that there is one pad at each RF port on each EUT.

## **SYSTEM CALIBRATION**

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device. The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is -64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

### **ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL**

A link is established between the Master and Slave and the Link Step Attenuator between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The WLAN traffic level, as displayed on the spectrum analyzer, is confirmed to be at lower amplitude than the radar detection threshold and is confirmed to be the Radar Detection Device rather than the associated device. If a different setting of the Master Step Attenuator is required to meet the above conditions, a new System Calibration is performed for the new Master Step Attenuator setting.


### **TEST AND MEASUREMENT EQUIPMENT**

The following test and measurement equipment was utilized for the DFS tests documented in this report:

<b>TEST EQUIPMENT LIST</b>				
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal Due</b>
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	US51350187	06/01/16
Signal Generator, MXG X-Series RF Vector	Agilent	N5172B	MY51350337	03/11/17
Arbitrary Waveform Generator	Agilent / HP	33220A	MY44037572	04/08/16

### 5.1.3. SETUP OF EUT

#### CONDUCTED METHOD EUT TEST SETUP

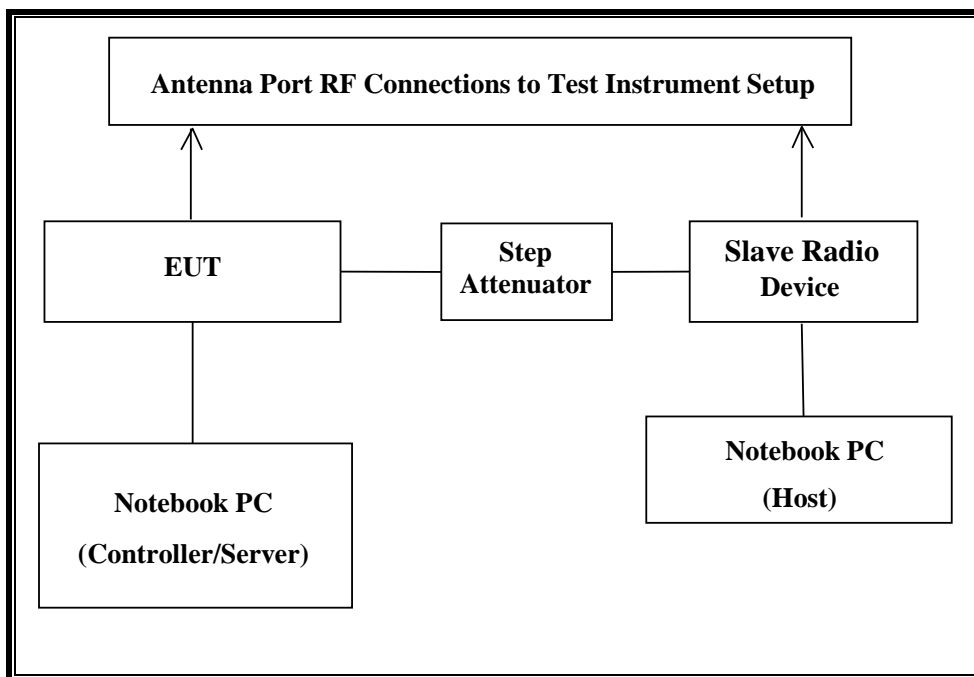

#### SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
P.O.E.Injector (EUT)	Phihong	PSA15M-300 (SM)	No Serial Number	DoC
Outdoor Point to Multi-Point System (Slave Device)	Cambium Networks	C058900A112A	04 04 56 C0 6E AE	Z8H89FT0006
P.O.E.Injector (Slave)	Phihong	PSA15M-300 (AP)	No Serial Number	DoC
Notebook PC (Controller/Server)	Motorola	HK1322	3433JC0021	DoC
AC Adapter (Controller/Server PC)	Motorola	AD-C019M-M	A050300091	DoC
Notebook PC (Host)	Motorola	ML900	3433FQ0285	DoC
AC Adapter (Host PC)	Hipro	HP-OW120F13	F3-070900274301	DoC

#### **5.1.4. DESCRIPTION OF EUT**

The EUT can be configured as a Master Device or a Slave Device without Radar Detection.

The highest power level within these bands is 30 dBm EIRP in the 5250-5350 MHz band and dBm EIRP in the 5470-5725 MHz band.

The only antenna assembly utilized with the EUT has a gain of 17 dBi.

Two identical orthogonally oriented antennas are utilized to meet the diversity and MIMO operational requirements.

The EUT was tested with a manufacturer declared gain of 0 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is  $-64 + 17 + 1 = -46$  dBm.

The calibrated conducted DFS Detection Threshold level is set to -63 dBm.

The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses two transmitter/receiver chains, each connected to a 50-ohm coaxial antenna port. All antenna ports are connected to the test system via a power divider to perform conducted tests.

The Slave device associated with the EUT during these tests does not have radar detection capability.

The EUT is a frame-based system. EUT system traffic was tested while running at a worst-case 75/25 percent uplink to downlink ratio.

WLAN traffic that meets or exceeds the minimum required loading was generated by transferring a data stream from the Master Device to the Slave Device using iPerf version 2.0.5 software package.

TPC is required since the maximum EIRP is greater than 500 mW (27 dBm).

The EUT utilizes a proprietary wireless architecture. One nominal channel bandwidth of 40 MHz is implemented.

The software installed in the EUT is revision 2.6.1-RC10.

#### **UNIFORM CHANNEL SPREADING**

This function is not required per KDB 905462.


## 5.1. RESULTS FOR 40 MHz BANDWIDTH


### 5.1.1. TEST CHANNEL

All tests were performed at a channel center frequency of 5550 MHz.


### 5.1.2. RADAR WAVEFORMS AND TRAFFIC


#### RADAR WAVEFORMS

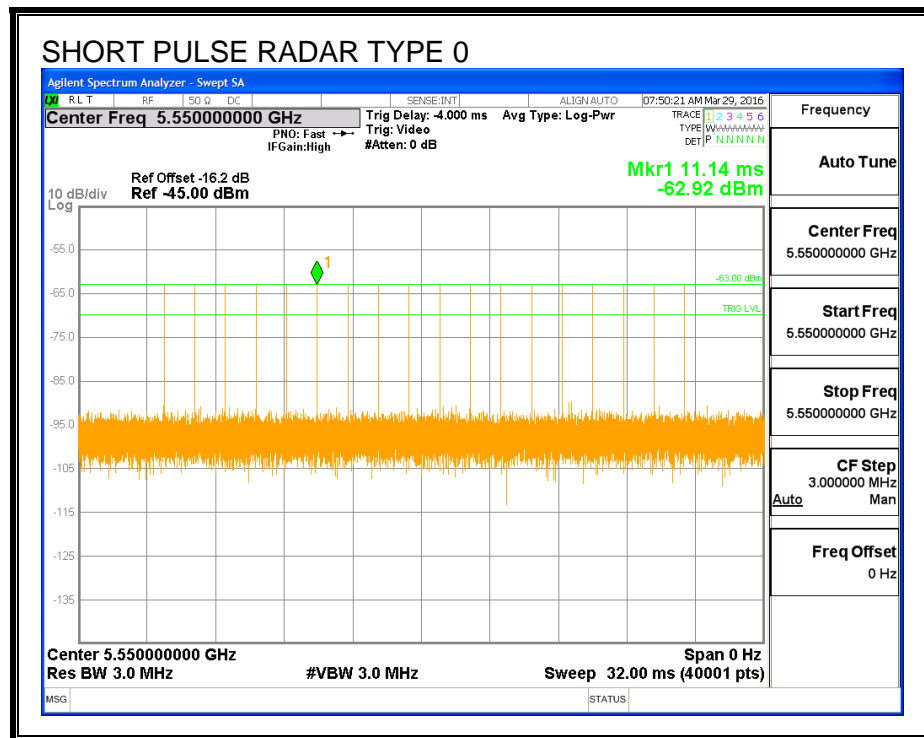


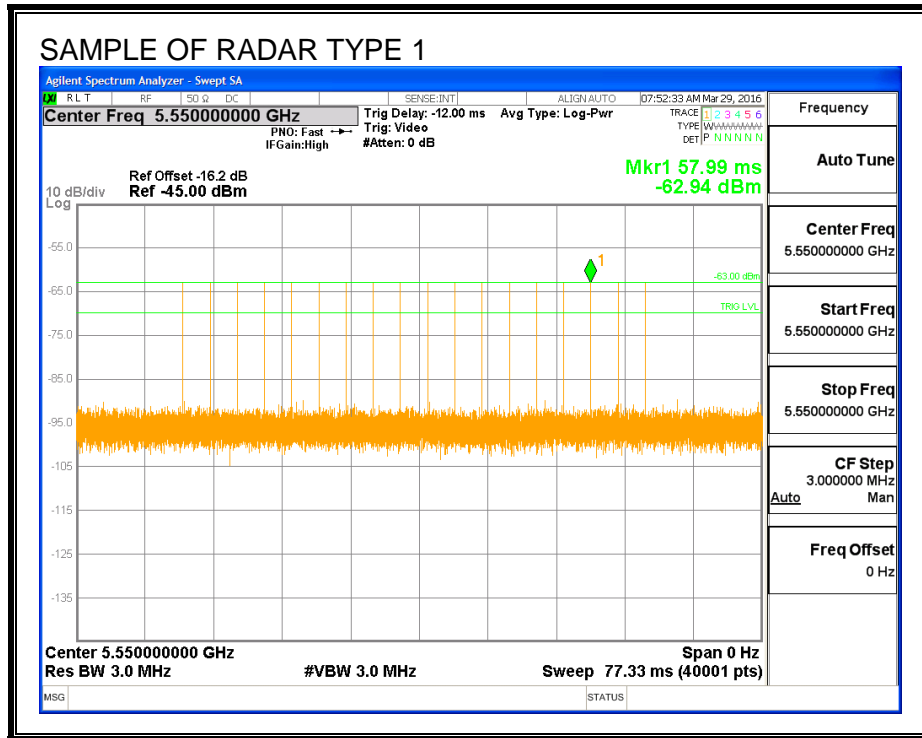




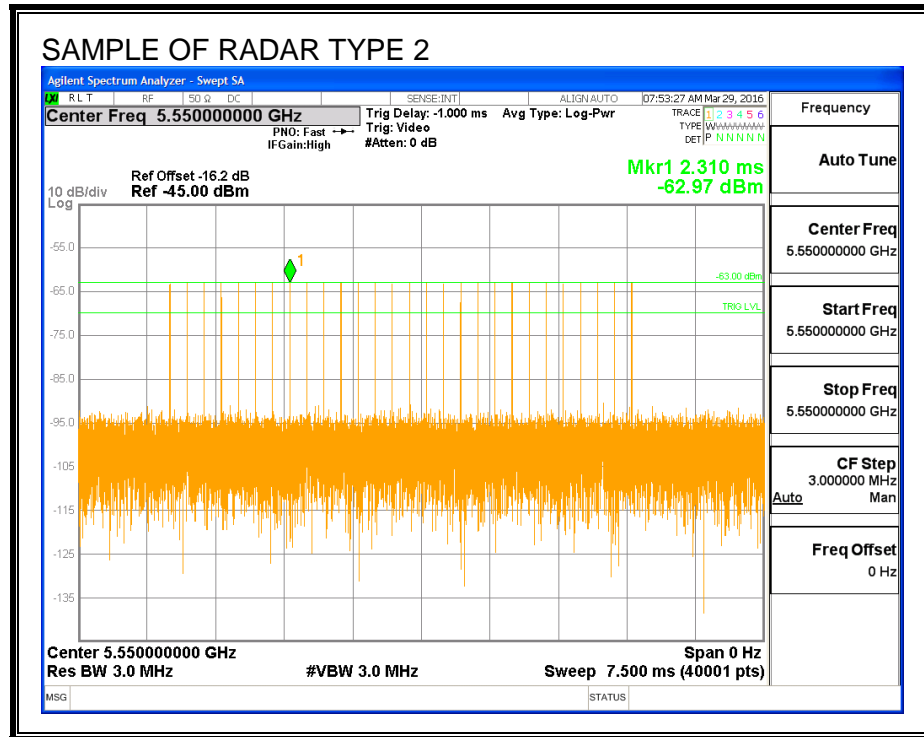

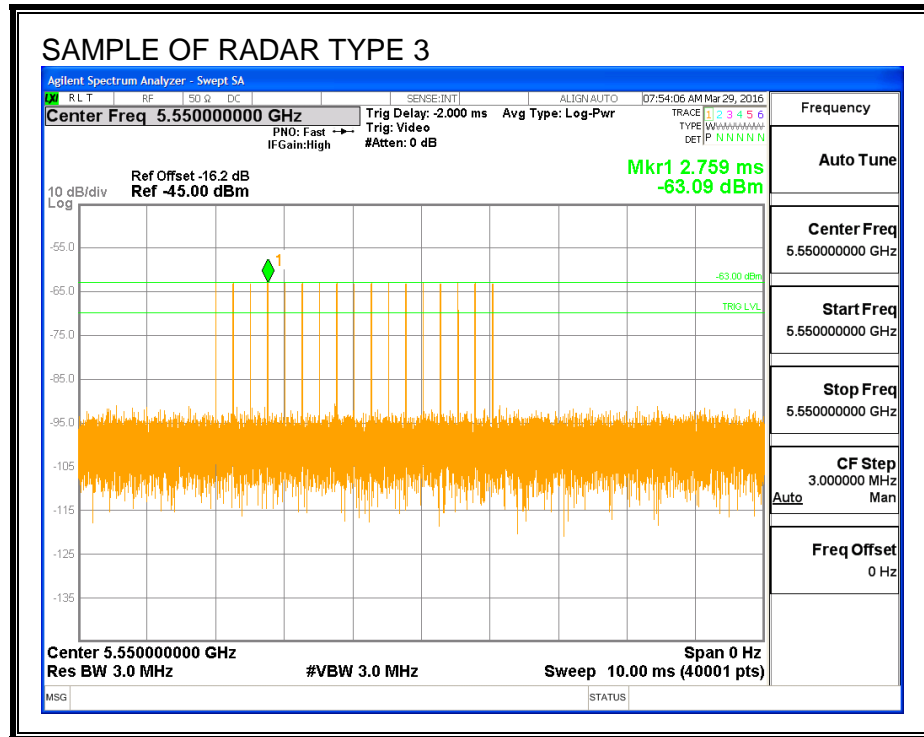


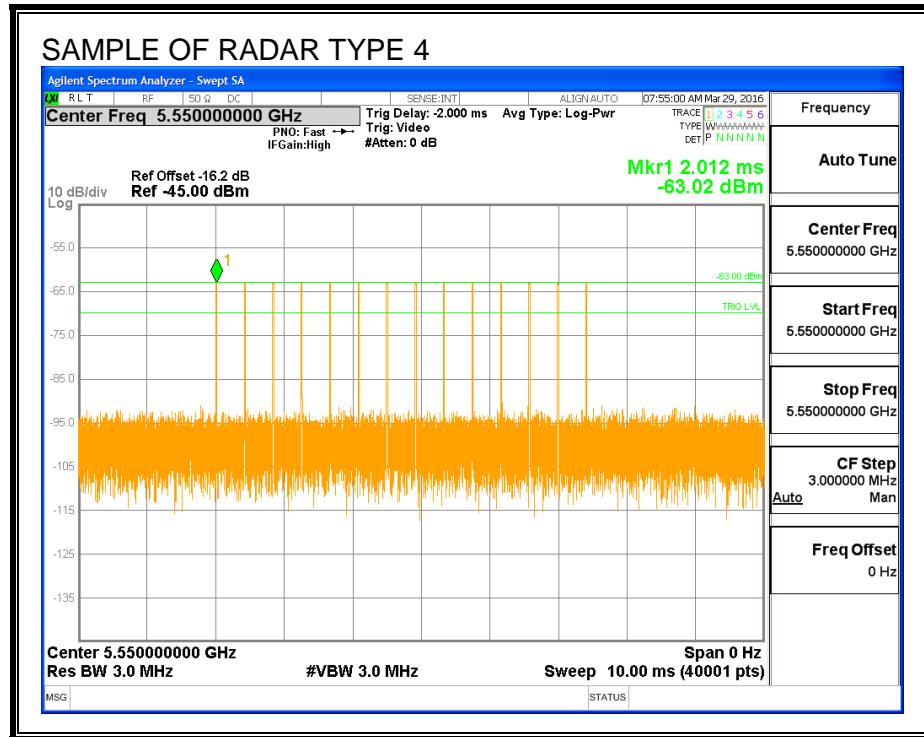




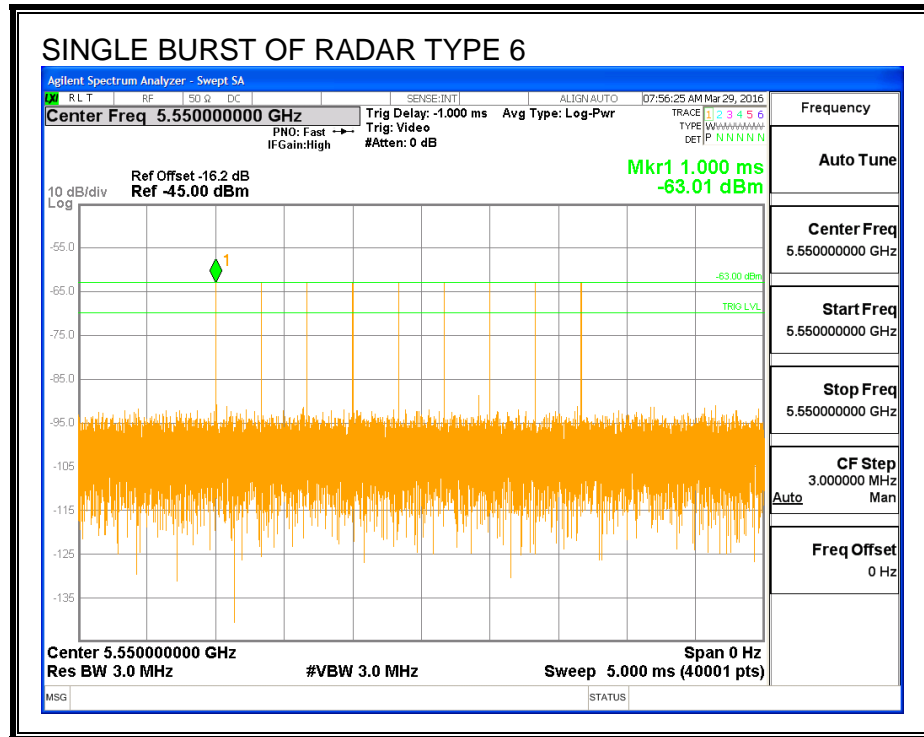

**TRAFFIC**

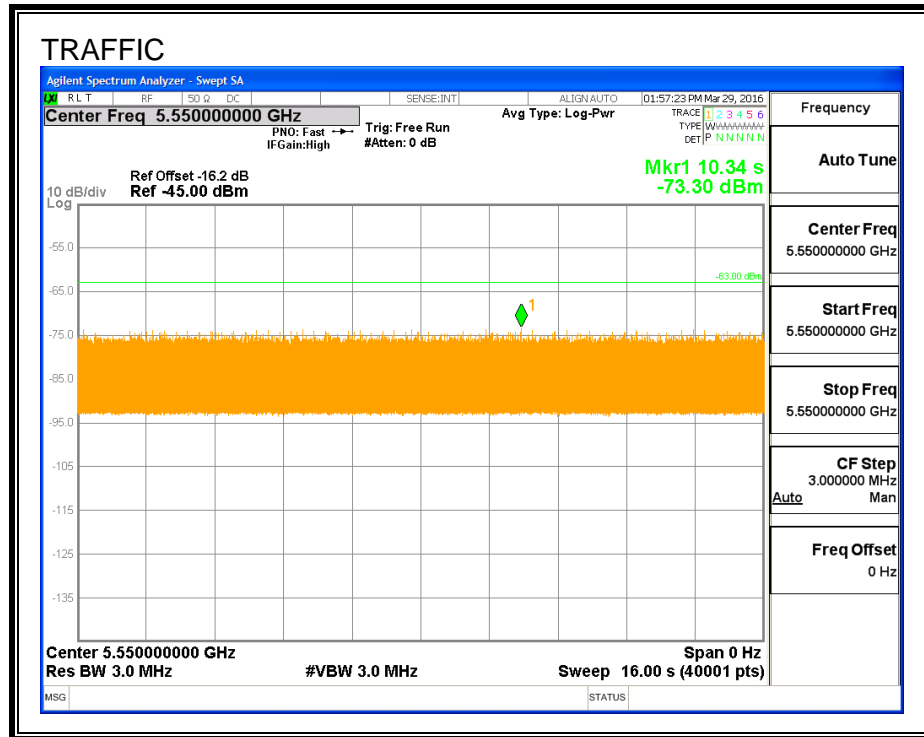

## CHANNEL LOADING

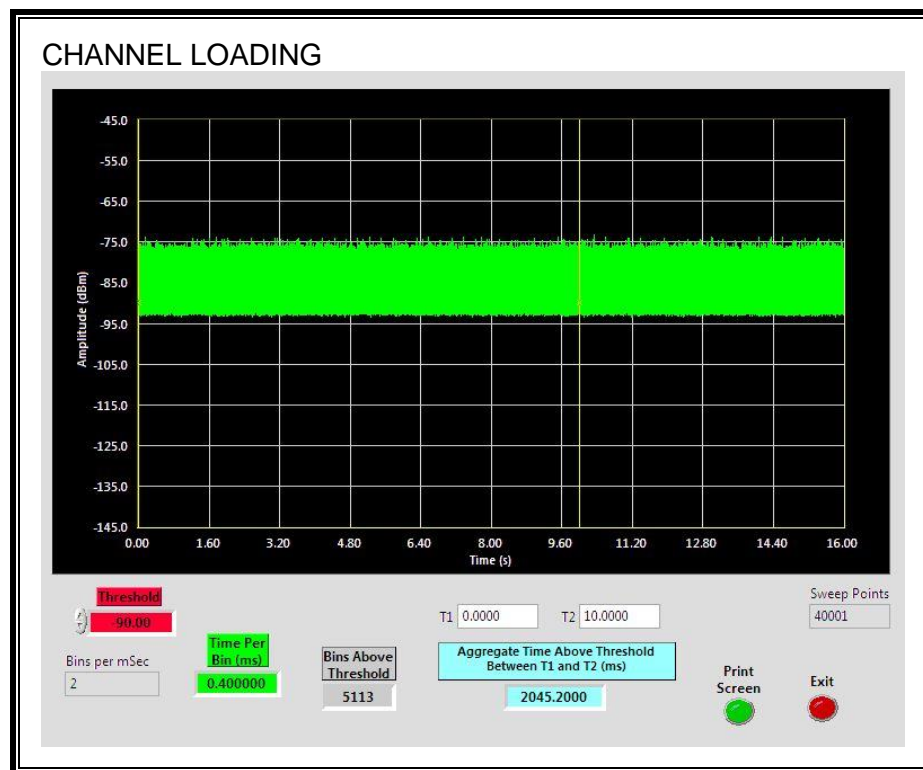

The level of traffic loading on the channel by the EUT is 20.45%

### **5.1.1. CHANNEL AVAILABILITY CHECK TIME**

#### **PROCEDURE TO DETERMINE INITIAL POWER-UP CYCLE TIME**

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

#### **PROCEDURE FOR TIMING OF RADAR BURST**

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.



## QUANTITATIVE RESULTS

### No Radar Triggered

Timing of Reboot (sec)	Timing of Start of Traffic (sec)	Total Power-up Cycle Time (sec)	Initial Power-up Cycle Time (sec)
30.84	133.7	102.9	42.9

### Radar Near Beginning of CAC

Timing of Reboot (sec)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)
31.18	77.4	46.3	3.4

### Radar Near End of CAC

Timing of Reboot (sec)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)
30.78	130.5	99.7	56.9

## QUALITATIVE RESULTS

Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel

## TIMING WITHOUT RADAR DURING CAC

AP is rebooted

Traffic ceases


Start of Initial Power-up cycle

End of Initial Power-up cycle

Start of CAC

End of CAC

Traffic is Initiated

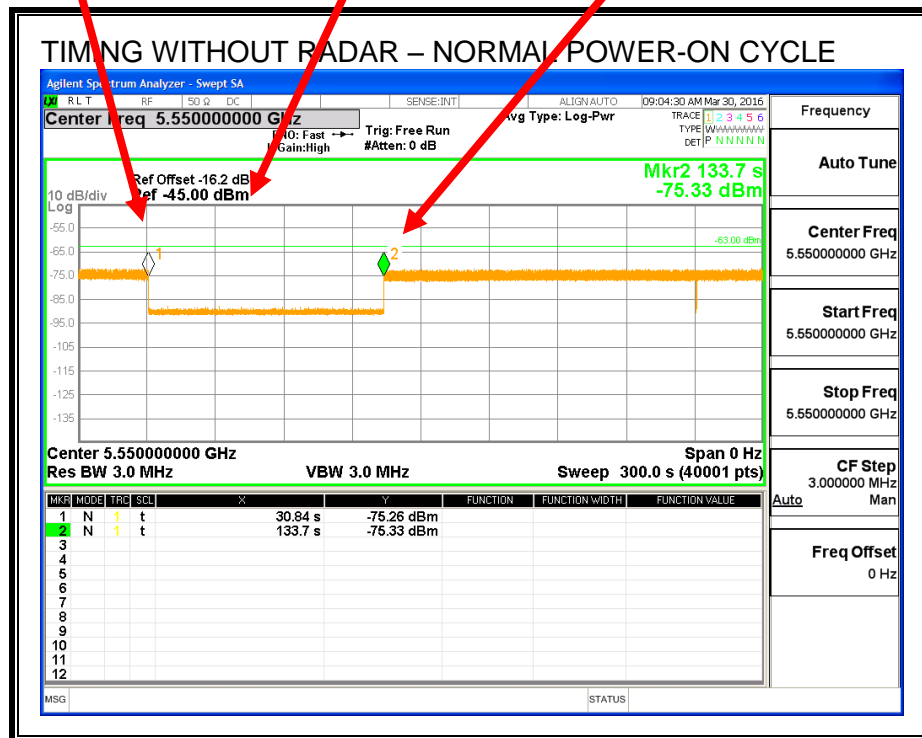


Transmissions begin on channel after completion of the initial power-up cycle and the CAC.

# TIMING WITH RADAR NEAR BEGINNING OF CAC

AP is rebooted  
Traffic ceases  
Start of Initial Power-up cycle

End of Initial Power-up cycle  
Start of CAC

Radar Signal Applied

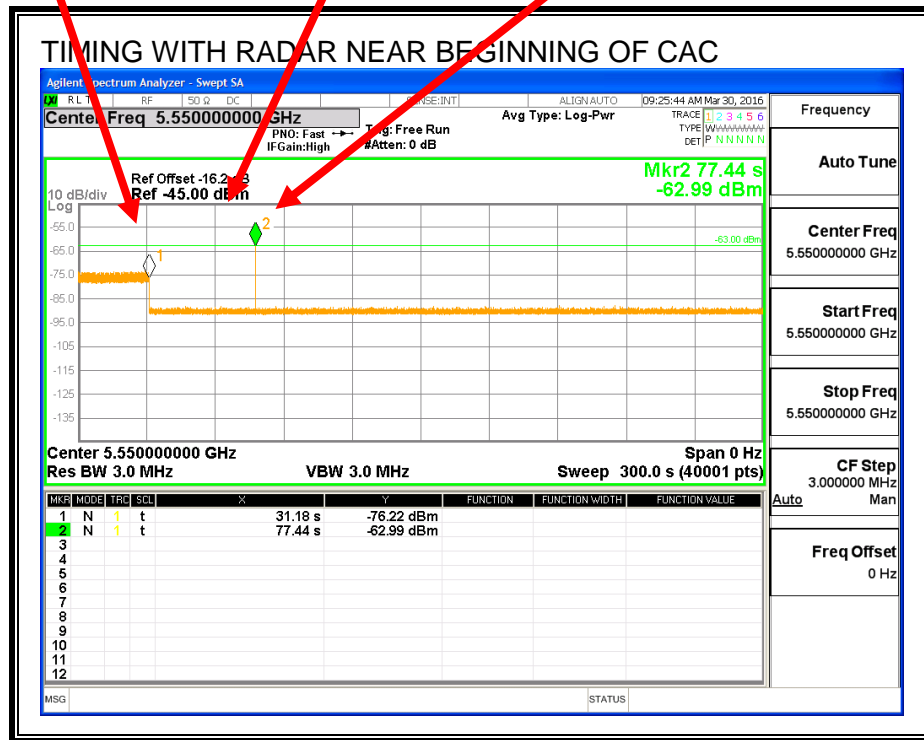


No EUT transmissions were observed after the radar signal.

# **TIMING WITH RADAR NEAR END OF CAC**

AP is rebooted  
Traffic ceases  
Start of Initial Power-up cycle

End of Initial Power-up cycle  
Start of CAC

Radar Signal Applied

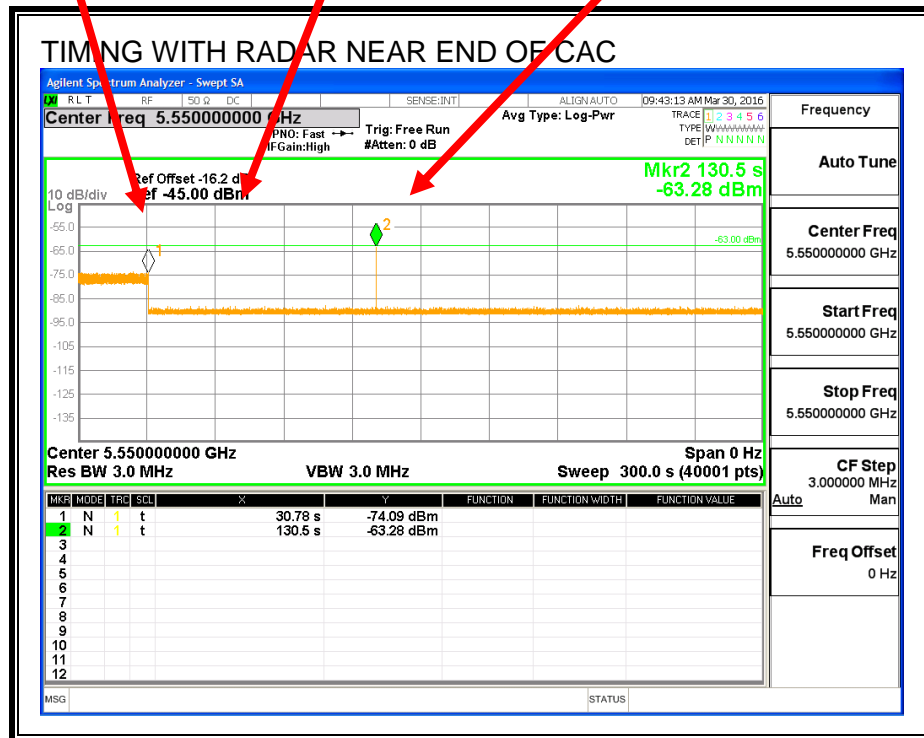

No EUT transmissions were observed after the radar signal.

### 5.1.2. OVERLAPPING CHANNEL TESTS

#### RESULTS

The EUT has only three channels enabled at any one time. The channels are intentionally selected so that they can't overlap. Therefore the EUT does not have an overlapping channel plan.

### 5.1.3. MOVE AND CLOSING TIME

#### REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =  
(Number of analyzer bins showing transmission) \* (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

#### RESULTS


Channel Move Time (sec)	Limit (sec)
0.0136	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

## MOVE TIME

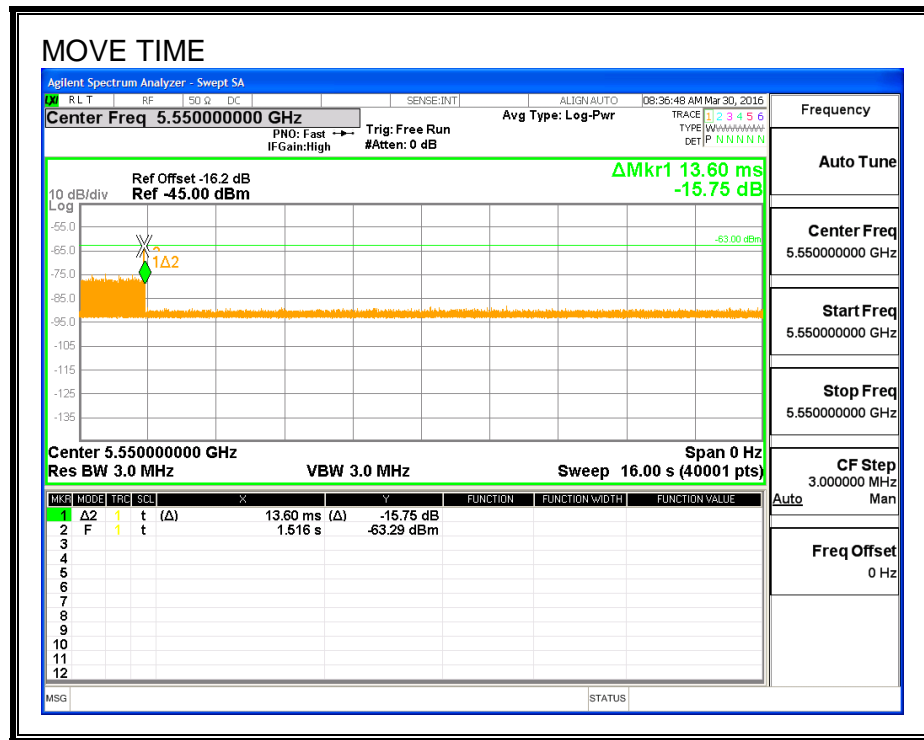


# **CHANNEL CLOSING TIME**

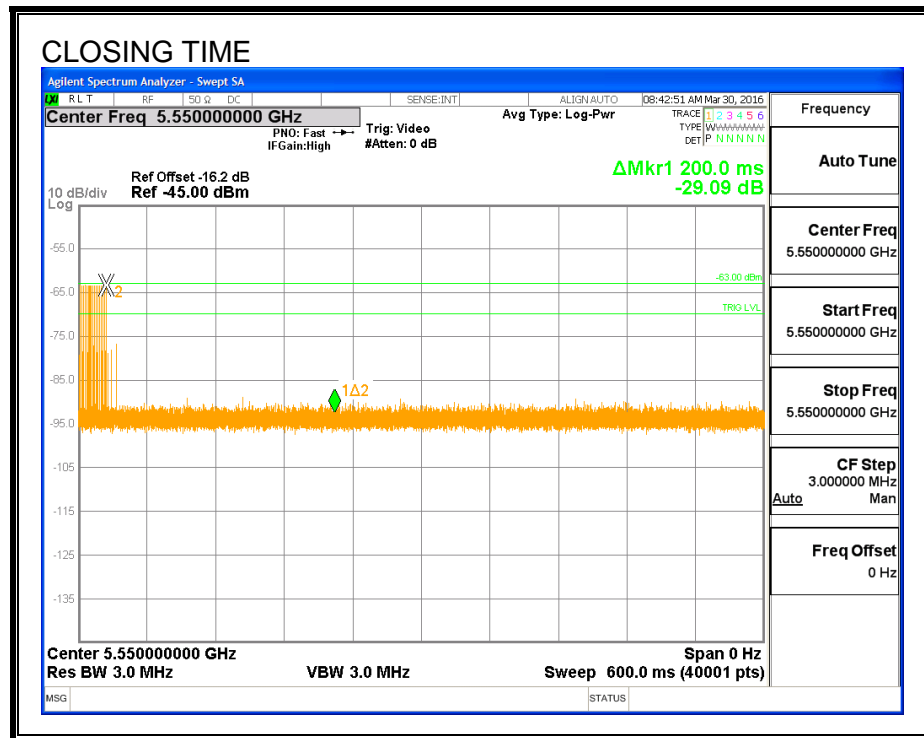

### AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

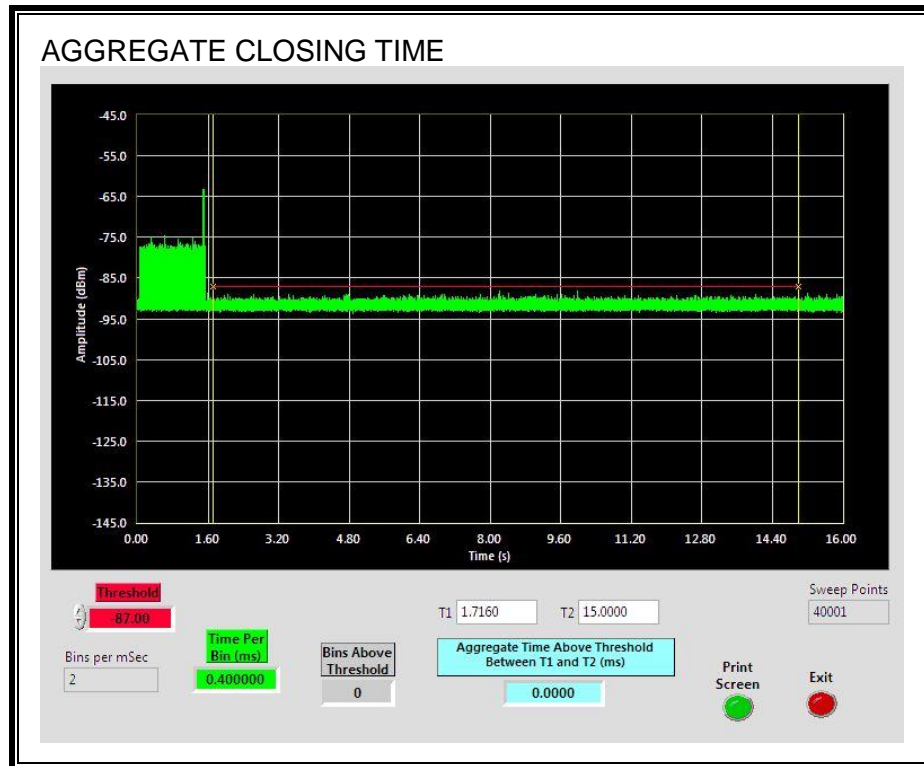



## LONG PULSE CHANNEL MOVE TIME


The traffic ceases prior to 10 seconds after the end of the radar waveform.

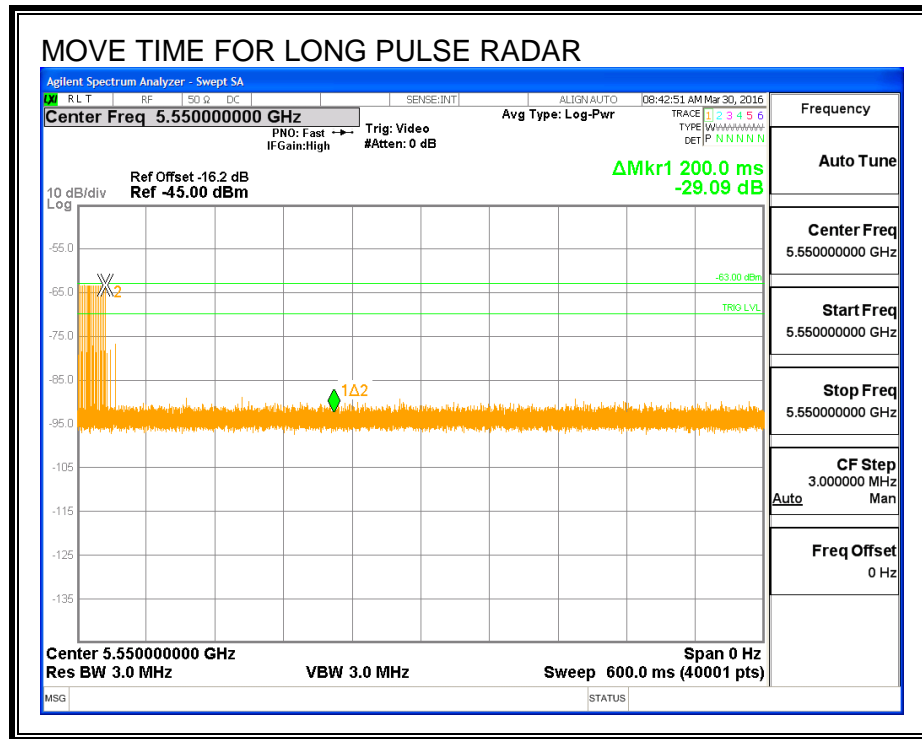

## 5.1.1. NON-OCCUPANCY PERIOD


### RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time. After the 30-minute non-occupancy period the EUT performed a new CAC, then resumed transmissions upon detecting no radar during this CAC period.

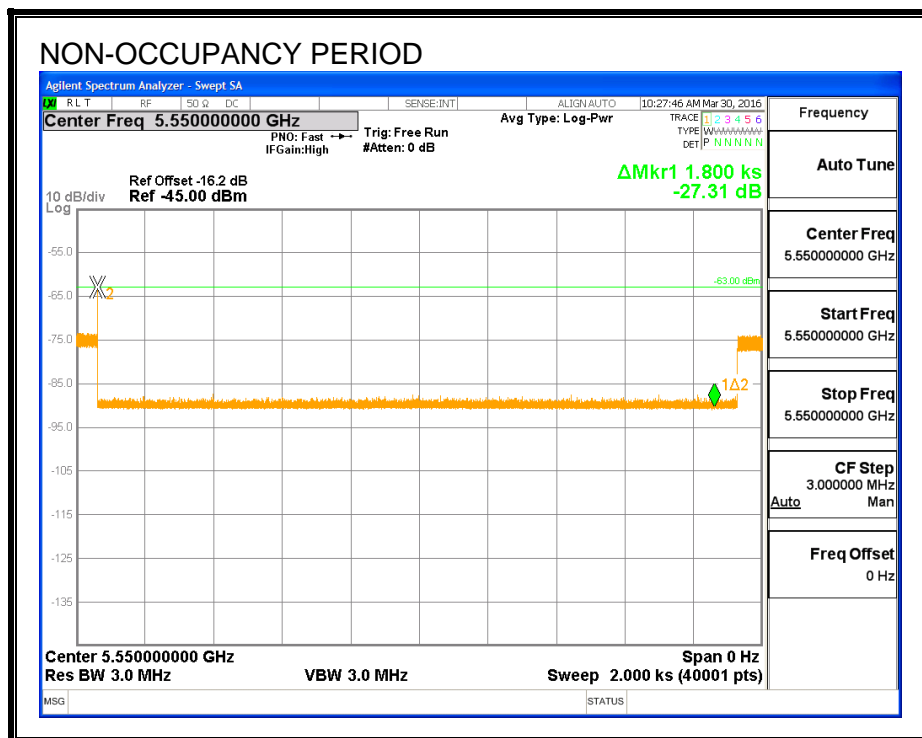

## 5.1.2. DETECTION BANDWIDTH

### REFERENCE PLOT OF 99% POWER BANDWIDTH

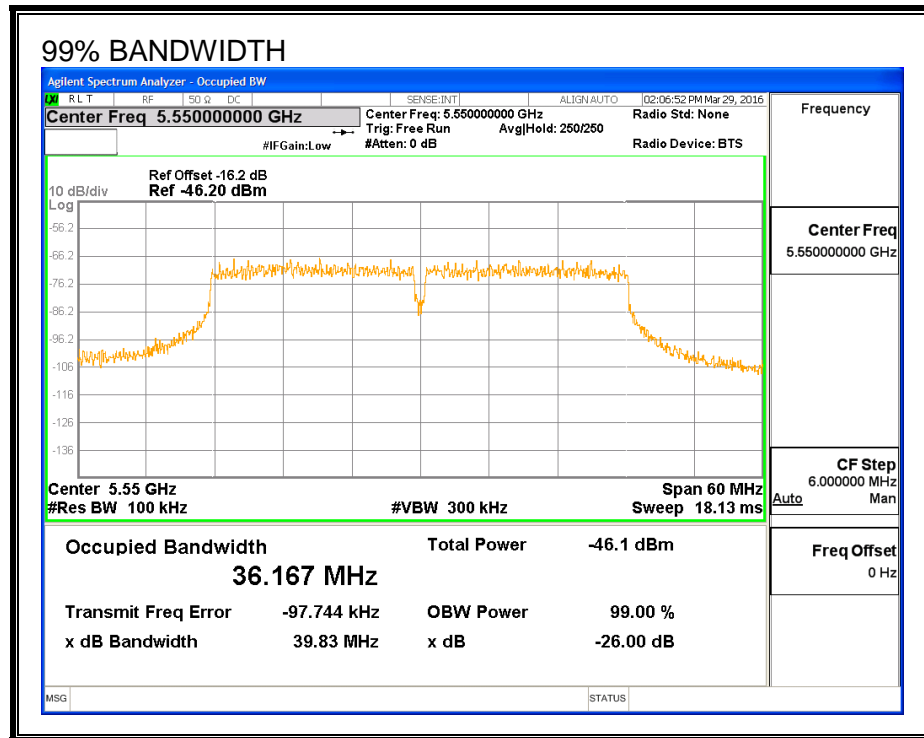

### RESULTS

FL	FH	Detection Bandwidth	99% Power Bandwidth	Ratio of Detection BW to 99% Power BW	Minimum Limit
(MHz)	(MHz)	(MHz)	(MHz)	(%)	(%)
5530	5570	40	36.167	110.6	100

**DETECTION BANDWIDTH PROBABILITY**

**DETECTION BANDWIDTH PROBABILITY RESULTS**

Detection Bandwidth Test Results				
FCC Type 0 Waveform: 1 us Pulse Width, 1428 us PRI, 18 Pulses per Burst				
Frequency (MHz)	Number of Trials	Number Detected	Detection (%)	Mark
5530	10	10	100	FL
5535	10	10	100	
5540	10	10	100	
5545	10	10	100	
5550	10	10	100	
5555	10	10	100	
5560	10	10	100	
5565	10	10	100	
5570	10	10	100	FH

### 5.1.3. IN-SERVICE MONITORING

#### RESULTS

FCC Radar Test Summary								
Signal Type	Number of Trials	Detection (%)	Limit (%)	Pass/Fail	Detection Bandwidth		80% of Det BW	
					FL	FH	FL5	FH5
FCC Short Pulse Type 1	30	100.00	60	Pass	5530	5570		
FCC Short Pulse Type 2	30	100.00	60	Pass	5530	5570		
FCC Short Pulse Type 3	30	93.33	60	Pass	5530	5570		
FCC Short Pulse Type 4	30	86.67	60	Pass	5530	5570		
Aggregate		95.00	80	Pass				
FCC Long Pulse Type 5	30	100.00	80	Pass	5530	5570	5534	5566
FCC Hopping Type 6	41	100.00	70	Pass	5530	5570		

**Note:** Random radar frequencies with at least one trial at the channel center frequency were tested for FCC Types 1-4 at client request.

**TYPE 1 DETECTION PROBABILITY**

Data Sheet for FCC Short Pulse Radar Type 1						
Waveform	Pulse Width (us)	PRI (us)	Pulses Per Burst	Test (A/B)	Frequency (MHz)	Successful Detection (Yes/No)
1001	1	3066	18	A	5563	Yes
1002	1	838	63	A	5560	Yes
1003	1	778	68	A	5531	Yes
1004	1	898	59	A	5566	Yes
1005	1	858	62	A	5533	Yes
1006	1	578	92	A	5550	Yes
1007	1	558	95	A	5539	Yes
1008	1	518	102	A	5546	Yes
1009	1	538	99	A	5532	Yes
1010	1	798	67	A	5536	Yes
1011	1	878	61	A	5549	Yes
1012	1	698	76	A	5557	Yes
1013	1	638	83	A	5568	Yes
1014	1	918	58	A	5567	Yes
1015	1	598	89	A	5560	Yes
1016	1	956	56	B	5534	Yes
1017	1	717	74	B	5557	Yes
1018	1	2156	25	B	5551	Yes
1019	1	2047	26	B	5543	Yes
1020	1	2262	24	B	5555	Yes
1021	1	1088	49	B	5547	Yes
1022	1	2786	19	B	5544	Yes
1023	1	1741	31	B	5554	Yes
1024	1	2374	23	B	5535	Yes
1025	1	1459	37	B	5540	Yes
1026	1	2221	24	B	5558	Yes
1027	1	1435	37	B	5563	Yes
1028	1	1132	47	B	5559	Yes
1029	1	1829	29	B	5533	Yes
1030	1	2850	19	B	5550	Yes

## TYPE 2 DETECTION PROBABILITY

Data Sheet for FCC Short Pulse Radar Type 2					
Waveform	Pulse Width (us)	PRI (us)	Pulses Per Burst	Frequency (MHz)	Successful Detection (Yes/No)
2001	1.4	187	28	5532	Yes
2002	3.7	230	29	5567	Yes
2003	4.6	224	29	5564	Yes
2004	3	152	27	5537	Yes
2005	2.1	150	24	5562	Yes
2006	2.9	163	23	5570	Yes
2007	4.2	208	23	5561	Yes
2008	3.2	225	26	5543	Yes
2009	2.8	155	23	5567	Yes
2010	4	177	27	5535	Yes
2011	1.9	192	24	5568	Yes
2012	1.3	179	25	5548	Yes
2013	3.5	199	26	5551	Yes
2014	3.2	190	23	5553	Yes
2015	1.5	176	29	5541	Yes
2016	3.5	172	27	5559	Yes
2017	4.2	161	25	5533	Yes
2018	2.4	204	27	5552	Yes
2019	3.3	160	23	5551	Yes
2020	1.7	207	25	5532	Yes
2021	4.9	167	28	5531	Yes
2022	1.6	218	28	5568	Yes
2023	1	182	24	5557	Yes
2024	1.9	199	24	5557	Yes
2025	1.5	211	28	5568	Yes
2026	4.9	151	24	5543	Yes
2027	4.7	166	26	5550	Yes
2028	4.1	154	29	5538	Yes
2029	2.2	173	24	5540	Yes
2030	1.9	165	28	5570	Yes

### TYPE 3 DETECTION PROBABILITY

Data Sheet for FCC Short Pulse Radar Type 3					
Waveform	Pulse Width (us)	PRI (us)	Pulses Per Burst	Frequency (MHz)	Successful Detection (Yes/No)
3001	6.7	252	17	5554	Yes
3002	6.6	490	16	5565	Yes
3003	7.4	458	16	5543	Yes
3004	5.1	340	18	5548	Yes
3005	6.2	454	18	5546	No
3006	6.9	348	16	5568	Yes
3007	8.3	475	17	5556	Yes
3008	9.2	383	17	5535	Yes
3009	8.4	271	18	5541	Yes
3010	9.7	458	18	5541	Yes
3011	9.1	359	17	5559	Yes
3012	8.2	426	18	5535	Yes
3013	8	473	16	5558	Yes
3014	7.3	434	18	5550	Yes
3015	10	494	18	5554	Yes
3016	9.6	468	17	5561	Yes
3017	5.1	424	16	5547	Yes
3018	5	293	17	5555	Yes
3019	5.8	261	18	5543	No
3020	8.6	260	17	5548	Yes
3021	9.7	374	17	5531	Yes
3022	5.3	269	18	5545	Yes
3023	6.7	396	16	5537	Yes
3024	7.6	303	16	5552	Yes
3025	6.8	325	17	5562	Yes
3026	8.1	379	17	5531	Yes
3027	7.5	280	16	5549	Yes
3028	6.6	479	17	5558	Yes
3029	6.3	393	18	5557	Yes
3030	5.7	355	17	5561	Yes



**TYPE 4 DETECTION PROBABILITY**

Data Sheet for FCC Short Pulse Radar Type 4					
Waveform	Pulse Width (us)	PRI (us)	Pulses Per Burst	Frequency (MHz)	Successful Detection (Yes/No)
4001	16.8	415	14	5570	No
4002	11.3	271	12	5563	Yes
4003	17.1	344	16	5549	Yes
4004	12.1	464	12	5548	Yes
4005	18.5	432	12	5546	Yes
4006	14	314	13	5534	Yes
4007	16.2	295	12	5533	Yes
4008	17.6	441	16	5550	Yes
4009	10.1	316	16	5566	Yes
4010	12	357	15	5538	Yes
4011	10.5	497	13	5547	Yes
4012	12.9	299	13	5566	Yes
4013	11.9	451	13	5559	Yes
4014	10	400	13	5531	Yes
4015	19.6	314	14	5536	Yes
4016	18.3	275	12	5560	Yes
4017	13.6	469	13	5549	Yes
4018	18.2	443	13	5546	Yes
4019	13.9	265	15	5562	Yes
4020	19	385	16	5566	Yes
4021	15.3	353	15	5539	Yes
4022	10.8	486	16	5553	Yes
4023	18.3	466	16	5560	Yes
4024	14.4	361	15	5559	No
4025	17	488	14	5554	Yes
4026	18.9	278	14	5570	No
4027	17.4	417	16	5570	No
4028	19.8	471	16	5565	Yes
4029	18.8	372	12	5549	Yes
4030	17	321	12	5541	Yes

**TYPE 5 DETECTION PROBABILITY**

Data Sheet for FCC Long Pulse Radar Type 5		
Trial	Frequency (MHz)	Successful Detection (Yes/No)
1	5541	Yes
2	5534	Yes
3	5548	Yes
4	5544	Yes
5	5550	Yes
6	5550	Yes
7	5547	Yes
8	5546	Yes
9	5559	Yes
10	5552	Yes
11	5537	Yes
12	5560	Yes
13	5560	Yes
14	5557	Yes
15	5545	Yes
16	5549	Yes
17	5552	Yes
18	5537	Yes
19	5558	Yes
20	5556	Yes
21	5535	Yes
22	5561	Yes
23	5564	Yes
24	5540	Yes
25	5535	Yes
26	5553	Yes
27	5545	Yes
28	5535	Yes
29	5544	Yes
30	5561	Yes

Note: The Type 5 randomized parameters tested are shown in a separate document.

# TYPE 6 DETECTION PROBABILITY

Data Sheet for FCC Hopping Radar Type 6				
1 us Pulse Width, 333 us PRI, 9 Pulses per Burst, 1 Burst per Hop				
NTIA August 2005 Hopping Sequence				
Trial	Starting Index Within Sequence	Signal Generator Frequency (MHz)	Hops within Detection BW	Successful Detection (Yes/No)
1	20	5530	7	Yes
2	495	5531	7	Yes
3	970	5532	10	Yes
4	1445	5533	5	Yes
5	1920	5534	10	Yes
6	2395	5535	11	Yes
7	2870	5536	11	Yes
8	3345	5537	12	Yes
9	3820	5538	11	Yes
10	4295	5539	8	Yes
11	4770	5540	11	Yes
12	5245	5541	7	Yes
13	5720	5542	10	Yes
14	6195	5543	9	Yes
15	6670	5544	4	Yes
16	7145	5545	9	Yes
17	7620	5546	4	Yes
18	8095	5547	10	Yes
19	8570	5548	5	Yes
20	9045	5549	5	Yes
21	9520	5550	7	Yes
22	9995	5551	11	Yes
23	10470	5552	6	Yes
24	10945	5553	11	Yes
25	11420	5554	10	Yes
26	11895	5555	10	Yes
27	12370	5556	5	Yes
28	12845	5557	7	Yes
29	13320	5558	12	Yes
30	13795	5559	8	Yes
31	14270	5560	8	Yes
32	14745	5561	9	Yes
33	15220	5562	9	Yes
34	15695	5563	11	Yes
35	16170	5564	4	Yes
36	16645	5565	8	Yes
37	17120	5566	12	Yes
38	17595	5567	4	Yes
39	18070	5568	7	Yes
40	18545	5569	9	Yes
41	19020	5570	8	Yes

## **5.2. BRIDGE MODE RESULTS**


Per KDB 905462, Section 5.1 (footnote 1):

Networks Access Points with Bridge and/or MESH modes of operation are permitted to operate in the DFS bands but must employ a DFS function. The functionality of the Bridge mode as specified in §15.403(a) must be validated in the DFS test report. Devices operating as relays must also employ DFS function. The method used to validate the functionality must be documented and validation data must be documented. Bridge mode can be validated by performing a test statistical performance check (Section 7.8.4) on any one of the radar types. This is an abbreviated test to verify DFS functionality. MESH mode operational methodology must be submitted in the application for certification for evaluation by the FCC.

This device does not support Bridge Mode therefore this test was not performed.

## 6. SETUP PHOTOS

### DYNAMIC FREQUENCY SELECTION MEASUREMENT SETUP

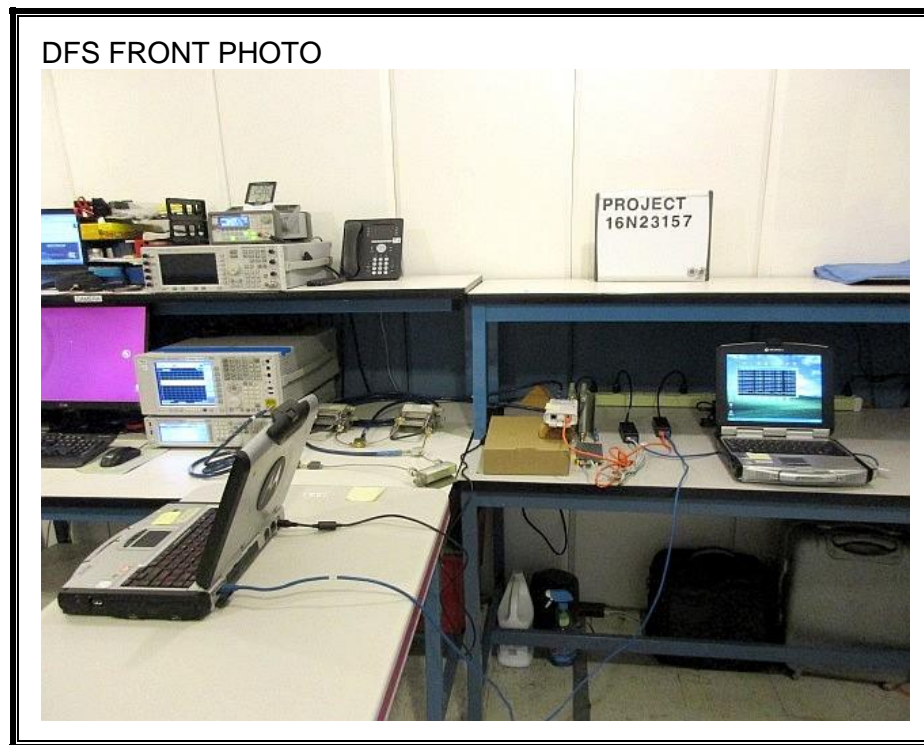

DFS BACK PHOTO



**END OF REPORT**