

# TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 (a) and  
RSS-210 issue 8 Annex 1

FOR:

**LogiTag Systems Ltd.**  
**One Channel Exciter**  
**Model: LTG2-04**  
**Single Location Unit**  
**Model: LTG2-04-PRF**  
**FCC ID:Z97LTG2-04**

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.  
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary .....	4
6	EUT description .....	5
6.1	General information .....	5
6.2	Ports and lines .....	5
6.3	Changes made in the EUT .....	5
6.4	Test configuration .....	6
6.5	Transmitter characteristics .....	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements .....	8
7.1	Periodic operation requirements .....	8
7.2	Field strength of emissions, UHF3 transmitter .....	11
7.3	Field strength of emissions, UHF1 transmitter .....	36
7.4	Occupied bandwidth test .....	61
7.5	Conducted emissions .....	65
7.6	Antenna requirements .....	68
8	APPENDIX A Test equipment and ancillaries used for tests .....	69
9	APPENDIX B Measurement uncertainties .....	70
10	APPENDIX C Test laboratory description .....	71
11	APPENDIX D Specification references .....	71
12	APPENDIX E Test equipment correction factors .....	72
13	APPENDIX F Abbreviations and acronyms .....	79
14	APPENDIX G Manufacturer's declaration of identity .....	80

## 1 Applicant information

**Client name:** LogiTag Systems Ltd.  
**Address:** 1st Floor, Building 9, 29 Yad Harutzim street, Poleg Industrial Zone, P.O.B. 8249, Netanya 4250473, Israel  
**Telephone:** +972 9835 4848  
**Fax:** +972 9865 6262  
**E-mail:** golank@Logi-tag.com  
**Contact name:** Mr. Golan Kormian

## 2 Equipment under test attributes

**Product name:** One Channel Exciter  
**Model:** LTG2-04  
**Serial number:** LTG2-04-1312-078  
**Hardware version:** C01  
**Software release:** V2.00  
**Receipt date** 17-Apr-14

## 3 Manufacturer information

**Manufacturer name:** LogiTag Systems Ltd.  
**Address:** 1st Floor, Building 9, 29 Yad Harutzim street, Poleg Industrial Zone, P.O.B. 8249, Netanya 4250473, Israel  
**Telephone:** +972 9835 4848  
**Fax:** +972 9865 6262  
**E-Mail:** golank@Logi-tag.com  
**Contact name:** Mr. Golan Kormian

## 4 Test details





**Project ID:** 25494  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 17-Apr-14  
**Test completed:** 04-May-14  
**Test specification(s):** FCC 47CFR part 15, subpart C, §15.231(a);  
RSS-210 issue 8 Annex 1

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 7.2.4, Conducted emission	Pass
FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mrs. E. Pitt, test engineer Mr. A. Chaplik, test engineer	May 4, 2014	 
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	May 20, 2014	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group manager	November 2, 2014	

## 6 EUT description

### 6.1 General information

The EUT, One Channel Exciter, has 2 main functions:

- To generate RF field at 125 kHz. The One Channel Exciter carries a unique number as identifier to the location/area where the RF field is operated.
- To communicate with RFID tags and a Base Station unit

The Exciter is a system which generates the RF field at 125 kHz, when RFID tag is within the range of the field, the tag is awaked and communicates with the Exciter via wireless transmitter at frequency of 433 MHz.

The Exciter communicates with the Base Station unit wireless at UHF frequency (902-928 MHz). The Exciter has an internal 125 kHz antenna, and has option to connect to external LF antenna (Ceiling or Door antenna). Only one antenna can transmit.

The EUT has the following features/ports:

- 1) The 125 kHz antenna driver outputs, 3 kinds of antennas: integrated, Ceiling and Door;
- 2) Transceivers
  - a) Tx/Rx with a base station in 902-928 MHz (UHF4)
  - b) Tx/Rx with a tamper tag at 433 MHz (UHF3)
  - c) Tx to tag at 433 MHz (UHF1)
  - d) Rx from tag at 433 MHz (UHF2);
- 3) General use relay;
- 4) USB ports;
- 5) Digital input.

According to manufacturer's declaration of identity provided in Appendix G of the test report, both One Channel Exciter, model LTG2-04 and Single Location Unit, model LTG2-04-PRF are electronically/electrically/mechanically identical and have only different design of Led lexan and different cover shape. That is why only model LTG2-04 was tested.

The present test report involves the test results for certification of 433 MHz transmitters as a part of a composite application for certification.

### 6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC mains	AC/DC adapter	1	Unshielded	1.5
Power	DC	AC/DC adapter	EUT	1	Unshielded	3
Control	Input	EUT	Open circuit	1	Unshielded	3
Control	Relay	EUT	Open circuit	1	Unshielded	3
Control	USB	EUT	No used	1	NA	NA
RF	Antenna	EUT	Antenna	4	NA	NA


### 6.3 Changes made in the EUT

To withstand the standard requirements the following changes were implemented in the EUT:

- 1) an inductor of 68  $\mu$ H was installed instead of L4;
- 2) a 10  $\mu$ F/50 V capacitor was added between pins of J5;
- 3) a 1nF/250 V capacitor was added between the following pins:
  - J8 pin 1 to J1 pin 2
  - J8 pin 2 to J1 pin 2
  - between pins of J1;
- 4) capacitors C150=1  $\mu$ F/25 V, C141=1 nF/50 V
- 5) a toroid p/n 5975004901 with 2x10 turns was connected between J5 and D13.

It is manufacturer responsibility to implement the change in the production version of the EUT. In any case the test report applies to the tested item only.

## 6.4 Test configuration

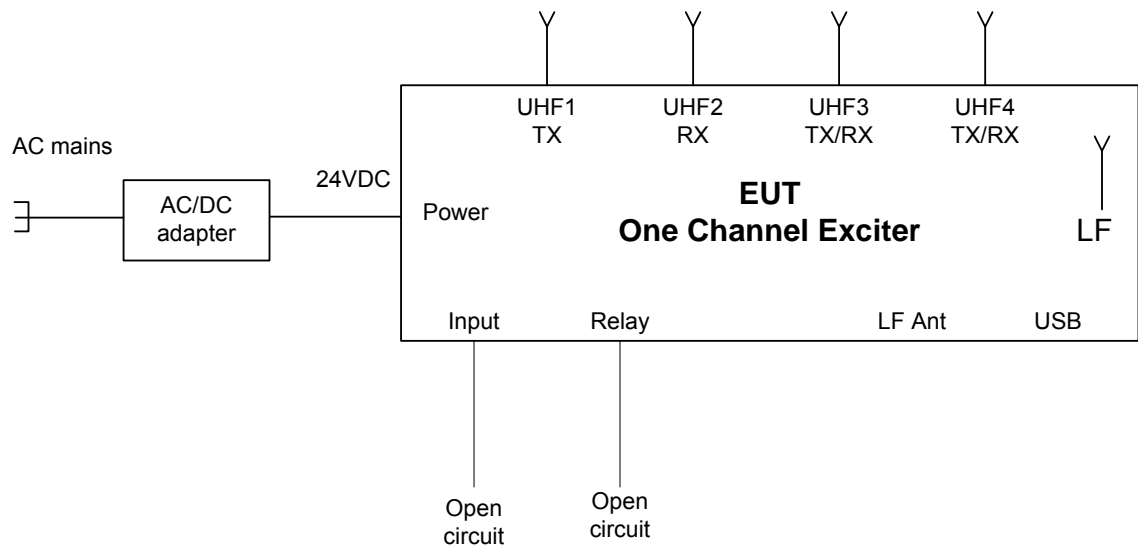



## 6.5 Transmitter characteristics

<b>Type of equipment</b>										
X	Stand-alone (Equipment with or without its own control provisions)									
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)									
	Plug-in card (Equipment intended for a variety of host systems)									
<b>Operating frequency</b>		433.26 MHz, 434.52 MHz								
<b>Maximum rated output power</b>		At transmitter 50 $\Omega$ RF output connector						dBm		
		Field strength at 3 m distance						95.1 dB( $\mu$ V/m) – peak 55.1 dB( $\mu$ V/m) -average		
<b>Is transmitter output power variable?</b>		X	No							
			Yes	continuous variable						
		stepped variable with stepsize						dB		
		minimum RF power						dBm		
		maximum RF power						dBm		
<b>Antenna connection</b>										
	unique coupling		standard connector	X	integral		with temporary RF connector			
						X	without temporary RF connector			
<b>Antenna/s technical characteristics</b>										
<b>Type</b>		<b>Manufacturer</b>		<b>Model number</b>		<b>Gain</b>				
External		APM		AGP-I43302SM-1		2 dBi				
External		APM		AGP-I433SM		2 dBi				
<b>Type of modulation</b>				QPSK						
<b>Bit rate</b>				160 kbps						
<b>Transmitter power source</b>										
	Battery	<b>Nominal rated voltage</b>								
X	DC	<b>Nominal rated voltage</b>		24 VDC via AC/DC adapter						
	AC mains	<b>Nominal rated voltage</b>								
<b>Common power source for transmitter and receiver</b>				X	yes		no			

<b>Test specification:</b>		<b>FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements</b>	
<b>Test procedure:</b>		Supplier declaration	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		30-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 Periodic operation requirements

#### 7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

#### 7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

Figure 7.1.1 Setup for transmitter shut down test








<b>Test specification:</b>	<b>FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements</b>		
<b>Test procedure:</b>	Supplier declaration		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	30-Apr-14		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b>			

Table 7.1.1 Periodic operation requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1, Plot 7.1.2	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	NA	NA
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	NA	NA

<b>Test specification:</b>		<b>FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements</b>	
<b>Test procedure:</b>		Supplier declaration	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		30-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b>			

Plot 7.1.1 Transmitter shut down test result, UHF1 transmitter

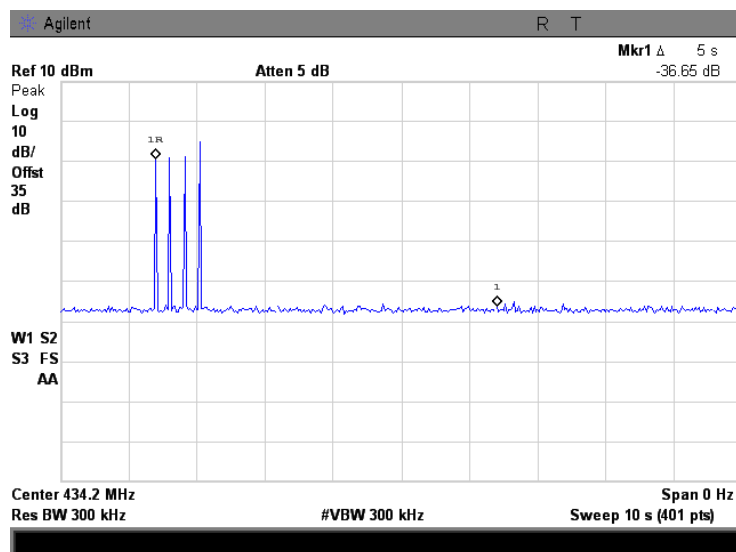

Plot 7.1.2 Transmitter shut down test result, UHF3 transmitter

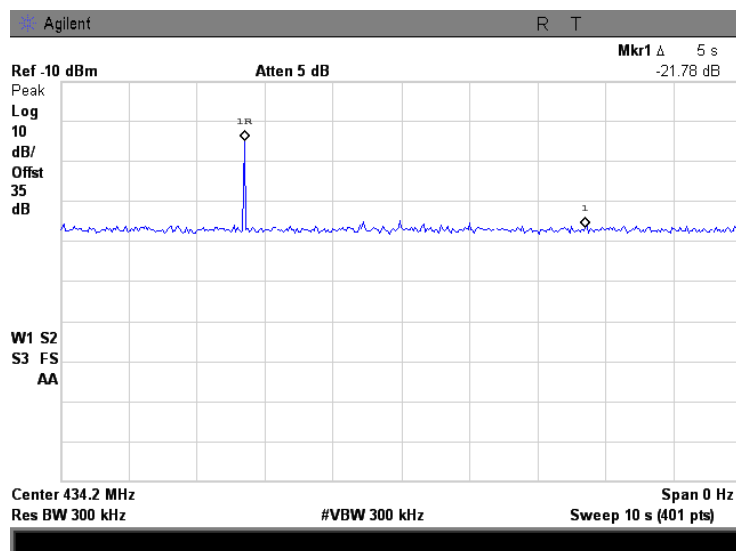

Reference numbers of test equipment used

HL 2780							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	17-Apr-14 - 01-May-14		
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

## 7.2 Field strength of emissions, UHF3 transmitter

### 7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.26	100.80	80.80
434.52	100.84	80.84

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**		
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log(S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\* - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

## 7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


## 7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

**Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz**

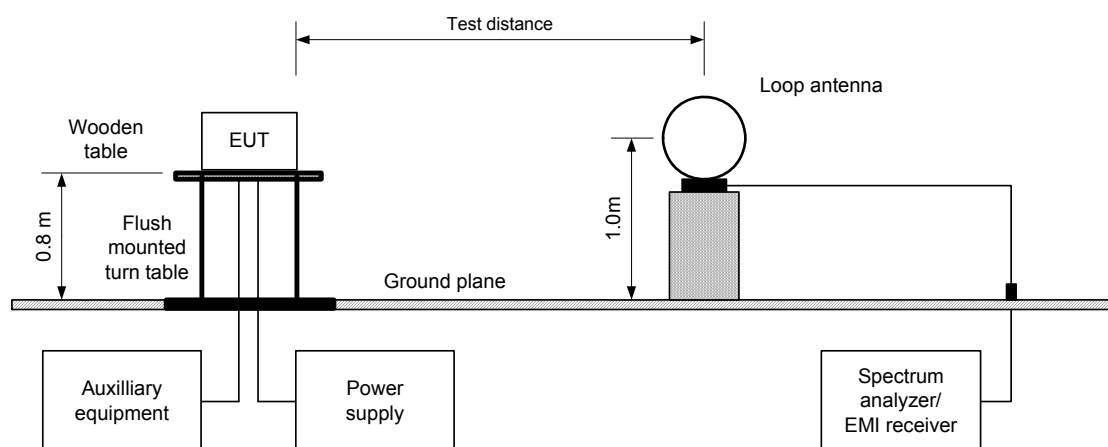

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

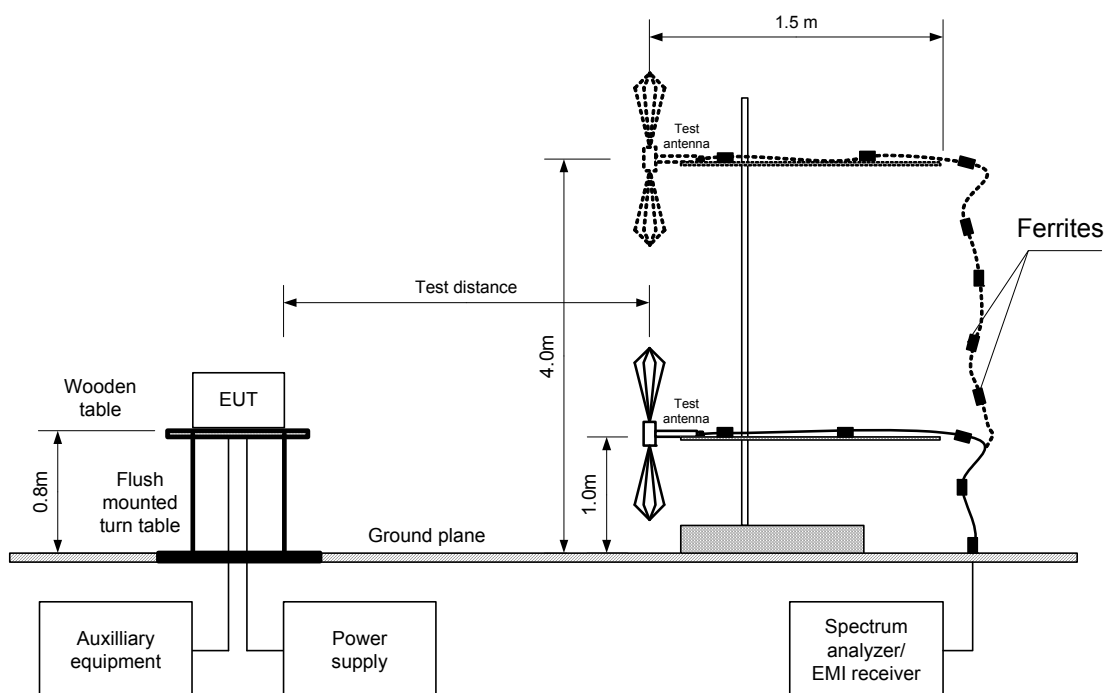

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	17-Apr-14 - 01-May-14		
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

**Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz**

TEST DISTANCE: 3 m  
EUT POSITION: Vertical & Horizontal  
MODULATION: GFSK  
BIT RATE: 160 kbps  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
INVESTIGATED FREQUENCY RANGE: 0.009 - 4400 MHz  
DETECTOR USED: Peak  
RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)  
9.0 kHz (150 kHz – 30 MHz)  
120 kHz (30 MHz – 1000 MHz)  
1.0 MHz (above 1000 MHz)  
VIDEO BANDWIDTH: ≥ Resolution bandwidth  
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
Biconilog (30 MHz – 1000 MHz)  
Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission 433.26 MHz											
433.180	H	1.0	150	95.06	100.80	-5.74	95.06	55.06	80.80	-25.74	Pass
Spurious emissions											
866.365	H	1.0	60	61.85	80.80	-18.95	61.85	21.85	60.80	-38.95	Pass
1299.793	H	1.0	360	54.15	80.80	-26.65	54.15	14.15	60.80	-46.65	
1733.003	H	1.0	230	67.97	80.80	-12.83	67.97	27.97	60.80	-32.83	
2166.225	H	1.0	330	58.80	80.80	-22.00	58.80	18.80	60.80	-42.00	
2599.485	V	1.0	200	67.01	80.80	-13.79	67.01	27.01	60.80	-33.79	
3032.808	H	1.0	330	70.64	80.80	-10.16	70.64	30.64	60.80	-30.16	
3466.105	V	1.0	220	71.42	80.80	-9.38	71.42	31.42	60.80	-29.38	
3899.365	H	1.0	160	69.76	74.00	-4.24	69.76	29.76	54.00	-24.24	
4332.563	V	1.0	360	56.79	74.00	-17.21	56.79	16.79	54.00	-37.21	
Fundamental emission 434.52 MHz											
434.443	H	1.0	360	95.10	100.84	-75.74	95.10	55.10	80.84	-25.74	Pass
Spurious emissions											
868.883	H	1.0	80	62.11	80.84	-18.73	62.11	22.11	60.84	-38.73	Pass
1303.585	H	1.0	360	55.65	74.00	-18.35	55.65	15.65	54.00	-38.35	
1738.030	H	1.0	250	67.78	80.84	-13.06	67.78	27.78	60.84	-33.06	
2172.600	H	1.0	300	58.85	80.84	-21.99	58.85	18.85	60.84	-41.99	
2607.083	V	1.0	190	66.04	80.84	-14.80	66.04	26.04	60.84	-34.80	
3041.578	H	1.0	310	68.80	80.84	-12.04	68.80	28.80	60.84	-32.04	
3476.148	V	1.0	200	71.35	80.84	-9.49	71.35	31.35	60.84	-29.49	
3910.730	H	1.0	175	70.52	74.00	-3.48	70.52	30.52	54.00	-23.48	
4345.138	V	1.0	30	58.14	74.00	-15.86	58.14	18.14	54.00	-35.86	

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin, dB =Measured (calculated) value, dB(μV/m)-Limit, dB(μV/m)



<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	17-Apr-14 - 01-May-14		
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number of pulses during 100 msec	Duration, ms	Period, ms		
1	1	NA	NA	NA	-40

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

**Reference numbers of test equipment used**

HL 0521	HL 0604	HL 1984	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	17-Apr-14 - 01-May-14		
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

**Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands**

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical & Horizontal)
MODULATION:	GFSK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Emissions (30 MHz – 1000 MHz)								
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.





Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure:	ANSI C63.4, Section 13.1.4			
Test mode:	Compliance	Verdict: PASS		
Date(s):	17-Apr-14 - 01-May-14			
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC	
Remarks: UHF3 transmitter				

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Horizontal

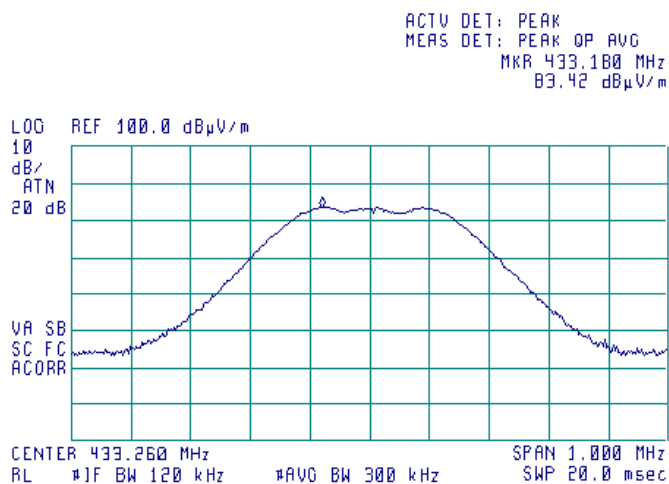

Plot 7.2.2 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Horizontal

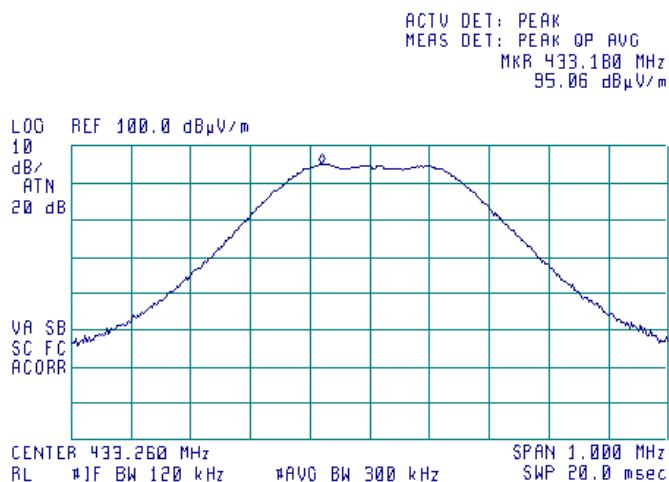




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.3 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Vertical

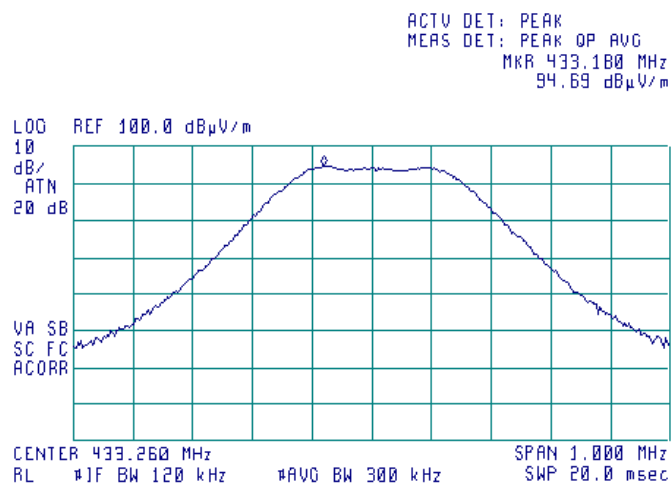

Plot 7.2.4 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Vertical

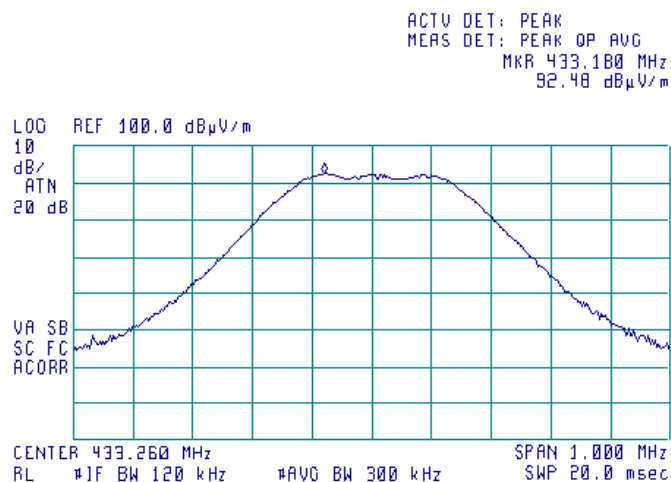




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.5 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Horizontal

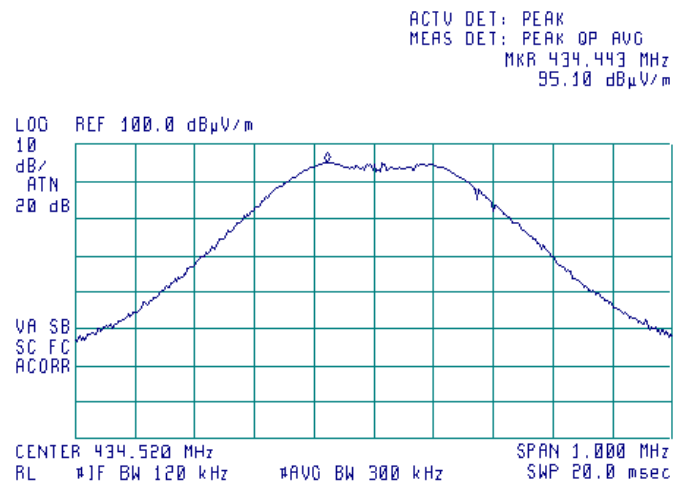

Plot 7.2.6 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Horizontal

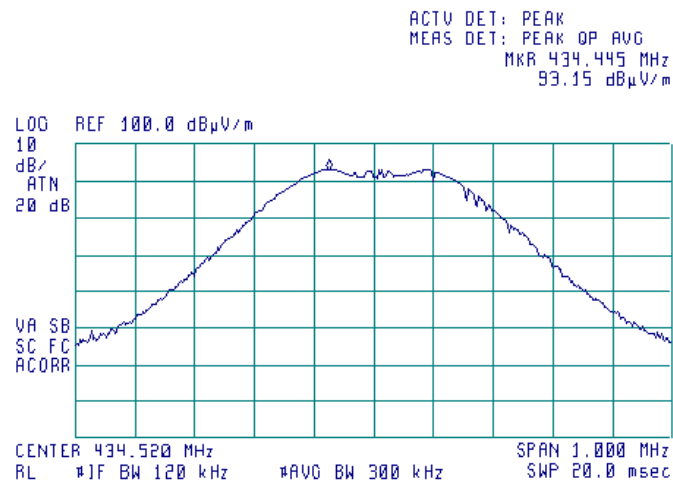




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.7 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Vertical

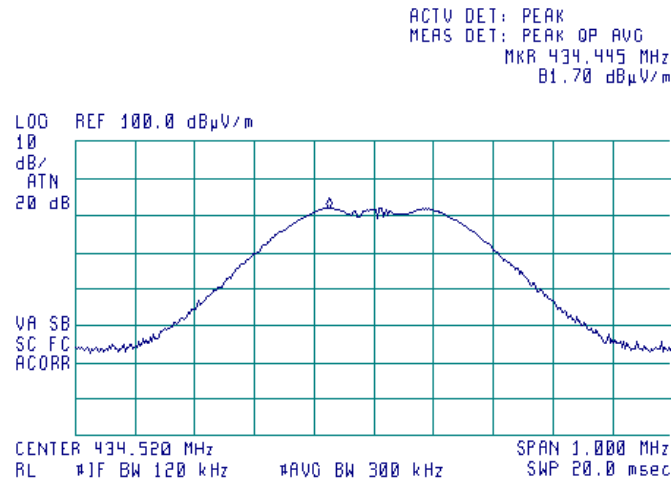

Plot 7.2.8 Radiated emission measurements at the fundamental frequency 434.52 MHz


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Vertical

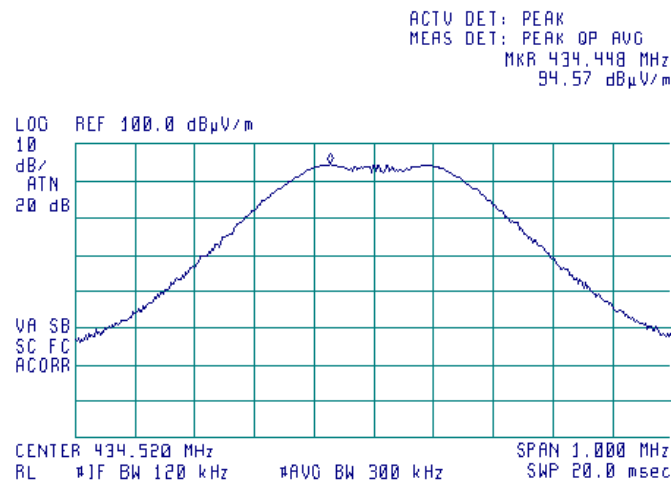

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			


#### Plot 7.2.9 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

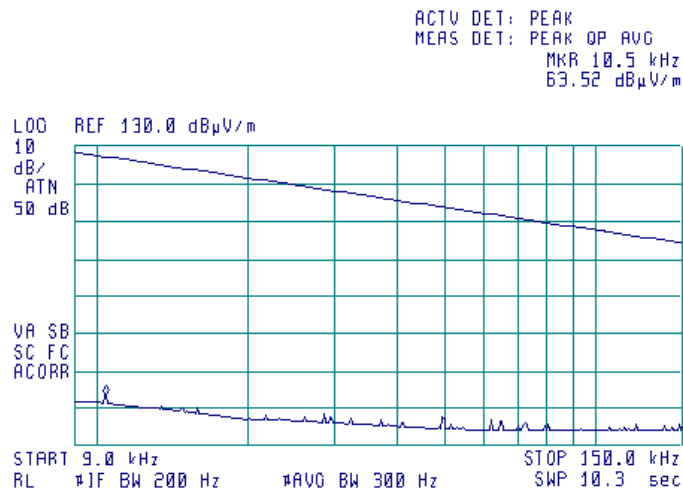

#### Plot 7.2.10 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

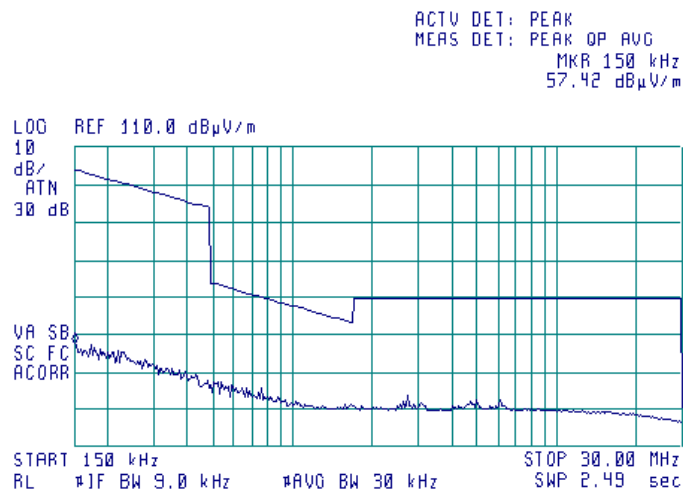




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

#### Plot 7.2.11 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical and Horizontal

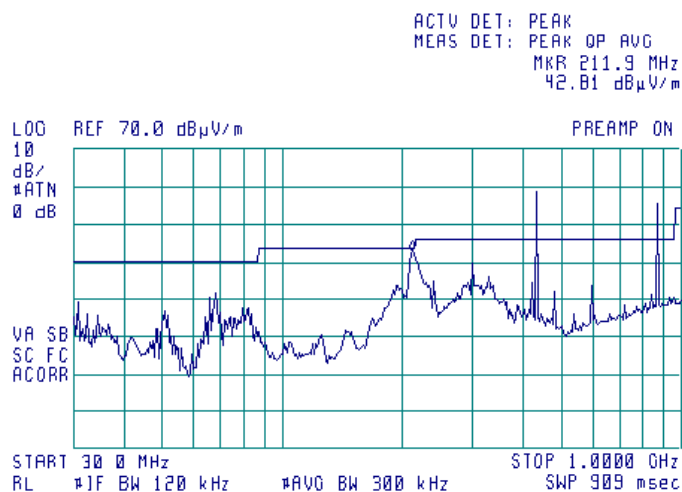





HERMON LABORATORIES

Test specification:		FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		17-Apr-14 - 01-May-14	
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			



Plot 7.2.12 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical and Horizontal  
OPERATING FREQUENCY: 433.26 MHz

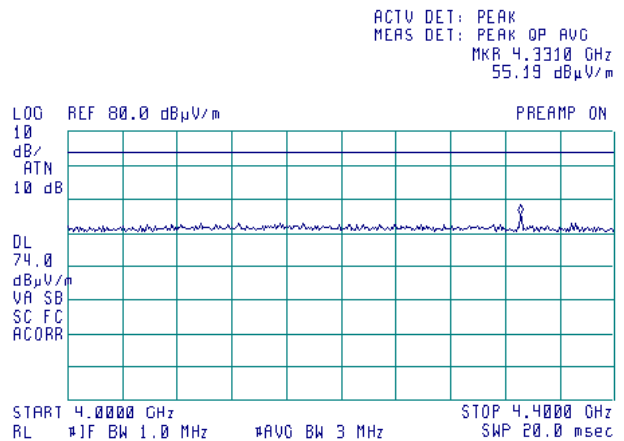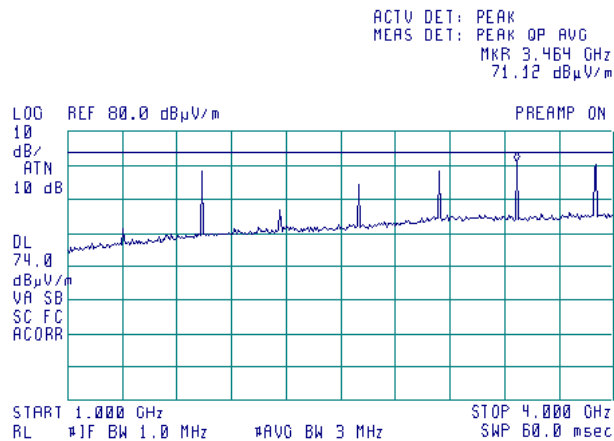

Plot 7.2.13 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical and Horizontal  
OPERATING FREQUENCY: 434.52 MHz

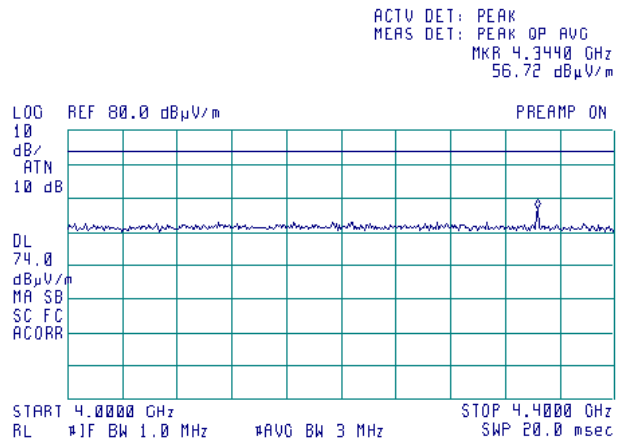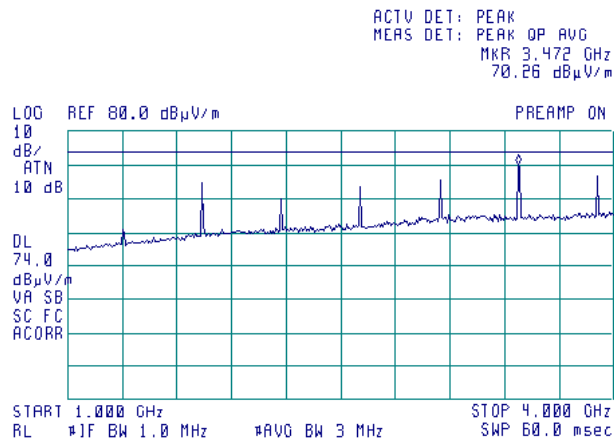






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.14 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

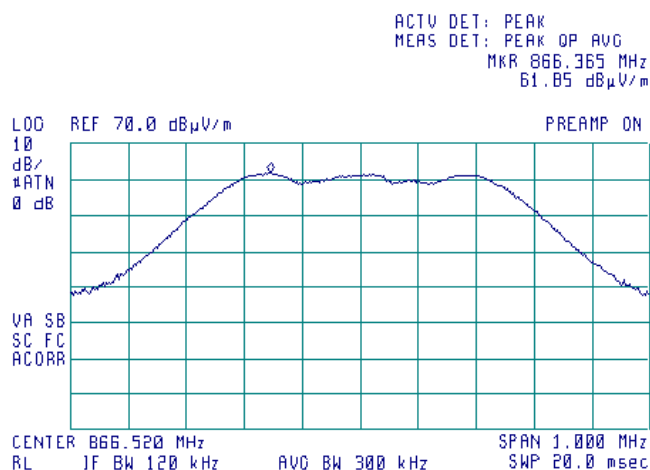

Plot 7.2.15 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

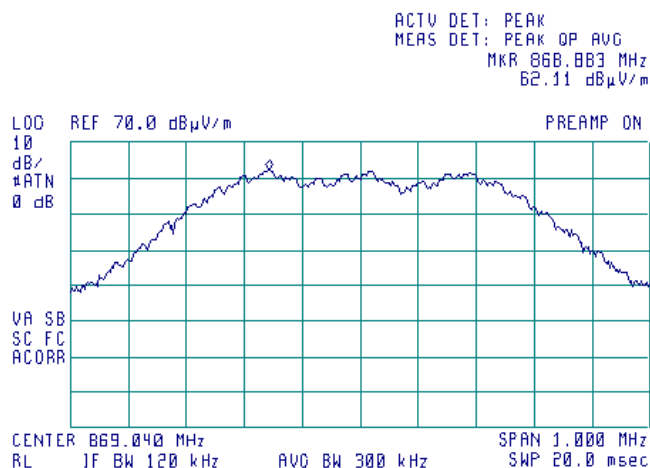




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.16 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical & Horizontal  
OPERATING FREQUENCY 433.26 MHz

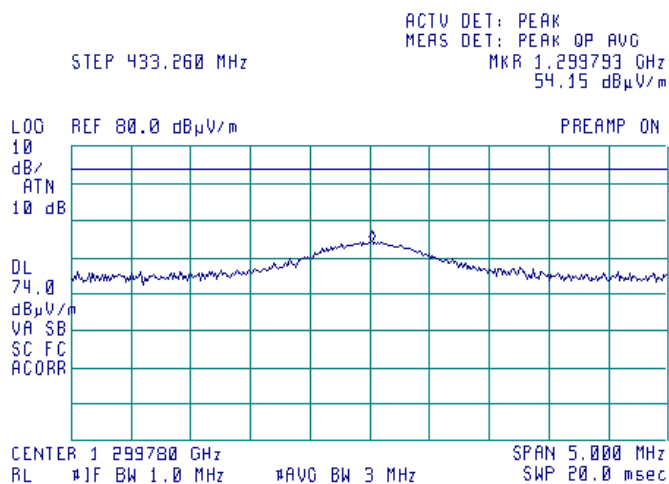

Plot 7.2.17 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical & Horizontal  
OPERATING FREQUENCY 434.52 MHz

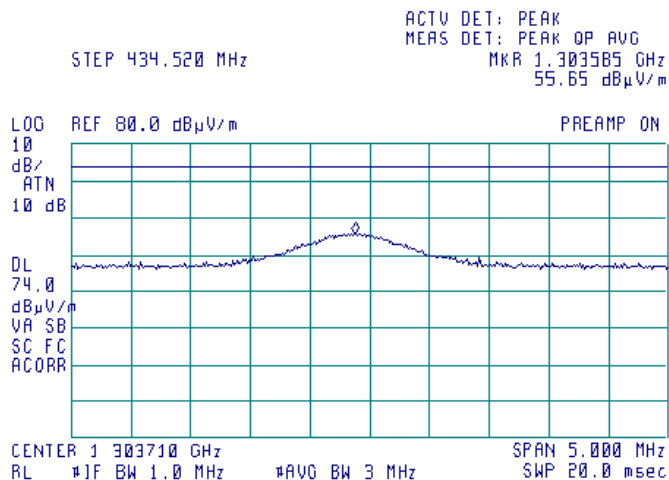




HERMON LABORATORIES

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			


**Plot 7.2.18 Radiated emission measurements at the fourth harmonic frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical& Horizontal  
 OPERATING FREQUENCY: 433.26 MHz

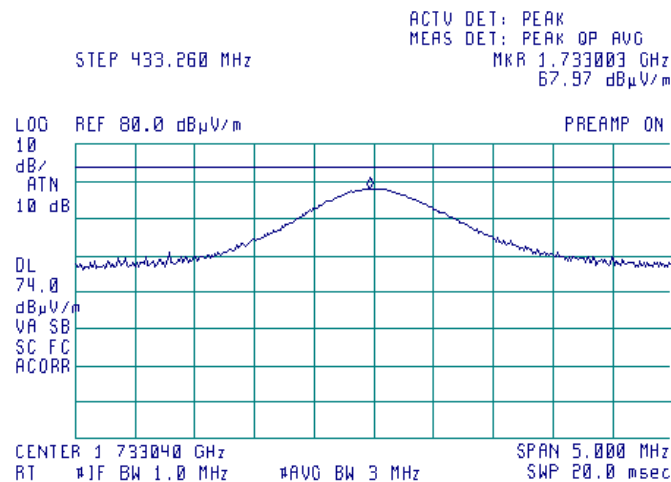

**Plot 7.2.19 Radiated emission measurements at the fourth harmonic frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical& Horizontal  
 OPERATING FREQUENCY: 434.52 MHz

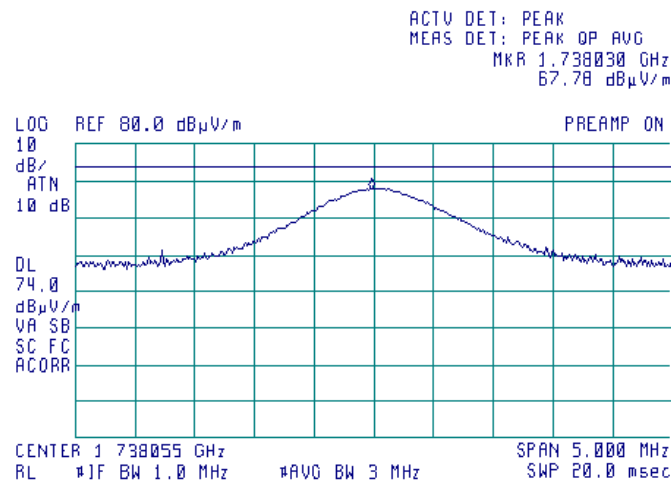




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.20 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

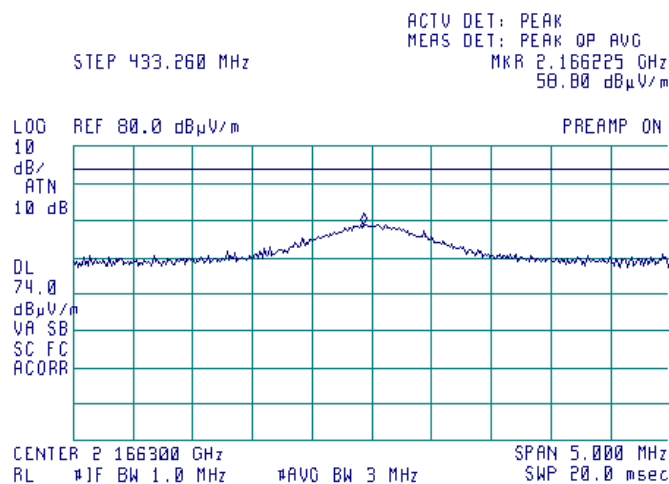

Plot 7.2.21 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

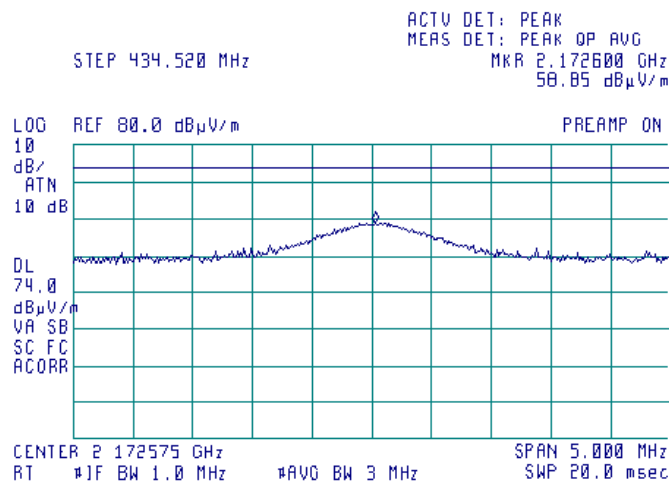




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.22 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

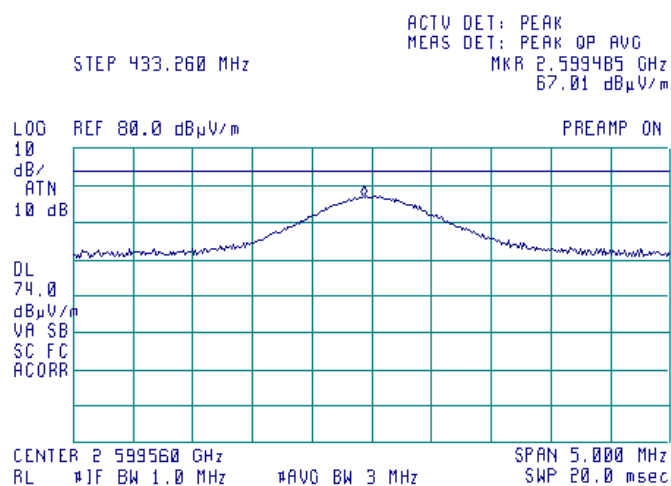

Plot 7.2.23 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

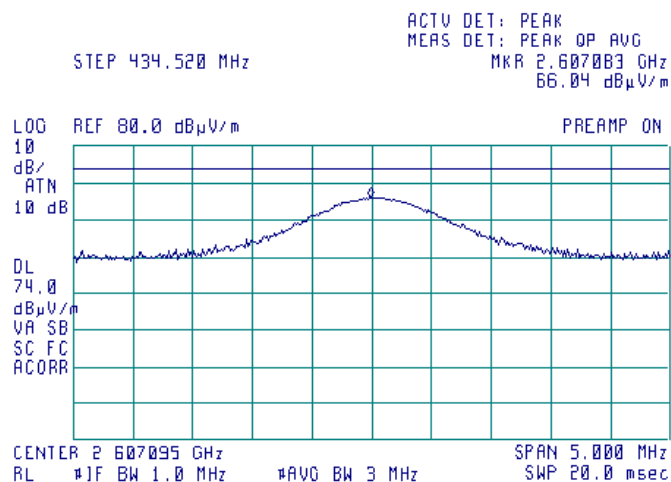




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


**Plot 7.2.24 Radiated emission measurements at the seventh harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

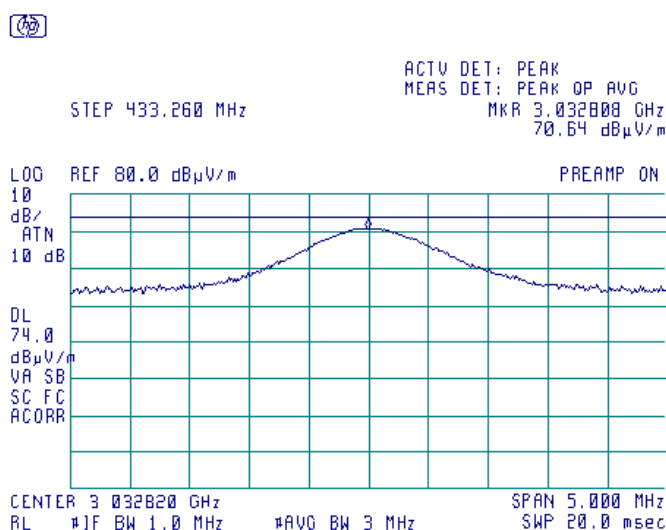

**Plot 7.2.25 Radiated emission measurements at the seventh harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

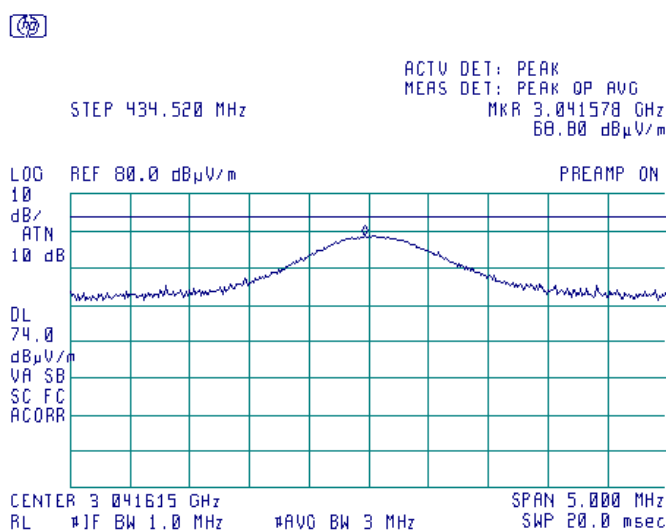




HERMON LABORATORIES

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			


#### Plot 7.2.26 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical& Horizontal  
 OPERATING FREQUENCY: 433.26 MHz

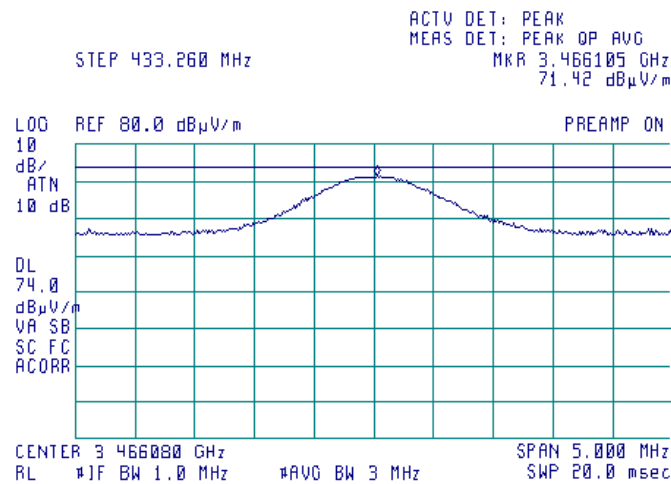

#### Plot 7.2.27 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical& Horizontal  
 OPERATING FREQUENCY: 434.52 MHz

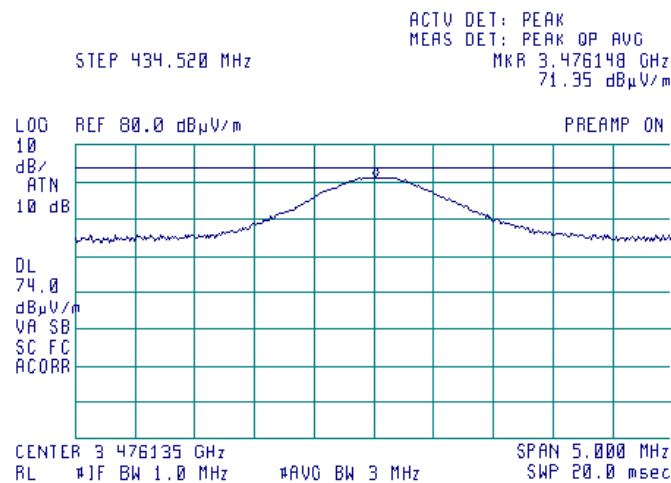




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.28 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

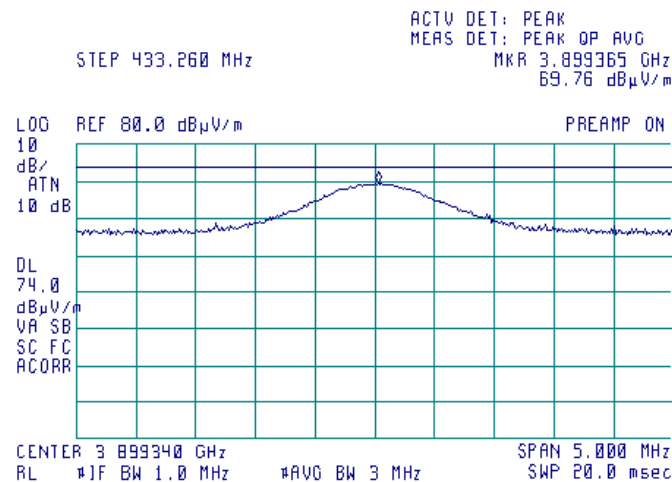

Plot 7.2.29 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

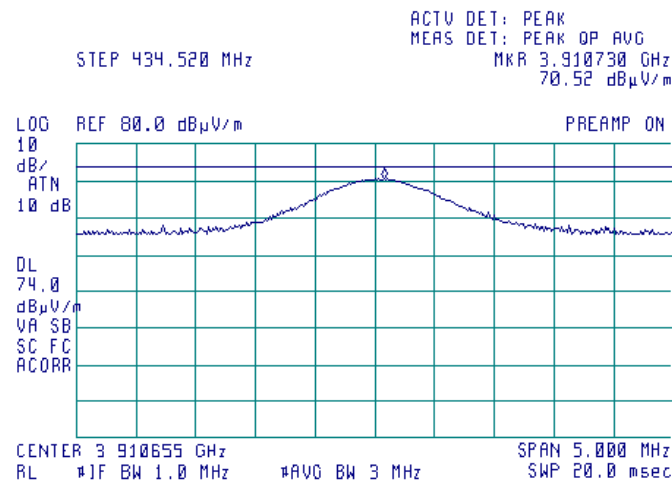






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.30 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

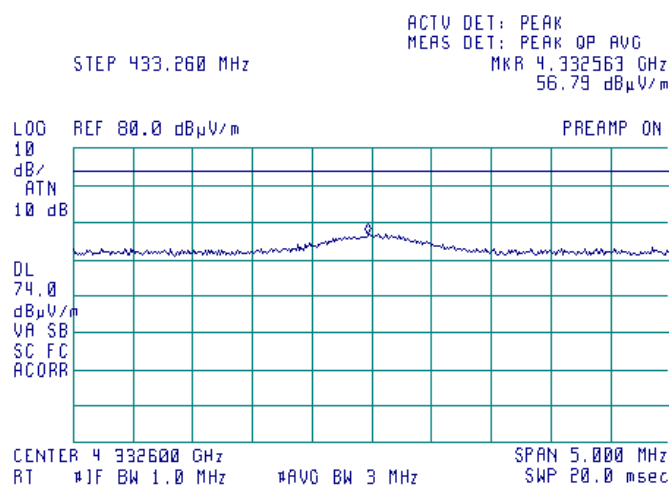


Plot 7.2.31 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

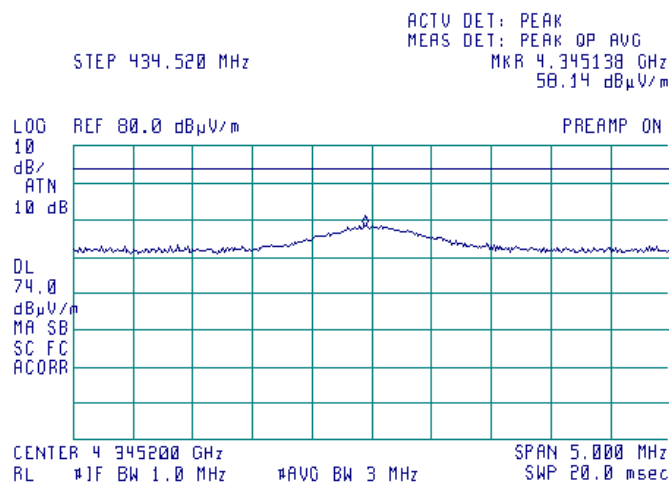


<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

Plot 7.2.32 Transmission pulse duration

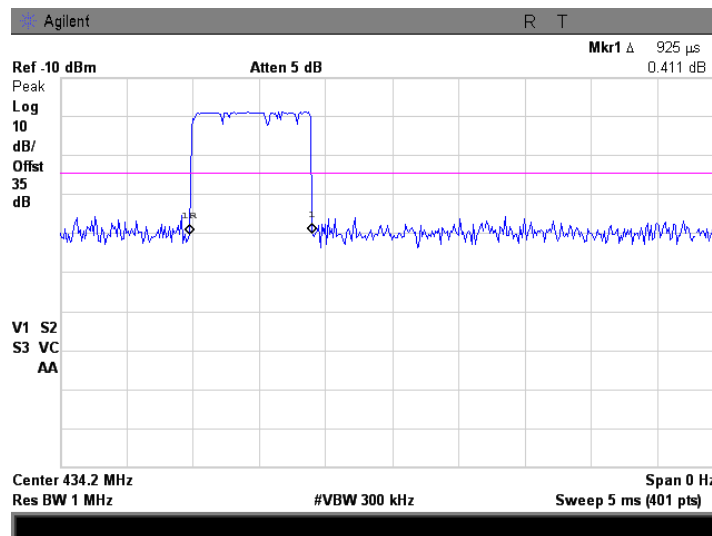


<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF3 transmitter			

Plot 7.2.33 Transmission pulse period

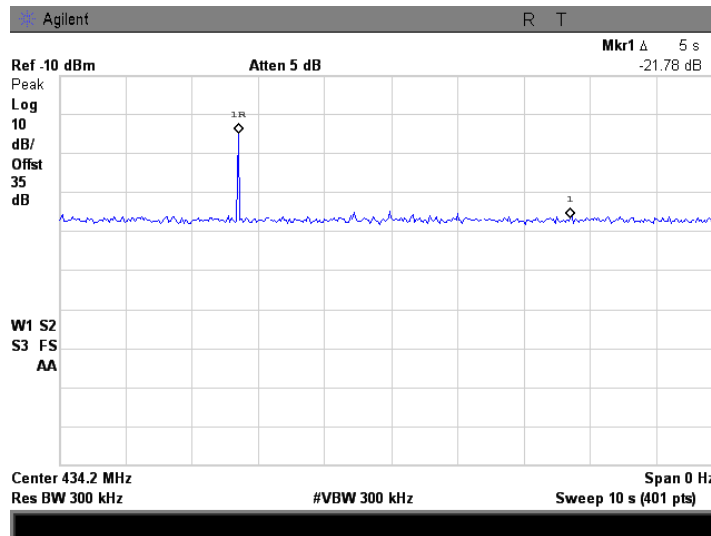

Plot 7.2.34 Transmission pulse period

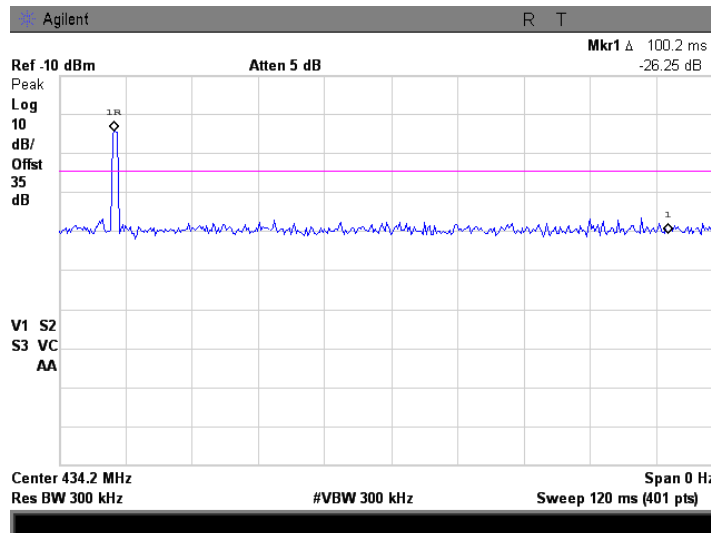

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	17-Apr-14 - 01-May-14		
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF1 transmitter			

## 7.3 Field strength of emissions, UHF1 transmitter

### 7.3.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.3.1 and Table 7.3.2.

**Table 7.3.1 Radiated fundamental emission limits**

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.26	100.80	80.80
434.52	100.84	80.84

**Table 7.3.2 Radiated spurious emissions limits**

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**		
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\* - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF1 transmitter			

### 7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded in Table 7.3.3, Table 7.3.5 and shown in the associated plots.


### 7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.3.3.3 The worst test results (the lowest margins) were recorded in Table 7.3.3, Table 7.3.5 and shown in the associated plots.

**Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz**

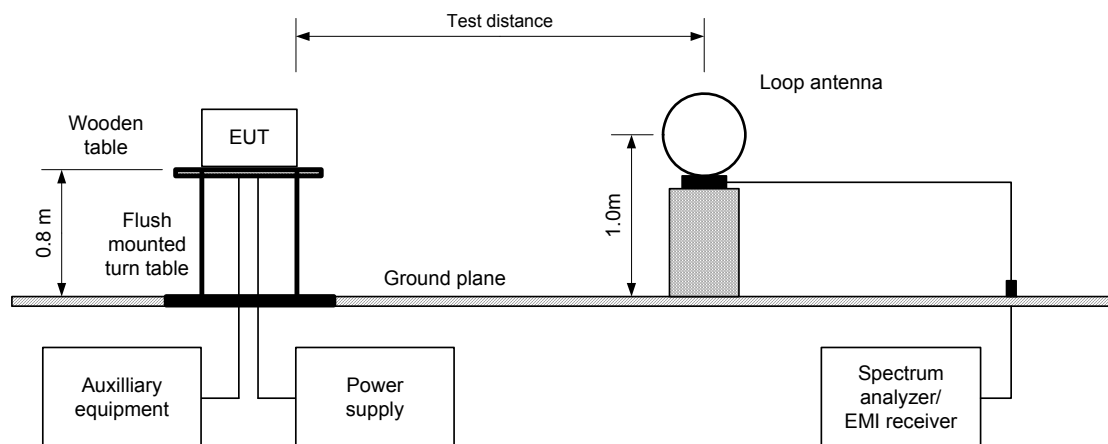

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF1 transmitter			

Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz

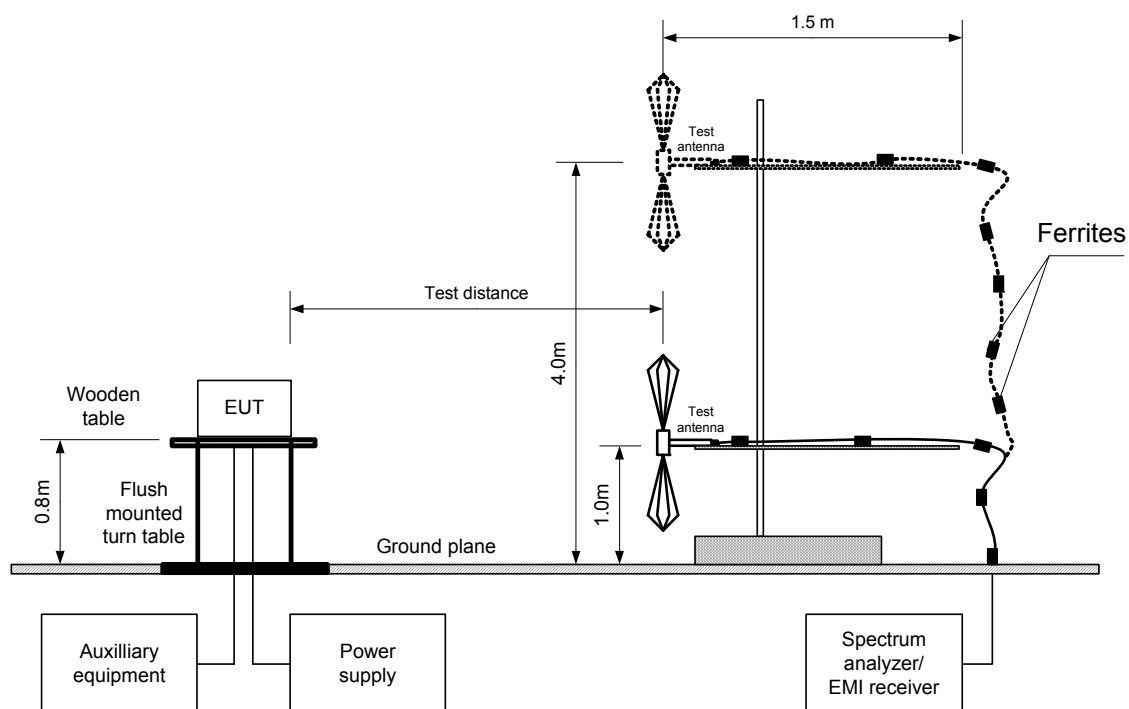



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions				
Test procedure:	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance	Verdict:			PASS
Date(s):	17-Apr-14 - 01-May-14				
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %		Power Supply: 24 VDC	
Remarks: UHF1 transmitter					

**Table 7.3.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz**

TEST DISTANCE: 3 m  
EUT POSITION: Typical (Vertical/ Horizontal)  
MODULATION: GFSK  
BIT RATE: 160 kbps  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
INVESTIGATED FREQUENCY RANGE: 0.009 - 4400 MHz  
DETECTOR USED: Peak  
RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)  
9.0 kHz (150 kHz – 30 MHz)  
120 kHz (30 MHz – 1000 MHz)  
1.0 MHz (above 1000 MHz)  
VIDEO BANDWIDTH: ≥ Resolution bandwidth  
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
Biconilog (30 MHz – 1000 MHz)  
Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Double ridged guide (above 1000 MHz)											
Fundamental emission 433.26 MHz											
433.180	H	1.0	220	93.59	100.80	-7.21	93.59	53.59	80.80	-27.21	Pass
Spurious emissions											
866.355	H	1.0	60	69.72	80.80	-11.08	69.72	29.72	60.80	-31.08	Pass
4332.563	H	1.0	360	55.15	74.00	-18.85	55.15	15.15	54.00	-38.85	
Fundamental emission 434.52 MHz											
434.438	H	1.0	160	93.17	100.84	-7.67	93.17	53.17	80.84	-27.63	Pass
Spurious emissions											
868.880	H	1.0	80	70.21	80.84	-10.63	70.21	30.21	60.84	-30.63	Pass
4345.188	H	1.0	360	55.56	74.00	-18.44	55.56	15.56	54.00	-38.44	

\*- EUT front panel refers to 0 degrees position of turntable.

\*\* - Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m)

**Table 7.3.4 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number of pulses during 100 msec	Duration, ms	Period, ms		
1	1	NA	NA	NA	-40

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

for pulse train longer than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$$

#### Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	17-Apr-14 - 01-May-14		
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF1 transmitter			

**Table 7.3.5 Field strength of emissions below 1 GHz within restricted bands**

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical/ Horizontal)
MODULATION:	GFSK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
240.0	34.8	33.2	46.0	-12.8	Vertical	1.0	180	Pass

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions				
Test procedure:	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance	Verdict: PASS			
Date(s):	17-Apr-14 - 01-May-14				
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %		Power Supply: 24 VDC	
Remarks: UHF1 transmitter					

Table 7.3.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.3.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.1 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Horizontal

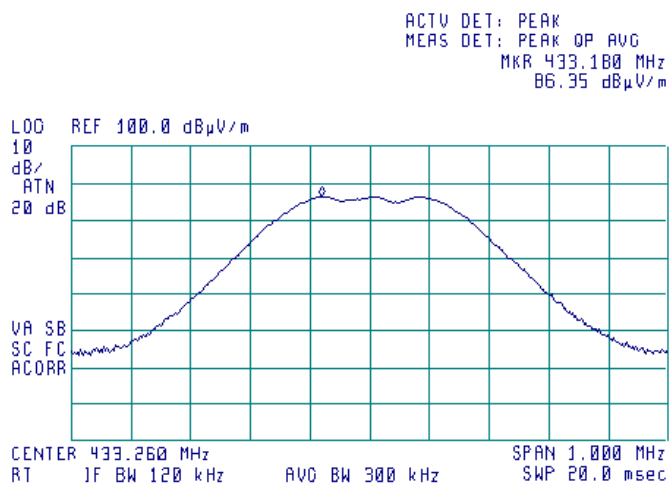

Plot 7.3.2 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Horizontal

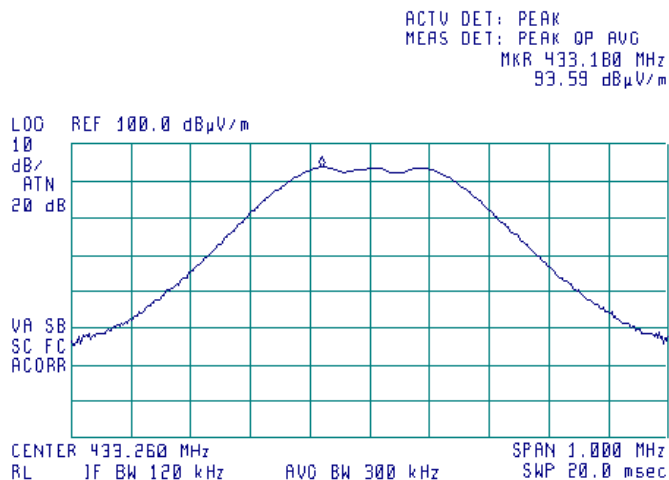




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.3 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Vertical

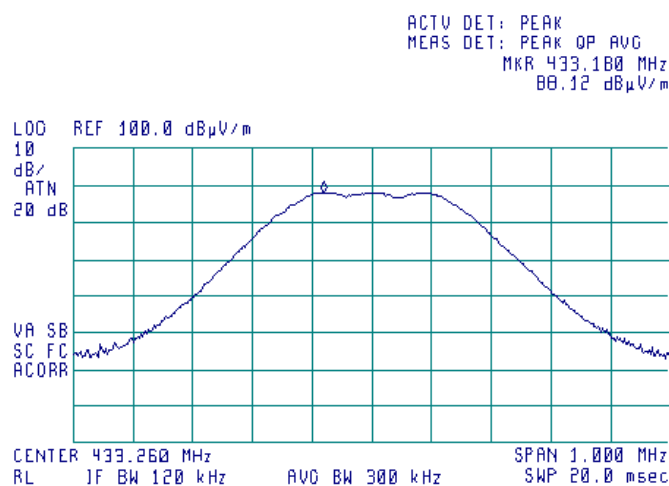

Plot 7.3.4 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Vertical

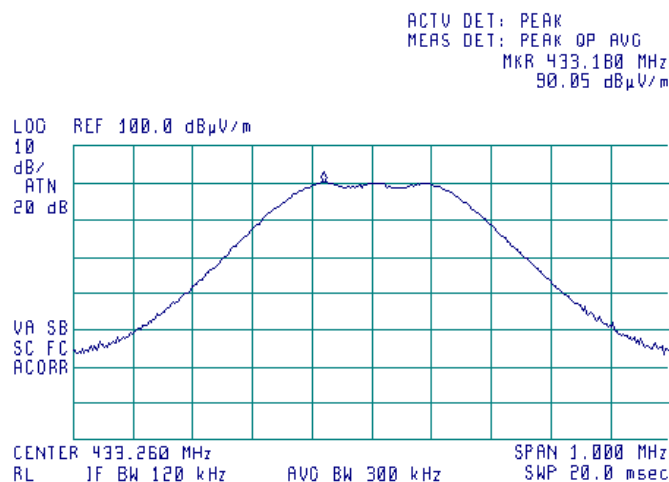




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.5 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Horizontal

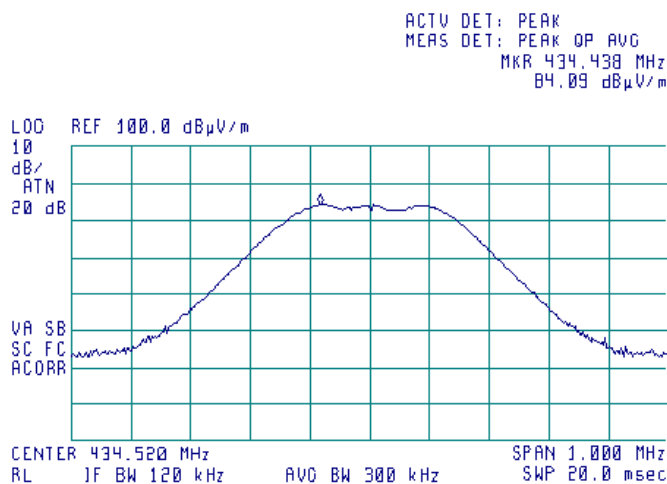

Plot 7.3.6 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Horizontal

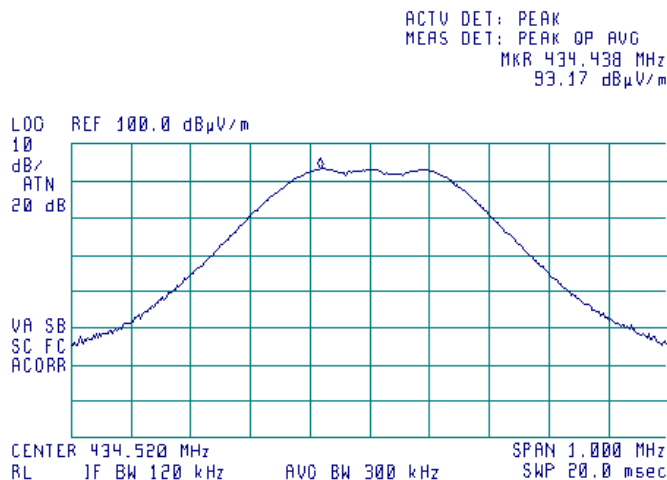




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.7 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Vertical

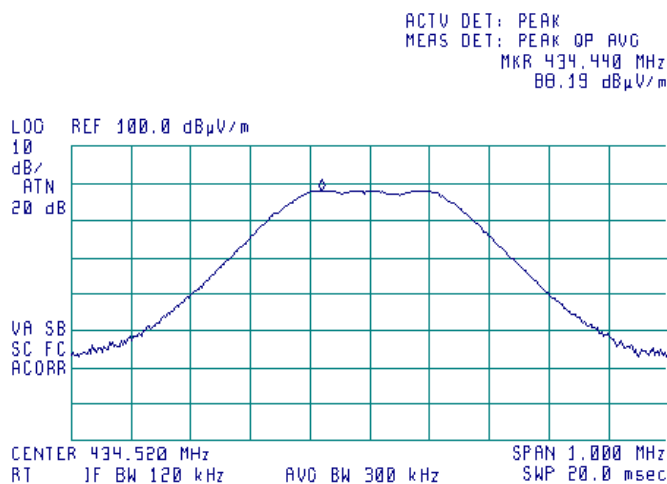

Plot 7.3.8 Radiated emission measurements at the fundamental frequency 434.52 MHz


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Vertical

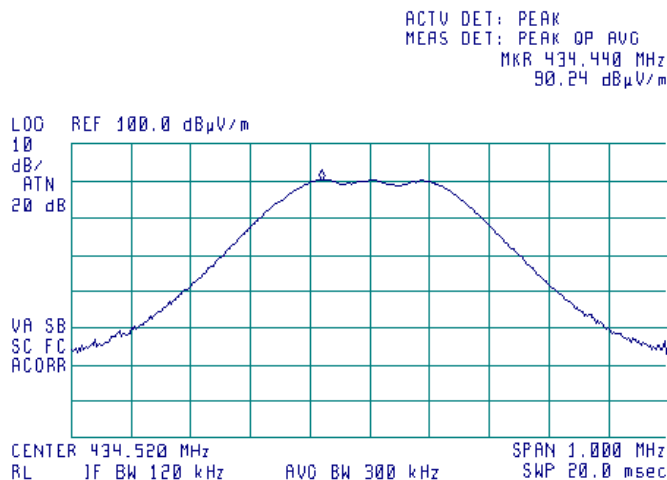

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF1 transmitter			


#### Plot 7.3.9 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

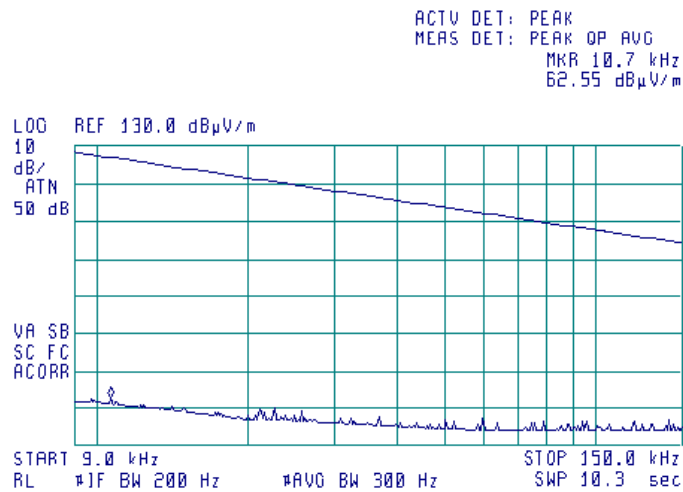

#### Plot 7.3.10 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

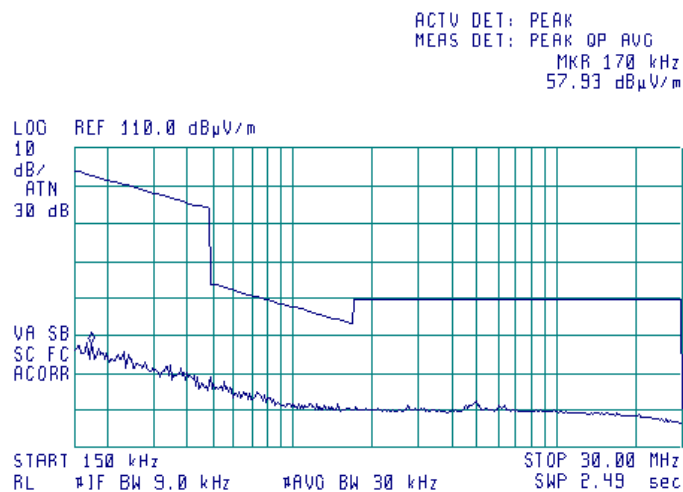




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.11 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 433.26 MHz

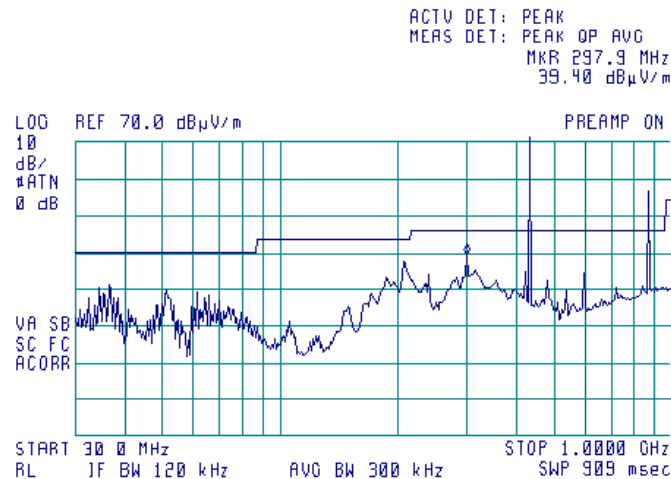

Plot 7.3.12 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 433.26 MHz

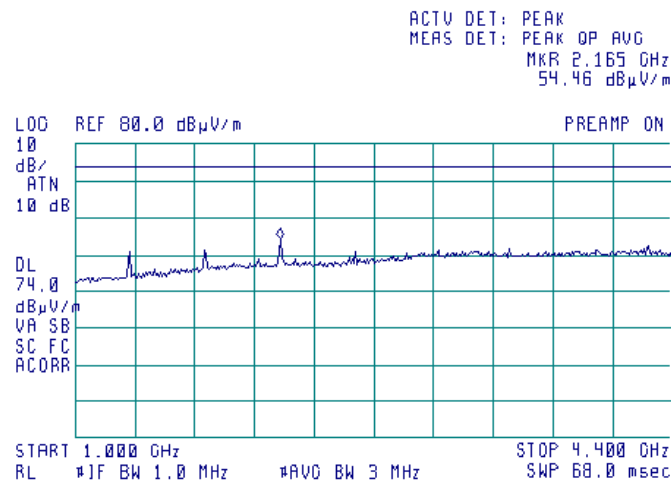




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.13 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 434.52 MHz

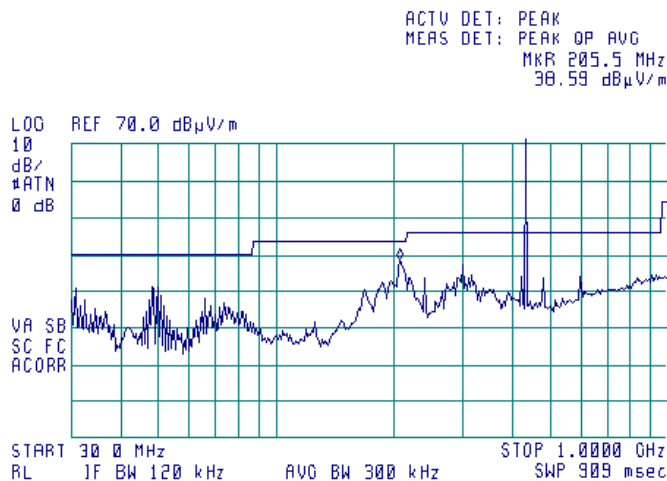

Plot 7.3.14 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 434.52 MHz

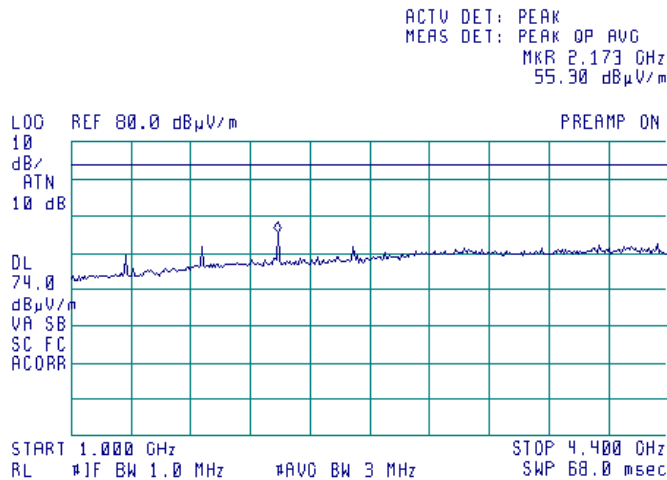






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


**Plot 7.3.15 Radiated emission measurements at the second harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 433.26 MHz

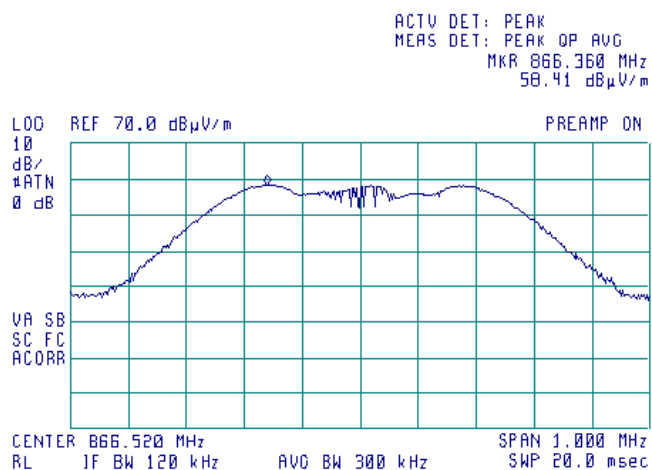

**Plot 7.3.16 Radiated emission measurements at the second harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 433.26 MHz

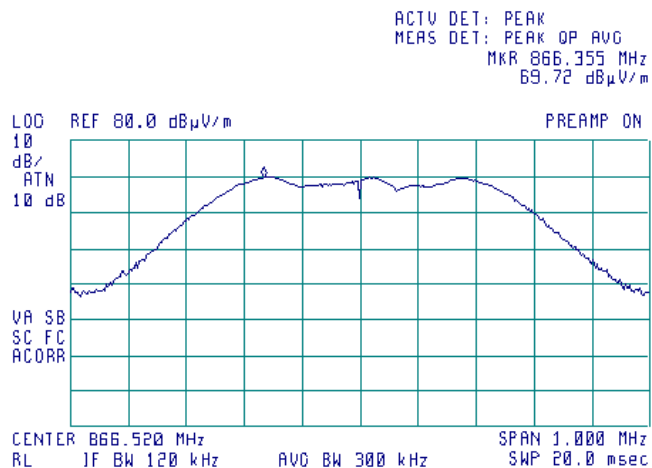




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.17 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 434.52 MHz

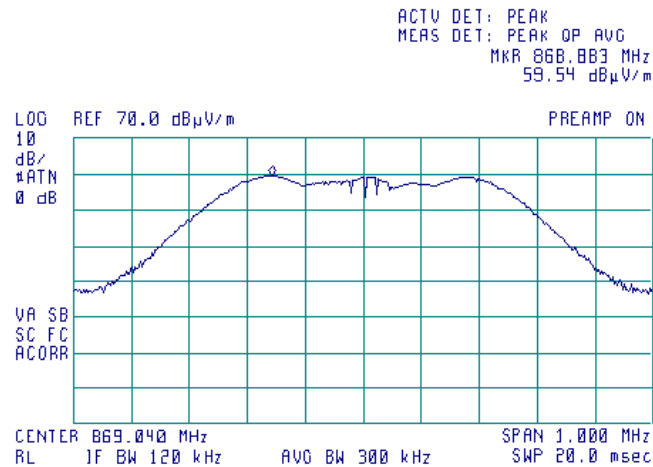

Plot 7.3.18 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Vertical and Horizontal  
EUT FREQUENCY: 434.52 MHz

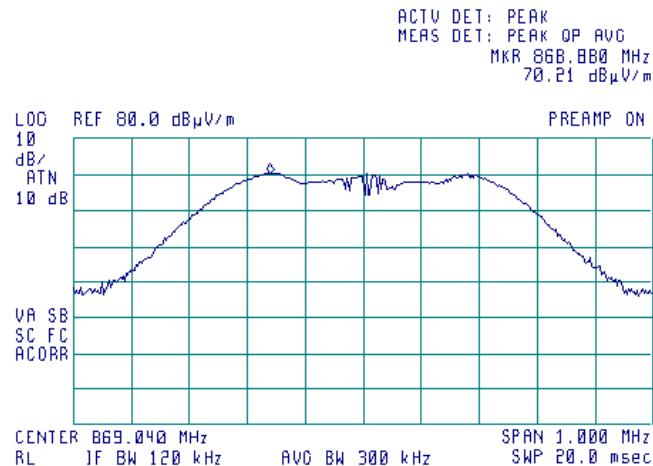




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


#### Plot 7.3.19 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical & Horizontal  
OPERATING FREQUENCY 433.26 MHz

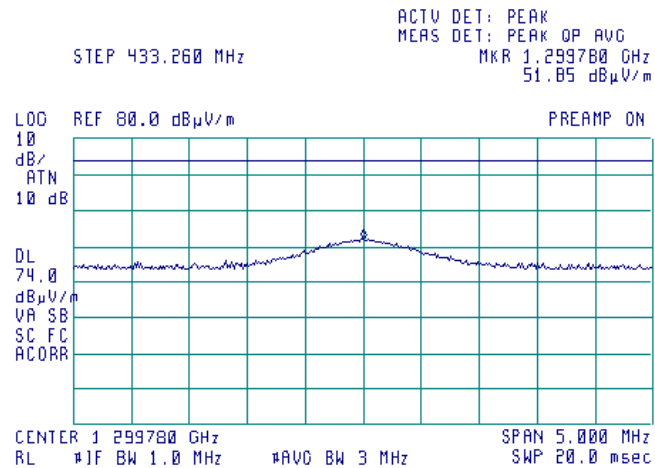

#### Plot 7.3.20 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical & Horizontal  
OPERATING FREQUENCY 434.52 MHz

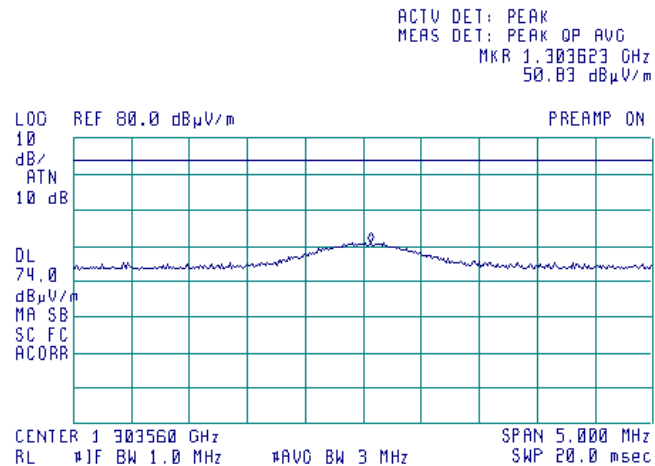




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.21 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

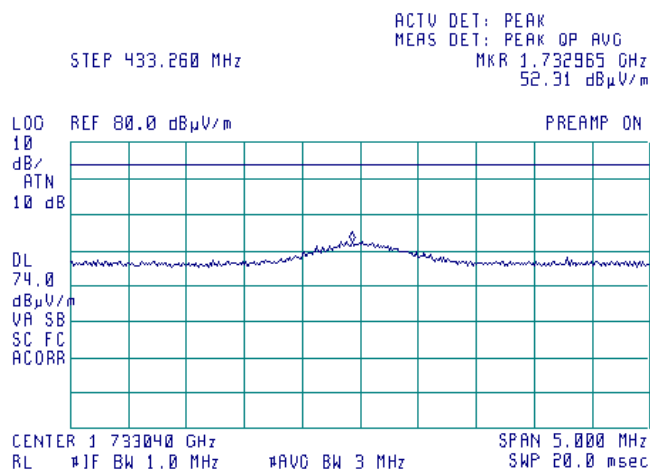

Plot 7.3.22 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

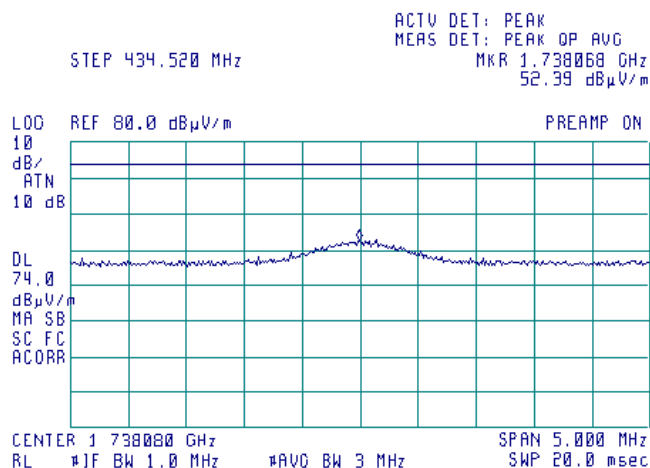




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.23 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

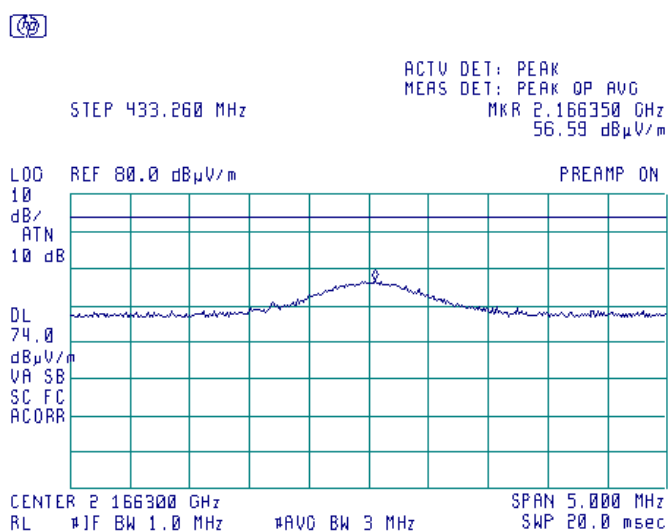

Plot 7.3.24 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

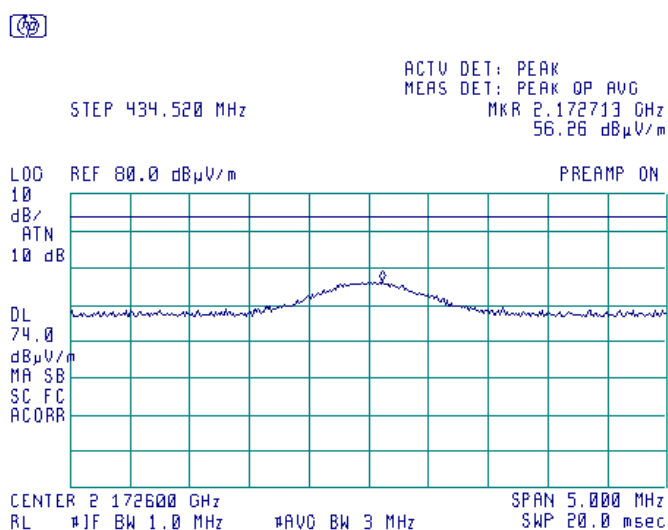




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


**Plot 7.3.25 Radiated emission measurements at the sixth harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

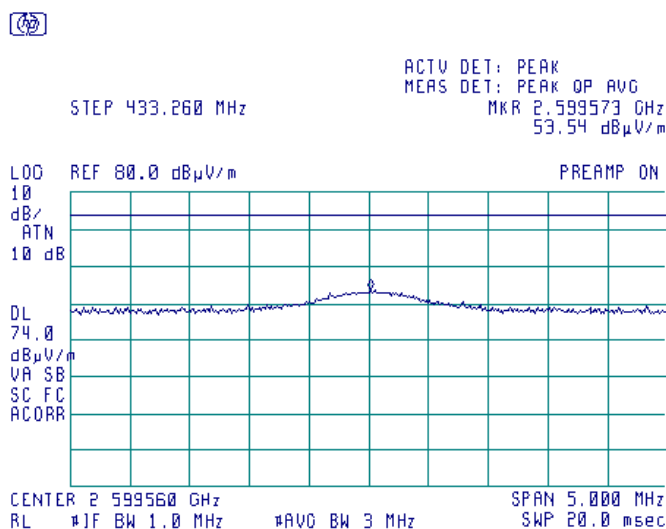

**Plot 7.3.26 Radiated emission measurements at the sixth harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

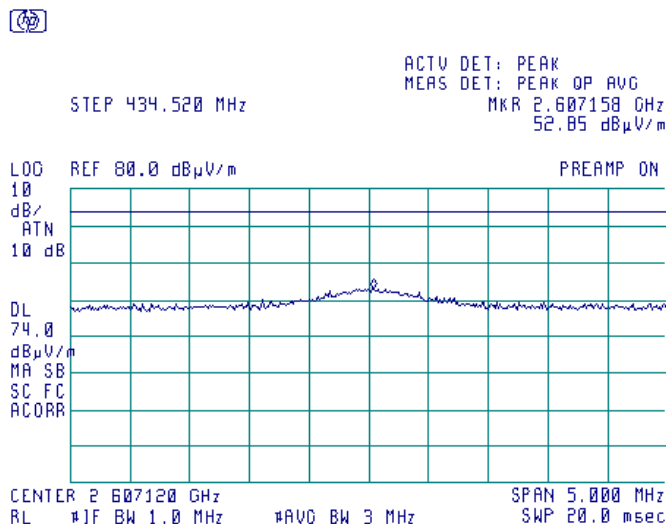




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.27 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

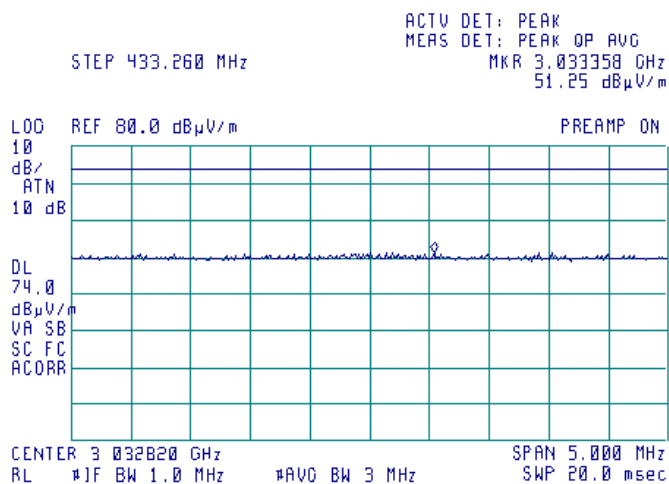

Plot 7.3.28 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

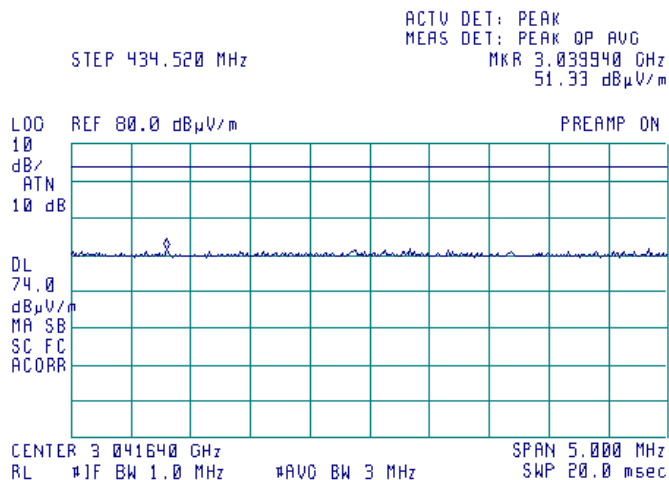




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


**Plot 7.3.29 Radiated emission measurements at the eighth harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

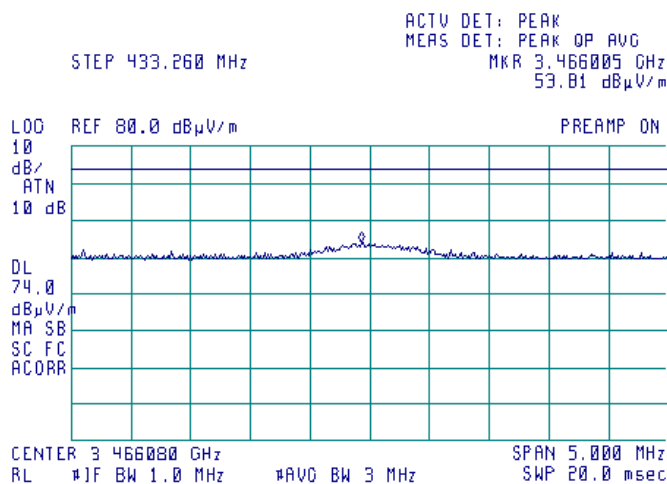

**Plot 7.3.30 Radiated emission measurements at the eighth harmonic frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

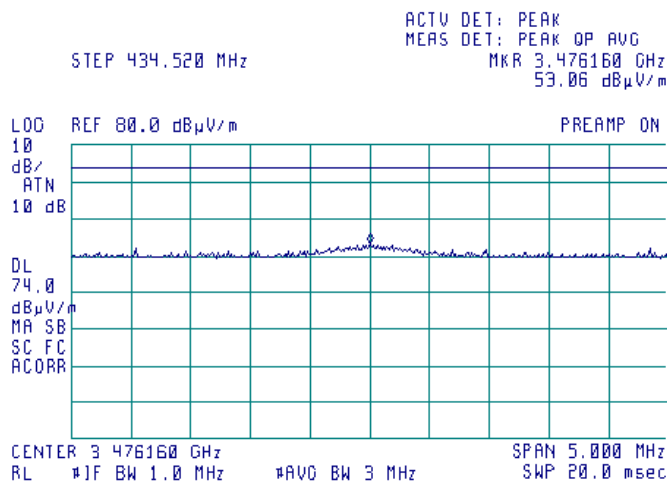






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.31 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

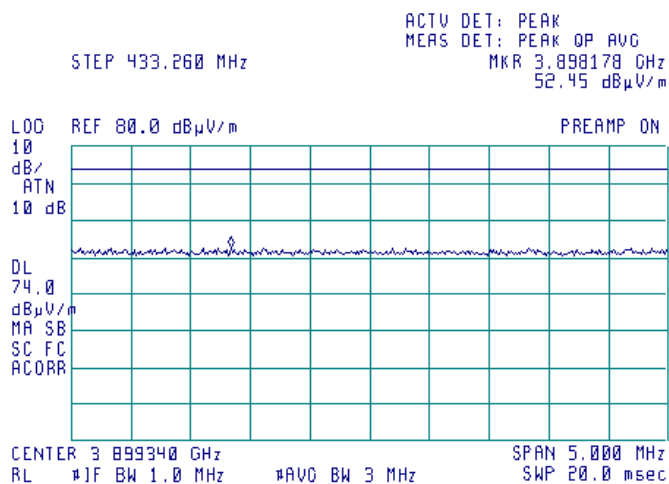

Plot 7.3.32 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

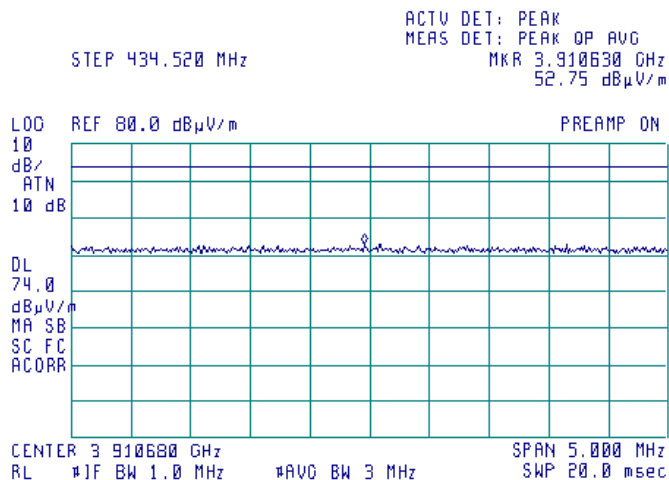




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.33 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 433.26 MHz

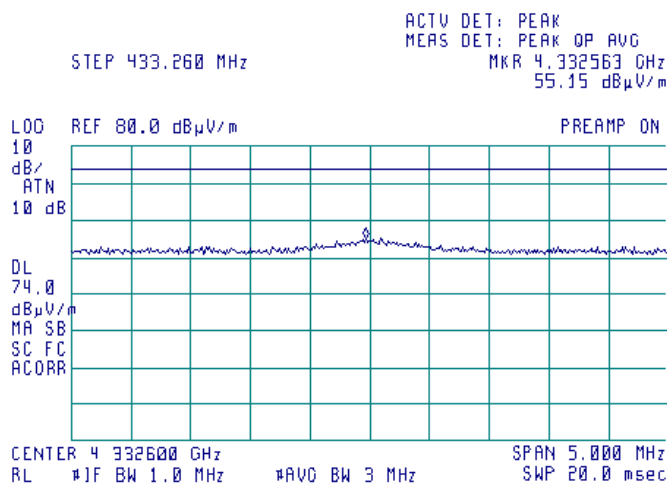


Plot 7.3.34 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical& Horizontal  
OPERATING FREQUENCY: 434.52 MHz

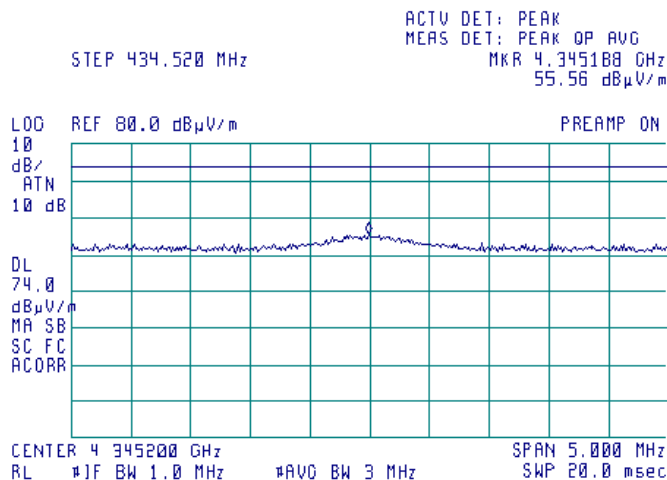


<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF1 transmitter			

Plot 7.3.35 Transmission pulse duration

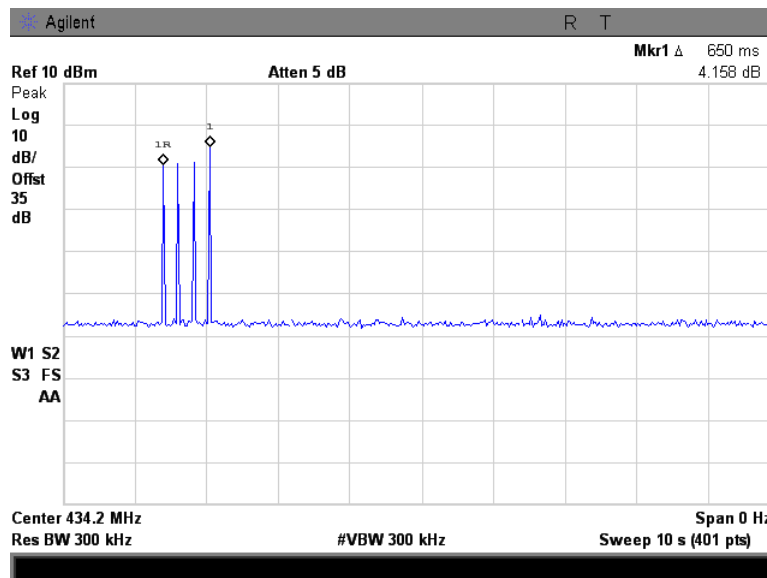


Plot 7.3.36 Transmission pulse duration

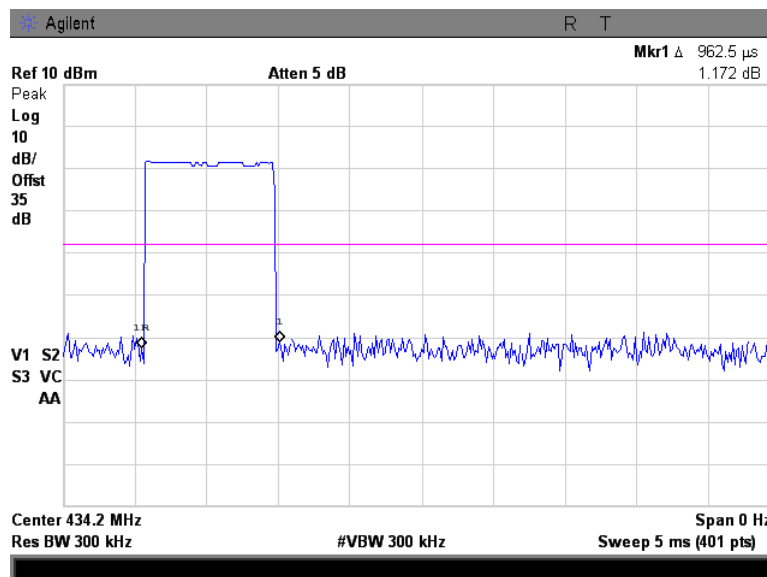

<b>Test specification:</b>		<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		17-Apr-14 - 01-May-14	
<b>Temperature:</b> 23.1 °C	<b>Air Pressure:</b> 1015 hPa	<b>Relative Humidity:</b> 53 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b> UHF1 transmitter			

Plot 7.3.37 Transmission pulse period

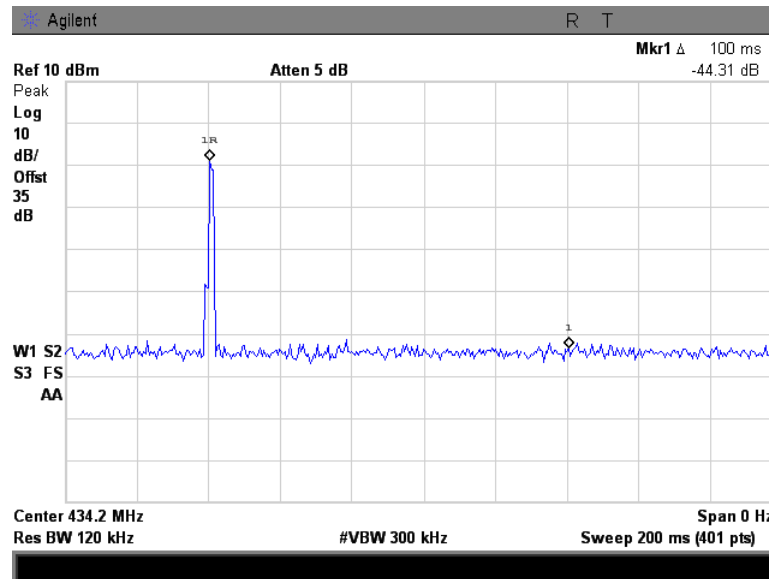

<b>Test specification:</b>		<b>FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.7	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		29-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b>			

## 7.4 Occupied bandwidth test

### 7.4.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0	0.25
Above 900		0.50

\*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

### 7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was set to transmit modulated carrier.

7.4.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and associated plot.

Figure 7.4.1 Occupied bandwidth test setup





<b>Test specification:</b>		<b>FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.7	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		29-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b>			

Table 7.4.2 Occupied bandwidth test results, UHF1 transmitter

DETECTOR USED: Peak hold  
 RESOLUTION BANDWIDTH: 10 kHz  
 VIDEO BANDWIDTH: 30 kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc  
 MODULATION: GFSK  
 BIT RATE: 160 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.26	280.0	0.25	1083.15	-803.15	Pass
434.52	340.0	0.25	1086.30	-746.30	Pass

Table 7.4.3 Occupied bandwidth test results, UHF3 transmitter

DETECTOR USED: Peak hold  
 RESOLUTION BANDWIDTH: 10 kHz  
 VIDEO BANDWIDTH: 30 kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc  
 MODULATION: GFSK  
 BIT RATE: 160 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.26	305.0	0.25	1083.15	-778.15	Pass
434.52	337.5	0.25	1086.30	-749.30	Pass



## Reference numbers of test equipment used

HL 2909								
---------	--	--	--	--	--	--	--	--



Full description is given in Appendix A.

<b>Test specification:</b> FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	
<b>Test procedure:</b> ANSI C63.4, Section 13.1.7	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 29-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa
	<b>Relative Humidity:</b> 41 %
	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b>	

Plot 7.4.1 Occupied bandwidth test result at 433.26 MHz, UHF1 transmitter

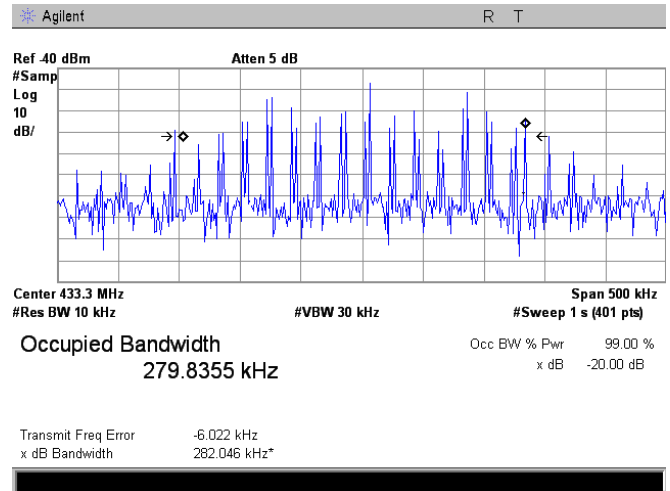
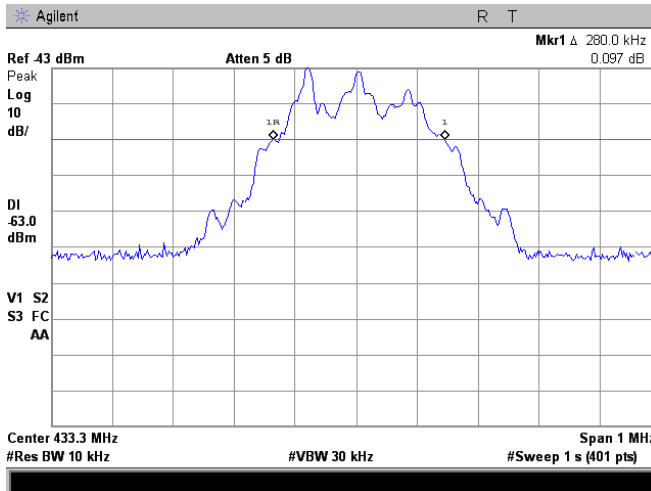


Plot 7.4.2 Occupied bandwidth test result at 434.52 MHz, UHF1 transmitter

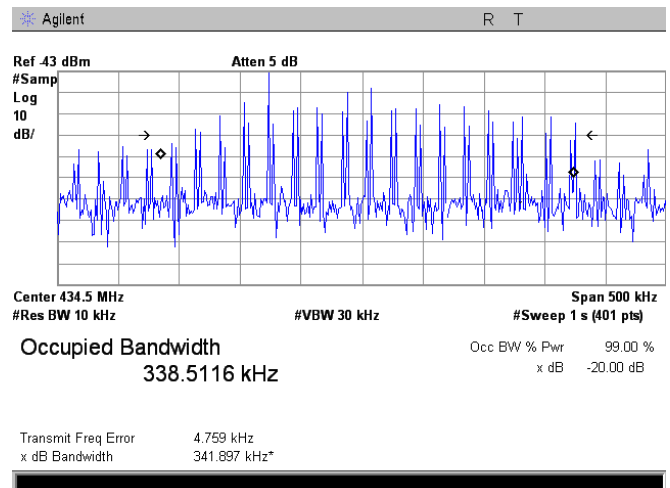
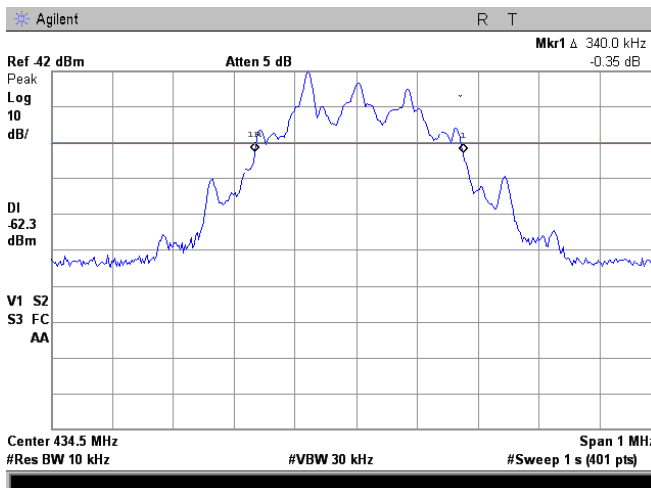


<b>Test specification:</b> FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	
<b>Test procedure:</b> ANSI C63.4, Section 13.1.7	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 29-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1008 hPa
<b>Relative Humidity:</b> 41 %	
<b>Power Supply:</b> 24 VDC	
<b>Remarks:</b>	

Plot 7.4.3 Occupied bandwidth test result at 433.26 MHz, UHF3 transmitter

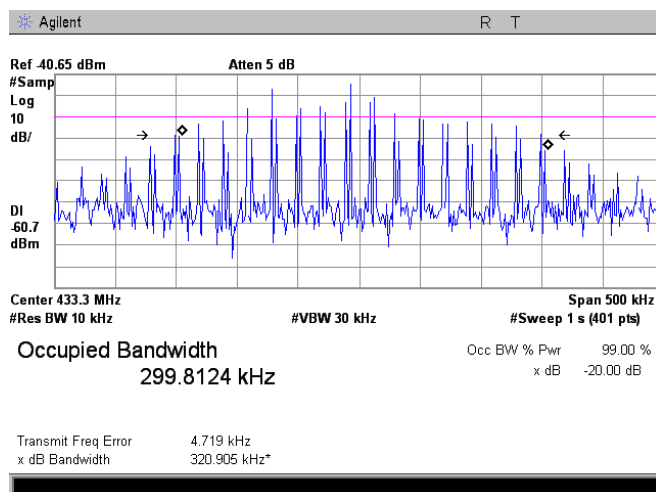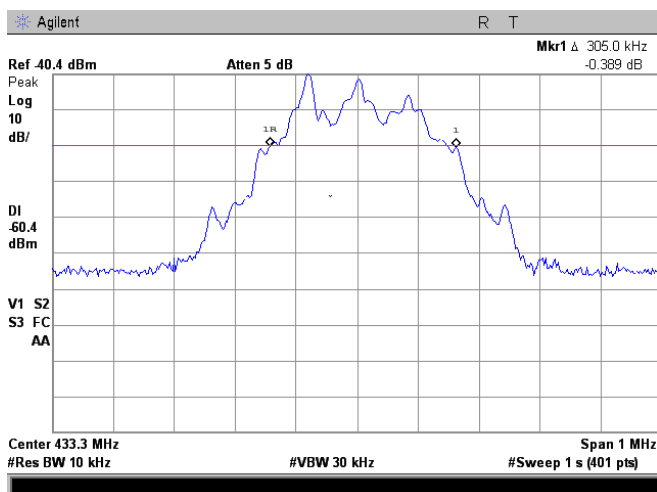

Plot 7.4.4 Occupied bandwidth test result at 434.52 MHz, UHF3 transmitter

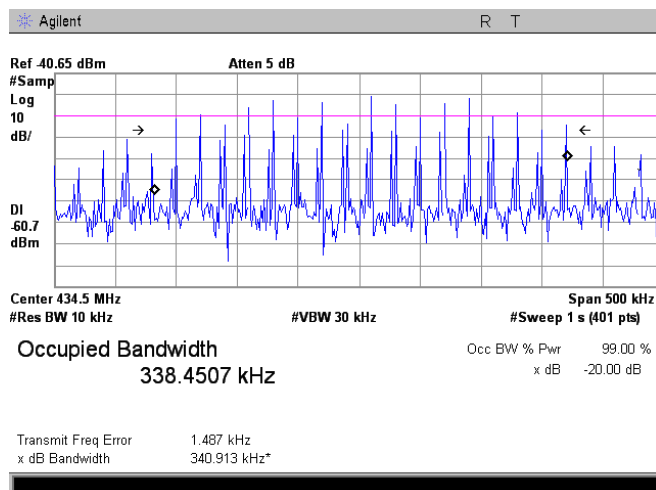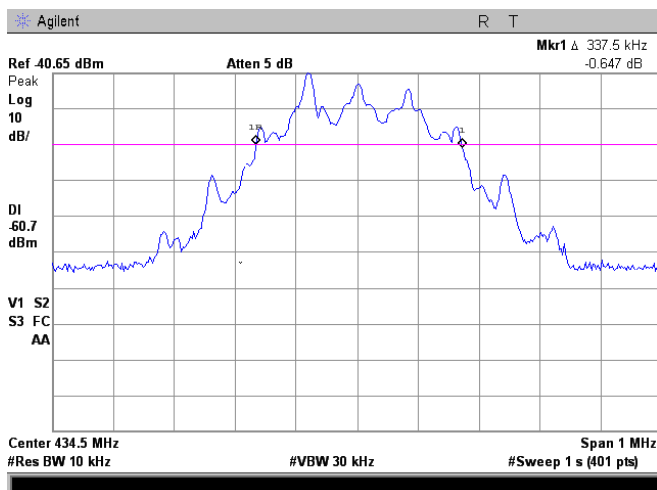



<b>Test specification:</b>		<b>Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.3	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		30-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

## 7.5 Conducted emissions

### 7.5.1 General

This test was performed to measure common mode conducted emissions at the EUT power port. The specification test limits are given in Table 7.5.1.

Table 7.5.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)		Class A limit, dB(μV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

\* The limit decreases linearly with the logarithm of frequency.

### 7.5.2 Test procedure


7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the EUT performance was checked.

7.5.2.2 The measurements were performed at the EUT power terminals with the LISN, connected to the EMI receiver in the frequency range referred to in Table 7.5.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.

7.5.2.3 The position of the EUT cables was varied to find the highest emission.

7.5.2.4 The worst test results with respect to the limits were recorded in Table 7.5.2 and shown in the associated plots.

Figure 7.5.1 Setup for conducted emission measurements, table-top EUT

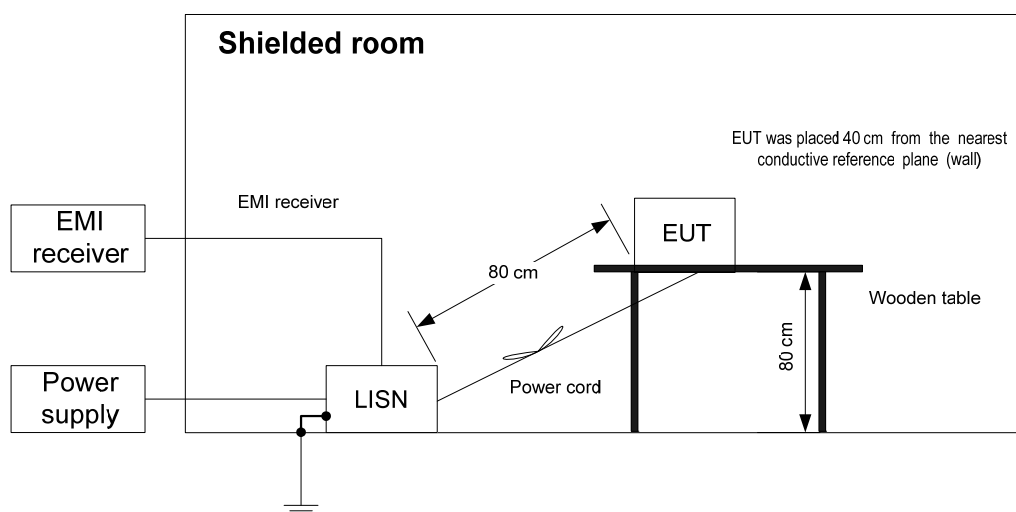



HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.3	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b>		30-Apr-14	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>			

Table 7.5.2 Conducted emission test results

LINE: AC mains  
EUT OPERATING MODE: Transmit  
EUT SET UP: TABLE-TOP  
TEST SITE: SHIELDED ROOM  
DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
FREQUENCY RANGE: 150 kHz - 30 MHz  
RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.194963	41.76	38.48	63.85	-25.37	27.94	53.85	-25.91	L1	Pass
0.352538	44.21	41.96	58.96	-17.00	25.70	48.96	-23.26		
0.423950	49.38	46.32	57.42	-11.10	29.03	47.42	-18.39		
0.444825	45.06	42.06	57.03	-14.97	24.27	47.03	-22.76		
0.508600	44.08	41.59	56.00	-14.41	24.45	46.00	-21.55		
0.989000	45.52	42.60	56.00	-13.40	27.47	46.00	-18.53		
0.354010	46.51	43.81	58.93	-15.12	25.45	48.93	-23.48	L2	Pass
0.415030	50.70	47.59	57.59	-10.00	33.47	47.59	-14.12		
0.444875	45.90	43.07	57.03	-13.96	24.26	47.03	-22.77		
0.759580	45.66	38.90	56.00	-17.10	25.59	46.00	-20.41		
0.919675	46.47	41.97	56.00	-14.03	25.43	46.00	-20.57		
1.074950	45.22	40.67	56.00	-15.33	31.70	46.00	-14.30		

\*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1425	HL 1513	HL 3612			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:		Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date(s):		30-Apr-14	
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.1 Conducted emission measurements

LINE: L1  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 420 kHz  
47.67 dBµV/m

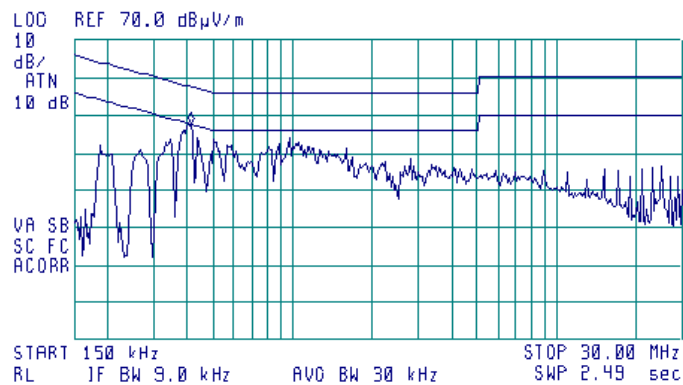


Plot 7.5.2 Conducted emission measurements

LINE: L2  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 410 kHz  
48.53 dBµV/m

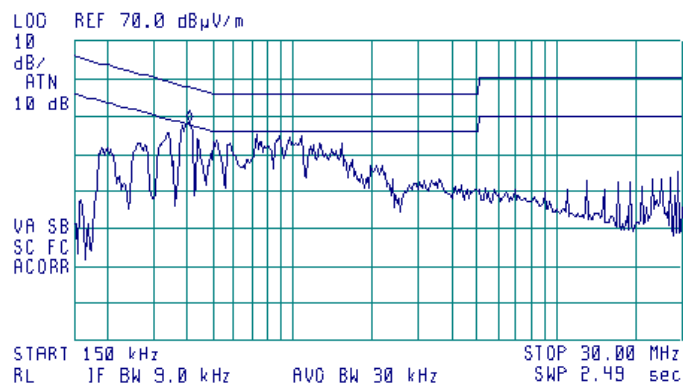

<b>Test specification:</b>		<b>FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements</b>	
<b>Test procedure:</b>		Visual inspection / supplier declaration	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	30-Apr-14		
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1011 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 24 VDC
<b>Remarks:</b>			

## 7.6 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

**Table 7.6.1 Antenna requirements**

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	NA	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	Supplier declaration provided in the User manual exhibit	

**Photograph 7.6.1 Antenna assembly**

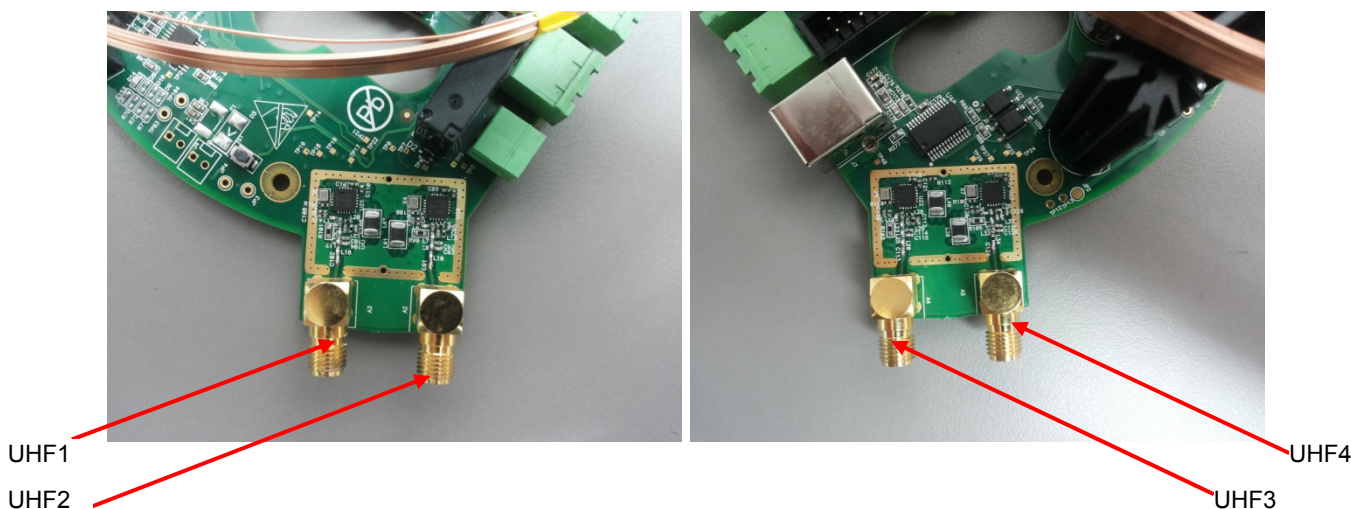

## 8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	21-Jan-14	21-Jan-15
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	23-Oct-13	23-Oct-14
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	04-Jun-13	04-Jun-14
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	13-Oct-13	13-Oct-14
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	25-Oct-13	25-Dec-14
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	05-Nov-13	05-Nov-14
1791	Laboratory DC Power Supply, Dual Tracking Output	RACOM	PS-404	8800692	13-Oct-13	13-Oct-14
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	03-Jan-14	03-Jan-15
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-13	04-Dec-14
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	23-Dec-13	23-Dec-14
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	3612	05-Dec-13	05-Dec-14
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29- N1N1-244	12025101 003	16-Mar-14	16-Mar-15

## 9 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization  Vertical polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Occupied bandwidth	$\pm 8.0$ %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

## **10 APPENDIX C Test laboratory description**

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.  
 Telephone: +972 4628 8001  
 Fax: +972 4628 8277  
 e-mail: mail@hermonlabs.com  
 website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## **11 APPENDIX D Specification references**

FCC 47CFR part 15: 2013	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 5:2012	Information Technology Equipment (ITE) – Limits and methods of measurement

## 12 APPENDIX E Test equipment correction factors

Correction factor  
Line impedance stabilization network  
Model LISN 16 - 1  
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



**Antenna factor**  
**Active loop antenna**  
**Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).

**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Cable loss**  
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,**  
**HL 2871**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

**Cable loss**  
**Cable coaxial, RG-214/U, N type-N type, 17 m**  
**Teldor, HL 3612**

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79

**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

## 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μV)	decibel referred to one microvolt
dB(μV/m)	decibel referred to one microvolt per meter
dB(μA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10 <sup>-6</sup> )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF TEST REPORT

## 14 APPENDIX G Manufacturer's declaration of identity



### Declaration of Identity

We, the undersigned,

Company: LOGITAG SYSTEMS

Address: Hamelach 2 Ntanya

Country: Israel

Telephone number: 972-9-8354848

Fax number: 972-9-8656262

Declare under our sole responsibility that the following equipment:

Brand/Item	Type/Model	Short Product description
One Channel Exciter	LTG2-04	Exciter and transceiver console for active RFID transponders

is electronically/electrically/mechanically identical to the following equipment (including Software/Hardware version(s)):

Brand/Item	Type/Model	Short Product description
Single Location Unit	LTG2-04-PRF	Exciter and transceiver console for active RFID transponders

The reason for name change is: **different design of Led lexan**

...28/05/2014.....

(date)

Headoffice | LogiTag Systems Ltd.

2 Hamelacha St. Poleg Industrial Zone. P.O. Box 8249, Netanya 42504, Israel  
☎ +972 9 835 4848 | 📠 +972 9 865 6262 | ✉ info@logi-tag.com

www.logi-tag.com





... Golan Kormian.....

(signature)

(printed name)

Logitag systems.....

(company stamp)

... Engineering manager.....

(position)

Headoffice | LogiTag Systems Ltd.

2 Hamelacha St. Poleg Industrial Zone. P.O. Box 8249, Netanya 42504, Israel  
☎ + 972 9 835 4848 | 📠 + 972 9 865 6262 | 📧 info@logi-tag.com

[www.logi-tag.com](http://www.logi-tag.com)

END OF DOCUMENT