

DATE: 22 November 2011

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report


for


Panoramic Power Ltd.


Equipment under test:

**Wireless Self-Powered Branch-
Circuit Level Current Sensor**

PAN-1-1-063-US

Written by: 
Y. Feldman, Documentation

Approved by: 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Panoramic Power Ltd.

Equipment under test:

Wireless Self-Powered Branch-Circuit Level Current Sensor

FCC ID: Z9M-PAN-1-0

This report concerns: Original Grant: x
Class I change:
Class II change:

47CFR15 Section 15.249

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:
Ishaiahou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
Tel: +972-8-918-6117
Fax: +972-8-915-3101
Email: sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
Adi Shamir
Panoramic Power Ltd.
20 Atir Yeda St.
Kfar Saba, 44643
Israel
Tel: 972-9-766-7600
Fax: 972-9-766-7610
Email: adi@panpwr.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	Special Accessories	7
2.3	Equipment Modifications	7
2.4	Configuration of Tested System	7
3.	RADIATED MEASUREMENTS TEST SETUP PHOTOS	8
4.	FIELD STRENGTH OF FUNDAMENTAL	9
4.1	Test Specification	9
4.2	Test Procedure	9
4.3	Test Results	9
4.4	Test Instrumentation Used, Field Strength of Fundamental	14
5.	SPURIOUS RADIATED EMISSION 9 KHZ - 30 MHZ	15
5.1	Test Specification	15
5.2	Test Procedure	15
5.3	Test results	15
5.4	Test Instrumentation Used, Radiated Measurements 9 kHz – 30 MHz	16
5.5	Field Strength Calculation	16
6.	SPURIOUS RADIATED EMISSION 30 MHZ- 10 GHZ	17
6.1	Test Specification	17
6.2	Test Procedure	17
6.3	Test Results	17
6.4	Test Instrumentation Used, Radiated Measurements 30 MHz – 10 GHz	20
6.5	Field Strength Calculation	20
7.	BAND EDGE ATTENUATION	21
7.1	Test Specification	21
7.2	Test Procedure	21
7.3	Test Results	21
7.4	Test Instrumentation Used, Band Edge Attenuation	25
8.	APPENDIX A - CORRECTION FACTORS	26
8.1	Correction factors for CABLE	26
8.2	Correction factors for CABLE	27
8.3	Correction factors for CABLE	28
12.6	Correction factors for LOG PERIODIC ANTENNA	29
8.4	Correction factors for LOG PERIODIC ANTENNA	30
8.5	Correction factors for BICONICAL ANTENNA	31
8.6	Correction factors for ACTIVE LOOP ANTENNA	32

1. General Information

1.1 Administrative Information

Manufacturer:	Panoramic Power Ltd.
Manufacturer's Address:	20 Atir Yeda St., Kfar Saba 44643, Israel Tel: +972-9-766-7600 Fax: +972-9-766-7610
Manufacturer's Representative:	Yael Alalio
Equipment Under Test (E.U.T):	Wireless Self-Powered Branch- Circuit Level Current Sensor
Equipment Model No.:	PAN-1-1-063-US
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	03.11.11
Start of Test:	06.11.11
End of Test:	0.7.11.11
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15, Subpart C, Section 15.249

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The product is a sensor which is located on the Building Branch Circuit to detect the current supplied. It is a compact, plastic encased unit, not directly connected to the electrical supply source but is mutually electromagnetically coupled to derive its electrical supply from the utility wiring. It uses internal step-down transformer for that coupling and supplying the circuits, to achieve low voltage for circuits needed for the measurement.

There are two versions of this sensor, one for current measurement range of 0-32 Amp, M/N PAN-1-1-032-US, and the other for current measurement range of 0-63 Amp, M/N PAN-1-1-063-US. The difference in circuitry is in the value of one resistor in the current sensing mechanism. There are no other differences between the models and specifically nothing related to the radio.

1.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

2. System Test Configuration

2.1 *Justification*

The E.U.T. was tested in normal operation mode set to transmit in 3 frequencies within the 902 – 928 MHz frequency band.

Since unit can be installed in different orientations, unit was scanned in 3 different orientations to determine worst-case radiation. The horizontal orientation was selected as the worst case orientation.

2.2 *Special Accessories*

No special accessories were needed to achieve compliance.

2.3 *Equipment Modifications*

No special modifications were needed to achieve compliance.

2.4 *Configuration of Tested System*

The configuration of the tested system is described below.




Figure 1. Configuration of Tested System

3. Radiated Measurements Test Setup Photos



Figure 2. Radiated Emission Test



Figure 3. Radiated Emission Test

4. Field Strength of Fundamental

4.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(a)

4.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequencies (905, 915 and 925 MHz) Peak and Quasi-peak Detection. The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver. The measurement was performed for vertical and horizontal polarizations of the test antenna.

4.3 Test Results

JUDGEMENT: Passed by 5.38 dB

The EUT met the FCC Part 15, Subpart C, Section 15.249(a) specification requirements.

See additional details in *Figure 4* to *Figure 10*.

TEST PERSONNEL:

Tester Signature: _____

Date: 27.11.11

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Wireless Self-Powered Branch-Circuit Level Current Sensor
 Model Number PAN-1-1-063-US
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak

Freq. (MHz)	Pol. V/H	Peak Reading (dBμV/m)	Peak Specification (dBμV/m)	QP Reading (dBμV/m)	QP Specification (dBμV/m)	Margin (dB)
905.0	H	77.1	113.98	75.7	93.98	-18.28
905.0	V	75.6	113.98	74.0	93.98	-19.98
915.0	H	89.9	113.98	88.6	93.98	-5.38
915.0	V	85.7	113.98	83.2	93.98	-10.78
925.0	H	84.5	113.98	82.3	93.98	-11.68
925.0	V	80.3	113.98	78.4	93.98	-15.58

**Figure 4. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus, a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes “Correction Factors.

“Correction Factors” = Antenna Correction Factor + Cable Loss.

“Quasi-peak Reading” includes “Correction Factors.

“Correction Factors” = Antenna Correction Factor + Cable Loss.

Field Strength of Fundamental

E.U.T Description Wireless Self-Powered Branch-Circuit Level Current Sensor
Model Number PAN-1-1-063-US
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak, Quasi-peak

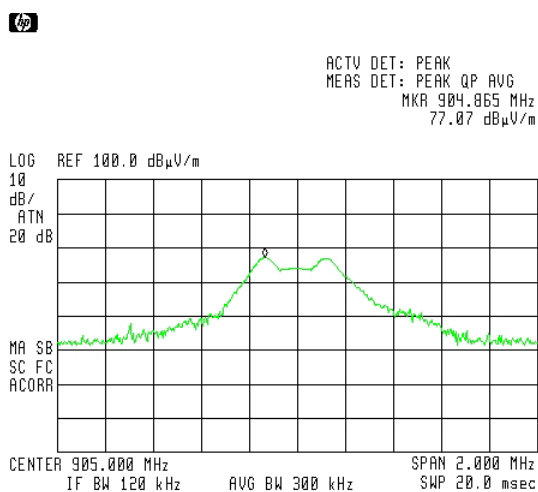


Figure 5. 905.00 MHz Antenna Polarization Horizontal

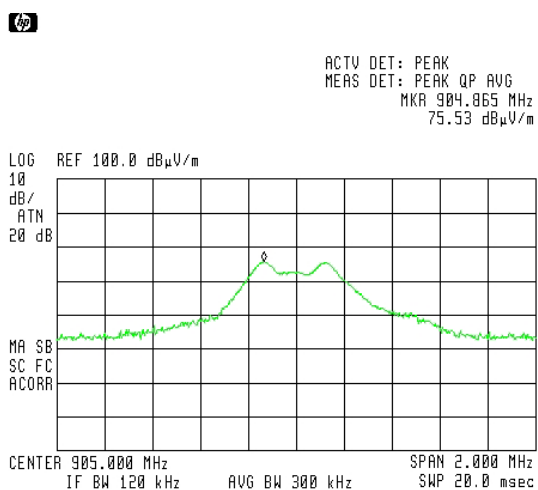


Figure 6. 905.00 MHz Antenna Polarization Vertical

Field Strength of Fundamental

E.U.T Description Wireless Self-Powered Branch-Circuit Level Current Sensor
Model Number PAN-1-1-063-US
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak, Quasi-peak

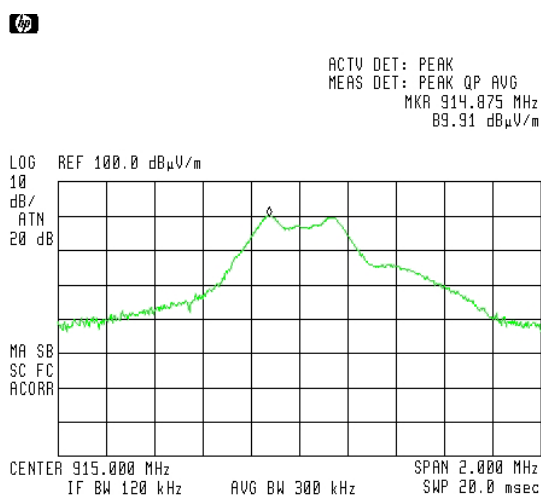


Figure 7. 915.00 MHz Antenna Polarization Horizontal

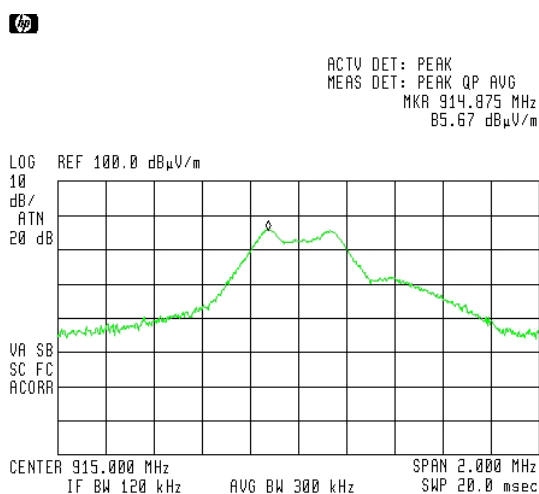


Figure 8. 915.00 MHz Antenna Polarization Vertical

Field Strength of Fundamental

E.U.T Description Wireless Self-Powered Branch-Circuit Level Current Sensor
Model Number PAN-1-1-063-US
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak, Quasi-peak

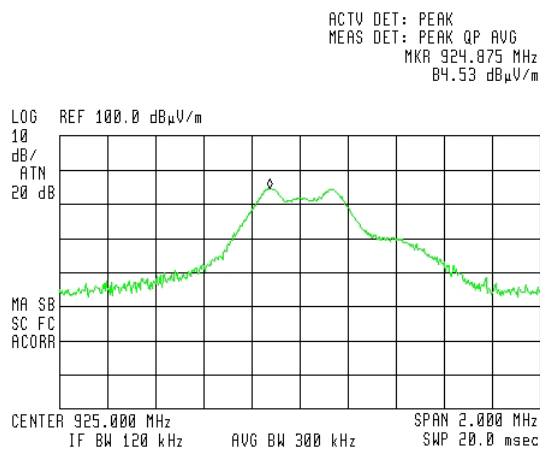


Figure 9. 925.00 MHz Antenna Polarization Horizontal

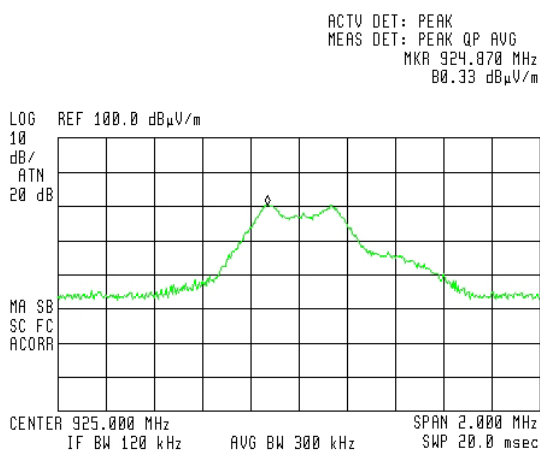


Figure 10. 925.00 MHz Antenna Polarization Vertical

4.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

5. Spurious Radiated Emission 9 kHz - 30 MHz

5.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(b)

5.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 9 kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

The E.U.T. was operated in continuous transmission to enable better detection of signals.

5.3 Test results

JUDGEMENT: Passed

No signals were detected in the frequency range of 9 kHz – 30 MHz.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 27.11.11

Typed/Printed Name: A. Sharabi

5.4 *Test Instrumentation Used, Radiated Measurements* 9 kHz – 30 MHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2011	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

5.5 *Field Strength Calculation*

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
 RA: Receiver Amplitude [dB μ V]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers were used.

6. Spurious Radiated Emission 30 MHz- 10 GHz

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(b)

6.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The emission levels were compared to the requirement of Section 15.249.

In the frequency range 30 MHz - 2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 10 GHz, a spectrum analyzer including a low noise amplifier was used. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.).

The test distance was 3 meters.

6.3 Test Results

JUDGEMENT: Passed by 9.7 dB

The margin between the emission level and the specification limit is 9.7 dB in the worst case at the frequency of 1810.00 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C Section 15.249, specification.

TEST PERSONNEL:

Tester Signature: 

Date: 27.11.11

Typed/Printed Name: A. Sharabi

Spurious Radiated Emission 30 MHz- 10 GHz

E.U.T Description Wireless Self-Powered Branch-Circuit
Level Current Sensor
Type PAN-1-1-063-US
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Freq. (MHz)	Pol. V/H	Peak Reading (dBμV/m)	Peak Specification (dBμV/m)	Margin (dB)
905.00	1810.00	H	54.3	74.0	-19.7
905.00	1810.00	V	60.1	74.0	-13.9
915.00	1830.00	H	48.0	74.0	-26.0
915.00	1830.00	V	48.1	74.0	-25.9
925.00	1850.00	H	48.9	74.0	-25.1
925.00	1850.00	V	48.6	74.0	-25.4

Figure 11. Spurious Radiated Emission

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Spurious Radiated Emission 30 MHz- 10 GHz

E.U.T Description Wireless Self-Powered Branch-Circuit
Level Current Sensor
Type PAN-1-1-063-US
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Freq. (MHz)	Pol. V/H	Average Reading (dBμV/m)	Average Specification (dBμV/m)	Margin (dB)
905.00	1810.00	H	38.4	54.0	-15.6
905.00	1810.00	V	44.3	54.0	-9.7
915.00	1830.00	H	36.5	54.0	-17.5
915.00	1830.00	V	36.4	54.0	-17.6
925.00	1850.00	H	35.7	54.0	-18.3
925.00	1850.00	V	36.0	54.0	-18.0

Figure 12. Spurious Radiated Emission

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

6.4 *Test Instrumentation Used, Radiated Measurements* 30 MHz – 10 GHz

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Filter Section	HP	85420E	3705A00248	November 24, 2010	1 Year
Antenna Biconical	ETS	3109	002-3244	August 1, 2011	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 27, 2011	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 5, 2011	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

6.5 *Field Strength Calculation*

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{V/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dBμV/m]
 RA: Receiver Amplitude [dBμV]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

7. Band Edge Attenuation

7.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(e)

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency and Peak Detection. The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver. The measurement was performed for vertical and horizontal polarizations of the test antenna.


7.3 Test Results

JUDGEMENT: Passed by 2.84 dB

The EUT met the FCC Part 15, Subpart C, Section 15.249(e) specification requirements.

See additional details in *Figure 13* to *Figure 15*.

TEST PERSONNEL:

Tester Signature: 

Date: 27.11.11

Typed/Printed Name: A. Sharabi

Band Edge Attenuation

E.U.T Description Wireless Self-Powered
Branch-Circuit Level Current
Sensor

Model Number PAN-1-1-063-US

Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(e)

Freq. (MHz)	Reading (dBc)	Specification (dBc)	Margin (dB)
902.0	-54.67	50	-4.67
928.0	-52.84	50	-2.84

Figure 13. Band Edge Attenuation

Band Edge Attenuation

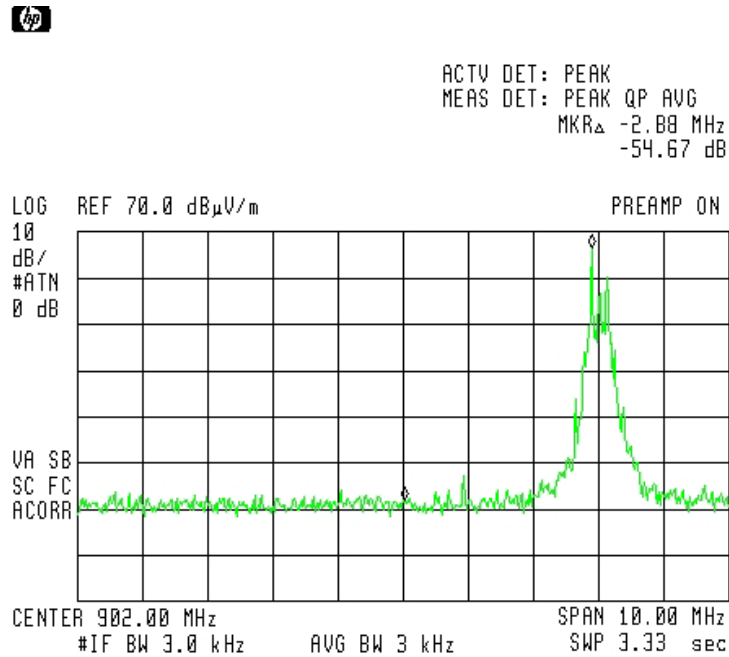


Figure 14. Band Edge Attenuation

Band Edge Attenuation



ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 3.25 MHz
 -52.84 dB

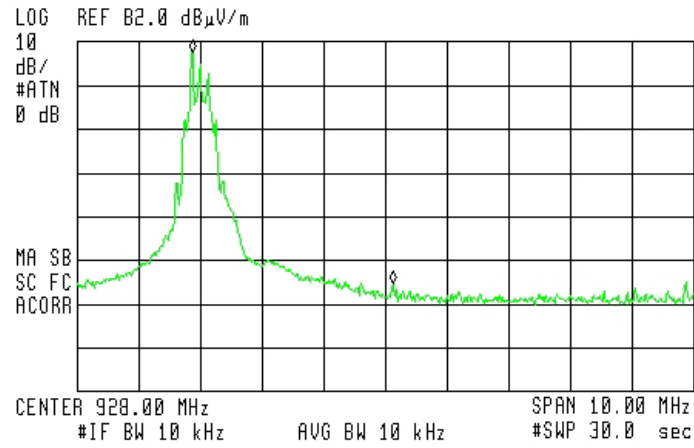


Figure 15. Band Edge Attenuation

7.4 Test Instrumentation Used, Band Edge Attenuation

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Filter Section	HP	85420E	3705A00248	November 24, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

8. APPENDIX A - CORRECTION FACTORS

8.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

8.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY	CORRECTION
(GHz)	FACTOR
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

8.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

8.4 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

8.5 Correction factors for *BICONICAL ANTENNA*
Type 3109,
at 3 meter range

FREQUENCY	APE
(MHz)	(dB/m)
30.0	13.3
40.0	12.7
50.0	11.0
60.0	9.2
70.0	10.0
80.0	7.2
90.0	7.9
100.0	9.4
120.0	11.9
140.0	13.1
160.0	12.3
180.0	12.4
200.0	14.8
250.0	15.3
300.0	17.9

NOTE:

1. Antenna serial number is 002-3244.

8.6 Correction factors for *ACTIVE LOOP ANTENNA*

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2