

**e-Maxim electronics CO.,LTD**

Size  
A





Document Number

**COMBO Rx 162**



Rev  
V1.2

Date: Friday, May 23, 2008

Sheet 1 of 4

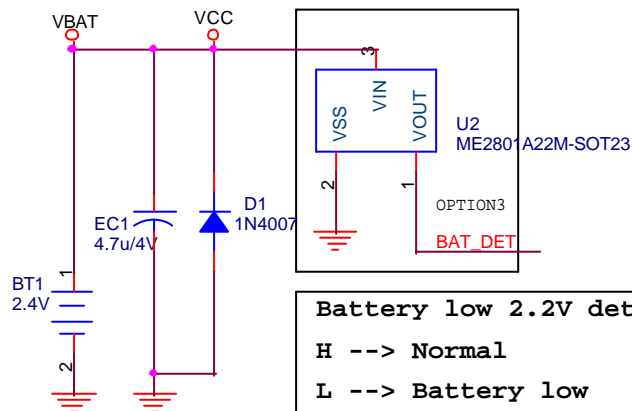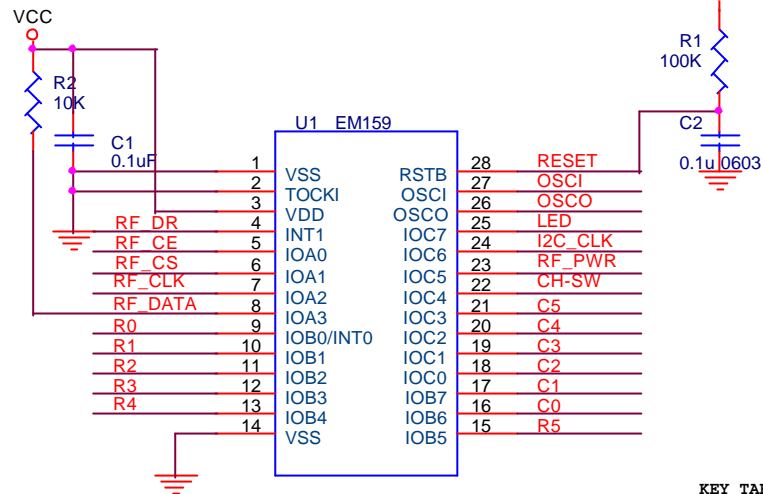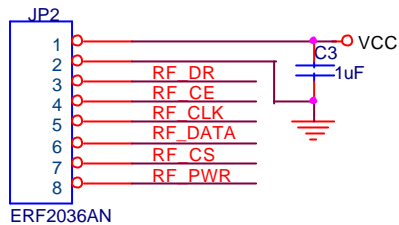



**Battery low 2.2V detect:**  
H --> Normal  
L --> Battery low

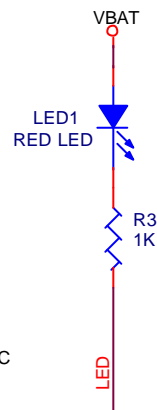

低电检测，当低电时会点亮LED指示状态

KEY TABLE:

	R5	R4	R3	R2	R1	R0
C0	7/HOME		1/END	NUM LOCK	4/LEFT	
C1	8/UP		2/DOWN	/	5	0/INS
C2					BACK SPACE	
C3	9/PGUP	-	3/PGDN	*	6/RIGHT	./DEL
C4					000	
C5	+		ENTER			

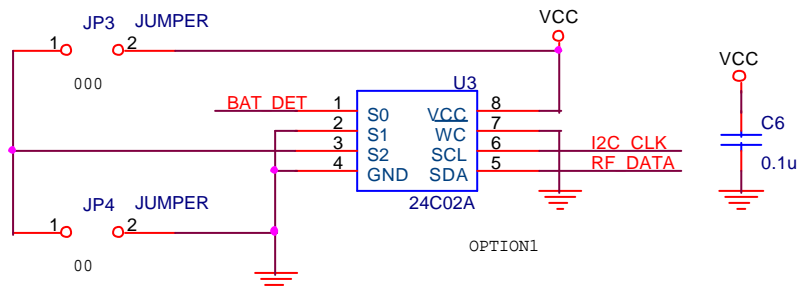

**e-Maxim electronics CO.,LTD**

Size  
A

Document Number

**COMBO KB**

Rev  
V1.2

Date: Friday, May 23, 2008

Sheet 1 of 3