

INTERTEK TESTING SERVICES

Report No.: HK12020032-1 Sample No.: 2/2

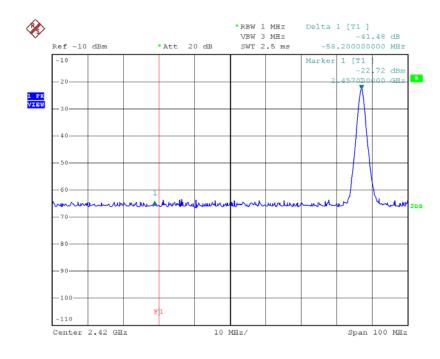

OATS = 93.0 dBuV/m Field Strength (Peak) =93.0 - 41.5 dBuV/m =51.5 dBuV/m

Field Strength (Average) =51.5 - AF dBuV/m =51.5 - 54.2 dBuV/m =-2.7 dBuV/m

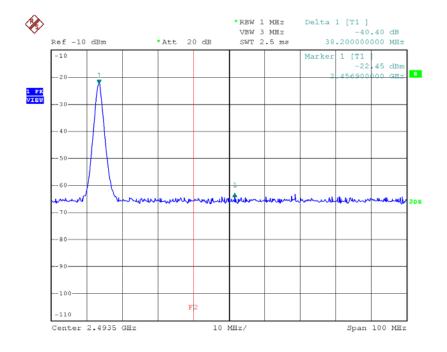

OATS = 93.00 dBuV/m Field Strength (Peak) =93.0 - 40.4 dBuV/m =52.6 dBuV/m

Field Strength (Average) =52.6 – AF dBuV/m =52.6 – 54.2 dBuV/m =-1.6 dBuV/m

Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass)

Code: FCC15C_f / Effective Date: 24 Jun 2011 (of)