



LCIE

RFID 13,56MHz Template: Release October 10th, 2016

# TEST REPORT

N°: 146947-699381E

Version : 01

## Subject

Radio spectrum matters  
tests according to standards:  
47 CFR Part 15.225 & Part 15.210 Issue 9 & RSS-Gen Issue 4 [P](#)

## Issued to

SAFRAN IDENTITY & SECURITY  
11 Boulevard Gallieni  
92130 - ISSY-LES-MOULINEAUX  
France

## Apparatus under test

↗ Product	MorphoAccess® SIGMA EXTREME Series
↗ Trade mark	Safran Identity and Security
↗ Manufacturer	Safran Identity and Security
↗ Model under test	MPH-AC002B
↗ Serial number	17001OMX0000002
↗ FCC ID	ZBW-MPHAC002B
↗ IC ID	11472A-MPHAC002B

## Test date

: March 9, 2017 to March 14, 2017

## Test location

Fontenay Aux Roses & Ecuelles


## Composition of document

36 pages

## Document issued on

March 30, 2017

Written by :  
Armand MAHOUNGOU  
Tests operator

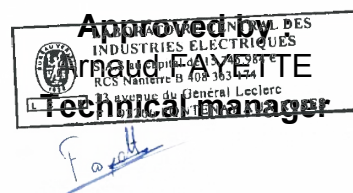

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision.

**LCIE**

Laboratoire Central des Industries Electriques  
Une société de Bureau Veritas

33, Av du Général Leclerc  
92266 Fontenay Aux Roses  
FRANCE

Tél : +33 1 40 95 60 60  
contact@lcie.fr  
www.lcie.fr



## PUBLICATION HISTORY

Version	Date	Author	Modification
01	March 15, 2017	Armand MAHOUNGOU	Creation of the document



## SUMMARY

1.	TEST PROGRAM .....	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER) .....	5
3.	OCCUPIED BANDWIDTH.....	10
4.	FREQUENCY TOLERANCE .....	13
5.	AC POWER LINE CONDUCTED EMISSIONS.....	16
6.	FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHZ .....	23
7.	FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHZ.....	33
8.	UNCERTAINTIES CHART .....	36



## 1. TEST PROGRAM

### References

- 47 CFR Part 15.225
- RSS 210 Issue 9
- RSS Gen Issue 4
- ANSI C63.10-2013

### Radio requirement:

Clause (47CFR Part 15.225 & RSS-210 Issue 9 & RSS-Gen Issue 4) Test Description	Test result - Comments			
Occupied Bandwidth <a href="#">P</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
AC Power Line Conducted Emission <a href="#">P</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA(2)	<input type="checkbox"/> NP(1)
Frequency Tolerance <a href="#">P</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Field strength within the band 13.110-14.010MHz <a href="#">P</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Field strength outside of the bands 13.110-14.010 MHz <a href="#">P</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Receiver Radiated Emissions <a href="#">P</a>	<input checked="" type="checkbox"/> PASS (3)	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

(1): Limited program

(2): EUT not directly or indirectly connected to the AC Power Public Network

(3) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

## 2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

### 2.1. INFORMATIONS

Morpho Access SIGMA Extreme — MA SIGMA Extreme is a biometric access controller terminal.

**MorphoAccess® Sigma Extreme device family standard models:**

Model	Name	Part#	RFID			Fake Finger Detection (FFD)
			iClass	Mifare/Desfire	Prox	
MPH-AC002B	MorphoAccess® SIGMA Extreme iClass	293696150	✓			
	MorphoAccess® SIGMA Extreme Multi	293696168		✓		
	MorphoAccess® SIGMA Extreme FFD iClass	293696189	✓			✓
	MorphoAccess® SIGMA Extreme FFD Multi	293696192		✓		✓

MPH-AC002B: Tests are performed on the most complete Product. Tests are performed on the most complete Product. MorphoAccess® SIGMA Extreme iClass FFD

The product tested is the most representative product with radio 13.56MHz with iClass tag reading functionality and the FFD function.

The three other products are based on MorphoAccess® SIGMA Extreme iClass FFD where functionality aren't populated (FFD function, iClass function).

Product with iClass function and Multi function have the same RFID PCB and RF components. Only digital components are added to support iclass feature.


### 2.2. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

**Equipment under test (EUT):**  
Safran Identity and Security

**Serial Number:** 17001OMX0000002



Front face

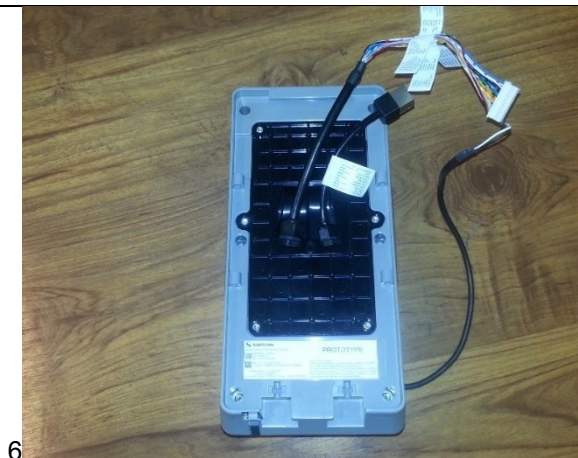


Back face

Equipment Under Test

**Inputs/outputs - Cable:**

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
1	Ethernet	10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Cable > 30m telecommunication port
2	USB Mini B	na	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Cable < 3m
3	USB micro AB	na	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Cable < 3m Service Only
4	RS422/ RS484	na	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Cable > 30m not a telecommunication port
5	Wiegand	na	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Cable > 30m not a telecommunication port
6	GPI/GPO	na	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Cable > 30m static signals

**Auxiliary equipment used during test:**

Type	Reference	Sn	Comments
Power supply – FRIWO 	FW7362/12	-	Not sold with the product

### Equipment information:

Type:	<input checked="" type="checkbox"/> <b>RFID</b>			
Frequency band:	[13.553 to 13.567] MHz			
Number of Channel:	1			
Antenna Type:	<input checked="" type="checkbox"/> Integral	<input type="checkbox"/> External	<input type="checkbox"/> Dedicated	
Transmit chains:	1			
Receiver chains:	1			
Type of equipment:	<input checked="" type="checkbox"/> Stand-alone	<input type="checkbox"/> Plug-in	<input type="checkbox"/> Combined	
Equipment type:	<input checked="" type="checkbox"/> Production model		<input type="checkbox"/> Pre-production model	
Operating temperature range:	Tmin:	<input checked="" type="checkbox"/> -30°C IC <input checked="" type="checkbox"/> -20°C FCC	<input type="checkbox"/> 0°C	<input type="checkbox"/> X°C
	Tnom:	20°C		
	Tmax:	<input type="checkbox"/> 35°C	<input checked="" type="checkbox"/> 50°C	<input checked="" type="checkbox"/> 60°C
Type of power source:	<input checked="" type="checkbox"/> AC power supply		<input type="checkbox"/> DC power supply	
Operating voltage range:	Vmin:	<input checked="" type="checkbox"/> 102V/60Hz	<input type="checkbox"/> XVdc	
	Vnom:	<input checked="" type="checkbox"/> 120V/60Hz	<input type="checkbox"/> XVdc	
	Vmax:	<input checked="" type="checkbox"/> 138V/60Hz	<input type="checkbox"/> XVdc	

### 2.3. RUNNING MODE


The EUT is set in the following modes during tests:

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent reception


During the test, products must be ON and communication with a PC through **ping** command.

To send the ping command, the laptop must be configured previously as below:


1. Modify IP address of the laptop (Windows 7 procedure) :
  - Click on « *Demarrer* » menu
  - Click on *Panneau de configuration* → *Centre Réseau et partage*
  - Click on « *Modifier les paramètres de la carte* »
  - Double click on « *Connexion au réseau local* »
  - Double click on « *Protocol Internet version 4 (TCP/IPv4)* »
  - Enter fields as below and click on “OK” button :

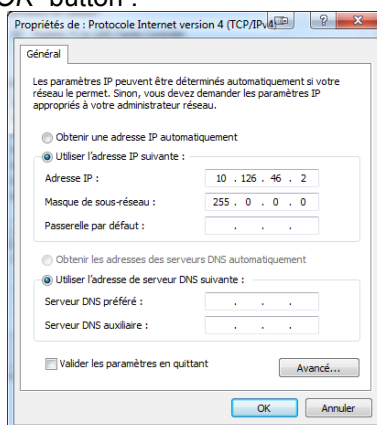

2. Open a windows console by clicking simultaneously on Windows button on the keyboard and “R” button.
3. The window below will open. Enter cmd in the field as below and click OK

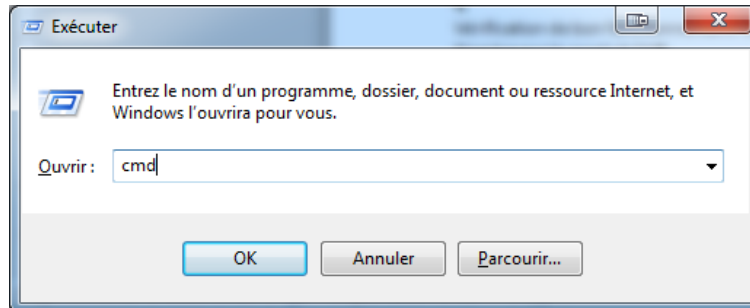

4. Finally, send ping command through the console.

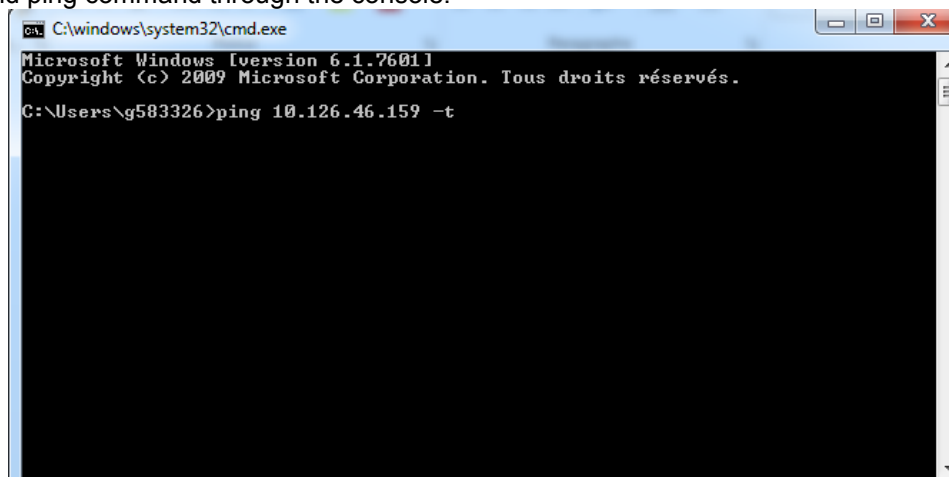

There are two different IP addresses according to the product under test.

- MPH-AC002A - MA-Extreme Prox FFD: IP address = 10.126.46.159
- MPH-AC002B - MA-Extreme iClass FFD: IP address = 10.126.46.159

So one of the two commands below must be sent to the good product:

- **MPH-AC002A : *ping 10.126.46.159 -t***
- **MPH-AC002B : *ping 10.126.46.159 -t***

To validate that the product works properly, procedure here under must be followed:

- Check Ping command response on the laptop. Command response must be successful.


Response awaited for MPH-AC002x product:

Réponse de 10.126.46.159 : octets=32 temps<1ms TTL=64

- Place your finger on the biometric sensor and after several seconds a closed door must appear on the screen or a second try window then a closed door must appear.
- Place a RFID card below biometric sensor and after several seconds a closed door or a Hold Card pop up must appear on the screen.




## 2.4. EQUIPMENT LABELLING

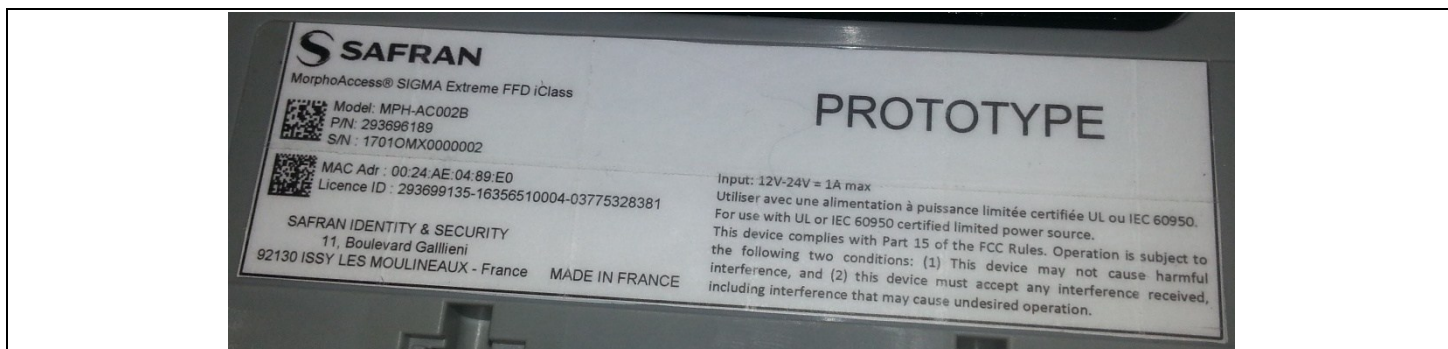

## 2.5. EQUIPMENT MODIFICATION

☐ None ☒ Modification:

-adding a ferrite reference 7427226 on a flat cable.

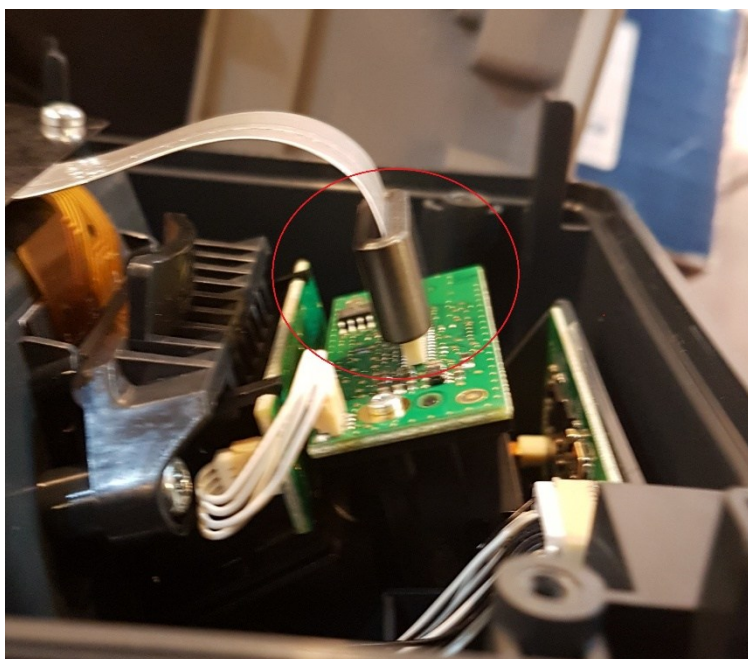

### 3. OCCUPIED BANDWIDTH

#### 3.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU  
Date of test : March 13, 2017  
Ambient temperature : 26 °C  
Relative humidity : 44 %

#### 3.2. TEST SETUP

- The Equipment Under Test is installed:


- ☐ On a table
- ☒ In a climatic chamber
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ RSS-Gen Issue 4 § 6.6

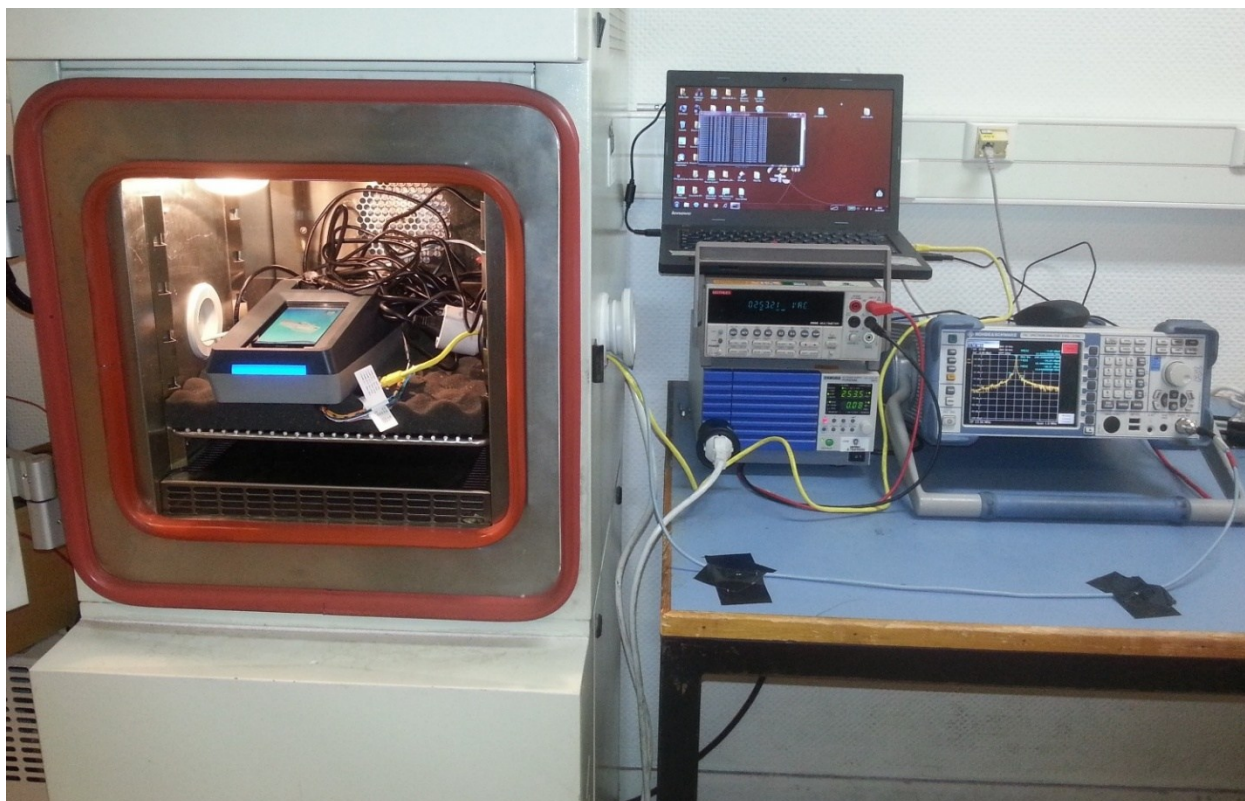

Photograph for Occupied bandwidth



Photograph for Occupied bandwidth in extreme test condition

### 3.1. LIMIT


None

### 3.2. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Climatic chamber	SECASI Technologies	SLT-34	D1024029	-	-
Spectrum analyzer	ROHDE & SCHWARZ	FSL6	A4060032	2015/04	2017/04
Thermometer	AOIP	TM 6630	B4041042	2016/09	2018/03
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
Cable	CABLES & CONNECTIQUES	-	A5329422	-	-

Note: In our quality system, the test equipment calibration due is more & less 2 months

### 3.3. RESULTS

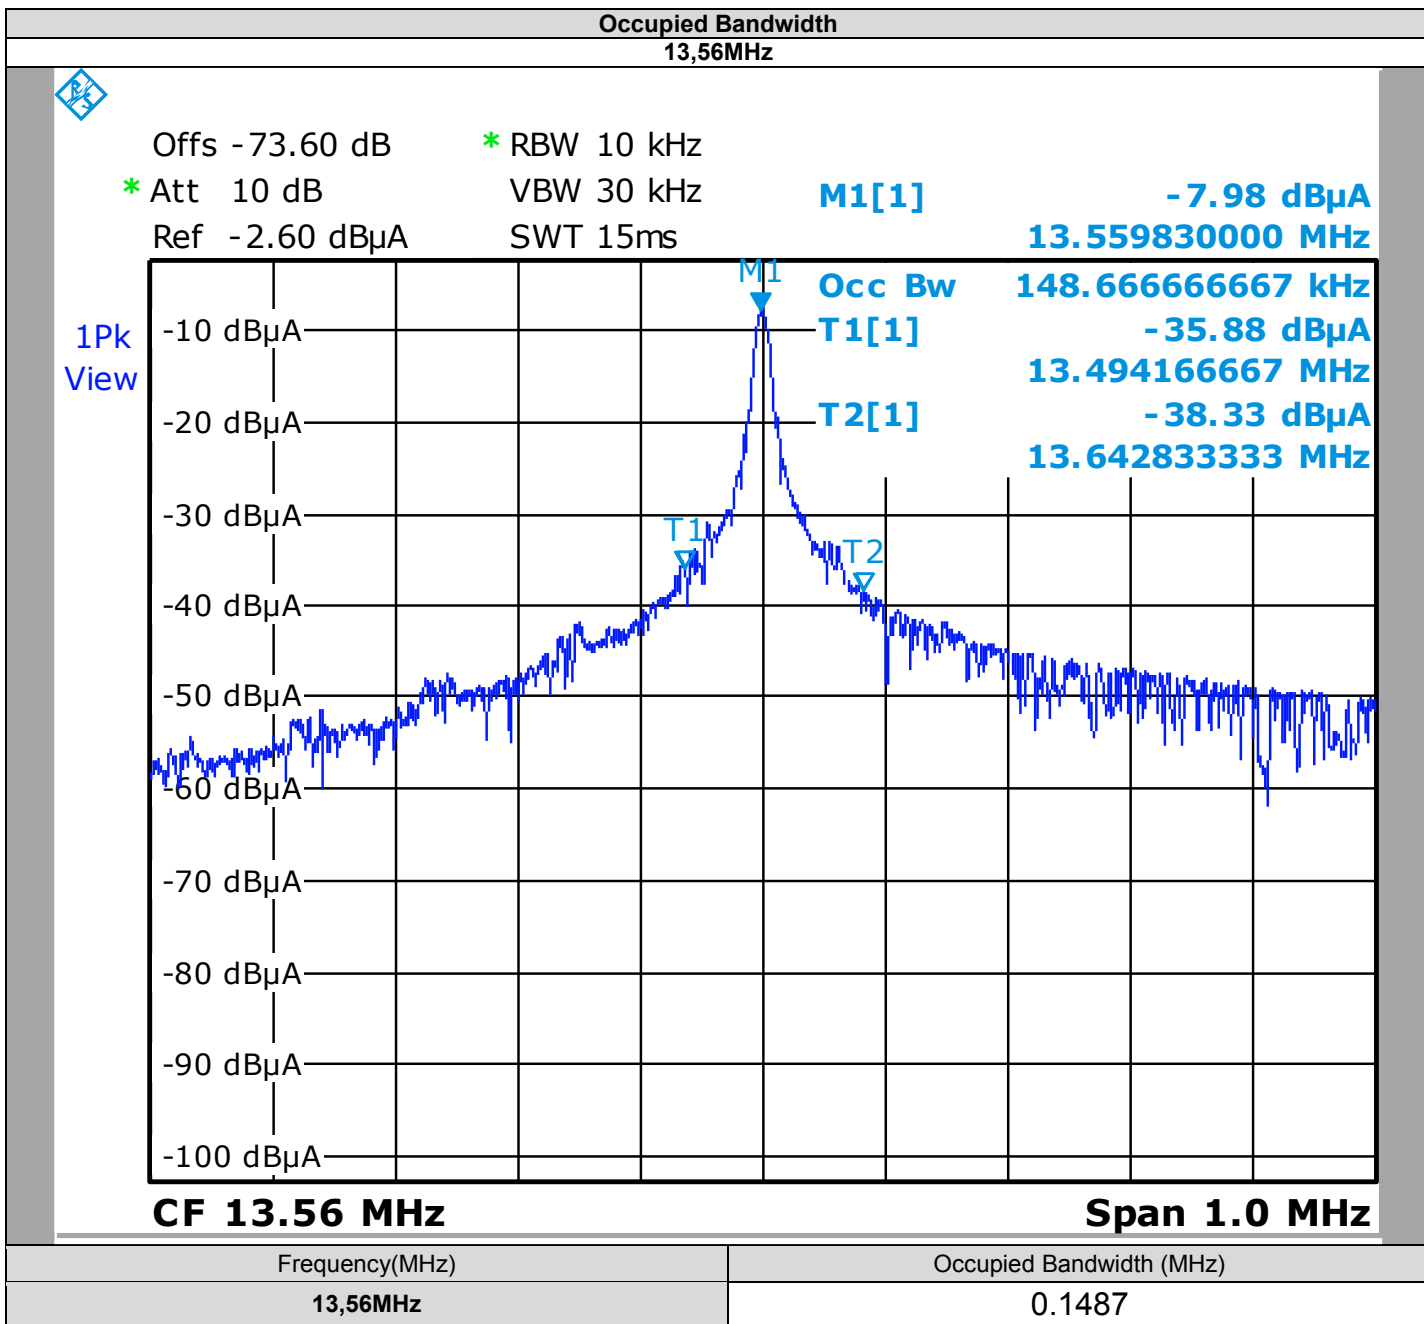

### 3.1. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **Safran Identity and Security** SN: **17001OMX0000002**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN ISSUE 4** limits.



## 4. FREQUENCY TOLERANCE

### 4.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU  
Date of test : March 13, 2017  
Ambient temperature : 23 °C  
Relative humidity : 45 %

### 4.2. TEST SETUP

- The Equipment Under Test is installed:


- ☐ On a table
- ☒ In a climatic chamber
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 6.8

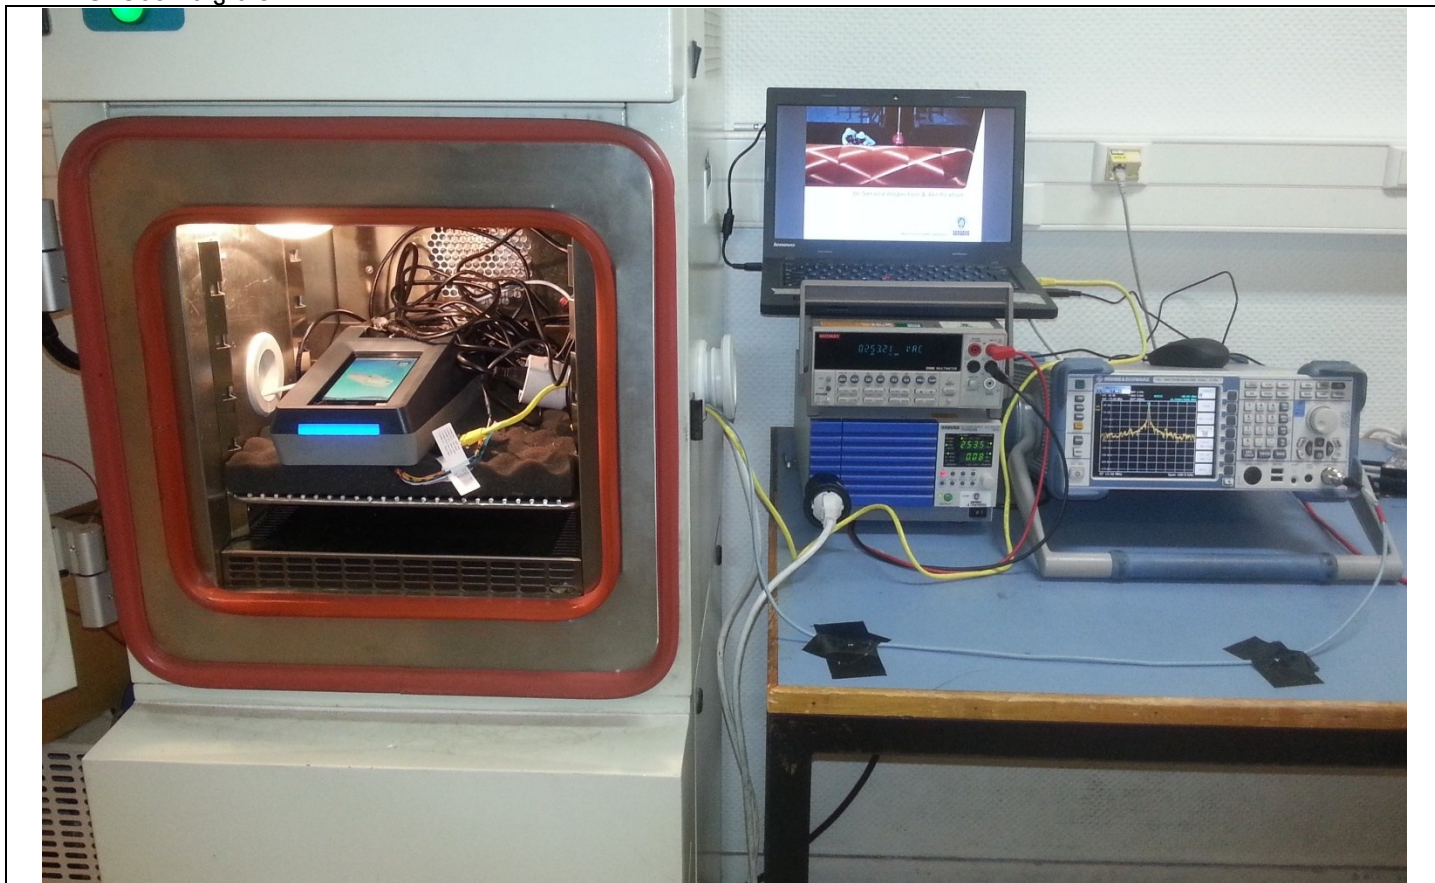

Photograph for Frequency Tolerance in normal test condition

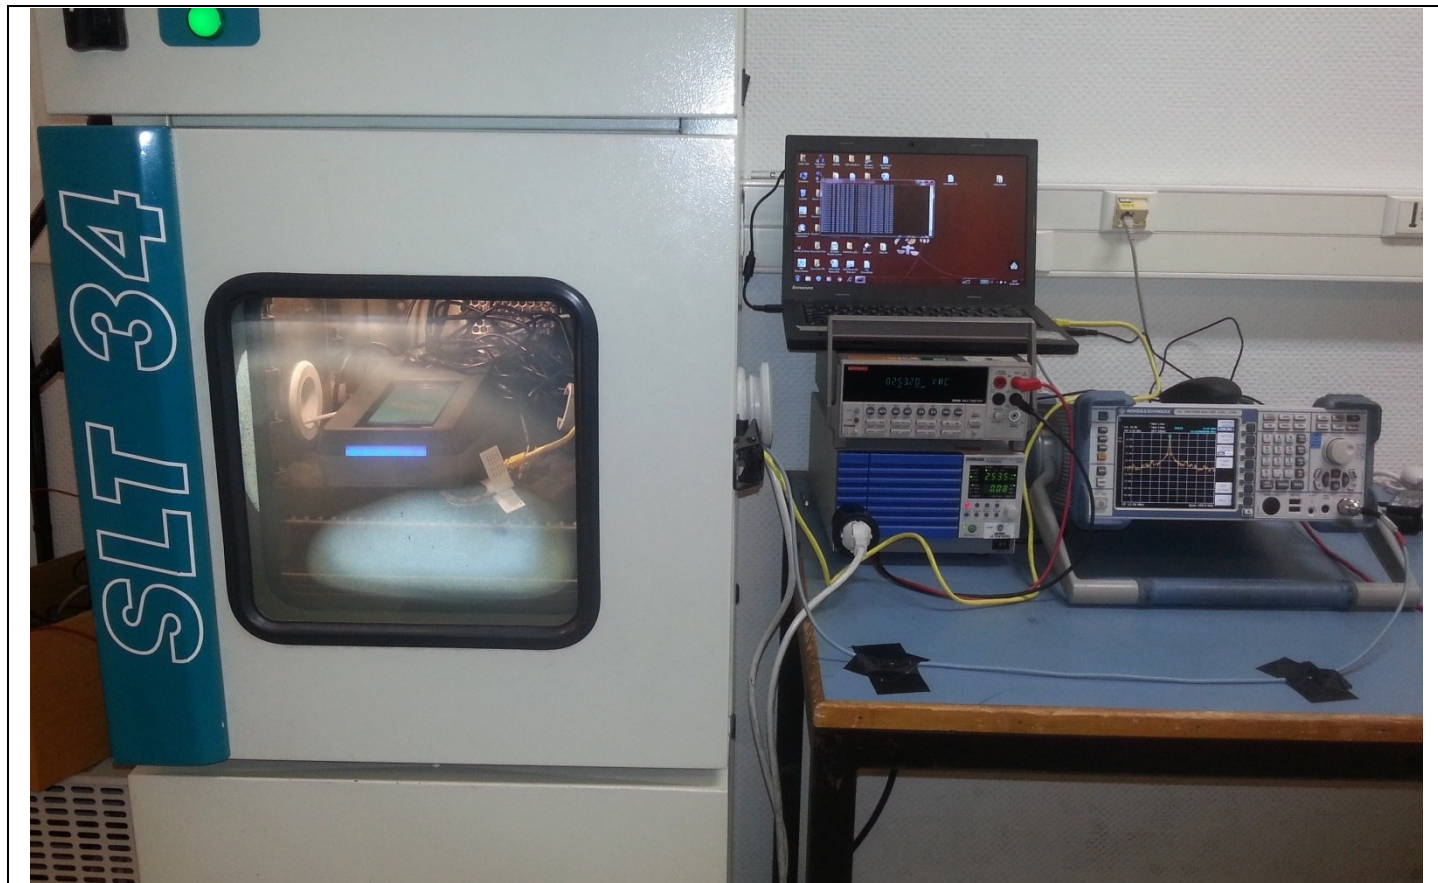

Photograph for Frequency Tolerance in extreme test condition

#### 4.3. LIMIT

The Center Frequency shall be inside  $\pm 0.01\text{MHz}$

#### 4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Climatic chamber	SECASI Technologies	SLT-34	D1024029	-	-
Spectrum analyzer	ROHDE & SCHWARZ	FSL6	A4060032	2015/04	2017/04
Thermometer	AOIP	TM 6630	B4041042	2016/09	2018/03
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
Cable	CABLES & CONNECTIQUES	-	A5329422	-	-

Note: In our quality system, the test equipment calibration due is more & less 2 months

#### 4.5. RESULTS

<b>EUT activation:</b>	<b>0min</b>									
<b>Voltage:</b>	<b>Vnom</b>									
<b>Temperature:</b>	<b>-30°C</b>	<b>-20°C</b>	<b>-10°C</b>	<b>0°C</b>	<b>10°C</b>	<b>20°C</b>	<b>30°C</b>	<b>40°C</b>	<b>50°C</b>	<b>60°C</b>
Frequency (MHz)	13,5597	13,5598	13,5598	13,5599	13,5599	13,5599	13,5598	13,5598	13,5598	13,5598
Frequency Drift (%)	-0,0023	-0,0017	-0,0015	-0,0011	-0,0011	-0,0011	-0,0018	-0,0017	-0,0018	-0,0018
<b>EUT activation:</b>	<b>2min</b>									
<b>Voltage:</b>	<b>Vnom</b>									
<b>Temperature:</b>	<b>-30°C</b>	<b>-20°C</b>	<b>-10°C</b>	<b>0°C</b>	<b>10°C</b>	<b>20°C</b>	<b>30°C</b>	<b>40°C</b>	<b>50°C</b>	<b>60°C</b>
Frequency (MHz)	13,5597	13,5598	13,5598	13,5599	13,5599	13,5599	13,5599	13,5599	13,5599	13,5599
Frequency Drift (%)	-0,0023	-0,0017	-0,0017	-0,0011	-0,0011	-0,0011	-0,0011	-0,0011	-0,0011	-0,0011
<b>EUT activation:</b>	<b>5min</b>									
<b>Voltage:</b>	<b>Tnom</b>									
<b>Temperature:</b>	<b>-30°C</b>	<b>-20°C</b>	<b>-10°C</b>	<b>0°C</b>	<b>10°C</b>	<b>20°C</b>	<b>30°C</b>	<b>40°C</b>	<b>50°C</b>	<b>60°C</b>
Frequency (MHz)	13,5597	13,5598	13,5597	13,5599	13,5599	13,5599	13,5599	13,5598	13,5599	13,5599
Frequency Drift (%)	-0,0021	-0,0014	-0,0020	-0,0011	-0,0011	-0,0011	-0,0011	-0,0018	-0,0011	-0,0011
<b>EUT activation:</b>	<b>10min</b>									
<b>Voltage:</b>	<b>Tnom</b>									
<b>Temperature:</b>	<b>-30°C</b>	<b>-20°C</b>	<b>-10°C</b>	<b>0°C</b>	<b>10°C</b>	<b>20°C</b>	<b>30°C</b>	<b>40°C</b>	<b>50°C</b>	<b>60°C</b>
Frequency (MHz)	13,5597	13,5598	13,5598	13,5599	13,5599	13,5599	13,5599	13,5598	13,5598	13,5599
Frequency Drift (%)	-0,0021	-0,0017	-0,0017	-0,0011	-0,0011	-0,0011	-0,0011	-0,0017	-0,0018	-0,0011

<b>Temperature</b>	<b>Tnom</b>		
<b>Voltage:</b>	<b>Vmin</b>	<b>Vnom</b>	<b>Vmax</b>
Frequency (MHz)	13,5599	13,5599	13,5599
Frequency Drift (%)	-0,0011	-0,0011	-0,0011

#### 4.6. CONCLUSION

Frequency tolerance measurement performed on the sample of the product **Safran Identity and Security** SN: **17001OMX0000002**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS 210 ISSUE 9 limits.



## 5. AC POWER LINE CONDUCTED EMISSIONS

### 5.1. TEST CONDITIONS

Test performed by : Laurent DENEUX  
Date of test : March 9, 2017  
Ambient temperature : 21 °C  
Relative humidity : 53 %

### 5.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013) method. The EUT is placed on the ground reference plane, at 80cm from the LISN. The distance between the EUT and the vertical ground plane is 40cm. Auxiliaries are powered by another LISN. The cable has been shorted to 1meter length. The EUT is powered through the LISN. Measurement is made with a receiver in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary. The LISN (measure) is  $50\Omega / 50\mu\text{H}$ . Interconnecting cables and equipment's were moved to position that maximized emission.



Photograph for AC Power Line Conducted Emissions (Front view)





Photograph for AC Power Line Conducted Emissions (Rear view)

### 5.3. LIMIT

#### Quasi-Peak

0,15kHz to 0,5MHz: 66dB $\mu$ V to 56dB $\mu$ V\*

0,5MHz to 5MHz: 56dB $\mu$ V

5MHz to 30MHz: 60dB $\mu$ V

#### Average

0,15kHz to 0,5MHz: 56dB $\mu$ V to 46dB $\mu$ V\*

0,5MHz to 5MHz: 46dB $\mu$ V

5MHz to 30MHz: 50dB $\mu$ V

\*Decreases with the logarithm of the frequency

### 5.4. TEST EQUIPMENT LIST

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015-12	2017-12
V ISLN	ROHDE & SCHWARZ	ESH2-Z5	C2322001	2016-05	2017-05
Pulse limiter	ROHDE & SCHWARZ	ESH3-Z2	A2649008	2016-03	2017-03
Cable	-	-	A5329417	2016-10	2017-10
Cable	-	-	A5329589	2016-10	2017-10
Ground plane	LCIE	-	-	-	-

Note: In our quality system, the test equipment calibration due is more & less 2 months


### 5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None      ☐ Divergence:


## 5.6. RESULTS

### AC Power Line Conducted Emission (with antenna)

#### Phase

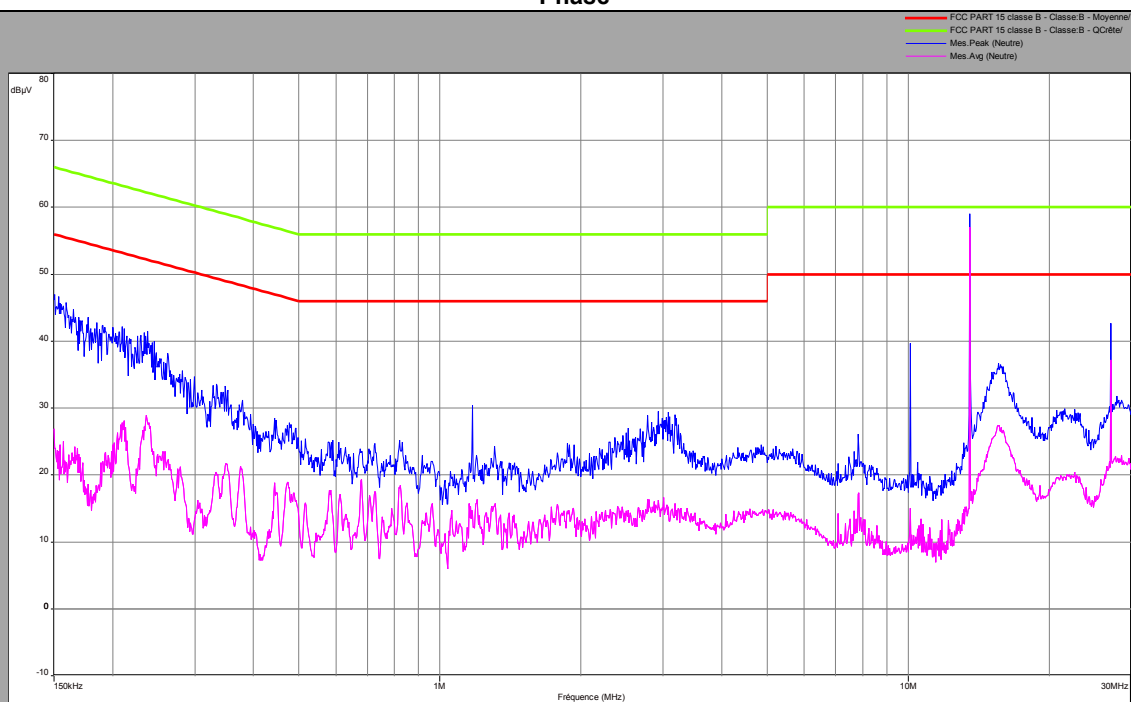

#### Line

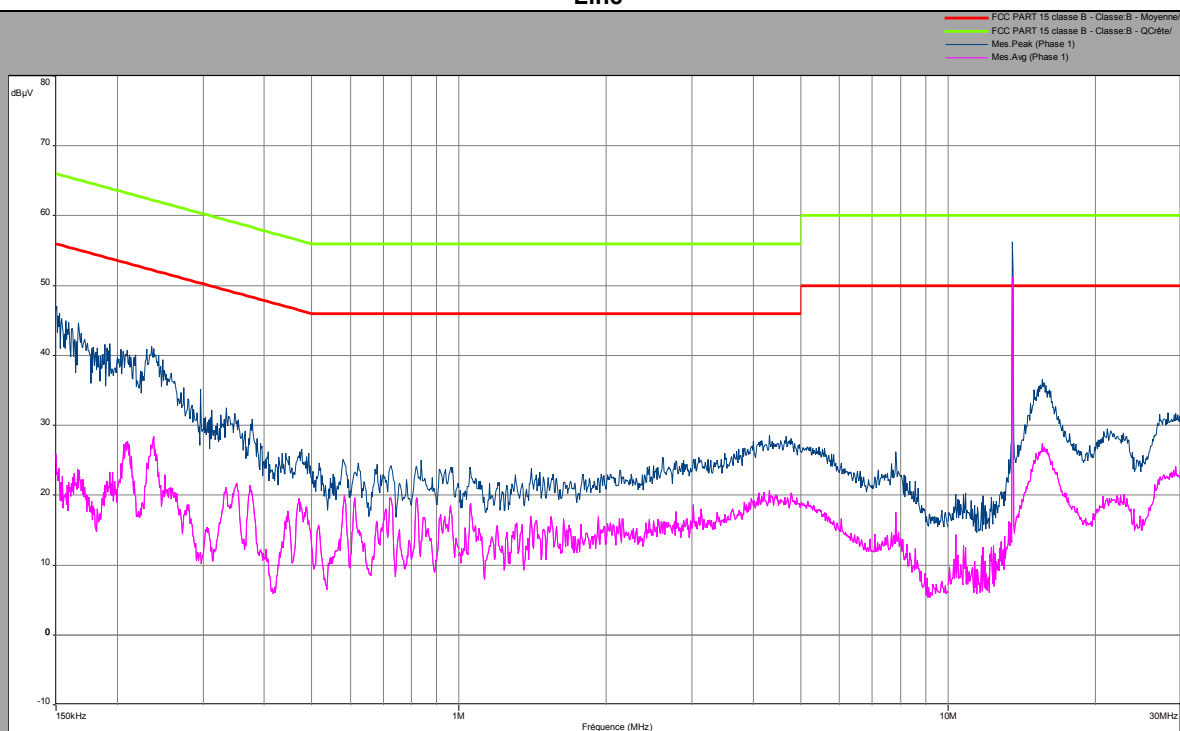


Phase Line (with antenna)					
Frequency (kHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Average Level (dBμV)	Average Limit (dBμV)
150	46.2	-	66	28.6	56
680	23	-	56	19.3	46
3008	29.5	-	56	15.5	46
13560	59	-	60	57	50
27120	42.6	-	60	37.2	50


Neutral Line (with antenna)					
Frequency (kHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Average Level (dBμV)	Average Limit (dBμV)
150	46.4	-	66	25.8	56
580	26	-	56	20	46
4316	28.5	-	56	21	46
13560	56.2	-	60	51	50
27120	31	-	60	21	50

## AC Power Line Conducted Emission (without antenna)

### Phase

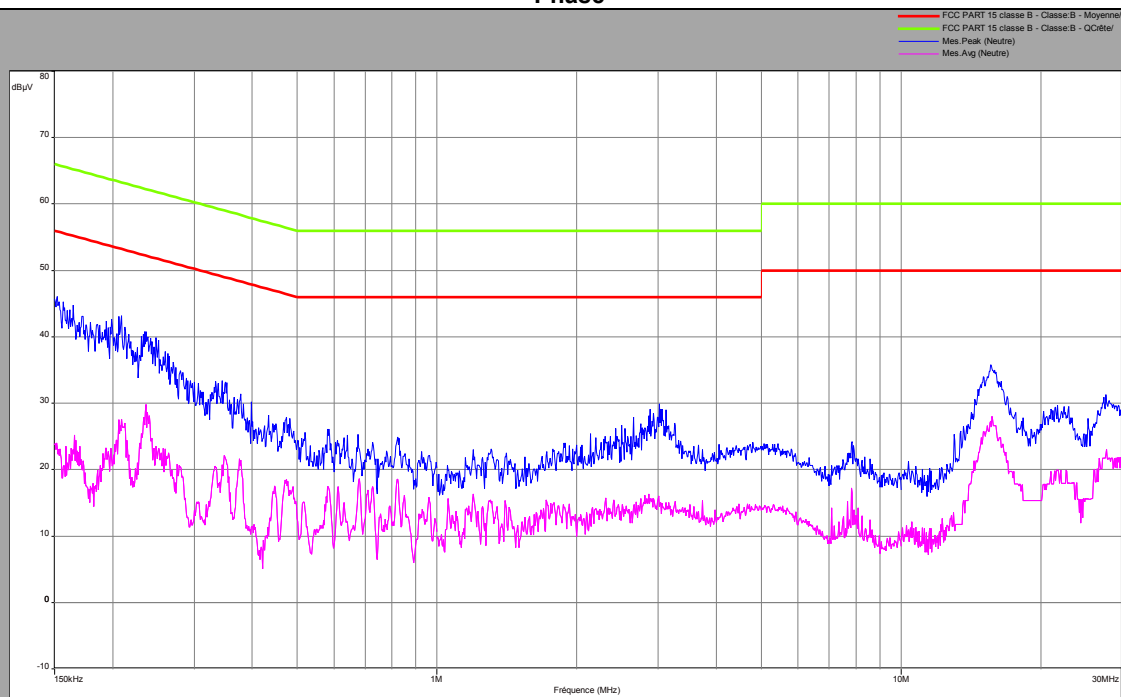

### Line

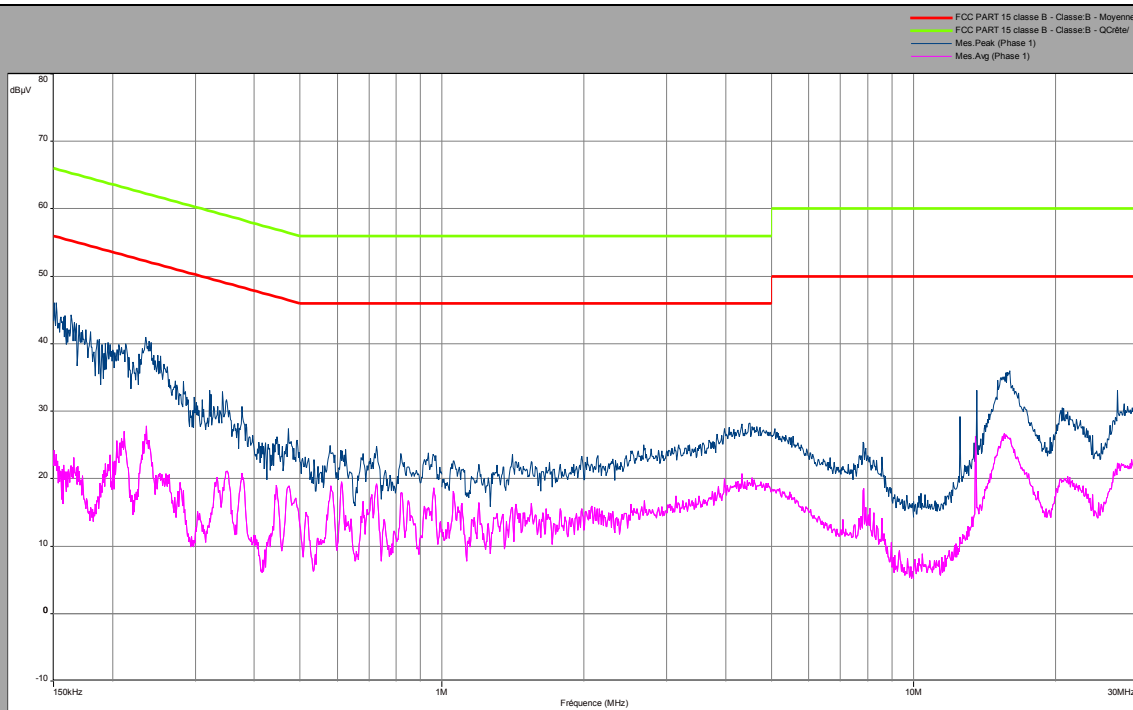

Phase Line (without antenna)					
Frequency (kHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Average Level (dBμV)	Average Limit (dBμV)
150	45.6	-	66	23.7	56
583	25	-	56	17.2	46
3001	30	-	56	16	46
13560	25.5	-	60	15.3	50
27120	31	-	60	23	50

Neutral Line (without antenna)					
Frequency (kHz)	Peak Level (dBμV)	Quasi-Peak Level (dBμV)	Quasi-Peak Limit (dBμV)	Average Level (dBμV)	Average Limit (dBμV)
150	46	-	66	23.6	56
580	25	-	56	20	46
4472	28	-	56	19.2	46
15700	35.7	-	60	26.3	50
27120	33.2	-	60	22.3	50

## 5.7. CONCLUSION

Ac Power Line Conducted Emission measurement performed on the sample of the product **Safran Identity and Security** SN: **17001OMX0000002**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS Gen ISSUE 4 limits.

## 6. FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHz

### 6.1. TEST CONDITIONS

Test performed by : Laurent DENEUX  
Date of test : March 9, 2017 to March 10, 2017  
Ambient temperature : 18 °C  
Relative humidity : 47 %

### 6.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013). The EUT is placed **on an open area test site**. Distance between measuring antenna and the EUT is **3m**.

Test is performed in parallel and perpendicular axis with a loop antenna below 30MHz. Measurement bandwidth was 200Hz below 150kHz and 9kHz between 150kHz & 30MHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height was 1m.

Test is performed in horizontal (H) and vertical (V) polarization with **bilog** between 30MHz & 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 120kHz below 1GHz and 1MHz above 1GHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height search was performed from 1 to 4m. The EUT is place at 1.5m high above 1GHz and at 0.8m high under 1GHz.



Photograph for Field strength outside of the bands 13.110-14.010 MHz





Photograph for Field strength outside of the bands 13.110-14.010 MHz



Photograph for Field strength outside of the bands 13.110-14.010 MHz





### 6.3. LIMIT

**Limit at 3m:**

9kHz to 0,490MHz:	2400/F(kHz)µV/m (300m) or 20log(2400/F(kHz))dBµV/m (3m) QPeak
0,490MHz to 1.705MHz:	240000/F(kHz)µV/m (30m) or 20log(240000/F(kHz))dBµV/m (3m) QPeak
1.705MHz to 30MHz:	30µV/m (30m) or dBµV/m (3m) QPeak
30MHz to 88MHz:	40dBµV/m QPeak
88MHz to 216MHz:	43,5dBµV/m QPeak
216MHz to 960MHz:	46dBµV/m QPeak
960MHz to 1000MHz:	54dBµV/m QPeak
Above 1000MHz:	74dBµV/m Peak
	54dBµV/m Average

**Limit at 10m:**

30MHz to 88MHz:	29.5dBµV/m QPeak
88MHz to 216MHz:	33dBµV/m QPeak
216MHz to 960MHz:	35.5dBµV/m QPeak
960MHz to 1000MHz:	43.5dBµV/m QPeak
Above 1000MHz:	63.5BµV/m Peak
	43.5BµV/m Average

## 6.4. TEST EQUIPMENT LIST


Apparatus	Trade Mark	Type	Registration number	Cal. Date	Cal. Due
Open test site	LCIE	-	F2000400	2016-05	2017-05
EMI Test Receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015-12	2017-12
Preamplifier	HELWETT PACKARD	8449B	A7080071	2016-02	2017-02
Bilog antenna	CHASE	CBL 6112A	C2040040	2016-02	2017-02
Loop antenna	RHODE & SCHWARZ	HFH2-Z2	C2040007	2015-11	2017-11
Horn	ETS	3115	C2042023	2016-01	2017-01
Cable	-	-	A5329542	2016-03	2017-03
Cable	-	-	A5329449	2016-10	2017-10
Cable	-	-	A5329368	2016-05	2017-05
Cable	-	-	A5329444	2016-10	2017-10

Note: In our quality system, the test equipment calibration due is more & less 2 months

## 6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


☒ None      ☐ Divergence:

## 6.6. RESULTS

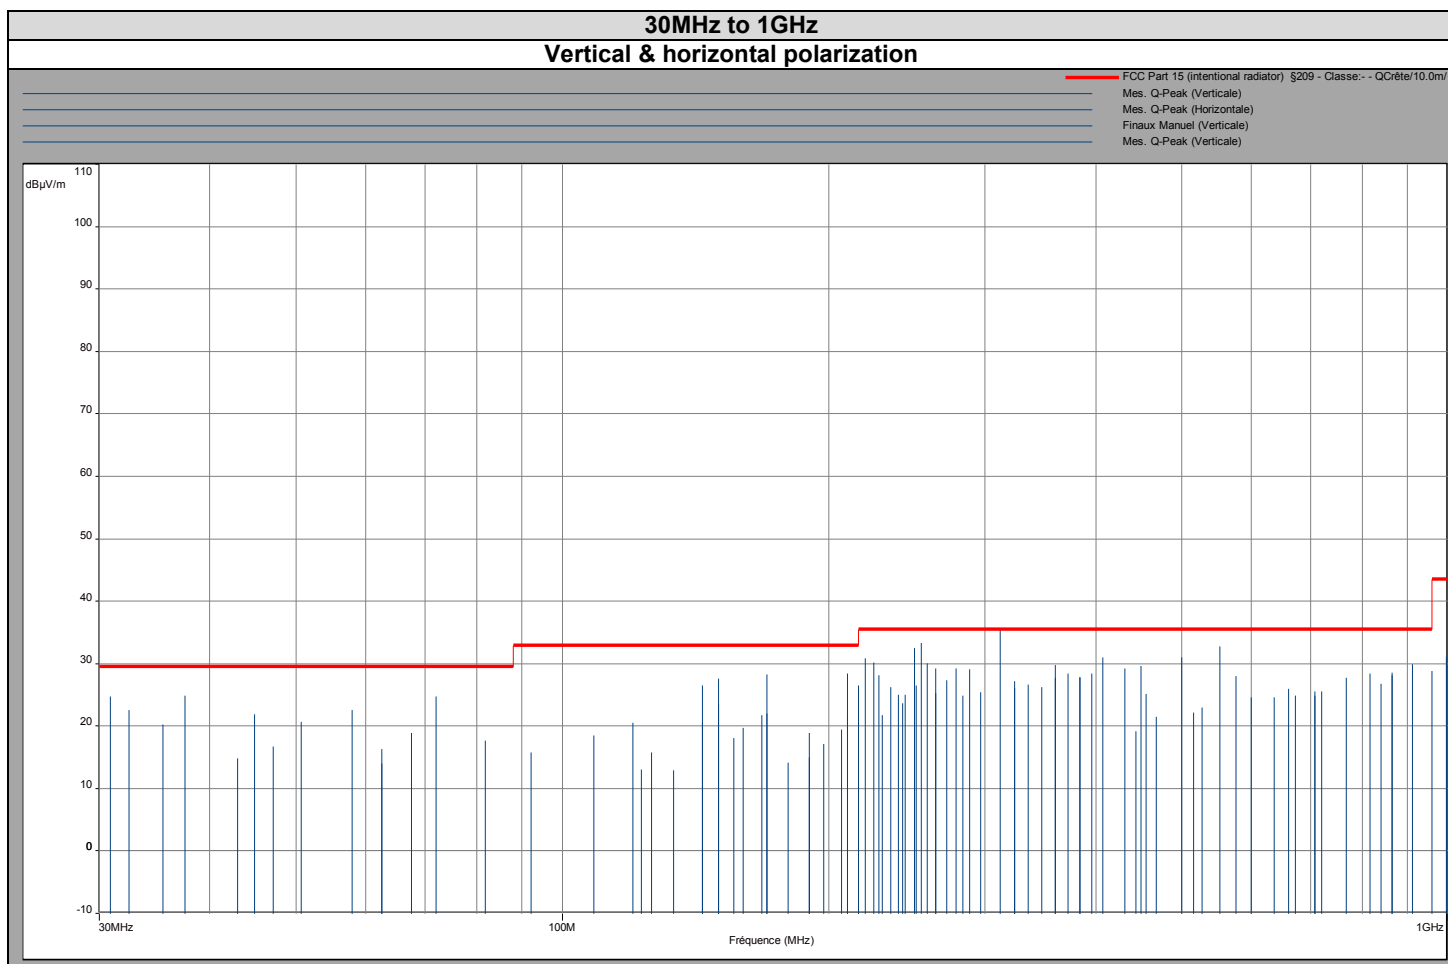


Above 1GHz

Vertical & horizontal polarization (peak measurement)

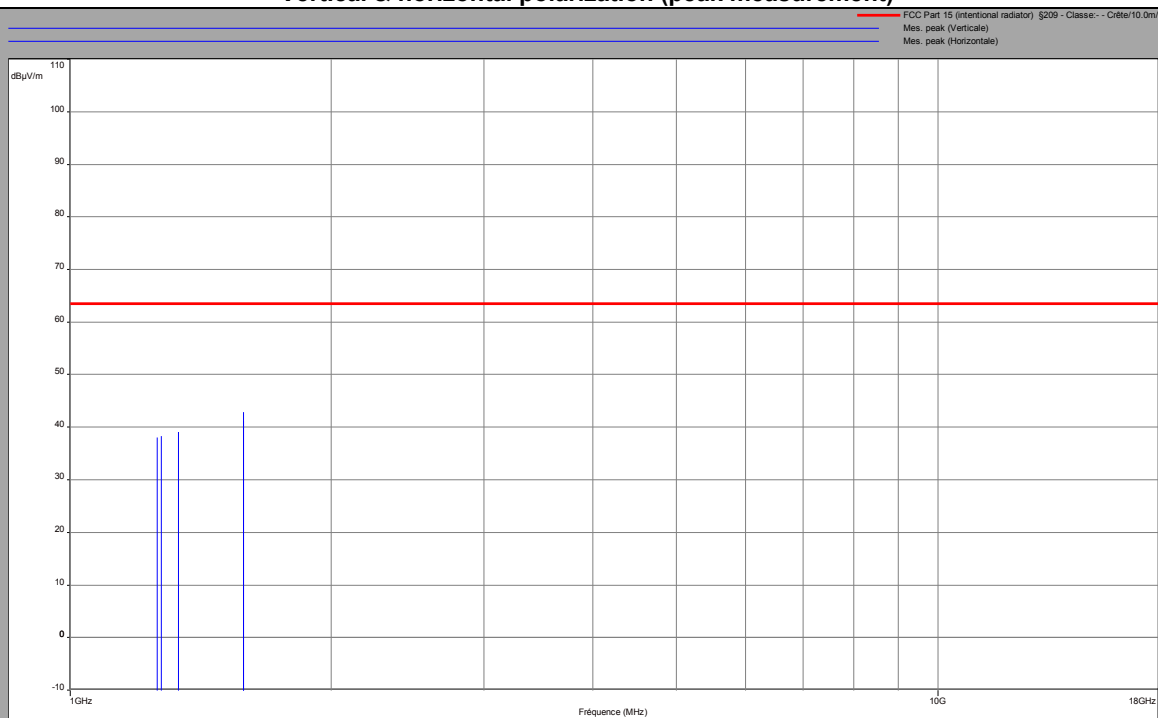

Vertical & horizontal polarization (average value)

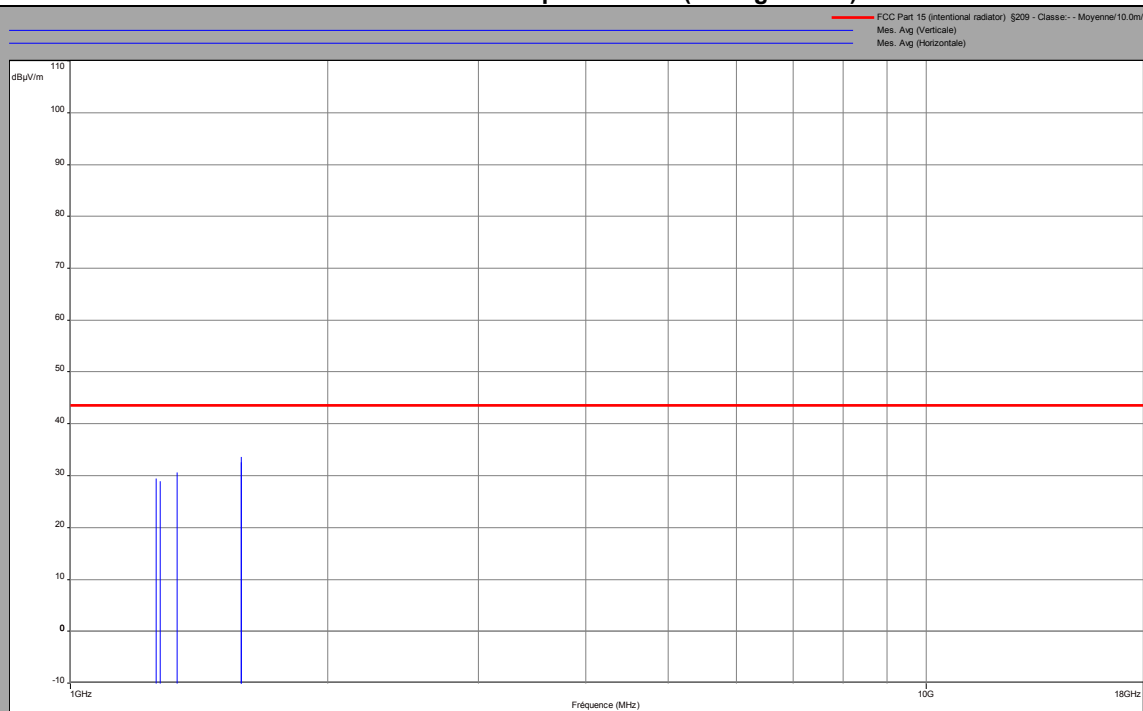

Perpendicular antenna  
Below 30MHz

Frequency (MHz)	QPeak Level (dB $\mu$ V/m)	Limit (3m) (dB $\mu$ V/m)
11.98	26.39	69.5
15.3	25.5	69.5
27.12	30.1	69.5

Paralell antenna

Frequency (MHz)	QPeak Level (dB $\mu$ V/m)	Limit (3m) (dB $\mu$ V/m)
11.98	29.3	69.5
15.3	28.6	69.5
27.12	31.23	69.5

30MHz to 1GHz			
Polarization	Frequency (MHz)	QPeak Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
Vertical	30.9	24.8	29.5
Vertical	32.4	22.6	29.5
Vertical	35.4	20.3	29.5
Vertical	37.5	24.9	29.5
Vertical	43	14.8	29.5
Vertical	44.9	22.0	29.5
Vertical	47.1	16.7	29.5
Vertical	50.7	20.8	29.5
Vertical	57.9	22.6	29.5
Vertical	62.5	14.1	29.5
Vertical	67.6	18.9	29.5
Vertical	72	24.8	29.5
Vertical	81.9	17.7	29.5
Vertical	92.2	15.8	33
Vertical	108.6	18.5	33
Vertical	120	20.6	33
Vertical	126.2	15.8	33
Vertical	144	20.6	33
Vertical	150	27.7	33
Vertical	156	18.1	33
Vertical	160	19.7	33
Vertical	170.2	28.4	33
Vertical	190	18.9	33
Vertical	197.3	17.2	33
Vertical	206.7	19.4	33
Vertical	210	28.5	33
Vertical	216	26.6	33
Vertical	219.9	30.9	35.5
Vertical	224.9	30.2	35.5
Vertical	227.7	28.2	35.5
Vertical	234.7	26.4	35.5
Vertical	239.7	25.1	35.5
Vertical	243.9	25.1	35.5
Vertical	250	32.5	35.5
Vertical	254	33.3	35.5
Vertical	258.1	30.1	35.5
Vertical	264	29.3	35.5
Vertical	271.9	27.4	35.5
Vertical	278.3	29.3	35.5
Vertical	288	29.1	35.5
Vertical	312	35.5	35.5
Vertical	324	27.2	35.5
Vertical	336	26.8	35.5
Vertical	348	26.2	35.5
Vertical	360	29.8	35.5

30MHz to 1GHz			
Polarization	Frequency (MHz)	QPeak Level (dBµV/m)	Limit (dBµV/m)
Vertical	372	28.5	35.5
Vertical	384	27.9	35.5
Vertical	396	28.4	35.5
Vertical	408	31.0	35.5
Vertical	432	29.2	35.5
Vertical	444	19.3	35.5
Vertical	450	29.8	35.5
Vertical	456	25.3	35.5
Vertical	468	21.5	35.5
Vertical	500	31.0	35.5
Vertical	516	22.2	35.5
Vertical	528	23.1	35.5
Vertical	552	32.8	35.5
Vertical	576	28.0	35.5
Vertical	600	24.6	35.5
Vertical	636	24.7	35.5
Vertical	660	26.0	35.5
Vertical	708	24.9	35.5
Vertical	840	26.9	35.5
Vertical	864	28.2	35.5
Vertical	912	29.9	35.5
Vertical	960	28.9	35.5
Vertical	996	31.2	43.5

30MHz to 1GHz			
Polarization	Frequency (MHz)	QPeak Level (dBμV/m)	Limit (dBμV/m)
Horizontal	62.5	16.4	29.5
Horizontal	122.9	13.1	33
Horizontal	133.4	12.9	33
Horizontal	144	26.5	33
Horizontal	150	23.6	33
Horizontal	168.1	21.8	33
Horizontal	170	22.0	33
Horizontal	179.9	14.1	33
Horizontal	190.1	15.1	33
Horizontal	210	21.7	33
Horizontal	216	22.0	33
Horizontal	229.9	21.8	35.5
Horizontal	242	23.7	35.5
Horizontal	250.9	26.6	35.5
Horizontal	264	25.4	35.5
Horizontal	283	24.9	35.5
Horizontal	296.6	25.5	35.5
Horizontal	324	26.2	35.5
Horizontal	360	27.7	35.5
Horizontal	384	27.9	35.5
Horizontal	672	25.0	35.5
Horizontal	708	25.7	35.5
Horizontal	720	25.7	35.5
Horizontal	768	27.7	35.5
Horizontal	816	28.5	35.5
Horizontal	864	28.6	35.5



Above 1GHz						
Polarization	Frequency (MHz)	Duty cycle correction (dB)	Average Level (dBμV/m)	Average Limit (dBμV/m)	Peak Level (dBμV/m)	Peak Limit (dBμV/m)
Vertical	1272.8	0	29	43.5	38.4	63.5
Vertical	1584	0	32.7	43.5	41.3	63.5
Horizontal	1260	0	29.4	43.5	38	63.5
Horizontal	1332	0	30.6	43.5	39.1	63.5
Horizontal	1584	0	33.6	43.5	42.9	63.5

## 6.7. CONCLUSION

Field strength outside of the bands 13.110-14.010 MHz measurement performed on the sample of the product **Safran Identity and Security** SN: **17001OMX0000002**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS-Gen ISSUE 4 limits.



## 7. FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHz

### 7.1. TEST CONDITIONS

Test performed by : Laurent DENEUX  
Date of test : March 9, 2017 to March 10, 2017  
Ambient temperature : 18 °C  
Relative humidity : 47 %

### 7.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013). The EUT is placed **on an open area test site**. Distance between measuring antenna and the EUT is **3m**.

Test is performed in parallel and perpendicular axis with a loop antenna below 30MHz. Measurement bandwidth was 200Hz below 150kHz and 9kHz between 150kHz & 30MHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height was 1m.

The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height search was performed from 1 to 4m. The EUT is place at 0.8m.



Photograph for Field strength within the band 13.110-14.010MHz



### 7.3. LIMIT

**Limit:**

Below 13.110MHz:	30 $\mu$ V/m (30m) or 69.5dB $\mu$ V/m (3m) QPeak
13.110MHz to 13.410MHz:	106 $\mu$ V/m (30m) or 80.5dB $\mu$ V/m (3m)
13.410MHz to 13.553MHz:	334 $\mu$ V/m (30m) or 90.5dB $\mu$ V/m (3m)
13.553MHz to 13.567MHz:	15848 $\mu$ V/m (30m) or 124dB $\mu$ V/m (3m)
13.567MHz to 13.710MHz:	334 $\mu$ V/m (30m) or 90.5dB $\mu$ V/m (3m)
13.710MHz to 14.010MHz:	106 $\mu$ V/m (30m) or 80.5dB $\mu$ V/m (3m)
Above 14.010MHz:	30 $\mu$ V/m (30m) or 69.5dB $\mu$ V/m (3m) QPeak

### 7.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal. Date	Cal. Due
Open test site	LCIE	-	F2000400	2016-05	2017-05
EMI Test Receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015-12	2017-12
Loop antenna	RHODE & SCHWARZ	HFH2-Z2	C2040007	2015-11	2017-11
Cable	-	-	A5329542	2016-03	2017-03
Cable	-	-	A5329449	2016-10	2017-10
Cable	-	-	A5329368	2016-05	2017-05
Cable	-	-	A5329444	2016-10	2017-10

Note: In our quality system, the test equipment calibration due is more & less 2 months

### 7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None ☐ Divergence:

## 7.6. RESULTS

Parallel Axis		
Frequency (MHz)	QPeak Level (dBµV/m) (3m)	Limit (dBµV/m) (3m)
Below 13.110	29.6	69.5
13.110 to 13.410	27	80.5
13.410 to 13.553	32.2	90.5
13.553 to 13.567	70	124
13.567 to 13.710	39	90.5
13.710 to 14.010	30	80.5
Above 14.010	28.3	69.5

Perpendicular Axis		
Frequency (MHz)	QPeak Level (dBµV/m) (3m)	Limit (dBµV/m) (3m)
Below 13.110	31.6	69.5
13.110 to 13.410	32	80.5
13.410 to 13.553	38	90.5
13.553 to 13.567	65	124
13.567 to 13.710	41	90.5
13.710 to 14.010	31	80.5
Above 14.010	26.5	69.5

## 7.7. CONCLUSION

Field strength within the band 13.110-14.010MHz measurement performed on the sample of the product **Safran Identity and Security** SN: **17001OMX0000002**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS 210 ISSUE 9 limits.

## 8. UNCERTAINTIES CHART

47 CFR Part 15.209 & 15.207 Kind of test	Wide uncertainty laboratory (k=2) $\pm x(\text{dB}) / (\text{Hz}) / \text{ms}$	Uncertainty limit
Measurement of conducted disturbances in voltage on the AC power port (9 kHz – 150 kHz)	2,67	3.8
Measurement of conducted disturbances in voltage on the AC power port (150 kHz – 30 MHz)	2,67	3.4
Measurement of conducted disturbances in voltage on the telecommunication port. (AAN)	3,67	5.0
Measurement of conducted disturbances in current (current clamp)	2,73	2.9
Measurement of disturbance power	2,67	4.5
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC V01	4,48	/
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC C01	4,48	/
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on the OATS (Ecuelles)	4,88	6.3
Measurement of radiated electric field from 1 to 18GHz on the Ecuelles site	5.16	/
Measurement of radiated electric field from 30 to 1000MHz in vertical position on the OATS (Ecuelles)	4,99	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC C01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC C01	5,16	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC V01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC V01	5,15	6.3
Measurement of radiated electric field from 1 to 6 GHz C01	5,1	5.2
Measurement of radiated electric field from 1 to 6 GHz V01	4,85	5.2
Measurement of radiated magnetic field from 10kHz to 30MHz on the OATS (Ecuelles)	4,48	/

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR. The conformity of the sample is directly established by the applicable limits values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report