



# The Photos of SAR test

No. I19Z60464-SEM06

For

**Jiaxing Yongrui Electron Technology Co., Ltd.**

**Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN**

**Modelname: SM-T295**

**With**

**Hardware Version: V0.3**

**Software Version: T295XXU0ASE8**

**FCC ID: ZCASMT295**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)




**Picture 1: Constituents of the sample**




**Picture 2: Left Hand Touch Cheek Position**

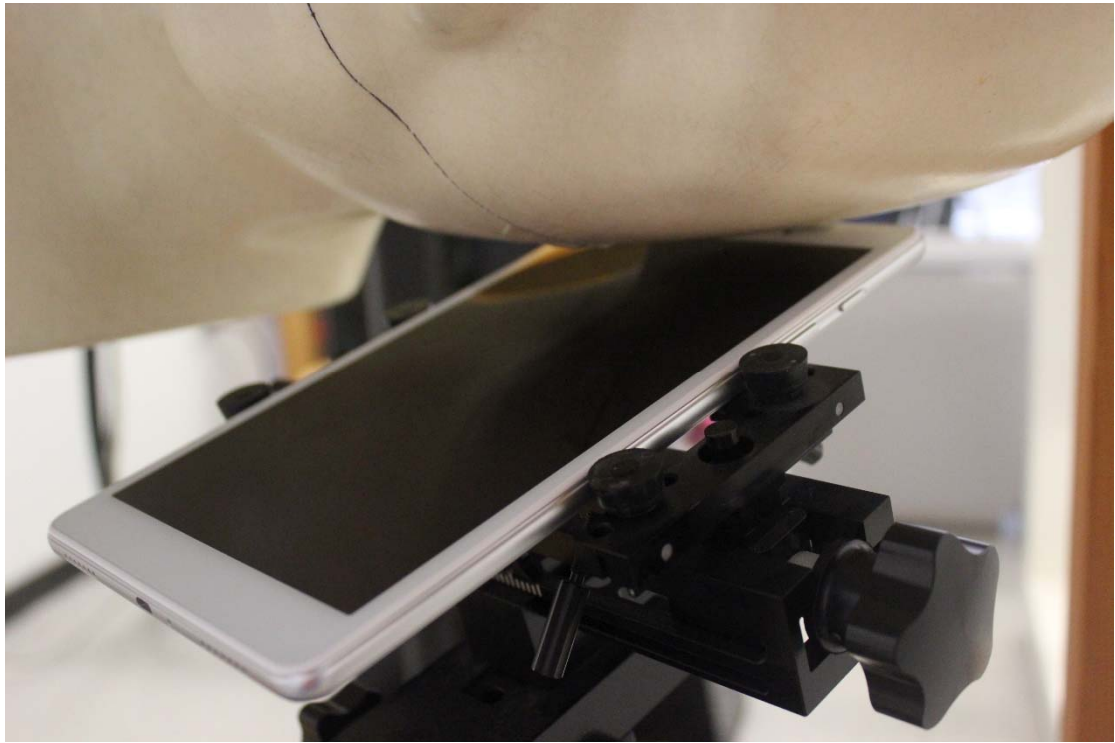

**Picture 3: Left Hand Tilt 15° Position**

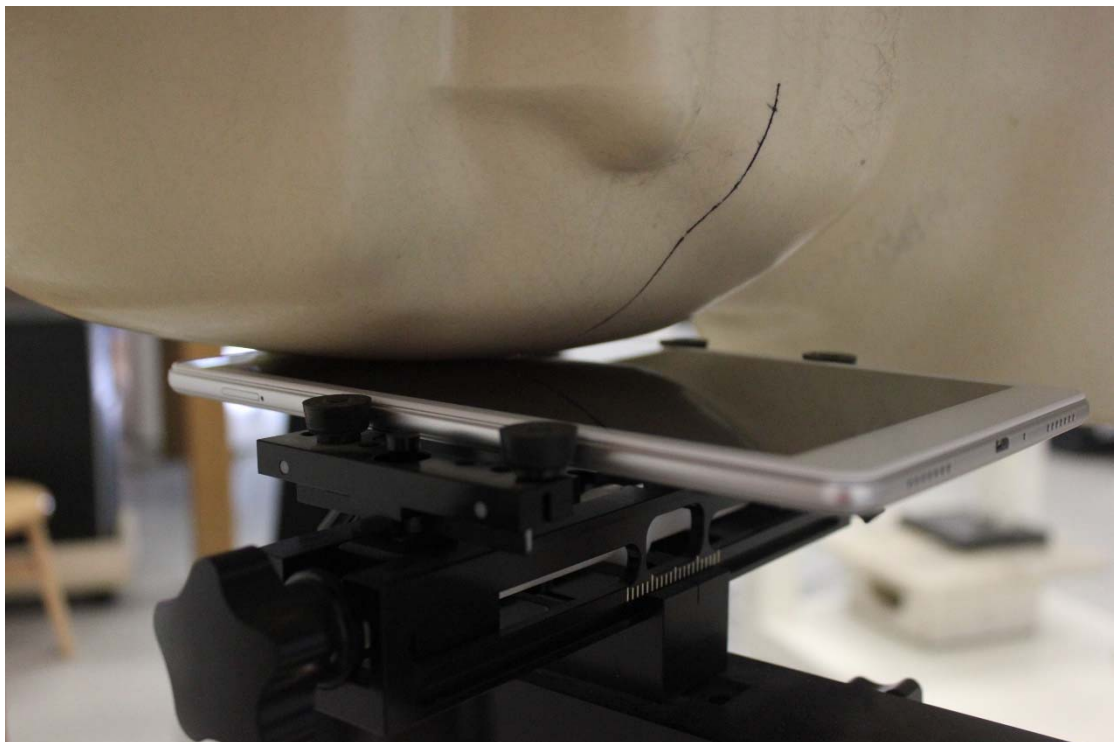

**Picture 4: Right Hand Touch Cheek Position**

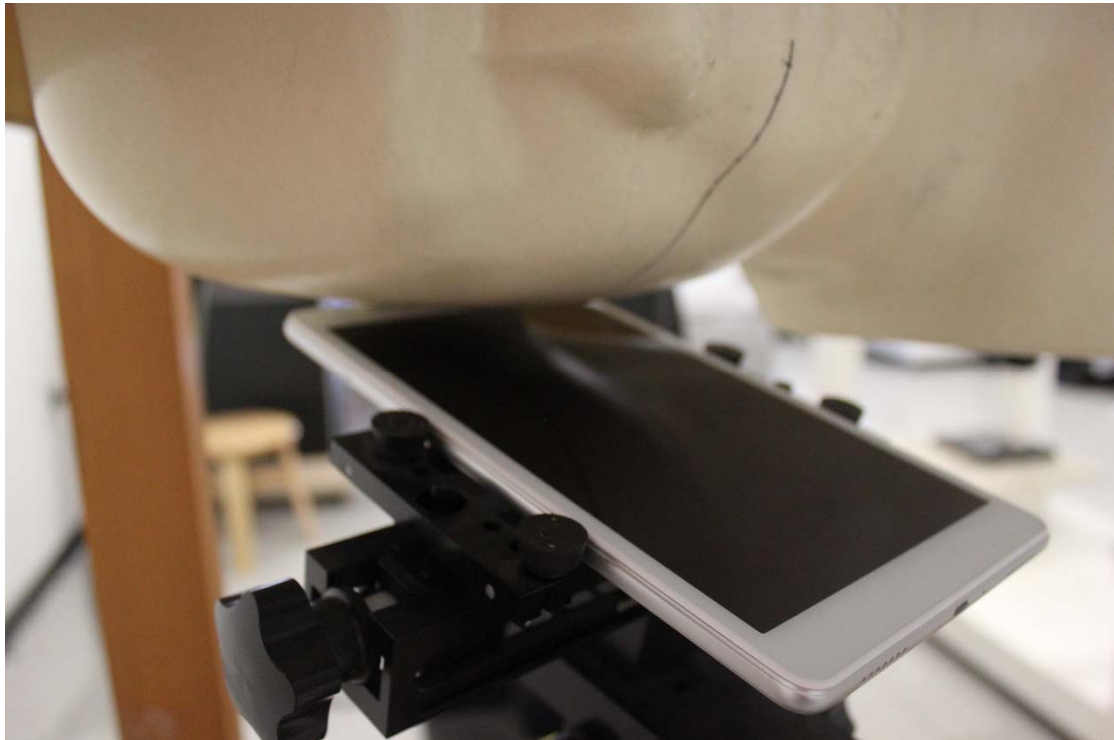

**Picture 5: Right Hand Tilt 15° Position**

**Test positions for body:**

The Body SAR is tested at the following 8 test positions all with the distance =0/4/14/19/29/mm between the EUT and the phantom bottom:




**Picture 6: Left 0mm**






**Picture 7: Left 14mm**

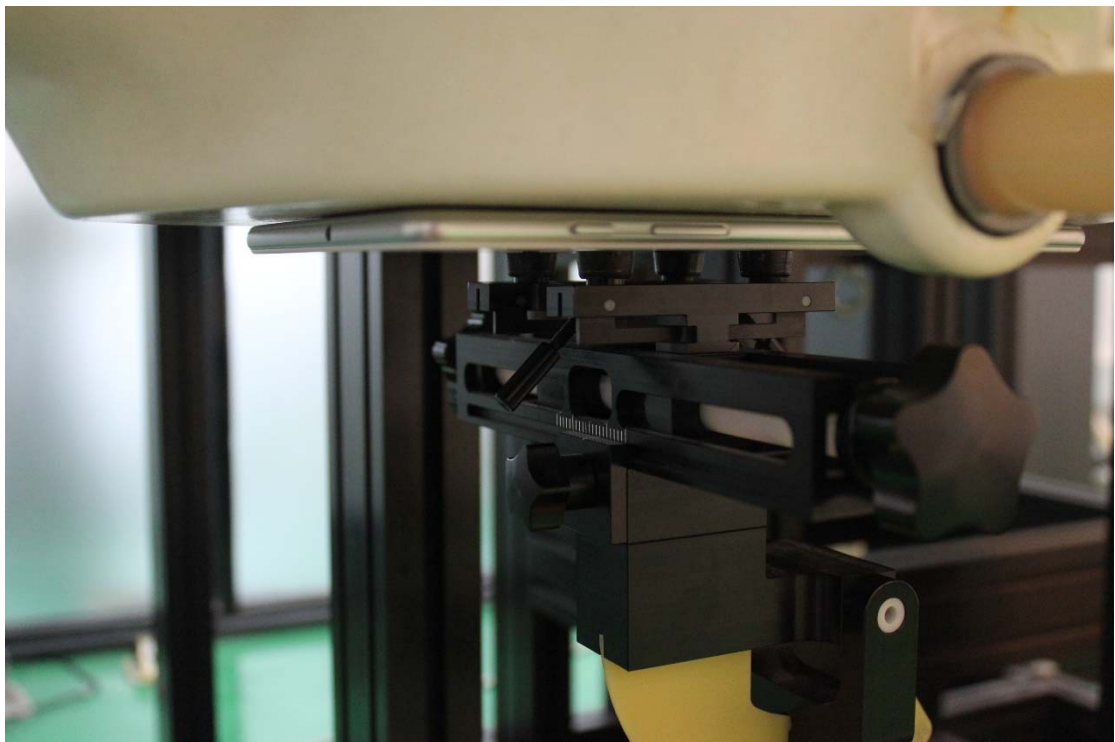


**Picture 8: Rear 0mm**

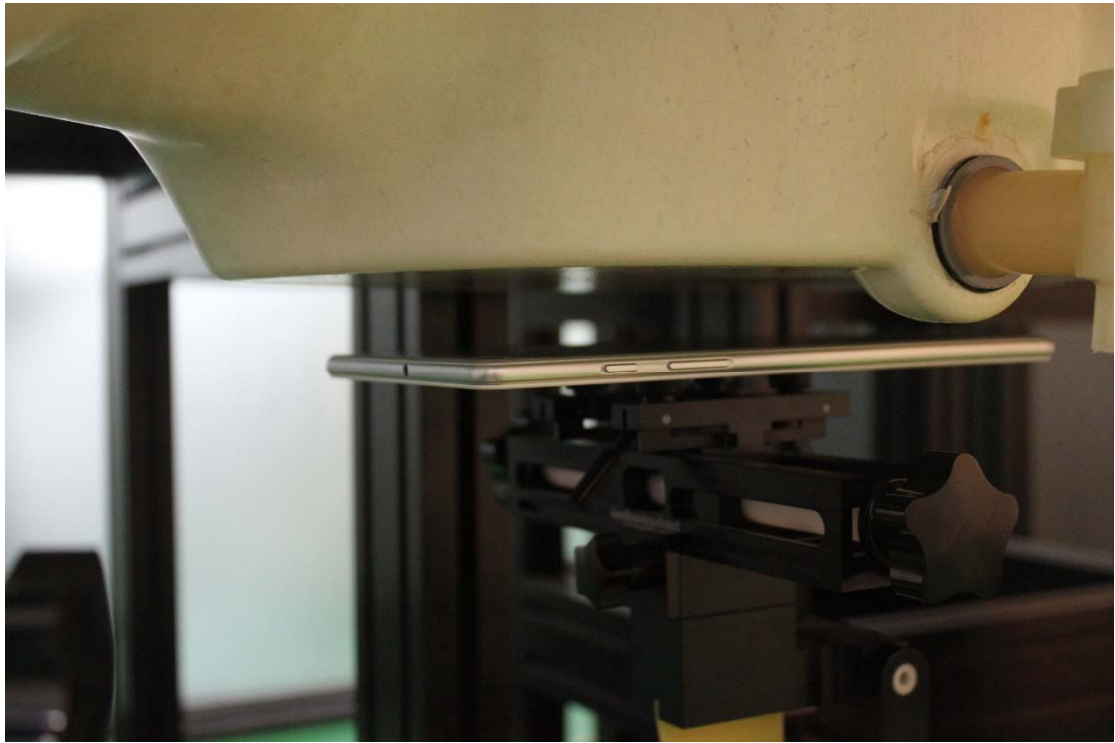

**Picture 8: Rear 19mm**



**Picture 9: Right 0mm**

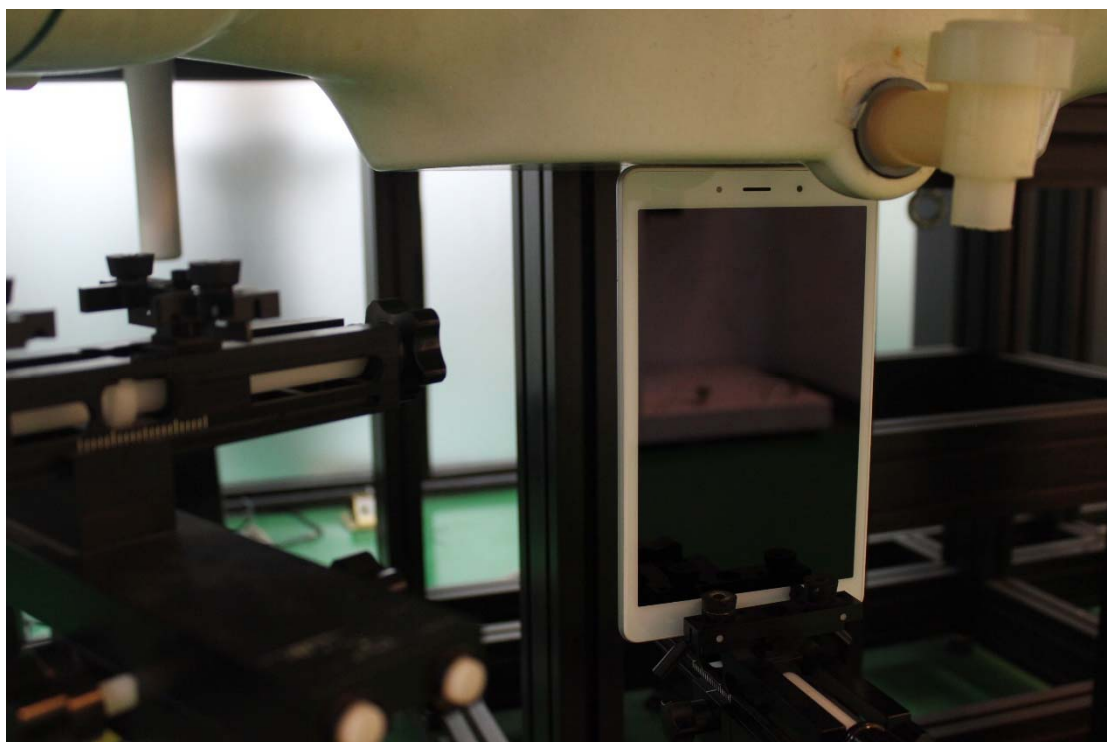

**Picture 10: Top 0mm**



**Picture 10: Top 4mm**



**Picture 12: Top 29mm**