



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Tablet PC

Trade Name : N/A
Model Number : CM9701, CM506, CM6501, CM704,
CM727, CM807, CM10101, CM10205
Report Number : GSI110216604001
Date : March 07, 2011
Regulations : See below

FCC ID: ZCXC97N

Issued to:

Shenzhen Careeror Technology Co., Ltd.
B218, Huafeng Commercial Building, 25th Block, Baoan 518000, Shenzhen,
China

Issued by:

Shenzhen GSI Electronic Technology Co.,Ltd.
Room 616, XianKeJiDian Building, BaGuaSi Road, Shenzhen, China

TEL: 86-755-25844177
FAX: 86-755-25844877

Note: This report shall not be reproduced except in full, without the written approval of GSI Electronic Technology Co., Ltd. This document may be altered or revised by GSI Electronic Technology Co., Ltd. Personnel only, and shall be noted in the revision section of the document.



VERIFICATION OF COMPLIANCE

Applicant:	Shenzhen Careeror Technology Co., Ltd. B218, Huafeng Commercial Building, 25th Block, Baoan 518000, Shenzhen, China
Manufacturer:	Shenzhen Careeror Technology Co., Ltd. B218, Huafeng Commercial Building, 25th Block, Baoan 518000, Shenzhen, China
Product Description:	Tablet PC
Brand Name:	N/A
Model Number:	CM9701, CM506, CM6501, CM704, CM727, CM807, CM10101, CM10205 (Note: The samples are the same except color and model number are different. We prepare CM9701 for test.)
Serial Number:	N/A
File Number:	GSI110216604001
Date of Test:	February 21, 2011 to March 04, 2011

The product described above is tested by **Bontek Compliance Testing Laboratory Ltd.** The measurement results are contained in this test report and **Shenzhen GSI Electronic Technology Co.,Ltd.** assume full responsibility for the accuracy of the test results. Also, this report shows that the EUT (Equipment Under Test) technically complies with conducted and radiated emission limits of FCC Rules Part 15.247..

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of **Shenzhen GSI Electronic Technology Co.,Ltd.**

Prepared by :

(John)

Approved & Authorized Signer:

(Morris)



Table of Contents

1.	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION.....	5
1.2	TEST FACILITY	5
1.3	RELATED SUBMITTAL(S) / GRANT (S)	6
1.4	TEST METHODOLOGY	6
1.5	SPECIAL ACCESSORIES	6
1.6	EQUIPMENT MODIFICATIONS	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE	7
2.4	CONFIGURATION OF TESTED SYSTEM	7
2.5	MEASUREMENT EQUIPMENT USED	9
3.	DESCRIPTION OF TEST MODES	10
4.	CONDUCTED EMISSIONS TEST	11
4.1	MEASUREMENT PROCEDURE:.....	11
4.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
4.3	CONDUCTED EMISSION LIMIT	11
4.4	MEASUREMENT RESULT:.....	11
4.6	CONDUCTED MEASUREMENT PHOTOS:	14
5.	RADIATED EMISSION TEST	15
5.1	MEASUREMENT PROCEDURE.....	15
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
5.3	RADIATED EMISSION LIMIT.....	16
5.4	MEASUREMENT RESULT	17
5.5	RADIATED MEASUREMENT PHOTOS:	25
6.	OCCUPIED BANDWIDTH TEST.....	26
6.1	MEASUREMENT PROCEDURE.....	26
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
6.3	MEASUREMENT EQUIPMENT USED:	26
6.4	LIMIT	26
6.5	MEASUREMENT RESULTS:	26
7.	MAXIMUM PEAK OUTPUT POWER TEST	31
7.1	MEASUREMENT PROCEDURE.....	31
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	31
7.3	MEASUREMENT EQUIPMENT USED:	31
7.4	PEAK POWER OUTPUT LIMIT.....	31



7.5	MEASUREMENT RESULTS:.....	31
8.	BAND EDGE TEST	33
8.1	MEASUREMENT PROCEDURE.....	33
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
8.3	MEASUREMENT EQUIPMENT USED:	34
8.4	MEASUREMENT RESULTS:.....	34
8.4.1	CONDUCTED TEST.....	34
8.4.2	RADIATED TEST.....	37
9.	POWER DENSITY	53
9.1	TEST EQUIPMENT	53
9.2	MEASURING INSTRUMENTS AND SETTING.....	53
9.3	TEST PROCEDURES	53
9.4	BLOCK DIAGRAM OF TEST SETUP.....	53
9.5	LIMIT	53
9.6	TEST RESULT	54
10.	ANTENNA PORT EMISSION.....	58
10.1	TEST EQUIPMENT	58
10.2	MEASURING INSTRUMENTS AND SETTING	58
10.3	TEST PROCEDURES	58
10.4	BLOCK DIAGRAM OF TEST SETUP	58
10.6	TEST RESULT.....	58
11.	ANTENNA APPLICATION.....	62
11.1	ANTENNA REQUIREMENT	62
11.2	RESULT.....	62



1. GENERAL INFORMATION

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Standards: IEEE802.11b/g
- B). Operation Frequency: 2412-2462MHz
- C). Modulation: OFDM with BPSK, QPSK, 16QAM, 64QAM(11g), BPSK, QPSK, CCK (11b)
- D). Number of Channel: 11
- E). Max Data Rate: 11Mbps(802.11b), 54Mbps(802.11g)
- F). Conducted Power: 12dBm(802.11b), 11dBm(802.11g),
- G). Antenna GAIN: 2dBi
- H). Antenna Type: Chip Antenna
- I). Power Supply: DC9V with AC Adapter or with battery
- J). Adapter: M/N: HW222SS
Input: 100-240V~50/60Hz
Output: DC9V, 1500mA

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Note:

1. This device is a 2.4GHz Tablet PC included 802.11b and 802.11g 2.4GHz transceiver function.
2. Test of channel was included the lowest middle and highest frequency in highest data rate and to perform the test, then record on this report.

1.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March, 2008.

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the



performance of with Registration NO.: 7631A on August 2009. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

CNAS - Registration No.: L3923

Bontek Compliance Testing Laboratory Ltd to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration:L3923, February,2009.

1.3 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: ZCXCM97N filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a DOC procedure.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.



2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System






Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Tablet PC	Careeror	CM9701	ZCXC97N	N/A	EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.



2.5 Measurement Equipment Used

Item	Test Equipment	Manufacturer	Model No.	LAST CAL.	Due.Date
1	EMI Test Receiver	Rohde & Schwarz	ESCI	2010/04/15	2011/04/14
2	Radio Communication Tester	Rohde & Schwarz	CMU200	2010/04/15	2011/04/14
3	Dual Directional Coupler	Agilent	778D	2010/04/15	2011/04/14
4	10dB Attenuator	SCHWARZBECK	MTAIMP-136	2010/04/15	2011/04/14
5	Tunable Bandreject Filter	K&L	3TNF-800	2010/04/15	2011/04/14
6	Tunable Bandreject filter	K&L	5TNF-1700	2010/04/15	2011/04/14
7	High-Pass Filter	K&L	9SH10-2700/X12750-O/O	2010/04/15	2011/04/14
8	High-Pass Filter	K&L	41H10-1375/U12750-O/O	2010/04/15	2011/04/14
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2010/04/15	2011/04/14
10	AC Power Supply	IDRC	CR-500TP	2010/04/15	2011/04/14
11	DC Power Supply	IDRC	CD-035-020PR	2010/04/15	2011/04/14
12	RF Current Probe	FCC	F-33-4	2010/04/15	2011/04/14
13	Temperature/Humidity Meter	Zhicheng	ZC1-2	2010/04/15	2011/04/14
14	MICROWAVE AMPLIFIER	HP	8349B	2010/04/15	2011/04/14
15	Amplifier	HP	8447D	2010/04/15	2011/04/14
16	SIGNAL GENERATOR	HP	8647A	2010/04/15	2011/04/14
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2010/04/15	2011/04/14
18	Horn Antenna	Schwarzbeck	BBHA9120A	2010/04/15	2011/04/14
19	EMI Test Receiver	R&S	ESPI	2010/04/15	2011/04/14



3. Description of test modes

The Transmitter of EUT is a Tablet PC and powered by host equipment. This is Digital Transmission system(DTS) and have four type of modulation DBPSK DQPSK CCK&OFDM. The data rates are 54Mbps.

The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11b/g protocol to enable wireless communications between the host computer and computers, in the same way that the computer would use an Ethernet adapter.

1. For lowest channel : 2412MHz(Channel 1)
2. For middle channel : 2437MHz(Channel 6)
3. For highest channel: 2462MHz(Channel 11)

EUT operating conditions:

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to typical use, The exercise sequence is listed as below:


1. Setup the EUT and simulators as shown on 2.4.
2. Turn on the power of all equipments.
3. The EUT Ping with the wireless router.
4. Repeat the above steps.

4. Conducted Emissions Test

4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

4.2 Test SET-UP (Block Diagram of Configuration)

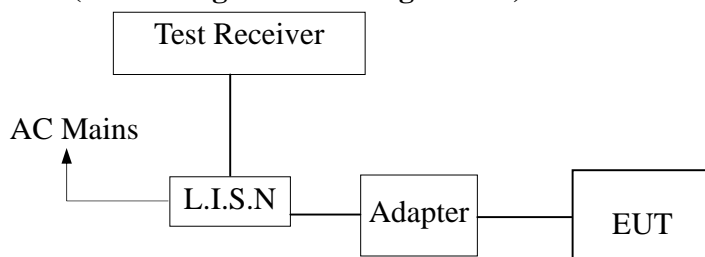

4.3 Conducted Emission Limit

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:


1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.4 Measurement Result:

Date of Test:	February 22, 2011	Temperature:	22°C
Frequency Detector:	0.15~30MHz	Humidity:	50%
Test Result:	PASS	Test Mode:	Normal Operation




Line:

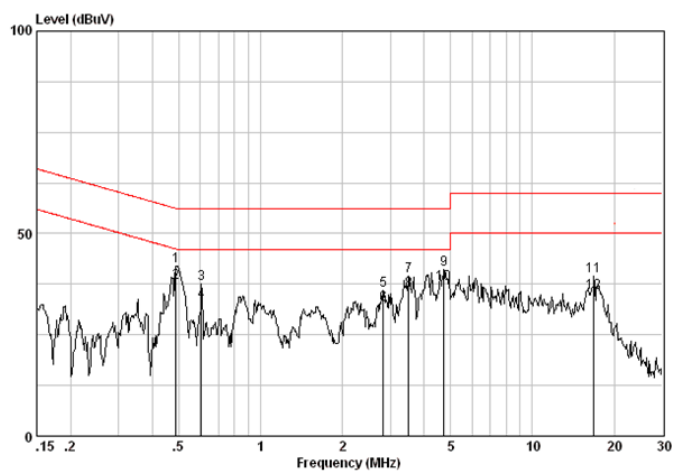

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.48890	0.06	-0.04	41.91	41.92	56.19	-14.26	QP
2 @	0.48890	0.06	-0.04	37.80	37.82	46.19	-8.37	Average
3	0.60431	0.06	-0.05	37.51	37.52	56.00	-18.48	QP
4 @	0.60431	0.06	-0.05	33.20	33.21	46.00	-12.79	Average
5	2.824	0.14	-0.07	35.94	36.00	56.00	-20.00	QP
6 @	2.824	0.14	-0.07	32.40	32.46	46.00	-13.54	Average
7	3.509	0.15	-0.08	39.38	39.45	56.00	-16.55	QP
8 @	3.509	0.15	-0.08	35.80	35.87	46.00	-10.13	Average
9	4.721	0.17	-0.11	41.02	41.08	56.00	-14.92	QP
10 @	4.721	0.17	-0.11	37.60	37.66	46.00	-8.34	Average
11	16.839	0.26	-0.56	39.79	39.49	60.00	-20.51	QP
12	16.839	0.26	-0.56	35.60	35.30	50.00	-14.70	Average




Neutral:

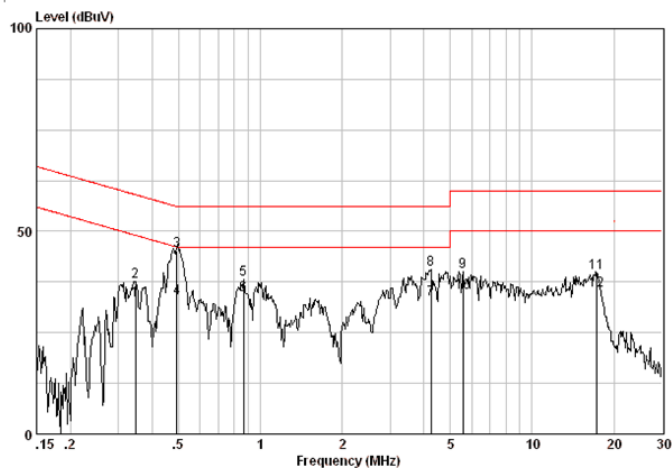

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.34646	0.05	-0.04	32.90	32.91	49.05	-16.13	Average
2	0.34646	0.05	-0.04	37.71	37.72	59.05	-21.33	QP
3	0.49250	0.06	-0.04	45.30	45.32	56.13	-10.81	QP
4	0.49250	0.06	-0.04	33.50	33.52	46.13	-12.61	Average
5	0.86643	0.07	-0.04	38.15	38.18	56.00	-17.82	QP
6	0.86643	0.07	-0.04	34.20	34.23	46.00	-11.77	Average
7	4.247	0.16	-0.10	33.20	33.26	46.00	-12.74	Average
8	4.247	0.16	-0.10	40.58	40.64	56.00	-15.36	QP
9	5.564	0.18	-0.13	40.05	40.10	60.00	-19.90	QP
10	5.564	0.18	-0.13	34.90	34.94	50.00	-15.06	Average
11	17.291	0.26	-0.58	40.06	39.74	60.00	-20.26	QP
12	17.291	0.26	-0.58	35.80	35.48	50.00	-14.52	Average

4.6 Conducted Measurement Photos:

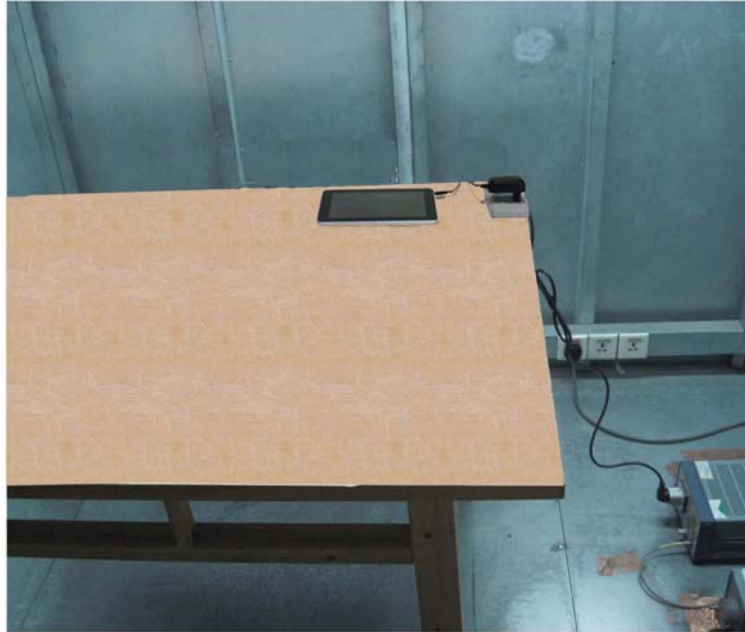


5. Radiated Emission Test

5.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

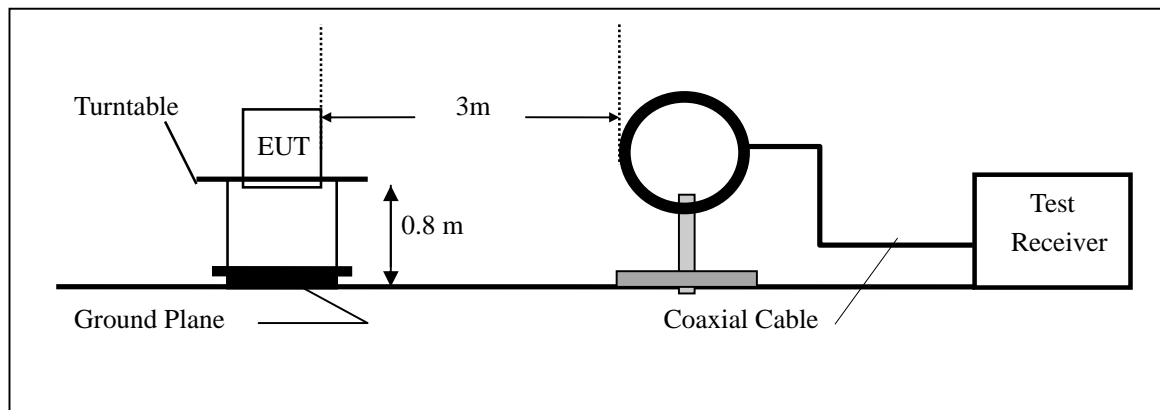

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

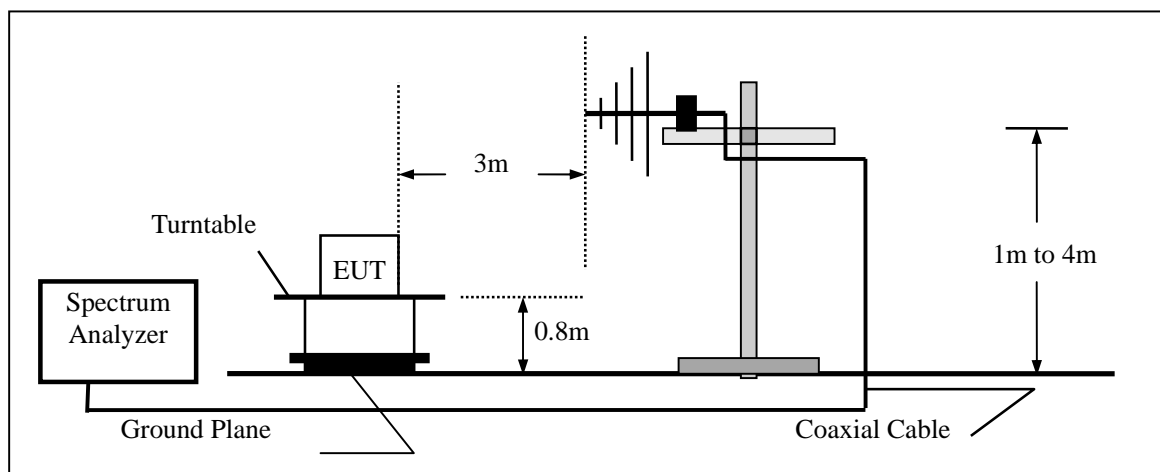

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

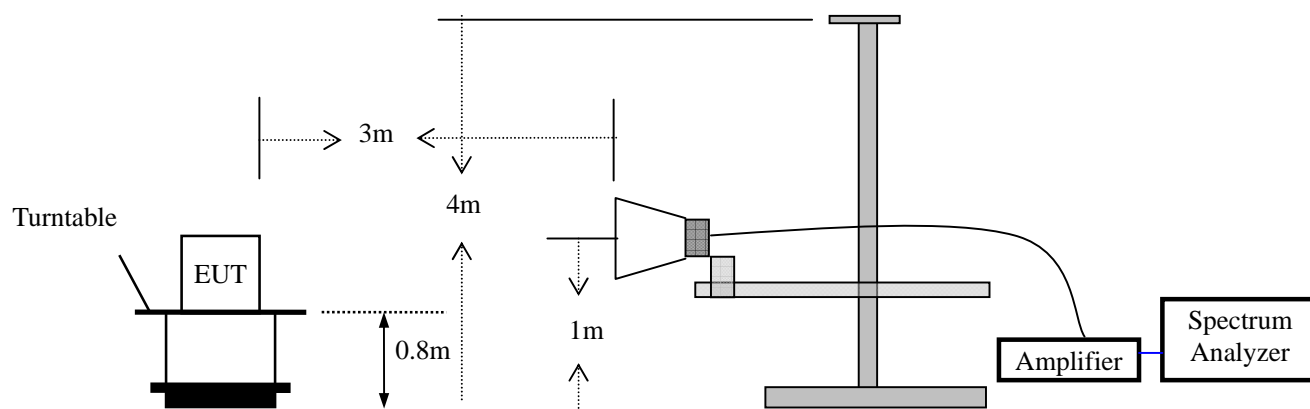

5.3 Radiated emission limit

FCC Class B Limit at 3m

Frequency MHz	Distance Meter	uV/m	Field Strength dBuV/m
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
Above 960	3	500	54.0


Note: The frequencies above 1000MHz, as measured using instrumentation with a peak detector function was corresponding to 20dB above maximum permitted average limit.



5.4 Measurement Result

Operation Mode: Normal Operation Test Date : February 25, 2011
Frequency Range: 30~1000MHz Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Measured Distance: 3m


Vertical:

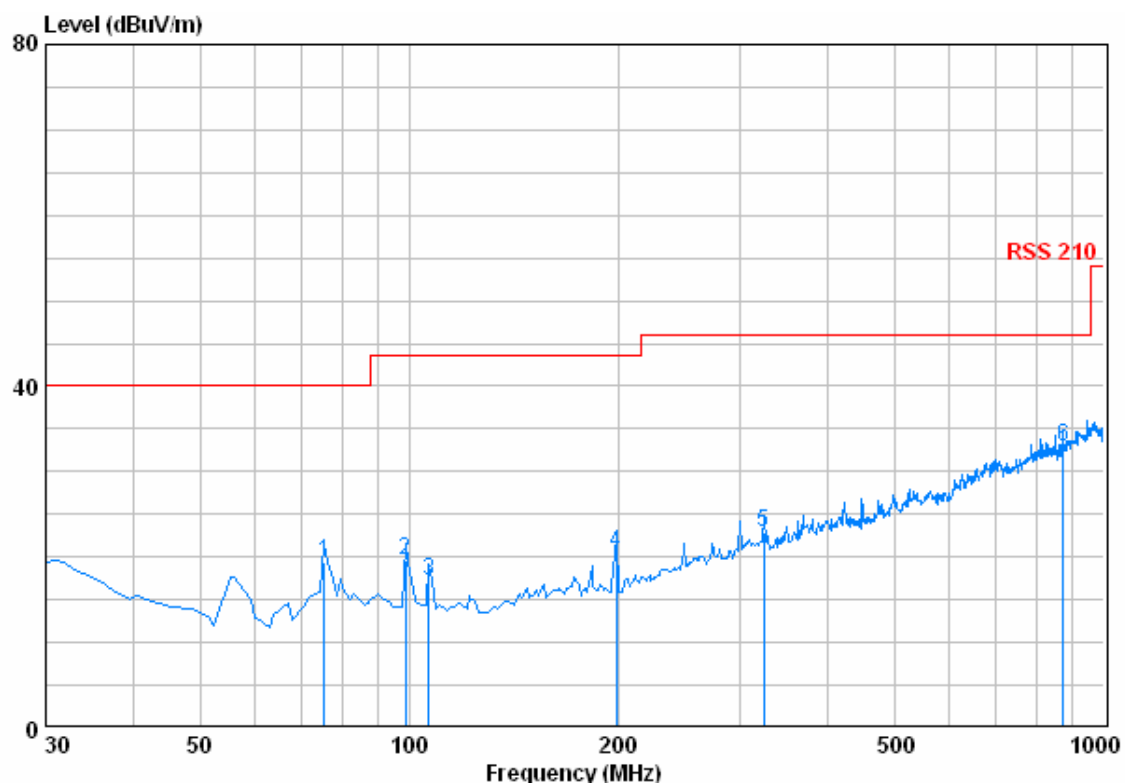

		CableAntenna Preamp			Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	75.590	0.97	7.37	28.00	39.16	19.50	40.00	-20.50
2	98.870	1.19	9.06	27.89	37.32	19.68	43.50	-23.82
3	106.630	1.22	8.77	27.81	34.98	17.16	43.50	-26.34
4	198.780	1.40	10.19	27.16	36.03	20.46	43.50	-23.04
5	323.910	1.98	14.76	26.91	33.05	22.88	46.00	-23.12
6	873.900	3.51	22.93	26.55	33.09	32.97	46.00	-13.03



Horizontal:

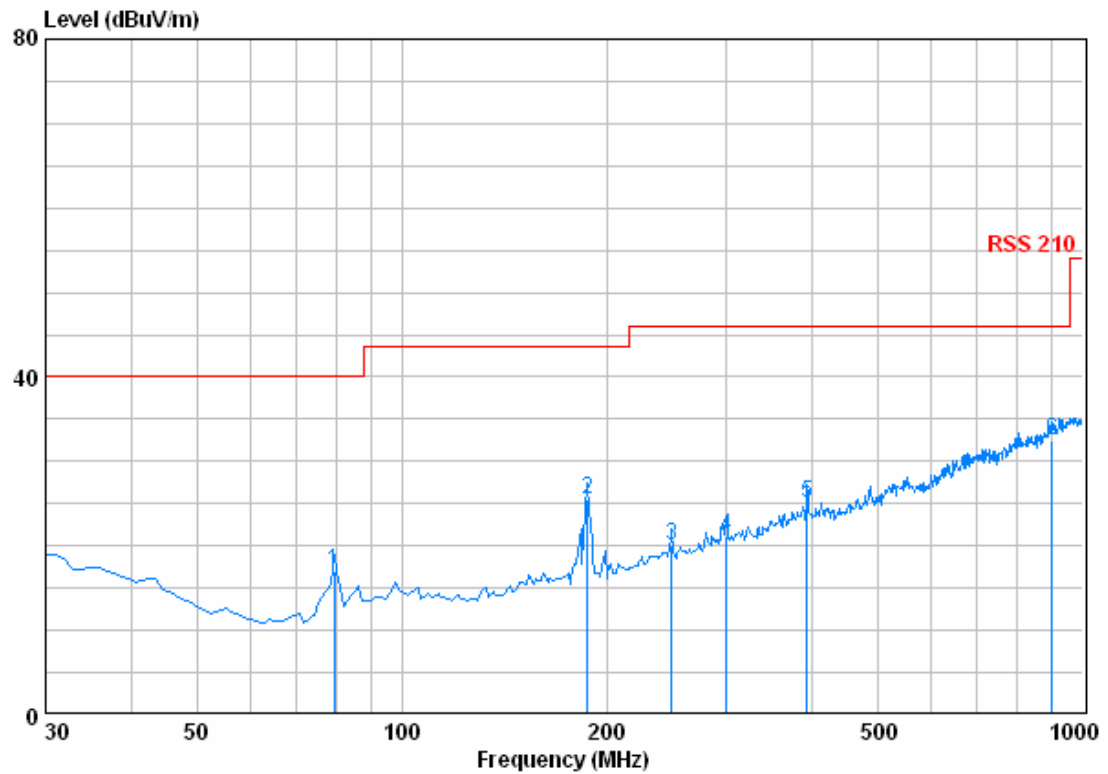

	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	79.470	1.08	7.68	28.00	36.17	16.93	40.00	-23.07
2	187.140	1.38	10.05	27.22	41.22	25.43	43.50	-18.07
3	249.220	1.67	12.27	26.92	32.93	19.96	46.00	-26.04
4	299.660	1.90	13.85	26.72	32.09	21.12	46.00	-24.88
5	393.750	2.18	16.22	27.37	34.15	25.18	46.00	-20.82
6	902.030	3.60	23.21	26.43	32.17	32.56	46.00	-13.44

Remark: the data above is tested with QP detector mode.



Operation Mode: 802.11b TX Channel 1 Test Date : February 22, 2011
Frequency Range: Above 1GHz Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1653.85	V	54.72	51.92	74	54	-19.28	-2.08
4823.60	V	41.90	39.14	74	54	-32.10	-14.86
7238.90	V	43.74	40.61	74	54	-30.26	-13.39
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
1653.85	H	55.09	52.18	74	54	-18.91	-1.82
4823.60	H	41.90	39.14	74	54	-32.10	-14.86
7238.90	H	43.74	40.61	74	54	-30.26	-13.39
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Operation Mode: 802.11b(Channel 6)
Frequency Range: Above 1GHz
Test Result: PASS
Measured Distance: 3m

Test Date : February 22, 2011
Temperature : 28 °C
Humidity : 65 %
Test By:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1653.85	V	54.03	51.23	74	54	-19.97	-2.77
4876.20	V	40.17	37.26	74	54	-33.83	-16.74
7324.00	V	43.82	41.93	74	54	-30.18	-12.07
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
1653.85	H	56.06	52.27	74	54	-17.94	-1.73
4876.20	H	42.09	39.28	74	54	-31.91	-14.72
7324.00	H	43.85	40.97	74	54	-30.15	-13.03
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Operation Mode: 802.11b(Channel 11) Test Date : February 22, 2011
Frequency Range: Above 1GHz Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1653.85	V	55.66	51.78	74	54	-18.34	-2.22
4927.00	V	41.81	38.31	74	54	-32.19	-15.69
7392.10	V	43.45	40.62	74	54	-30.55	-13.38
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
1653.85	H	56.86	52.56	74	54	-17.14	-1.44
4927.00	H	41.90	38.40	74	54	-32.10	-15.60
7392.10	H	42.67	39.73	74	54	-31.33	-14.27
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Operation Mode: 802.11g TX Channel 1 Test Date : February 22, 2011
Frequency Range: Above 1GHz Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1653.85	V	44.34	41.26	74	54	-29.66	-12.74
4823.60	V	39.34	36.67	74	54	-34.66	-17.33
7238.90	V	40.03	39.41	74	54	-33.97	-14.59
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
1653.85	H	45.35	42.56	74	54	-28.65	-11.44
4823.60	H	41.37	38.82	74	54	-32.63	-15.18
7238.90	H	42.59	39.83	74	54	-31.41	-14.17
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Operation Mode: 802.11g(Channel 6)
Frequency Range: Above 1GHz
Test Result: PASS
Measured Distance: 3m

Test Date : February 22, 2011
Temperature : 28 °C
Humidity : 65 %
Test By:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1653.85	V	52.37	39.01	74	54	-21.63	-14.99
4876.00	V	38.34	35.52	74	54	-35.66	-18.48
7324.00	V	41.07	38.59	74	54	-32.93	-15.41
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
1653.85	H	44.26	41.80	74	54	-29.74	-12.20
4876.00	H	39.96	37.09	74	54	-34.04	-16.91
7324.00	H	42.37	39.41	74	54	-31.63	-14.59
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Operation Mode: 802.11g(Channel 11)
Frequency Range: Above 1GHz
Test Result: PASS
Measured Distance: 3m

Test Date : February 22, 2011
Temperature : 28 °C
Humidity : 65 %
Test By:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1653.85	V	45.25	41.68	74	54	-28.75	-12.32
4927.00	V	40.14	37.32	74	54	-33.86	-16.68
7392.00	V	41.06	38.40	74	54	-32.94	-15.60
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
--	V	--	--	74	54	--	--
1653.85	H	46.94	42.08	74	54	-27.06	-11.92
4927.00	H	40.67	37.02	74	54	-33.33	-16.98
7392.00	H	43.77	40.95	74	54	-30.23	-13.05
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--
--	H	--	--	74	54	--	--

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5 Radiated Measurement Photos:




6. Occupied Bandwidth test

6.1 Measurement Procedure

The EUT was operating in IEEE 802.11b/g mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:

Same as 4.3 Radiated Emission Measurement.

6.4 Limit



The minimum 6dB bandwidth shall be at least 500kHz.


6.5 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	March 01, 2011
Operation Mode:	802.11 b	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)
1	2412	9.9	>500
6	2437	10.3	>500
11	2462	10.3	>500

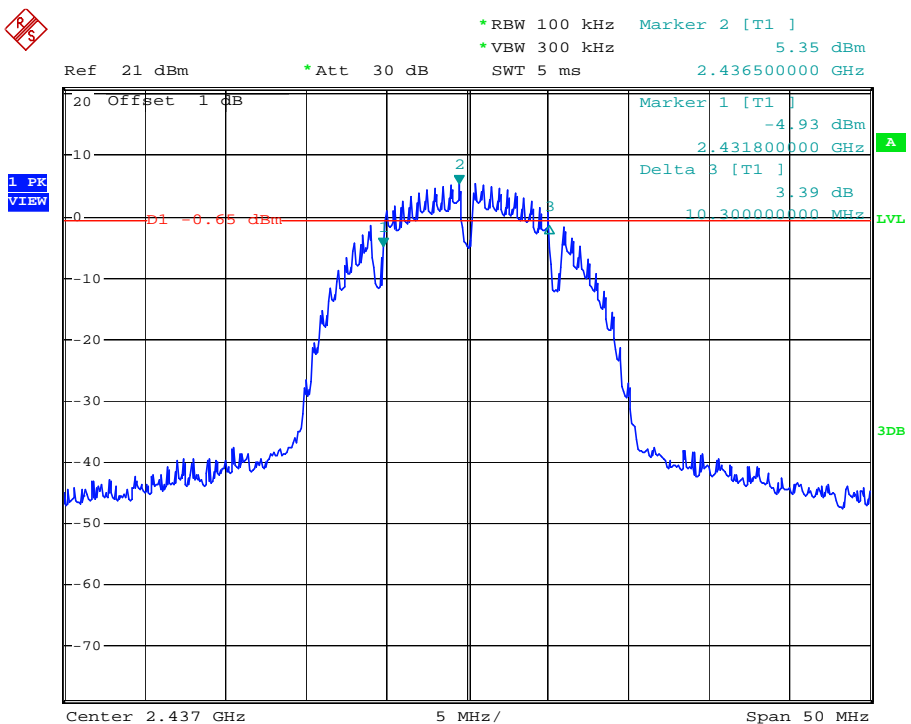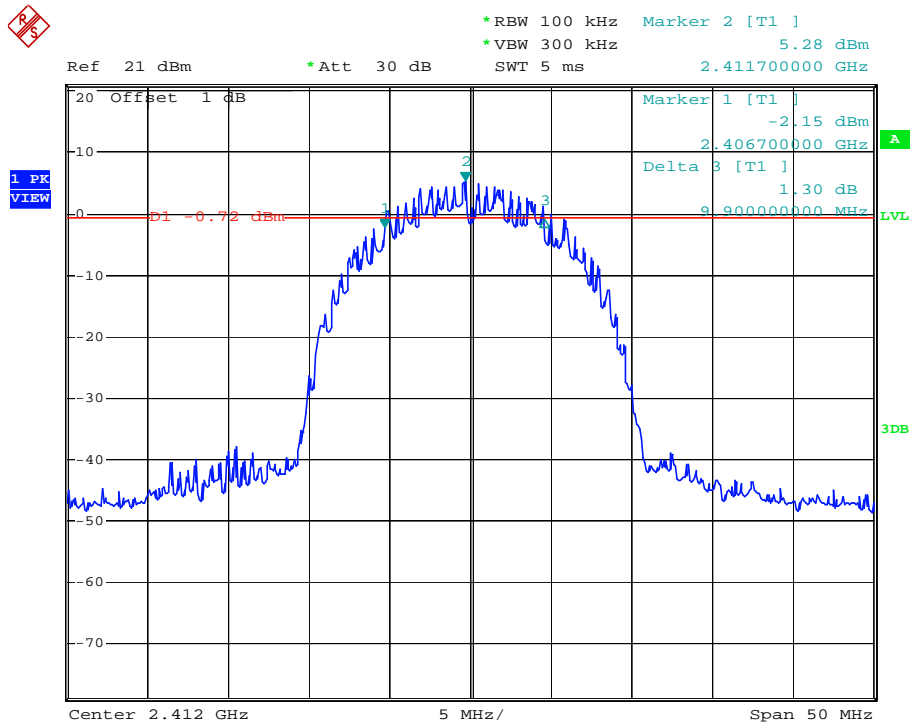



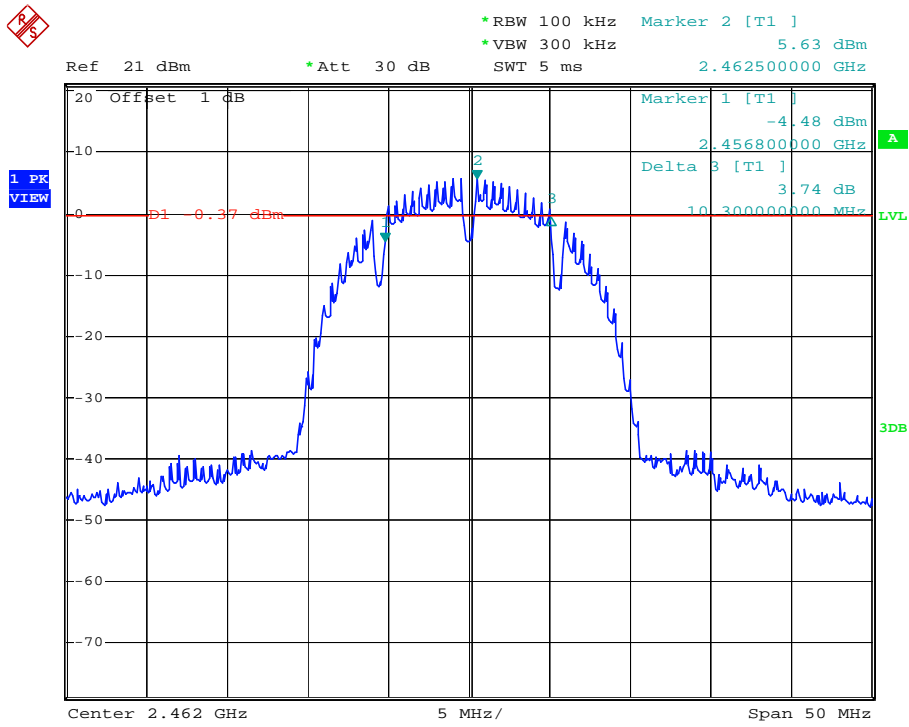




Spectrum Detector:	PK	Test Date :	March 01, 2011
Operation Mode:	802.11 g	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)
1	2412	16.2	>500
6	2437	16.1	>500
11	2462	16.2	>500

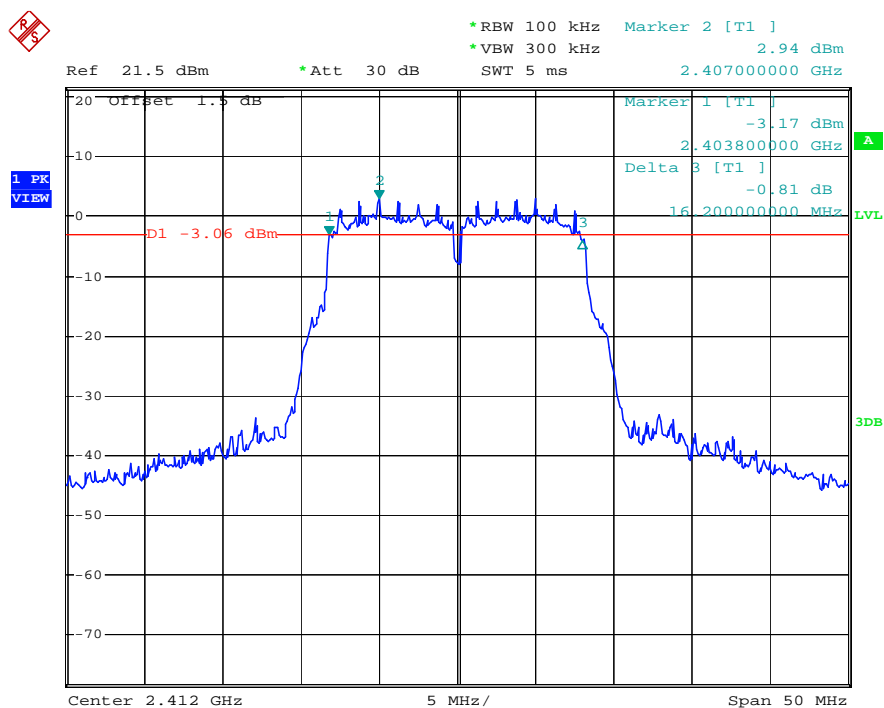

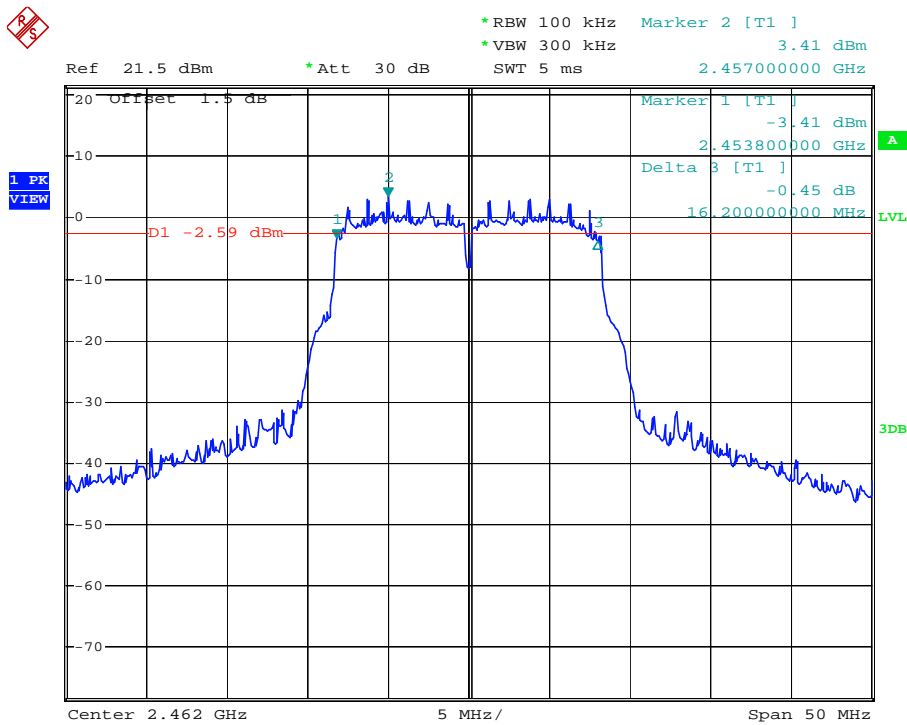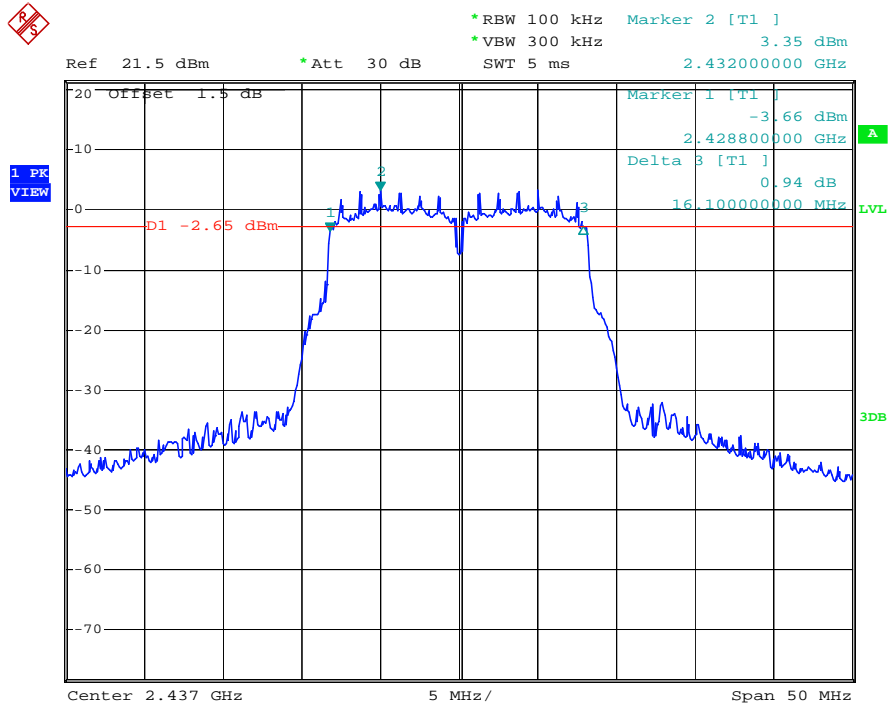




7. MAXIMUM PEAK OUTPUT POWER TEST

7.1 Measurement Procedure

- The Transmitter output (antenna port) was connected to the power meter.
- Turn on the EUT and power meter and then record the peak power value.
- Repeat above procedures on all channels needed to be tested.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	Boonton	4232A	29001	11/28/2010	11/28/2011
Power sensor	Boonton	51011-EMC	31184	11/28/2010	11/28/2011

7.4 Peak Power output limit

The maximum peak power shall be less 1Watt.

7.5 Measurement Results:

Spectrum Detector:	PK	Test Date :	March 01, 2011
Operation Mode:	802.11b	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	11.37	1W(30dBm)	PASS
6	2437.00	11.58	1W(30dBm)	PASS
11	2462.00	11.52	1W(30dBm)	PASS



Spectrum Detector: PK Test Date : March 01, 2011
Test By: Andy Temperature : 28 °C
Test Result: PASS Humidity : 65 %
Operation Mode: 802.11g

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(W)	Pass/Fail
1	2412.00	10.04	1W(30dBm)	PASS
6	2437.00	10.85	1W(30dBm)	PASS
11	2462.00	10.12	1W(30dBm)	PASS




8. Band EDGE test

8.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

8.2 Test SET-UP (Block Diagram of Configuration)

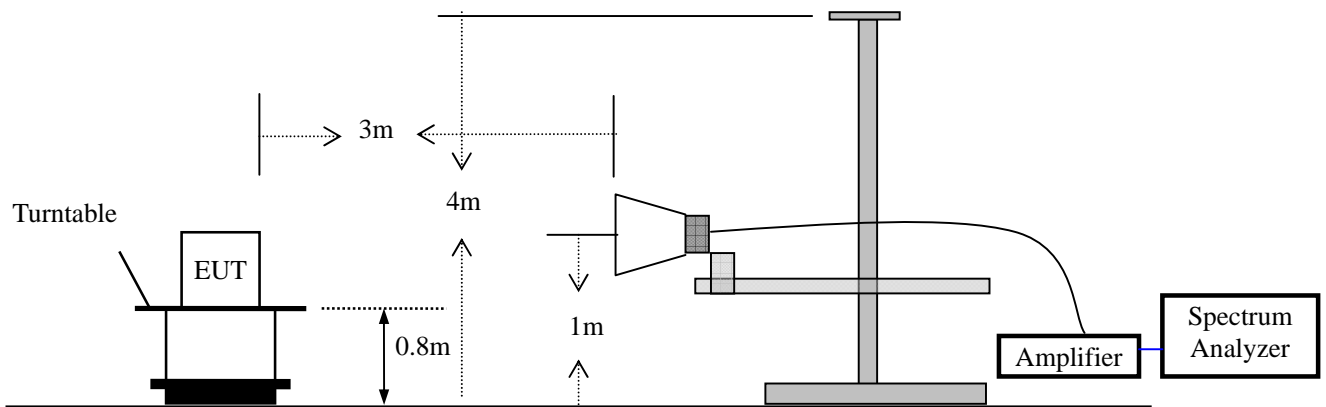



8.3 Measurement Equipment Used:


Same as 4.3 Radiated Emission Measurement.


8.4 Measurement Results:

Refer to attached data chart.

8.4.1. Conducted Test

Spectrum Detector:	PK	Test Date :	March 01, 2011
Operation Mode:	802.11b	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

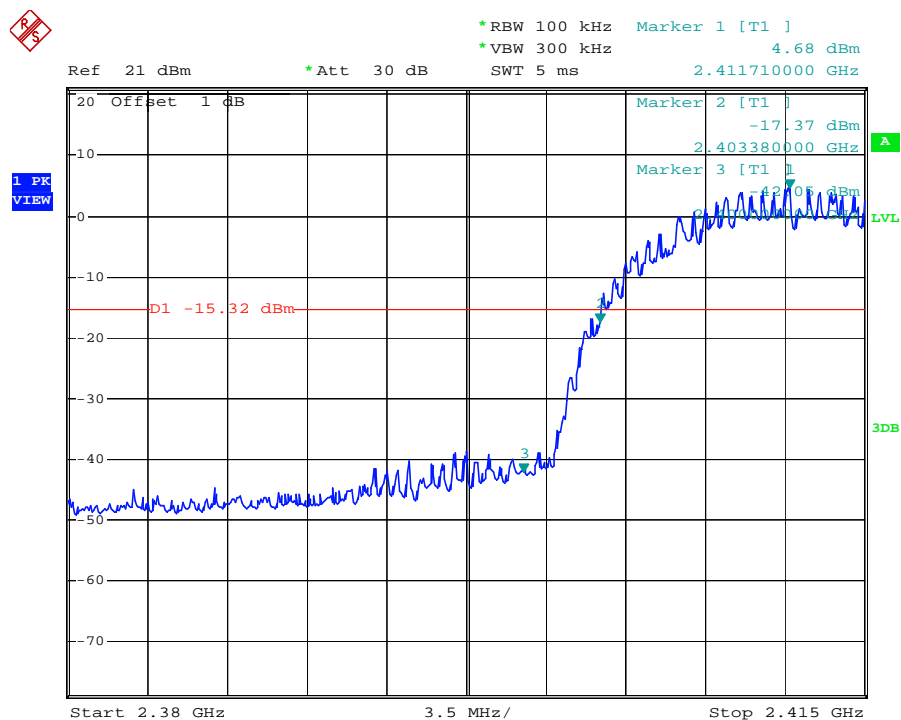

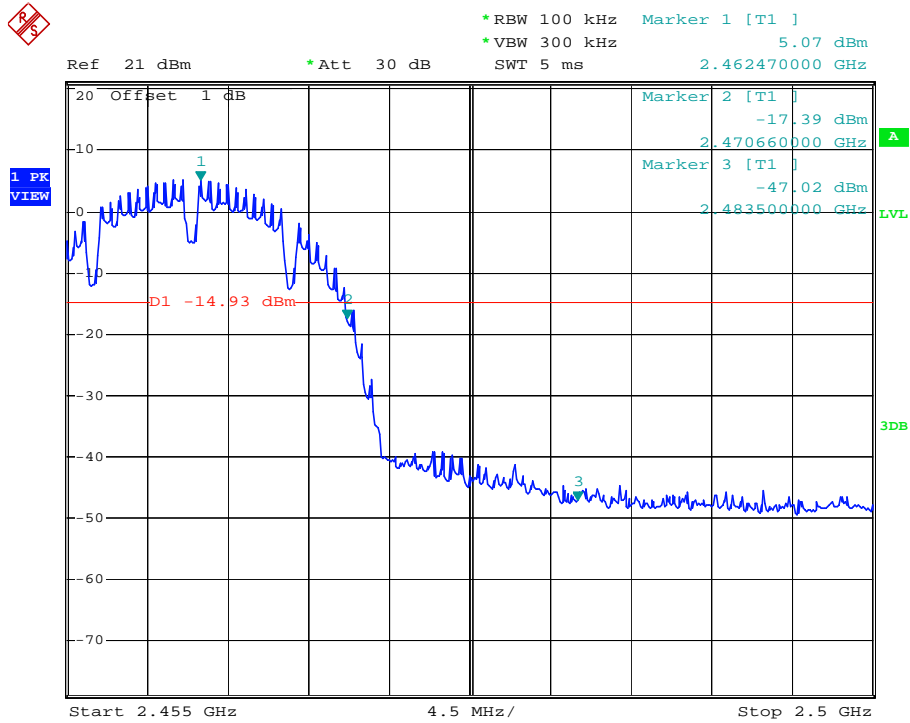

Spectrum Detector:

PK

Test Date :

March 01, 2011

Operation Mode:

802.11g

Temperature :



28 °C

Test Result:

PASS

Humidity :

65 %

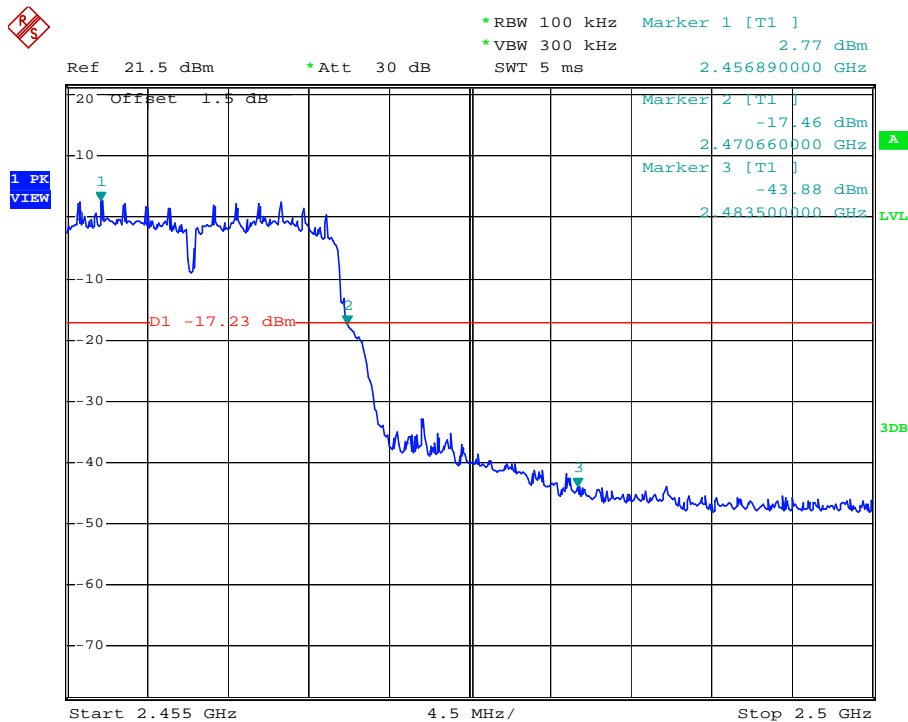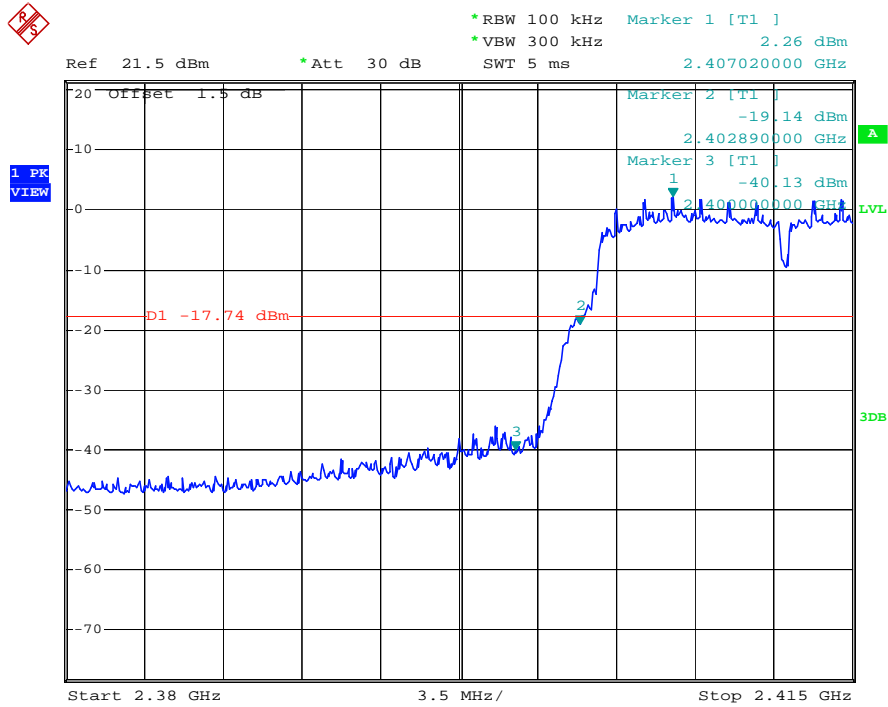




8.4.2. Radiated Test

Spectrum Detector: PK Test Date : February 26, 2011
Operation Mode: 802.11b Temperature : 28 °C
Test Result: PASS Humidity : 65 %


Vertical:

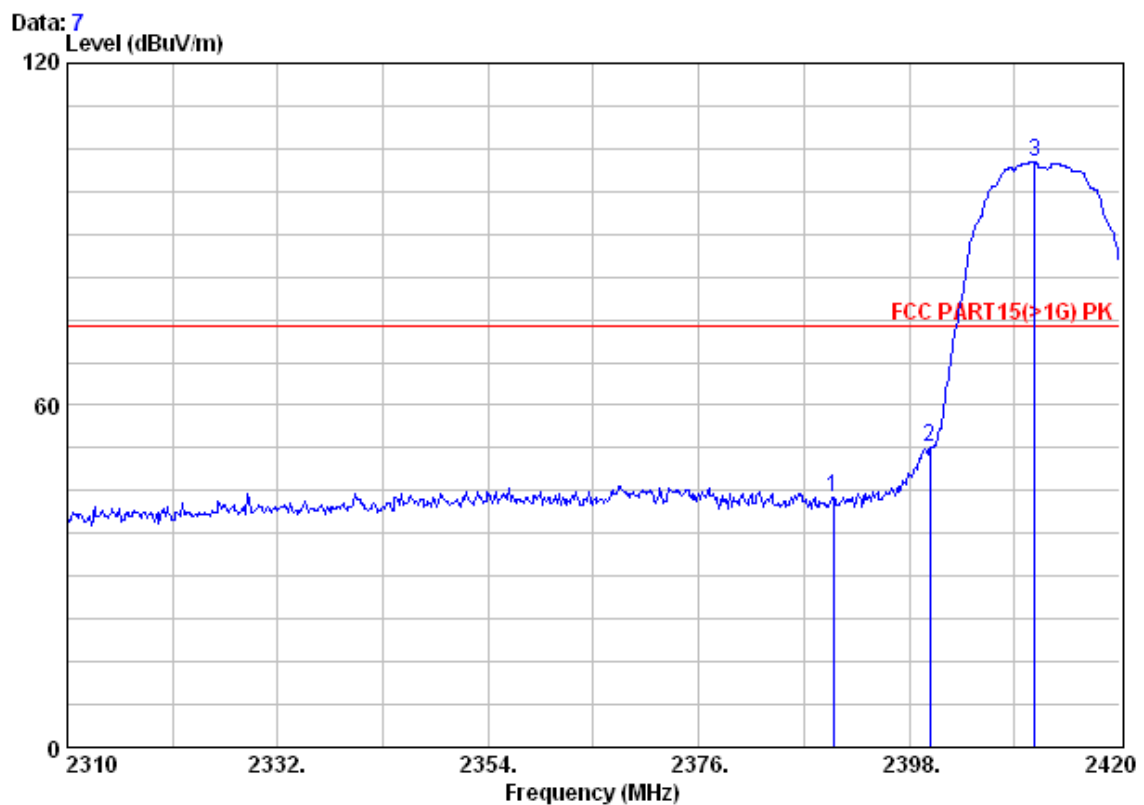

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.080	2.62	32.51	39.85	48.55	43.83	74.00	-30.17
2	2400.200	2.62	32.51	39.86	57.30	52.57	74.00	-21.43
3 X	2411.090	2.62	32.54	39.86	107.40	102.70	74.00	28.70



Horizontal:

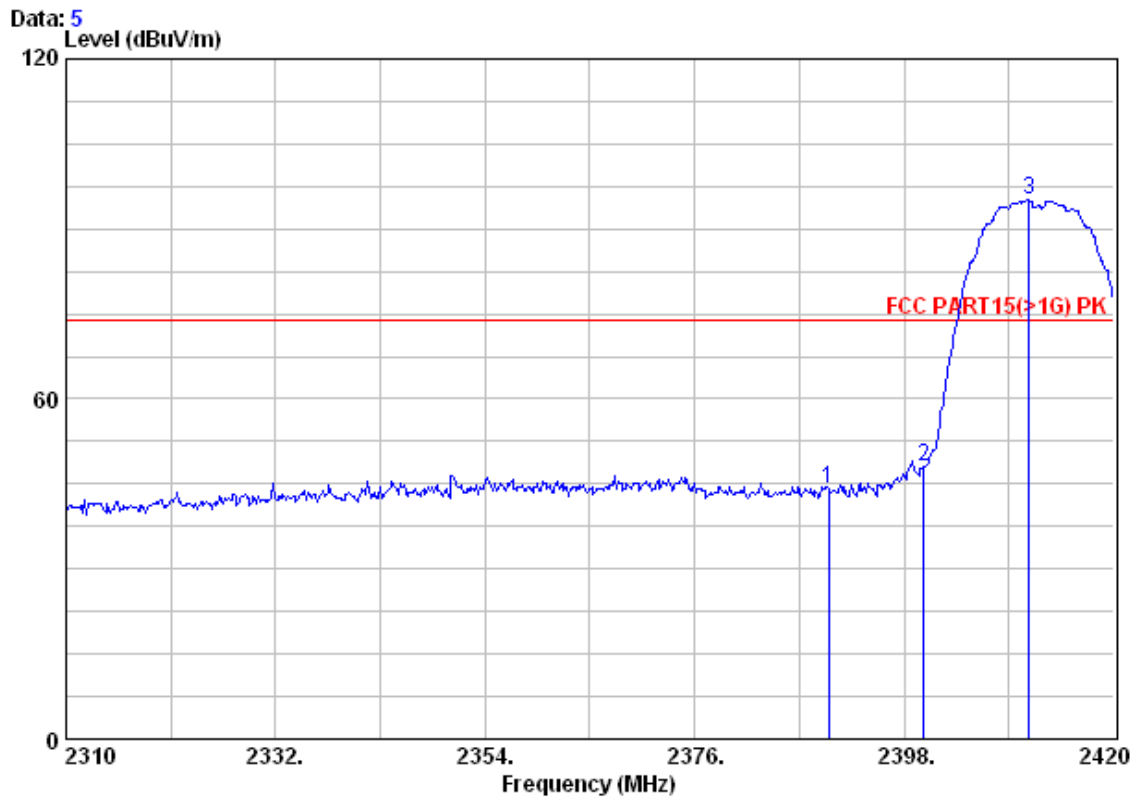


	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.080	2.62	32.51	39.85	48.85	44.13	74.00	-29.87
2	2400.090	2.62	32.51	39.86	52.77	48.04	74.00	-25.96
3 X	2411.090	2.62	32.54	39.86	99.74	95.05	74.00	21.05



Spectrum Detector: Average Test Date : February 26, 2011
Operation Mode: 802.11b Temperature : 28 °C
Test Result: PASS Humidity : 65 %


Vertical:

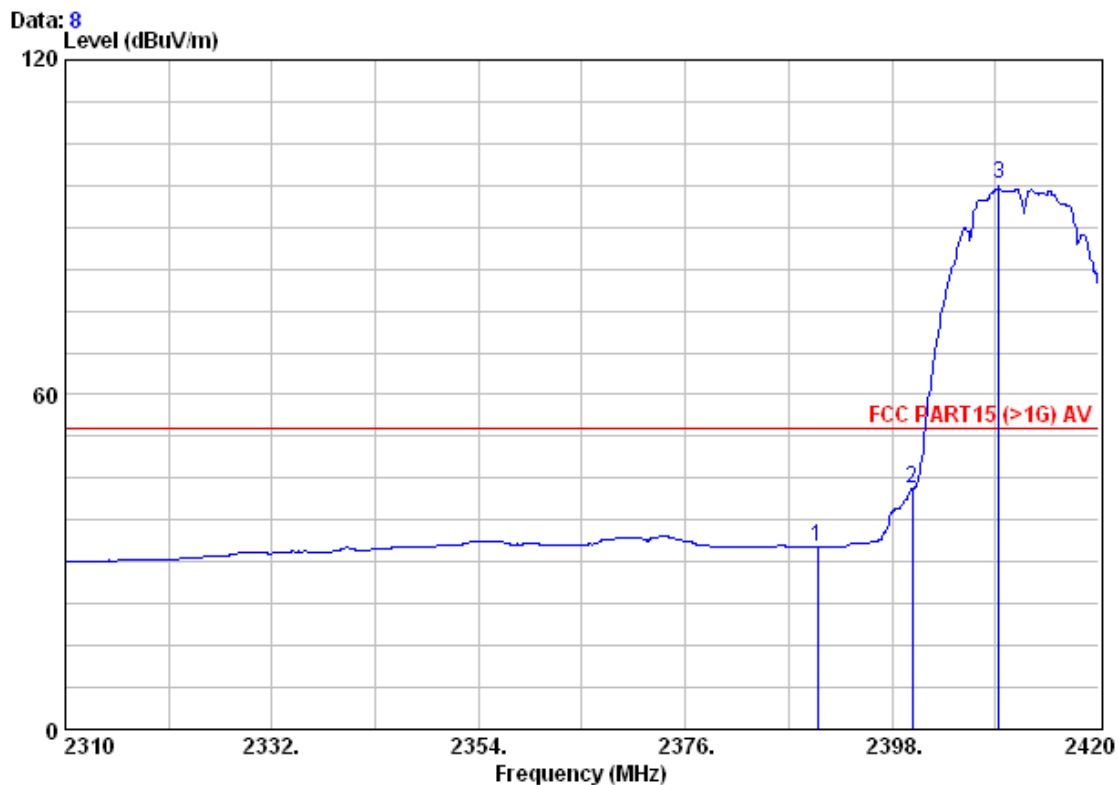

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.080	2.62	32.51	39.85	37.46	32.75	54.00	-21.25
2	2400.200	2.62	32.51	39.86	47.99	43.26	54.00	-10.74
3	2409.330	2.62	32.54	39.86	102.63	97.93	54.00	43.93



Horizontal:

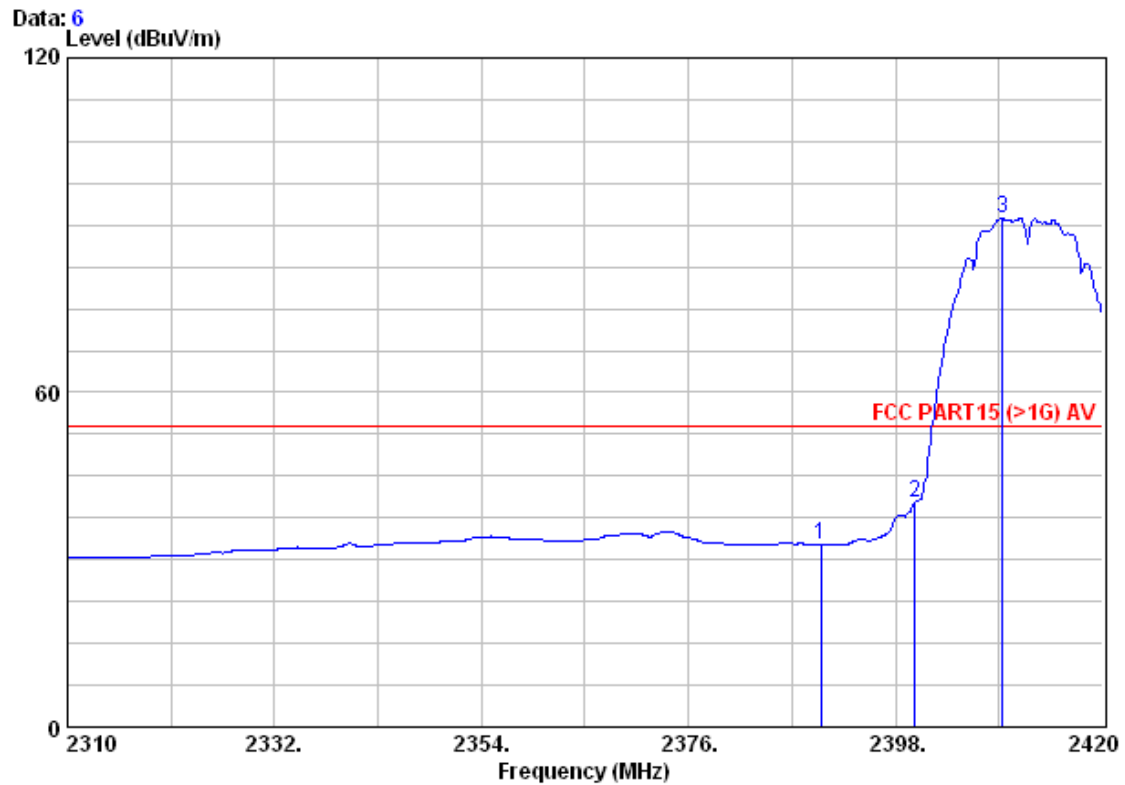


	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.080	2.62	32.51	39.85	37.53	32.82	54.00	-21.18
2	2400.090	2.62	32.51	39.86	45.10	40.37	54.00	-13.63
3	2409.330	2.62	32.54	39.86	95.96	91.26	54.00	37.26



Spectrum Detector: PK Test Date : February 26, 2011
Operation Mode: 802.11g Temperature : 28 °C
Test Result: PASS Humidity : 65 %


Vertical:

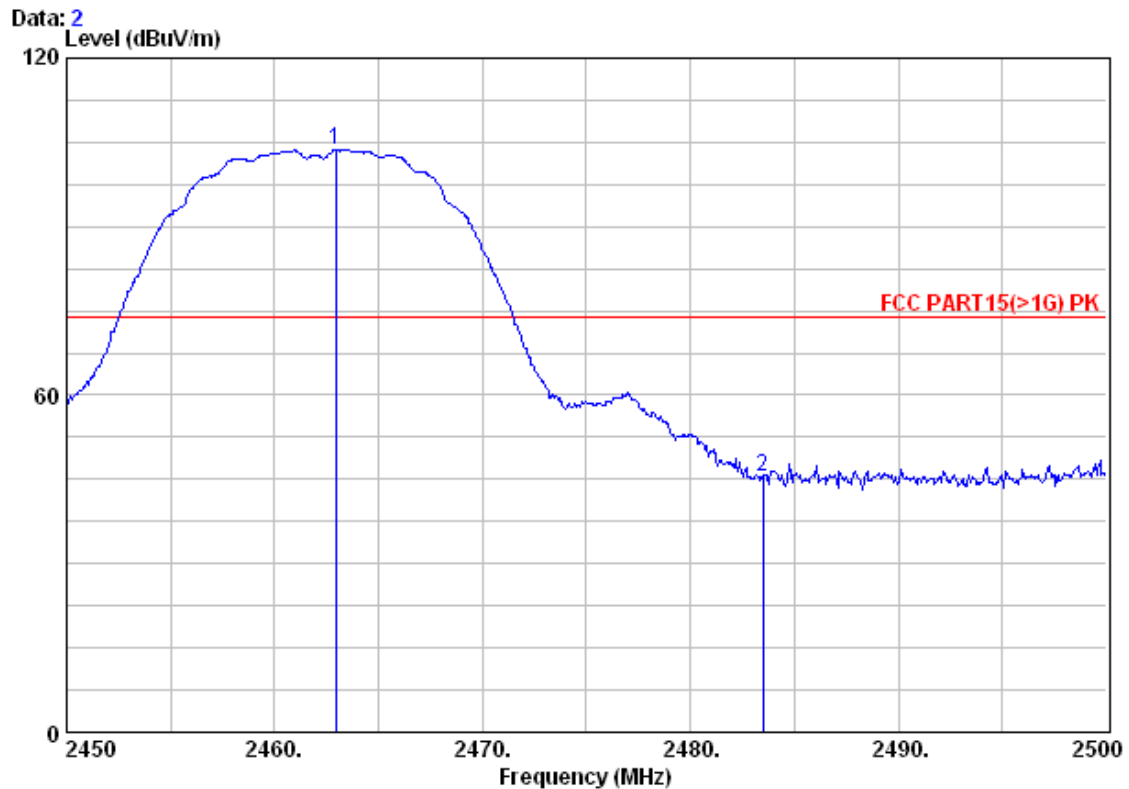

		CableAntenna Preamp			Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2462.950	2.63	32.64	39.91	108.44	103.80	74.00	29.80
2	2483.500	2.63	32.67	39.92	50.13	45.51	74.00	-28.49



Horizontal:

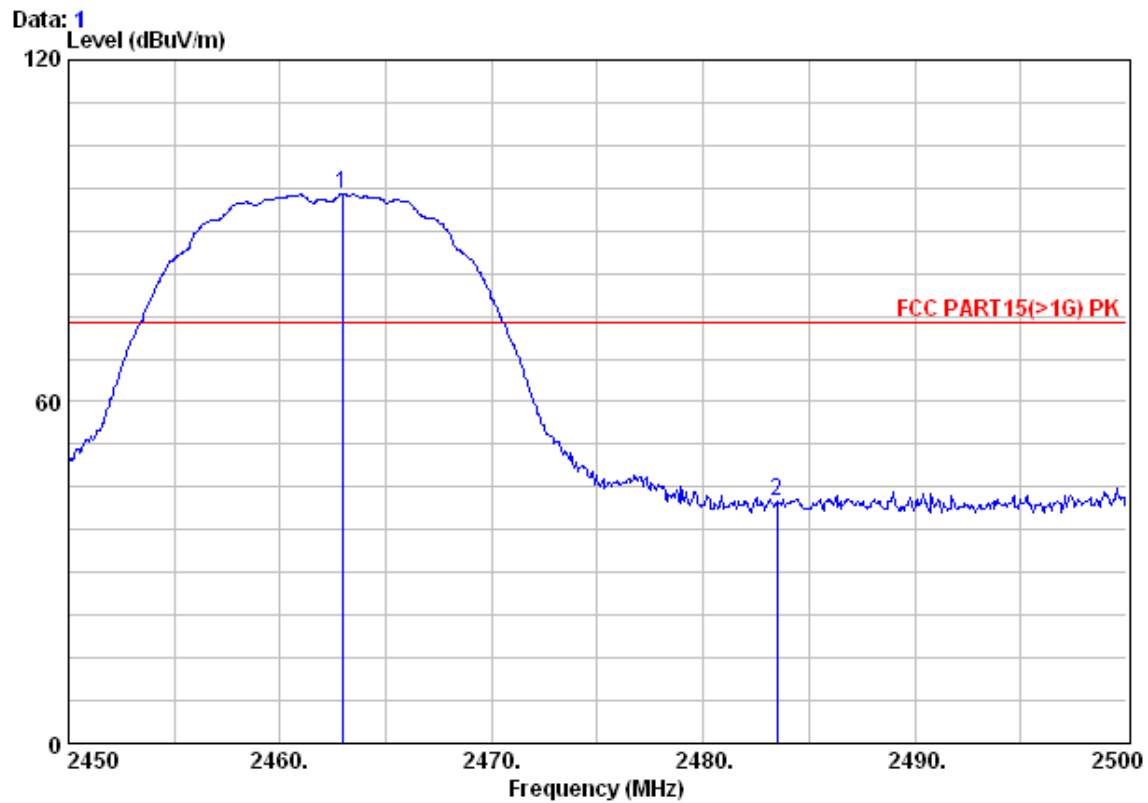


		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2462.950	2.63	32.64	39.91	101.11	96.46	74.00	22.46
2	2483.500	2.63	32.67	39.92	47.05	42.43	74.00	-31.57



Spectrum Detector:	Average	Test Date :	February 26, 2011
Operation Mode:	802.11g	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %


Vertical:

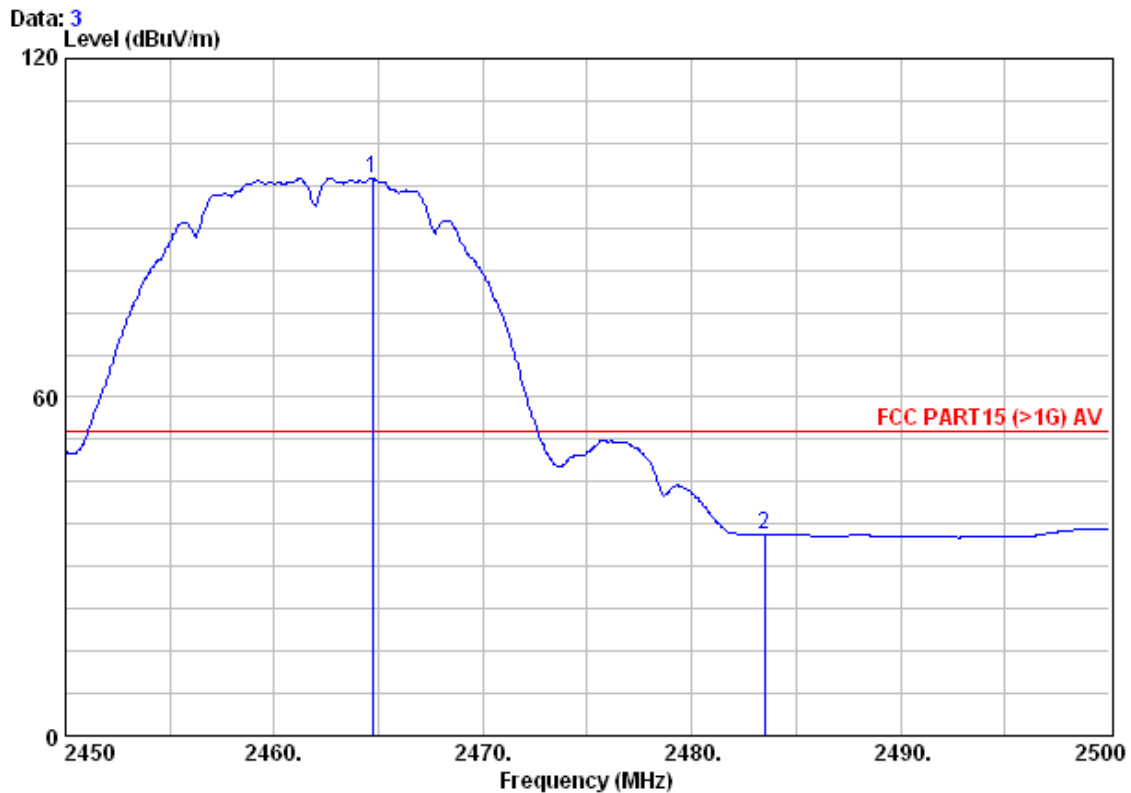

	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2464.700	2.63	32.64	39.91	103.40	98.76	54.00	44.76
2	2483.500	2.63	32.67	39.92	40.25	35.63	54.00	-18.37



Horizontal:

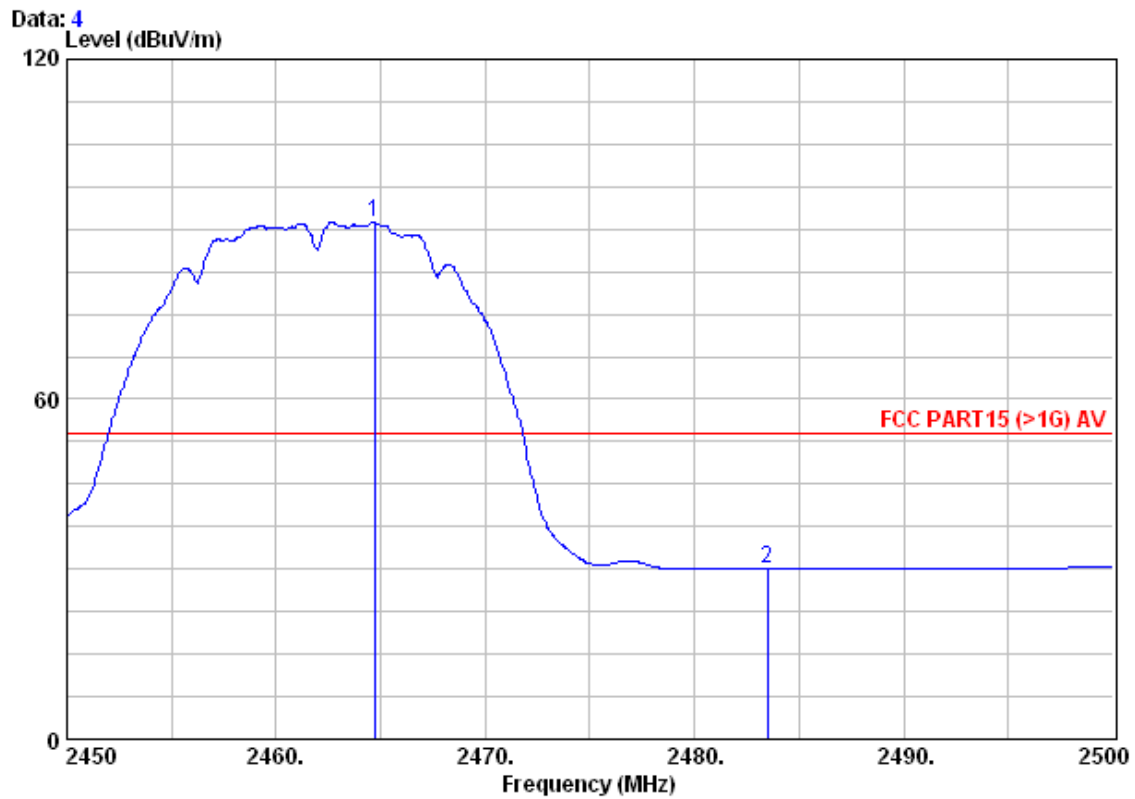


		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2464.700	2.63	32.64	39.91	95.82	91.18	54.00	37.18
2	2483.500	2.63	32.67	39.92	34.85	30.22	54.00	-23.78



Test mode:	802.11g	Test channel:	Lowest	Remark:	Peak
------------	---------	---------------	--------	---------	------


Vertical:

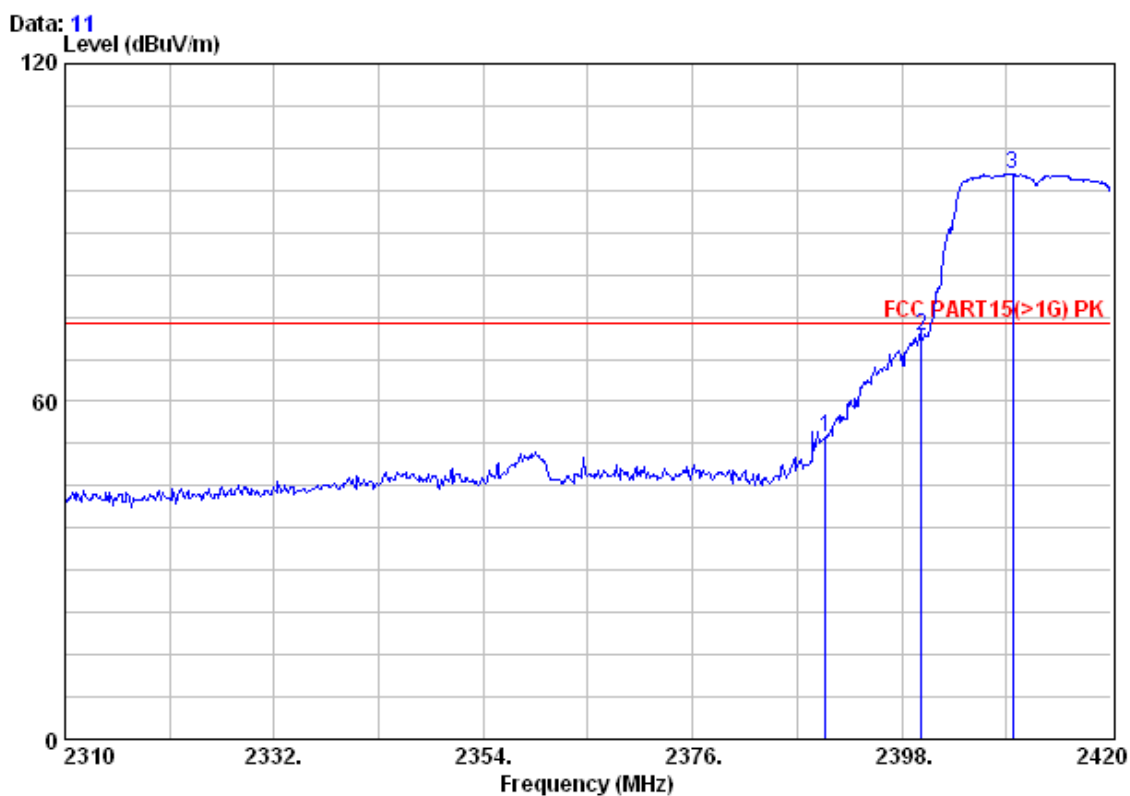

	Freq	Cable	Antenna	Preamp	Read	Limit	Over
		Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	2390.000	2.62	32.51	39.85	58.45	53.73	74.00 -20.27
2	2400.090	2.62	32.51	39.86	76.30	71.57	74.00 -2.43
3 X	2409.660	2.62	32.54	39.86	105.07	100.38	74.00 26.38



Horizontal:

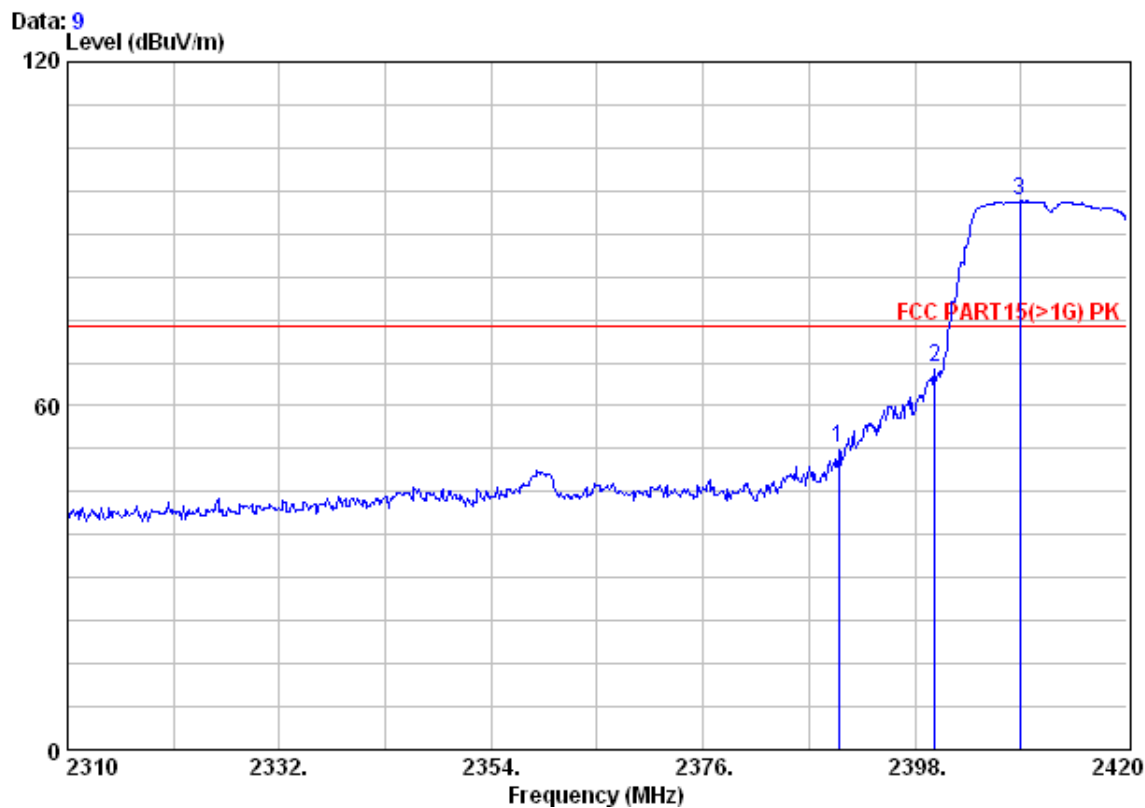

		CableAntenna Preamp			Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.080	2.62	32.51	39.85	57.50	52.79	74.00	-21.21
2	2400.090	2.62	32.51	39.86	71.49	66.76	74.00	-7.24
3 X	2408.890	2.62	32.54	39.86	100.50	95.80	74.00	21.80




Test mode:	802.11g	Test channel:	Lowest	Remark:	Average
------------	---------	---------------	--------	---------	---------

Vertical:

Data: 12


Level (dBuV/m)

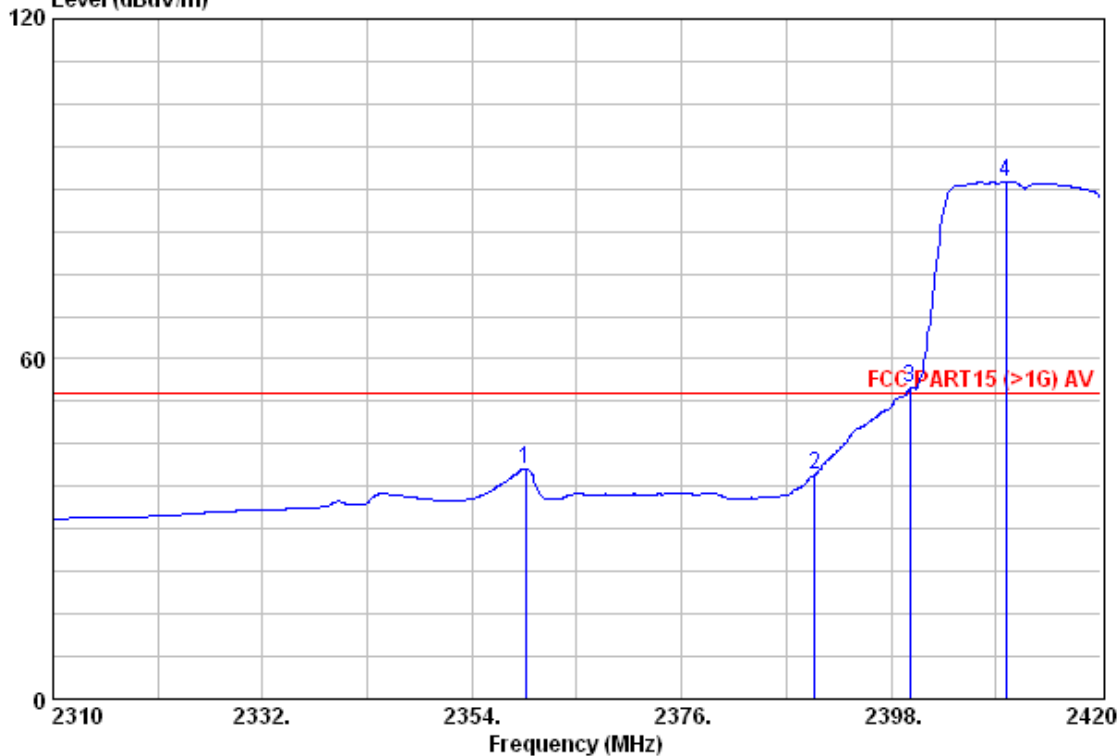

	Freq	Cable	Antenna	Preamp	Read	Limit	Over
		Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	2359.610	2.59	32.45	39.84	45.36	40.56	-13.44
2	2390.000	2.62	32.51	39.85	44.41	39.69	-14.31
3 X	2400.000	2.62	32.51	39.86	59.52	54.80	0.80
4 @	2410.100	2.62	32.54	39.86	96.03	91.33	37.33



Horizontal:

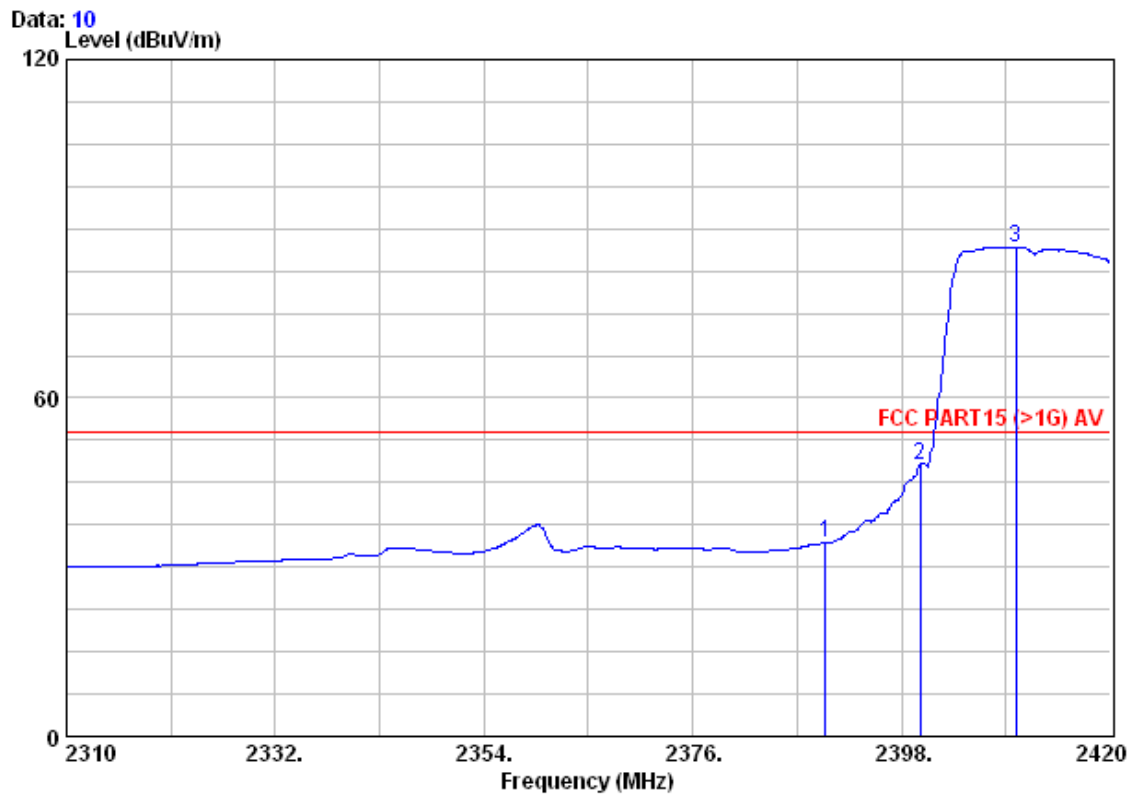


	Freq	Cable&Antenna Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.62	32.51	39.85	39.00	34.28	54.00	-19.72
2	2400.000	2.62	32.51	39.86	52.91	48.18	54.00	-5.82
3	2410.100	2.62	32.54	39.86	91.48	86.78	54.00	32.78



Test mode:	802.11g	Test channel:	Highest	Remark:	Peak
------------	---------	---------------	---------	---------	------

Vertical:

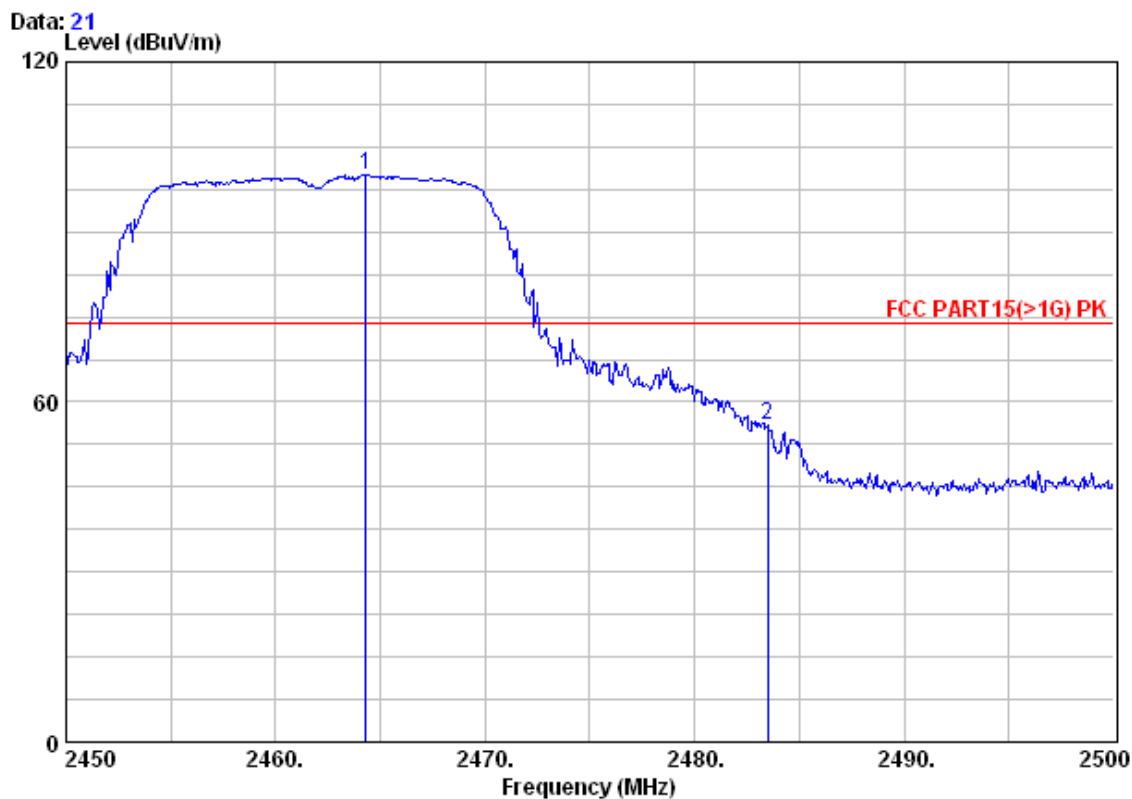


		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2464.300	2.63	32.64	39.91	104.82	100.18	74.00	26.18
2	2483.500	2.63	32.67	39.92	60.40	55.78	74.00	-18.22



Horizontal:

Data: 23
Level (dBuV/m)

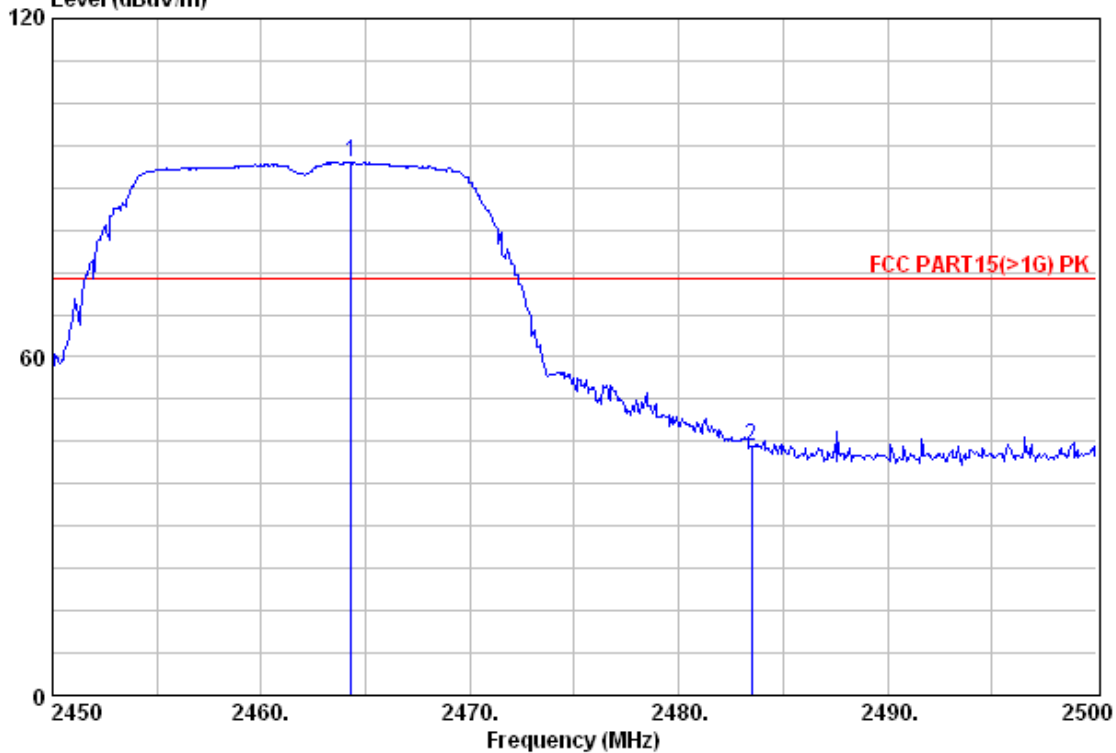


		CableAntenna Preamp			Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2464.300	2.63	32.64	39.91	99.25	94.61	74.00	20.61
2	2483.500	2.63	32.67	39.92	48.76	44.14	74.00	-29.86



Test mode:	802.11g	Test channel:	Highest	Remark:	Average
------------	---------	---------------	---------	---------	---------

Vertical:

Data: 22
Level (dBuV/m)

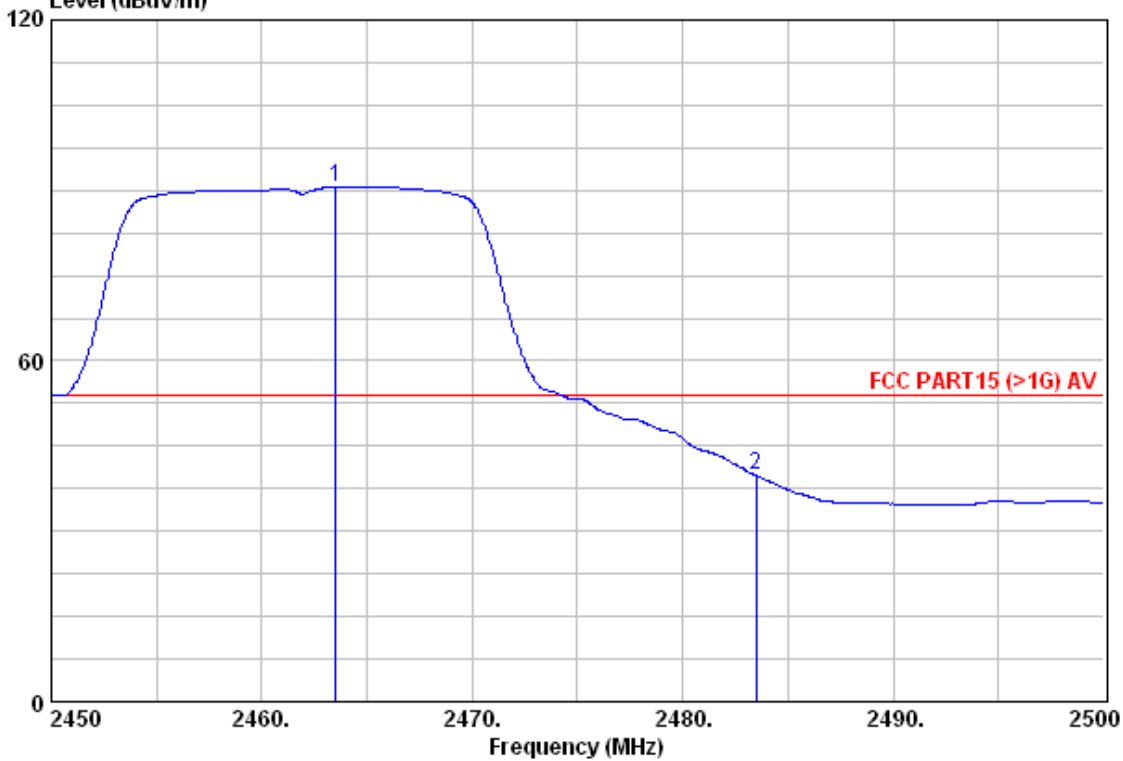


	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @	2463.500	2.63	32.64	39.91	95.23	90.59	54.00	36.59
2	2483.500	2.63	32.67	39.92	44.41	39.79	54.00	-14.21



Horizontal:

Data: 24
Level (dBuV/m)

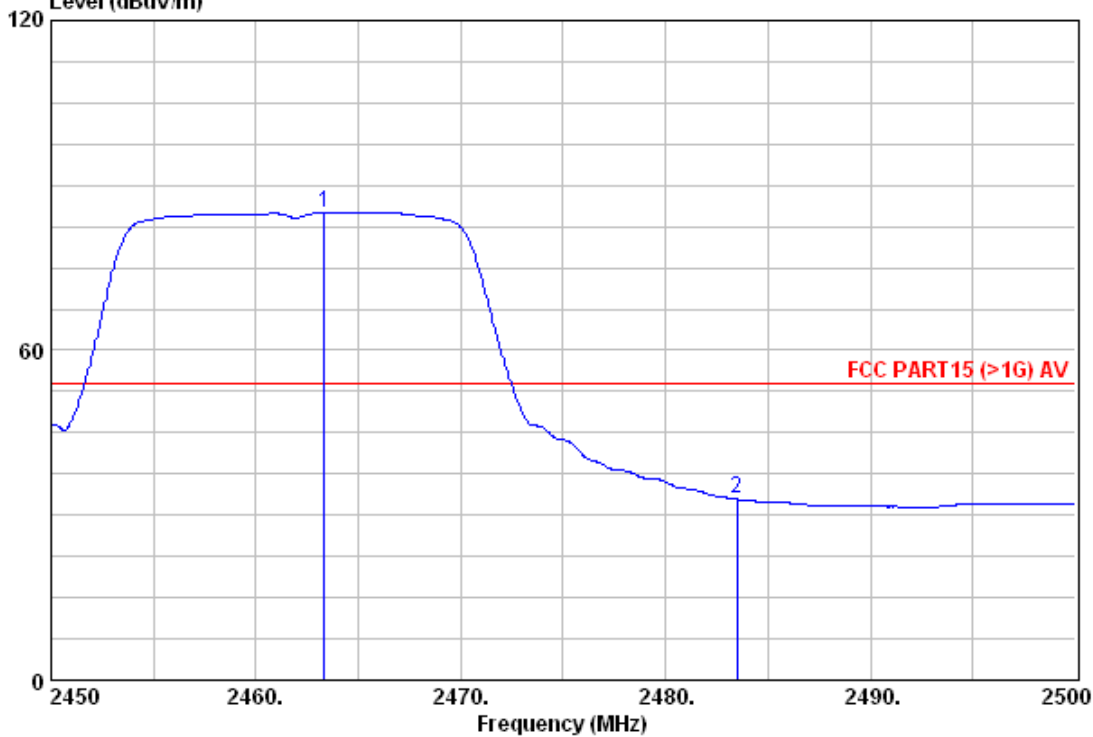

		CableAntenna		Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0	2463.350	2.63	32.64	39.91	89.77	85.13	54.00
2		2483.500	2.63	32.67	39.92	37.51	32.89	54.00
								-21.11

9. Power density

9.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	HP	8594E	88156318	11/28/2010	11/28/2011

9.2 Measuring Instruments and setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	300kHz
RB	3kHz
VB	10kHz
Detector	Peak
Trace	Max hold
Sweep Time	100s

9.3 Test Procedures

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz, Set Detector to Peak, Trace to Max Hold.
- Mark the frequency with maximum peak power as the center of the display of the spectrum.
- Set the span to 300kHz and the sweep time to 100s and record the maximum peak value.

9.4 Block Diagram of Test setup




9.5 Limit



The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3KHz bandwidth.

9.6. Test Result

Spectrum Detector:	PK	Test Date :	March 01, 2011
Operation Mode:	802.11 b	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Frequency (MHz)	Measurement Level (dBm)	Required limit (dBm)	Result
2412.00	-7.75	<8dBm	PASS
2437.00	1.84	<8dBm	PASS
2462.00	1.82	<8dBm	PASS

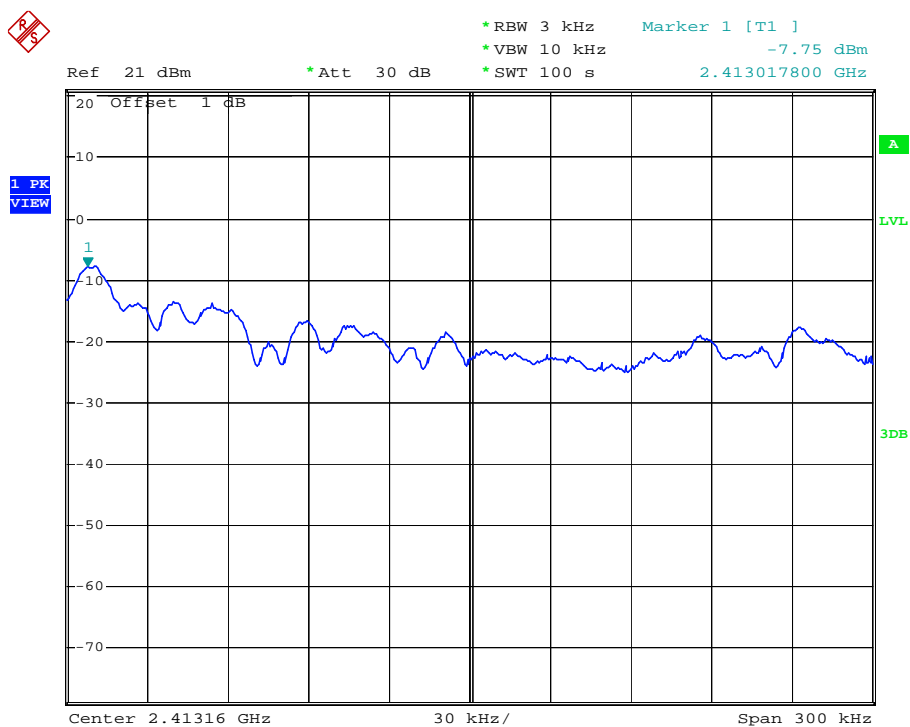


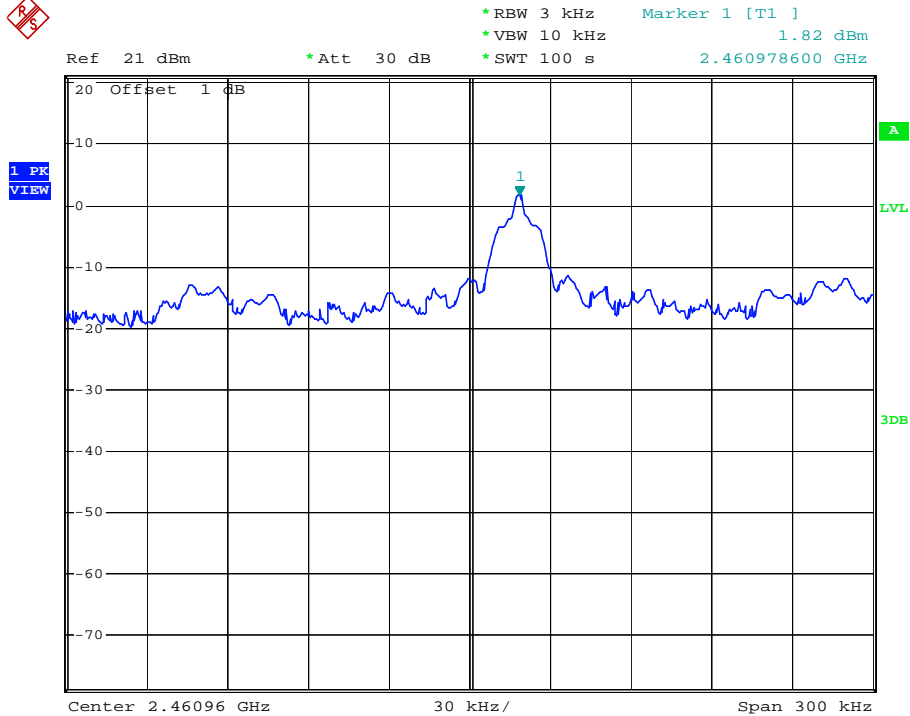
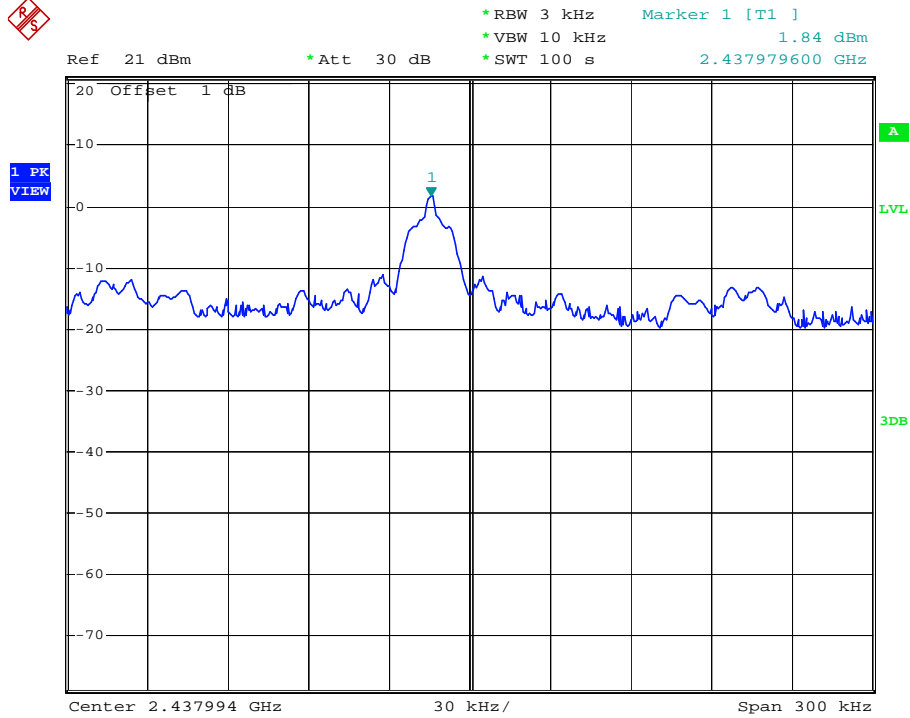




Spectrum Detector: PK Test Date : March 01, 2011
Operation Mode: 802.11 g Temperature : 28 °C
Test Result: PASS Humidity : 65 %

Frequency (MHz)	Measurement Level (dBm)	Required limit (dBm)	Result
2412.00	-10.33	<8dBm	PASS
2437.00	-9.76	<8dBm	PASS
2462.00	-9.71	<8dBm	PASS

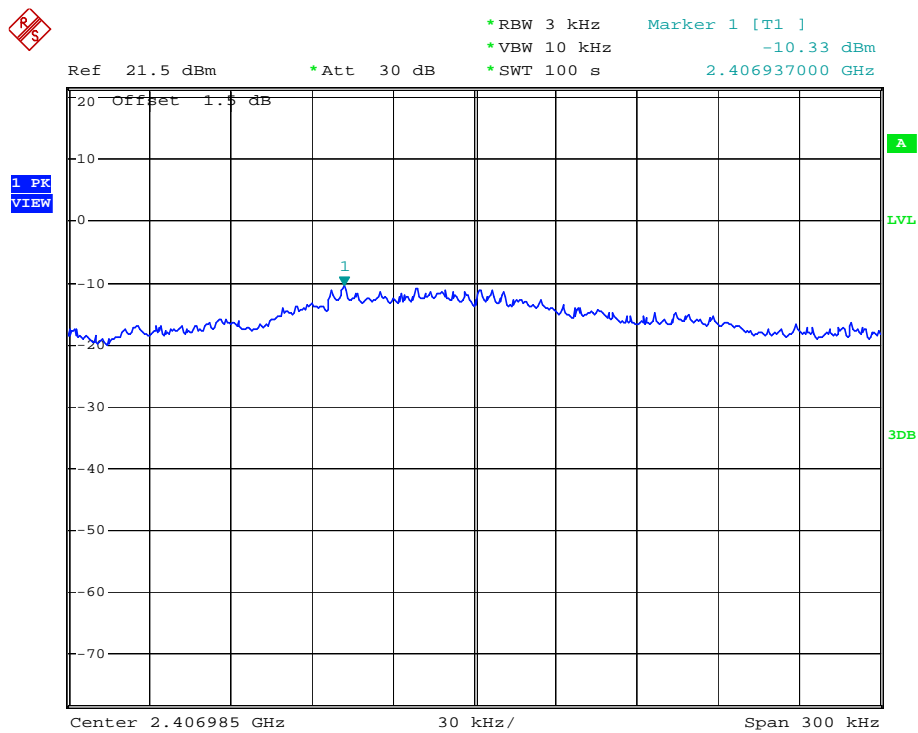

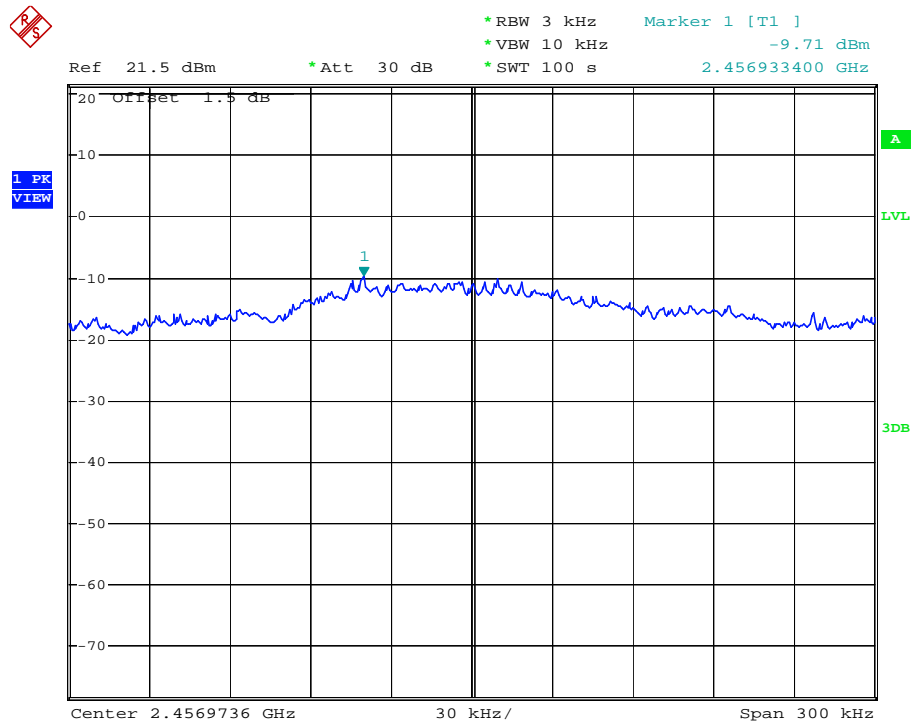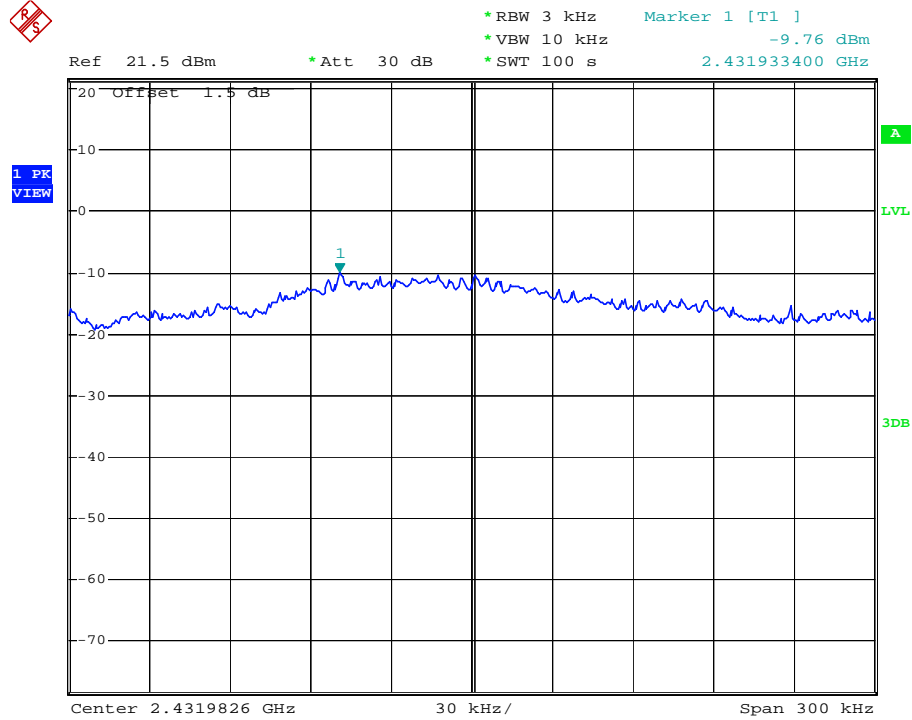

10. Antenna Port Emission

10.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	11/28/2010	11/28/2011

10.2 Measuring Instruments and setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

10.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels, The limit was determined by attenuation 20dB of the RF peak power output.

10.4 Block Diagram of Test setup




10.6. Test Result


PASS.



802.11b Low Channel 1

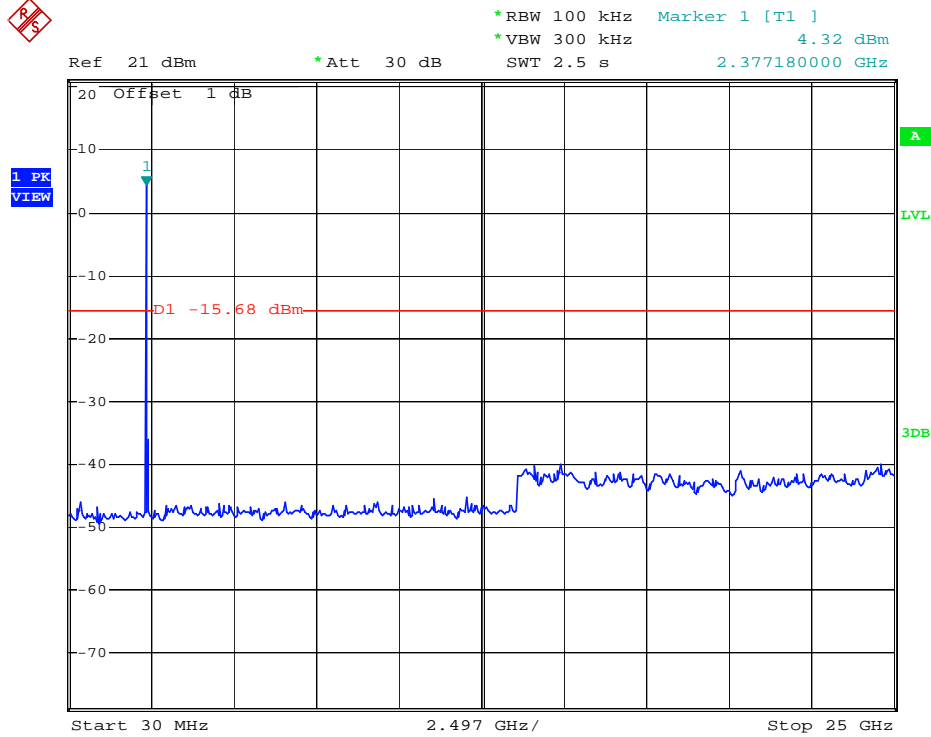


802.11b Middle Channel 6

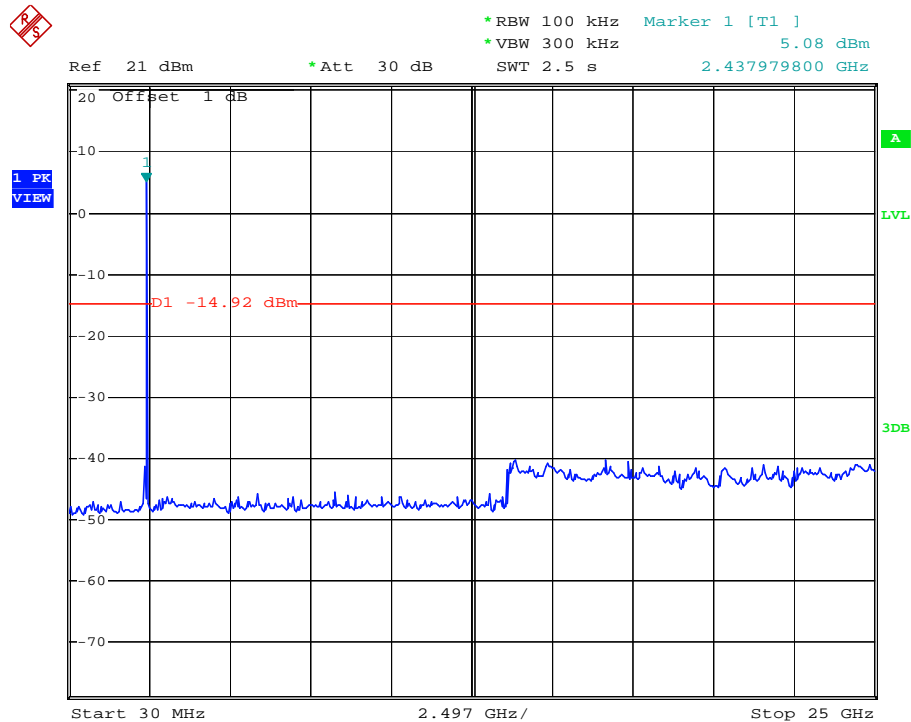




802.11b Highest Channel 11

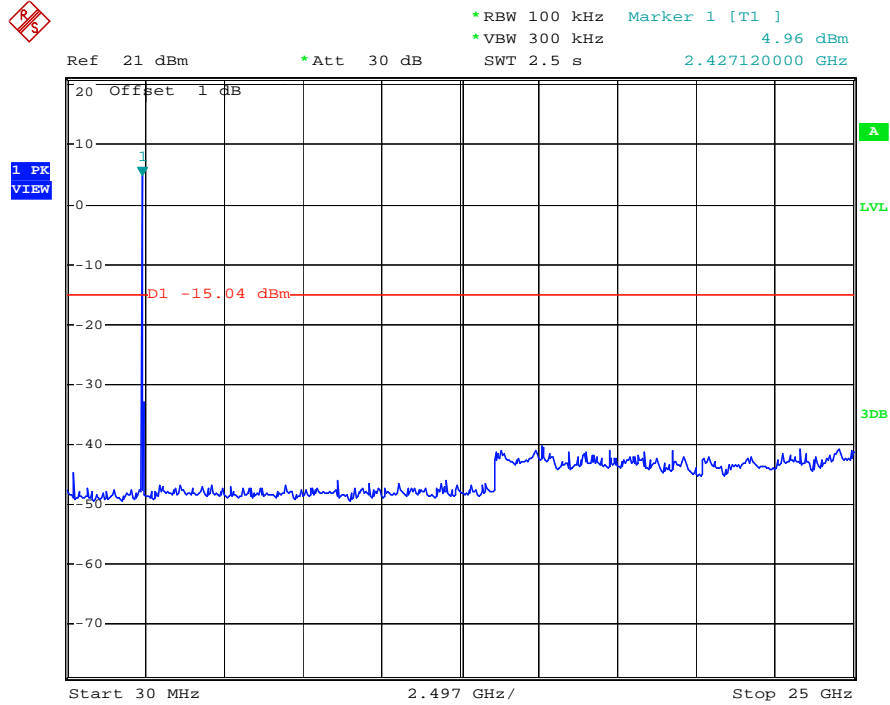


802.11g Low Channel 1

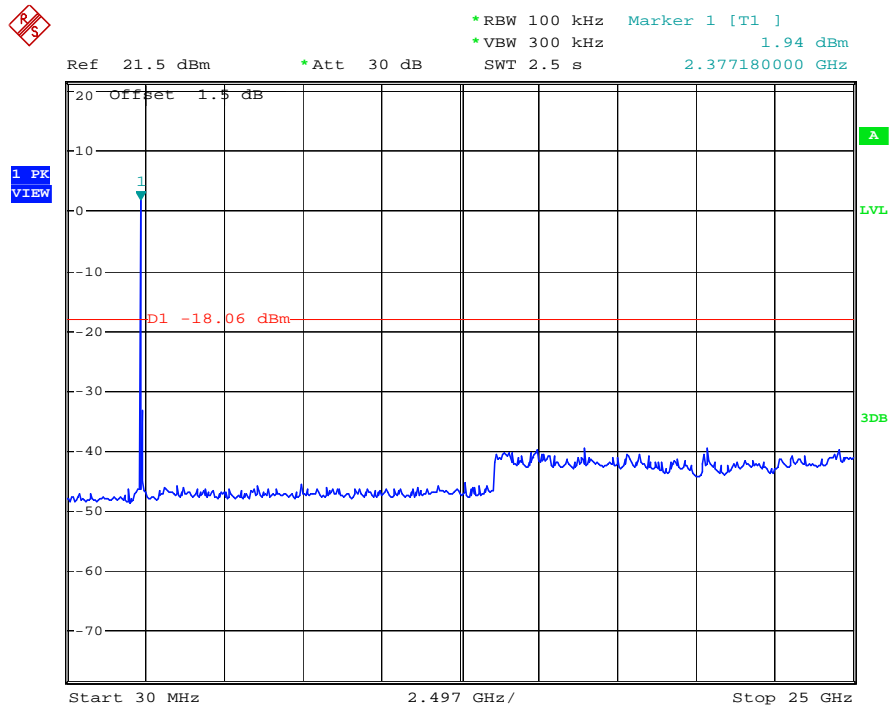




802.11g Middle Channel 6

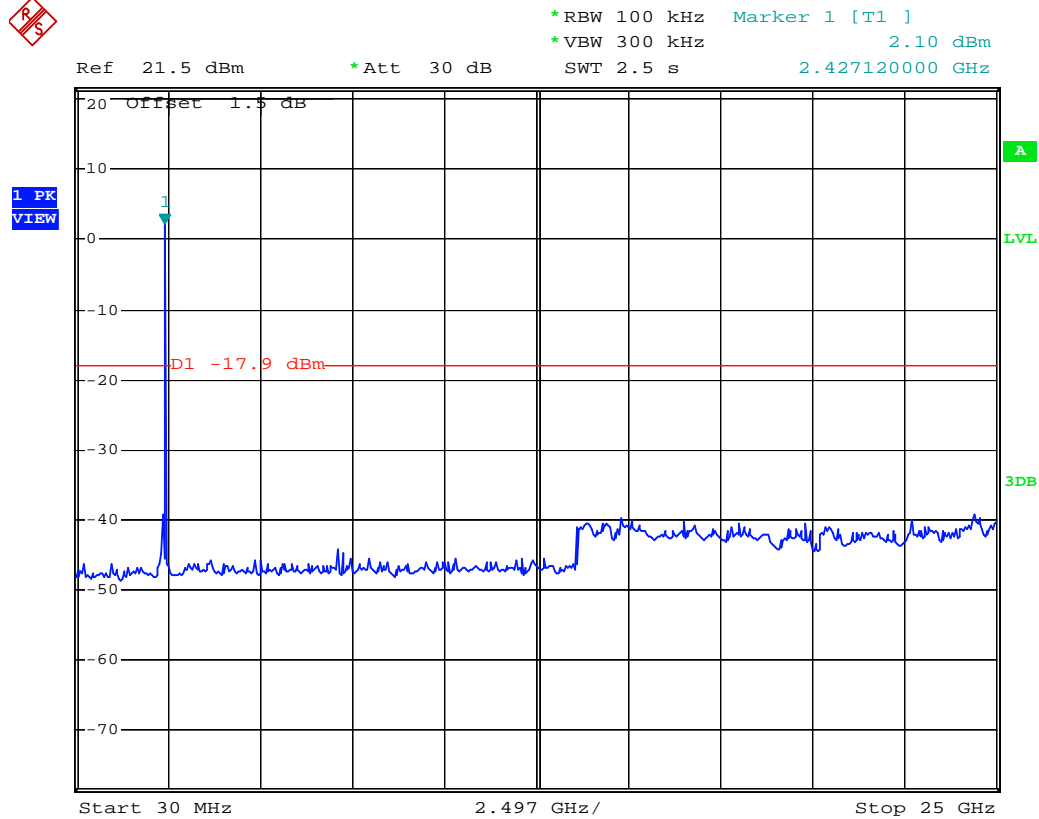

802.11g Highest Channel 11

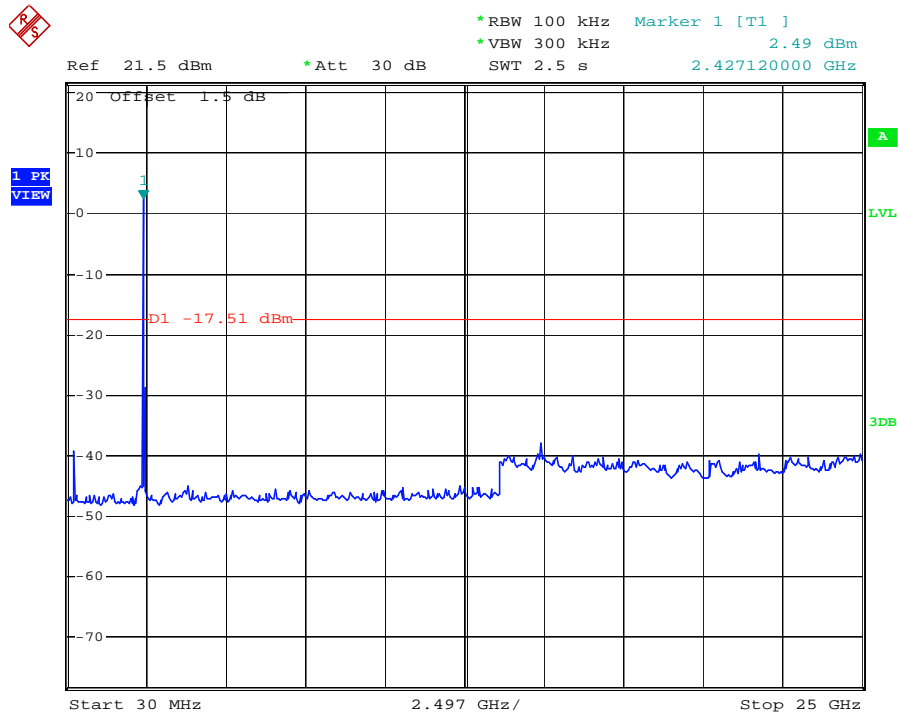

11. Antenna Application

11.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203.

11.2 Result

The EUT'S antenna is Chip antenna on PCB. The antenna's gain is 2dBi and meets the requirement.