

FCC PART 15.247

TEST REPORT

For

ShenZhen Foscam Intelligent Technology Co.,Ltd

5/F, Block 1, Vision Business Park, Nanshan District, Shenzhen, PRC

FCC ID: ZDEFI9800P

Report Type: Original Report	Product Type: Outdoor HD IP Camera
Test Engineer: David Lee	David Lee
Report Number: RSZ150910004-00B	
Report Date: 2015-09-22	
Reviewed By: Jimmy Xiao	Jimmy Xiao
Prepared By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUPPORT DEVICES DESCRIPTION	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
APPLICABLE STANDARD	8
RESULT	8
FCC §15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED FACTOR & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	12
TEST DATA	12
ENVIRONMENTAL CONDITIONS.....	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	18
ENVIRONMENTAL CONDITIONS.....	18
PRODUCT SIMILARITY DECLARATION LETTER.....	26

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The ShenZhen Foscam Intelligent Technology Co.,Ltd's product, model number: FI9800P (FCC ID: ZDEFI9800P) or the "EUT" in this report was a *Outdoor HD IP Camera*, which was measured approximately: 16.2 cm (L) x 6.8cm (W) x 6.4 cm (H), rated with input voltage: DC 12.0V from adapter.

Adapter Information:

Model: SAW-1201000

Input: 100-240V, 50-60Hz, 0.5A.

Output: 12.0V,1000mA.

Note: The product, series models FC5415P, FI9800P V2, FC5415P V2, FI9803P V2, FC5410P V2, FI9803P V3, FC5410P V3, FI9800XE, FI9851XE, FI9851P V2, FC6411P V2, HT9873P, FC7411P, HT9852P, FC6401P, FI9801P, FC5512P, FI9801W, FC5512W, FI9801EP, FC5512EP, FI9902P, FC5713P, FI9902W, FC5713W, FI9902EP, FC5713EP are electrically identical with the model FI9800P, that was selected for fully testing, They are only named different due to marketing purpose, the detailed information can be referred to the attached declaration letter that stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number 1506398. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2015-09-10.*

Objective

This report is prepared on behalf of ShenZhen Foscam Intelligent Technology Co.,Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related grant

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	/
4	2437	9	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Wifi test with this software: MT7601 USB QA V1.0.4.0 [0108].

The test was performed under:

802.11b: Data rate: 1 Mbps, Power level: 07

802.11g: Data rate: 6 Mbps, Power level: 00

802.11n-HT20: Data rate: MCS0, Power level: 00

802.11n-HT40: Data rate: MCS0, Power level: 00

Support Devices Description


Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-415K	5503290068073
Sagemcom	Router	N/A	32546

External I/O Cable

Cable Description	Length (m)	From Port	To
Shielding Detachable RJ45 cable	3.0	EUT	Router
Un-shielding Un-detachable AC cable	1.8	Socket	Mains
Un-shielding Un-detachable DC cable	1.6	EUT	Adapter

Block Diagram of Test Setup

For conducted emission

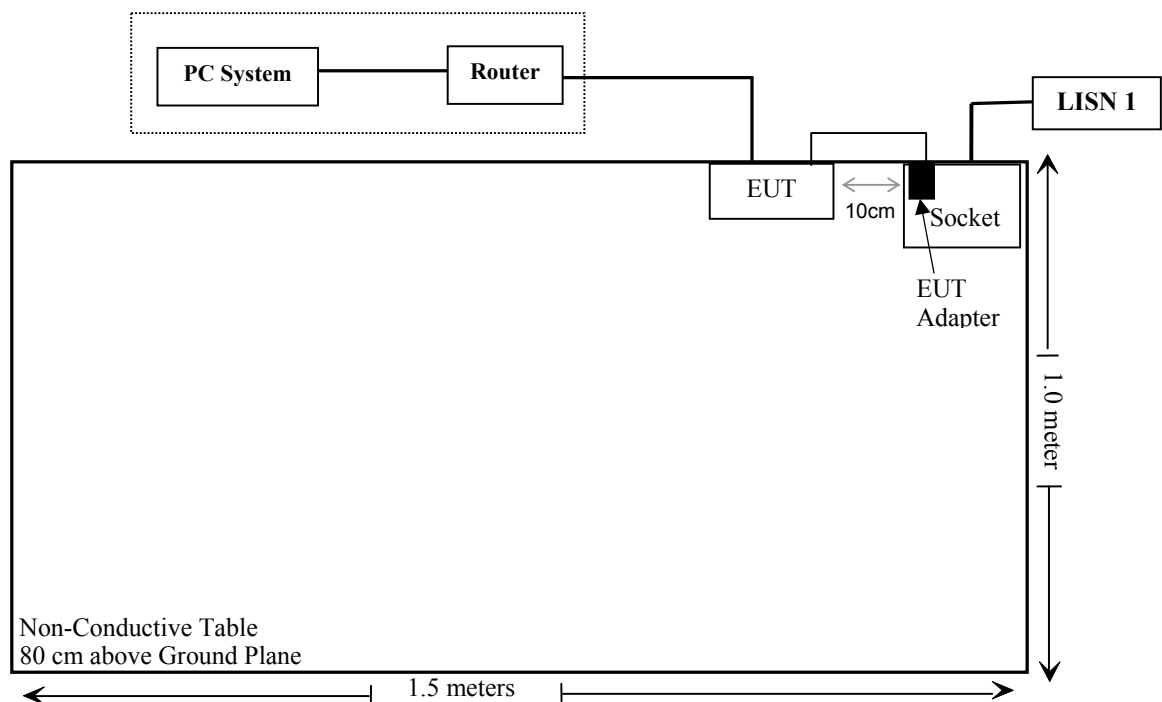

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1091	Maximum Permissible Exposure(MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance*
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance*
§15.247(b)(3)	Maximum Conducted Output Power	Compliance*
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance*
§15.247(e)	Power Spectral Density	Compliance*

Compliance*: the EUT (Model: FI9800P, FCC ID: ZDEFI9800P) has used a certified module with model FR1213C3 (FCC ID: Q8Y-FR1213C3), the different test data between them are “§15.207 (a) AC Line Conducted Emissions” and “§15.205, §15.209, §15.247(d) Spurious Emissions”, so all the other test data are referred to the report KSZ2013053101J01 with model number FR1213C3 (FCC ID: Q8Y-FR1213C3), issued on 2013-08-19 by Ke Mei Ou Laboratory Co., Ltd.

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412	2	1.58	15.33	34.12	20	0.0107	1

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a RP-SMA antenna arrangement, which were permanently attached and the gain was 2 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

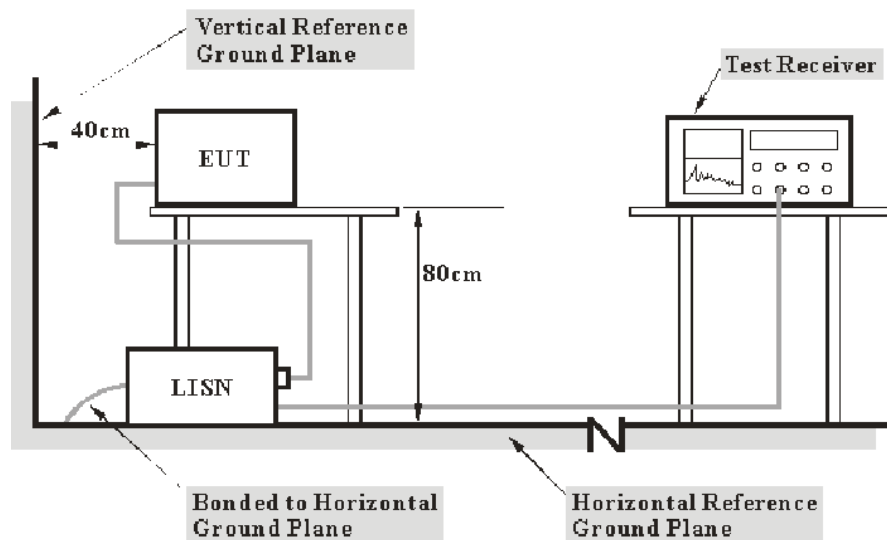

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and Average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2015-06-03	2016-06-03
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2014-12-01	2015-12-01
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2015-06-09	2016-06-09
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2015-05-14	2016-05-13
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

14.9db at 0.573270 MHz in the Line conducted

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-09-21.

EUT operation mode: WIFI Transmitting

AC 120V/60 Hz, Line


EMI Auto Test L

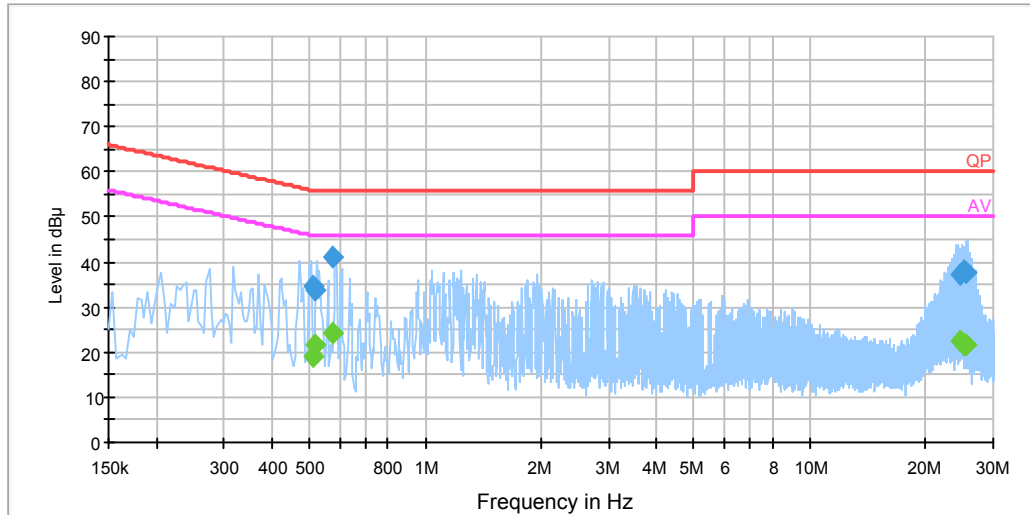

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.510410	34.7	19.9	56.0	21.3	QP
0.510410	18.9	19.9	46.0	27.1	Ave.
0.518170	33.8	19.9	56.0	22.2	QP
0.518170	21.5	19.9	46.0	24.5	Ave.
0.573270	41.1	19.9	56.0	14.9	QP
0.573270	24.2	19.9	46.0	21.8	Ave.
24.680330	37.4	20.1	60.0	22.6	QP
24.680330	22.4	20.1	50.0	27.6	Ave.
25.323770	38.0	20.2	60.0	22.0	QP
25.323770	21.7	20.2	50.0	28.3	Ave.
25.361310	37.8	20.2	60.0	22.2	QP
25.361310	21.6	20.2	50.0	28.4	Ave.

AC 120V/60 Hz, Neutral

EMI Auto Test N

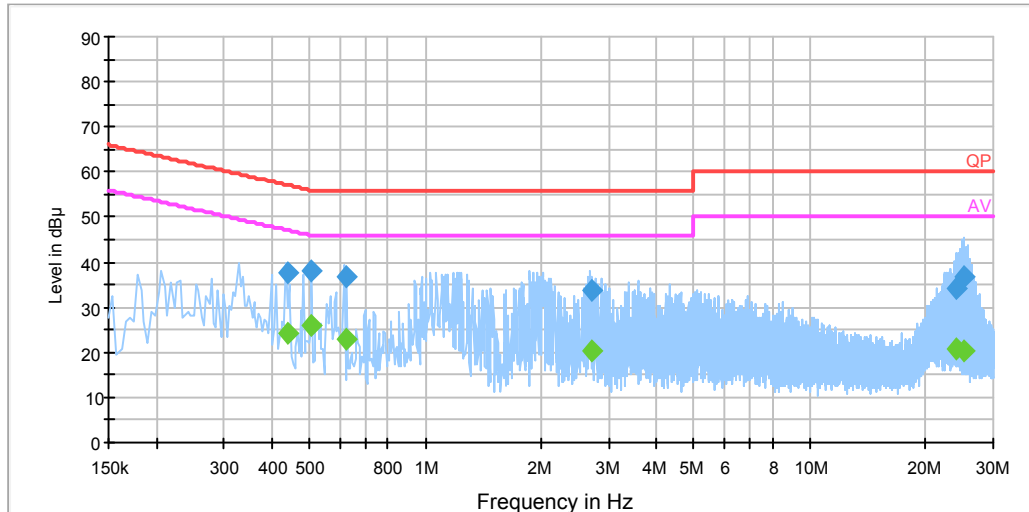

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.440510	37.6	19.9	57.1	19.5	QP
0.440510	24.2	19.9	47.1	22.9	Ave.
0.506410	38.3	19.9	56.0	17.7	QP
0.506410	25.9	19.9	46.0	20.1	Ave.
0.620730	36.7	19.9	56.0	19.3	QP
0.620730	22.8	19.9	46.0	23.2	Ave.
2.705590	33.6	20.0	56.0	22.4	QP
2.705590	20.1	20.0	46.0	25.9	Ave.
24.097910	34.4	20.1	60.0	25.6	QP
24.097910	20.7	20.1	50.0	29.3	Ave.
25.117170	36.6	20.2	60.0	23.4	QP
25.117170	20.4	20.2	50.0	29.6	Ave.

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (Average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

Below 1 GHz:

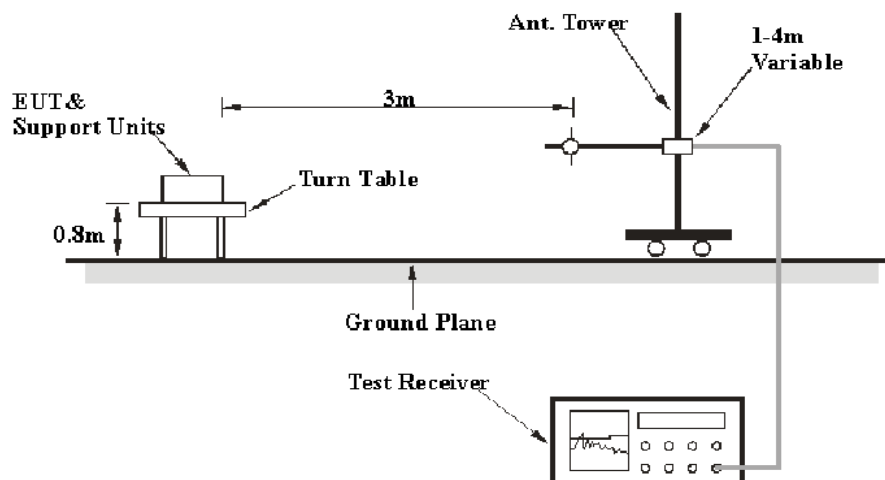

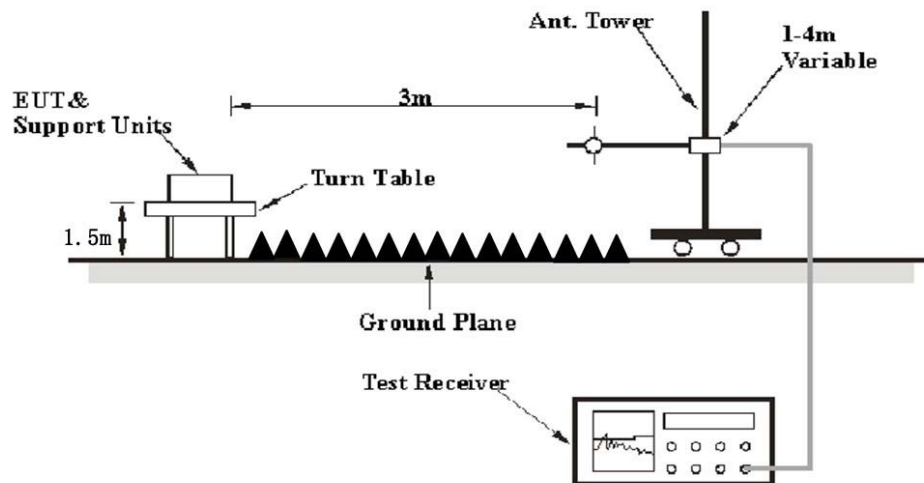Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The socket was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Mini	Amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
A.H. System	Horn Antenna	SAS-200/571	135	2015-02-10	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2012-10-15	2015-10-15
TDK	Chamber	Chamber B	1#	2015-07-22	2016-07-22
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2015-08-03	2016-08-03
R&S	Auto test Software	EMC32	V9.10	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

0.41 dB at 250.0 MHz in the Horizontal polarization for 802.11b mode in Middle Channel

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-09-14.

EUT operation mode: Transmitting

30 MHz-25 GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2412MHz)									
250.0	59.39	QP	6	1.7	H	-14.6	44.79	46	1.21
2412.00	90.29	PK	35	1.8	H	4.97	95.26	/	/
2412.00	82.08	Ave.	35	1.8	H	4.97	87.05	/	/
2412.00	98.15	PK	307	2.5	V	4.97	103.12	/	/
2412.00	92.70	Ave.	307	2.5	V	4.97	97.67	/	/
2381.99	45.09	PK	261	1.8	H	4.97	50.06	74	23.94
2381.99	28.40	Ave.	261	1.8	H	4.97	33.37	54	20.63
2495.70	41.69	PK	289	1.3	H	6.29	47.98	74	26.02
2495.70	20.52	Ave.	289	1.3	H	6.29	26.81	54	27.19
2492.13	45.24	PK	313	2.4	V	6.29	51.53	74	22.47
2492.13	44.27	Ave.	313	2.4	V	6.29	50.56	54	3.44
4824.00	47.70	PK	220	2.2	V	16.92	64.62	74	9.38
4824.00	32.48	Ave.	220	2.2	V	16.92	49.40	54	4.60
7236.00	40.08	PK	181	1.5	H	19.08	59.16	74	14.84
7236.00	22.80	Ave.	181	1.5	H	19.08	41.88	54	12.12
9648.00	37.90	PK	222	1.3	V	22.72	60.62	74	13.38
9648.00	23.31	Ave.	222	1.3	V	22.72	46.03	54	7.97

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel(2437 MHz)									
250.0	60.19	QP	123	1.4	H	-14.6	45.59	46	0.41
2437.00	90.68	PK	237	2.0	H	4.97	95.65	/	/
2437.00	82.77	Ave.	237	2.0	H	4.97	87.74	/	/
2437.00	97.60	PK	206	1.5	V	4.97	102.57	/	/
2437.00	92.73	Ave.	206	1.5	V	4.97	97.70	/	/
2384.89	44.40	PK	199	1.1	H	4.97	49.37	74	24.63
2384.89	29.49	Ave.	199	1.1	H	4.97	34.46	54	19.54
2493.63	41.27	PK	36	2.0	H	6.29	47.56	74	26.44
2493.63	20.52	Ave.	36	2.0	H	6.29	26.81	54	27.19
2493.99	44.83	PK	321	1.4	V	6.29	51.12	74	22.88
2493.99	43.01	Ave.	321	1.4	V	6.29	49.30	54	4.70
4874.00	48.46	PK	119	2.3	H	16.91	65.37	74	8.63
4874.00	32.40	Ave.	119	2.3	H	16.91	49.31	54	4.69
7311.00	40.09	PK	72	1.3	V	19.40	59.49	74	14.51
7311.00	23.24	Ave.	72	1.3	V	19.40	42.64	54	11.36
9748.00	37.99	PK	95	1.8	H	22.72	60.71	74	13.29
9748.00	22.15	Ave.	95	1.8	H	22.72	44.87	54	9.13
High Channel(2462 MHz)									
250.0	59.90	QP	325	1.7	H	-14.6	45.30	46	0.70
2462.00	90.82	PK	194	1.2	H	6.29	97.11	/	/
2462.00	82.98	Ave.	194	1.2	H	6.29	89.27	/	/
2462.00	98.58	PK	320	2.5	V	6.29	104.87	/	/
2462.00	93.20	Ave.	320	2.5	V	6.29	99.49	/	/
2385.07	45.55	PK	260	2.0	H	4.97	50.52	74	23.48
2385.07	28.49	Ave.	260	2.0	H	4.97	33.46	54	20.54
2490.49	41.43	PK	269	1.6	H	6.29	47.72	74	26.28
2490.49	20.52	Ave.	269	1.6	H	6.29	26.81	54	27.19
2484.52	46.61	PK	83	1.6	V	6.29	52.90	74	21.10
2484.52	44.67	Ave.	83	1.6	V	6.29	50.96	54	3.04
4924.00	47.80	PK	281	1.5	V	16.91	64.71	74	9.29
4924.00	33.24	Ave.	281	1.5	V	16.91	50.15	54	3.85
7386.00	38.65	PK	156	2.2	H	18.34	56.99	74	17.01
7386.00	23.08	Ave.	156	2.2	H	18.34	41.42	54	12.58
9848.00	38.11	PK	158	1.0	V	23.79	61.90	74	12.10
9848.00	22.55	Ave.	158	1.0	V	23.79	46.34	54	7.66

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2412MHz)									
250.0	59.33	QP	278	1.3	H	-14.6	44.73	46	1.27
2412.00	90.31	PK	71	1.2	H	4.97	95.28	/	/
2412.00	82.96	Ave.	71	1.2	H	4.97	87.93	/	/
2412.00	97.78	PK	132	2.1	V	4.97	102.75	/	/
2412.00	92.53	Ave.	132	2.1	V	4.97	97.50	/	/
2383.72	45.33	PK	30	2.2	H	4.97	50.30	74	23.70
2383.72	28.99	Ave.	30	2.2	H	4.97	33.96	54	20.04
2491.55	41.84	PK	255	1.2	H	6.29	48.13	74	25.87
2491.55	20.52	Ave.	255	1.2	H	6.29	26.81	54	27.19
2486.44	46.42	PK	108	2.0	V	6.29	52.71	74	21.29
2486.44	43.96	Ave.	108	2.0	V	6.29	50.25	54	3.75
4824.00	48.35	PK	28	2.5	V	16.92	65.27	74	8.73
4824.00	33.67	Ave.	28	2.5	V	16.92	50.59	54	3.41
7236.00	39.95	PK	168	2.3	H	19.08	59.03	74	14.97
7236.00	21.76	Ave.	168	2.3	H	19.08	40.84	54	13.16
9648.00	37.07	PK	118	1.9	H	22.72	59.79	74	14.21
9648.00	22.69	Ave.	118	1.9	H	22.72	45.41	54	8.59
Middle Channel(2437 MHz)									
250.0	59.61	QP	79	2.4	H	-14.6	45.01	46	0.99
2437.00	90.88	PK	29	1.3	H	4.97	95.85	/	/
2437.00	82.59	Ave.	29	1.3	H	4.97	87.56	/	/
2437.00	96.74	PK	274	1.7	V	4.97	101.71	/	/
2437.00	93.02	Ave.	274	1.7	V	4.97	97.99	/	/
2388.22	44.63	PK	286	1.4	H	4.97	49.60	74	24.40
2388.22	29.31	Ave.	286	1.4	H	4.97	34.28	54	19.72
2488.51	40.14	PK	85	1.6	H	6.29	46.43	74	27.57
2488.51	20.52	Ave.	85	1.6	H	6.29	26.81	54	27.19
2491.84	45.70	PK	40	1.3	V	6.29	51.99	74	22.01
2491.84	44.90	Ave.	40	1.3	V	6.29	51.19	54	2.81
4874.00	48.05	PK	36	1.2	V	16.91	64.96	74	9.04
4874.00	32.37	Ave.	36	1.2	V	16.91	49.28	54	4.72
7311.00	39.77	PK	233	1.0	H	19.40	59.17	74	14.83
7311.00	22.96	Ave.	233	1.0	H	19.40	42.36	54	11.64
9748.00	38.03	PK	243	1.4	H	22.72	60.75	74	13.25
9748.00	23.64	Ave.	243	1.4	H	22.72	46.36	54	7.64

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(2462 MHz)									
250.0	59.41	QP	26	1.5	H	-14.6	44.81	46	1.19
2462.00	90.09	PK	54	1.6	H	6.29	96.38	/	/
2462.00	82.41	Ave.	54	1.6	H	6.29	88.70	/	/
2462.00	96.83	PK	266	2.1	V	6.29	103.12	/	/
2462.00	92.30	Ave.	266	2.1	V	6.29	98.59	/	/
2380.68	44.56	PK	205	1.4	H	4.97	49.53	74	24.47
2380.68	29.22	Ave.	205	1.4	H	4.97	34.19	54	19.81
2499.10	41.52	PK	4	1.1	H	6.29	47.81	74	26.19
2499.10	20.52	Ave.	4	1.1	H	6.29	26.81	54	27.19
2499.62	46.19	PK	147	1.9	V	6.29	52.48	74	21.52
2499.62	43.08	Ave.	147	1.9	V	6.29	49.37	54	4.63
4924.00	47.16	PK	32	2.3	H	16.91	64.07	74	9.93
4924.00	33.41	Ave.	32	2.3	H	16.91	50.32	54	3.68
7386.00	40.25	PK	170	1.4	H	18.34	58.59	74	15.41
7386.00	22.47	Ave.	170	1.4	H	18.34	40.81	54	13.19
9848.00	38.55	PK	230	1.7	H	23.79	62.34	74	11.66
9848.00	21.98	Ave.	230	1.7	H	23.79	45.77	54	8.23

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2412MHz)									
250.0	59.14	QP	258	1.7	H	-14.6	44.54	46	1.46
2412.00	90.21	PK	316	1.3	H	4.97	95.18	/	/
2412.00	82.03	Ave.	316	1.3	H	4.97	87.00	/	/
2412.00	98.22	PK	279	1.1	V	4.97	103.19	/	/
2412.00	92.62	Ave.	279	1.1	V	4.97	97.59	/	/
2388.15	45.03	PK	173	1.7	H	4.97	50.00	74	24.00
2388.15	29.34	Ave.	173	1.7	H	4.97	34.31	54	19.69
2498.88	40.68	PK	120	2.4	H	6.29	46.97	74	27.03
2498.88	20.52	Ave.	120	2.4	H	6.29	26.81	54	27.19
2499.68	45.04	PK	119	1.7	V	6.29	51.33	74	22.67
2499.68	44.71	Ave.	119	1.7	V	6.29	51.00	54	3.00
4824.00	47.21	PK	31	1.1	V	16.92	64.13	74	9.87
4824.00	32.18	Ave.	31	1.1	V	16.92	49.10	54	4.90
7236.00	40.03	PK	335	1.6	H	19.08	59.11	74	14.89
7236.00	21.76	Ave.	335	1.6	H	19.08	40.84	54	13.16
9648.00	38.46	PK	240	2.0	H	22.72	61.18	74	12.82
9648.00	22.82	Ave.	240	2.0	H	22.72	45.54	54	8.46
Middle Channel(2437 MHz)									
250.0	60.15	QP	54	1.4	H	-14.6	45.55	46	0.45
2437.00	90.87	PK	282	2.0	H	4.97	95.84	/	/
2437.00	82.41	Ave.	282	2.0	H	4.97	87.38	/	/
2437.00	98.35	PK	45	1.2	V	4.97	103.32	/	/
2437.00	92.69	Ave.	45	1.2	V	4.97	97.66	/	/
2382.05	44.27	PK	69	1.3	H	4.97	49.24	74	24.76
2382.05	29.40	Ave.	69	1.3	H	4.97	34.37	54	19.63
2486.34	40.86	PK	281	1.0	H	6.29	47.15	74	26.85
2486.34	20.52	Ave.	281	1.0	H	6.29	26.81	54	27.19
2493.66	46.51	PK	97	2.0	H	6.29	52.80	74	21.20
2493.66	43.48	Ave.	97	2.0	H	6.29	49.77	54	4.23
4874.00	48.68	PK	148	1.8	H	16.91	65.59	74	8.41
4874.00	32.72	Ave.	148	1.8	H	16.91	49.63	54	4.37
7311.00	39.75	PK	252	1.1	H	19.40	59.15	74	14.85
7311.00	22.51	Ave.	252	1.1	H	19.40	41.91	54	12.09
9748.00	37.54	PK	129	1.7	H	22.72	60.26	74	13.74
9748.00	23.40	Ave.	129	1.7	H	22.72	46.12	54	7.88

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(2462 MHz)									
250.0	59.89	QP	36	2.2	H	-14.6	45.29	46	0.71
2462.00	91.21	PK	83	1.4	H	6.29	97.50	/	/
2462.00	81.25	Ave.	83	1.4	H	6.29	87.54	/	/
2462.00	96.89	PK	282	2.0	V	6.29	103.18	/	/
2462.00	92.95	Ave.	282	2.0	V	6.29	99.24	/	/
2384.17	44.19	PK	327	1.2	H	4.97	49.16	74	24.84
2384.17	29.45	Ave.	327	1.2	H	4.97	34.42	54	19.58
2484.52	40.35	PK	301	1.7	H	6.29	46.64	74	27.36
2484.52	20.52	Ave.	301	1.7	H	6.29	26.81	54	27.19
2497.32	46.48	PK	131	1.5	H	6.29	52.77	74	21.23
2497.32	44.02	Ave.	131	1.5	H	6.29	50.31	54	3.69
4924.00	48.57	PK	30	2.0	V	16.91	65.48	74	8.52
4924.00	33.93	Ave.	30	2.0	V	16.91	50.84	54	3.16
7386.00	39.47	PK	250	1.7	H	18.34	57.81	74	16.19
7386.00	22.79	Ave.	250	1.7	H	18.34	41.13	54	12.87
9848.00	37.72	PK	315	1.3	H	23.79	61.51	74	12.49
9848.00	22.14	Ave.	315	1.3	H	23.79	45.93	54	8.07

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
250.0	59.30	QP	286	2.0	H	-14.6	44.70	46	1.30
2422.00	90.09	PK	329	2.1	H	4.97	95.06	/	/
2422.00	82.71	Ave.	329	2.1	H	4.97	87.68	/	/
2422.00	96.92	PK	29	1.6	V	4.97	101.89	/	/
2422.00	93.19	Ave.	29	1.6	V	4.97	98.16	/	/
2381.77	44.58	PK	309	1.8	H	4.97	49.55	74	24.45
2381.77	28.56	Ave.	309	1.8	H	4.97	33.53	54	20.47
2495.95	41.85	PK	280	1.2	H	6.29	48.14	74	25.86
2495.95	20.52	Ave.	280	1.2	H	6.29	26.81	54	27.19
2487.51	45.83	PK	232	2.4	V	6.29	52.12	74	21.88
2487.51	44.58	Ave.	232	2.4	V	6.29	50.87	54	3.13
4844.00	48.38	PK	62	2.4	V	16.92	65.30	74	8.70
4844.00	32.04	Ave.	62	2.4	V	16.92	48.96	54	5.04
7266.00	38.96	PK	121	2.2	V	19.40	58.36	74	15.64
7266.00	22.35	Ave.	121	2.2	V	19.40	41.75	54	12.25
9688.00	38.44	PK	72	1.5	V	22.72	61.16	74	12.84
9688.00	22.75	Ave.	72	1.5	V	22.72	45.47	54	8.53
Middle Channel (2437 MHz)									
250.0	59.70	QP	117	1.9	H	-14.6	45.10	46	0.90
2437.00	89.94	PK	236	1.5	H	4.97	94.91	/	/
2437.00	82.09	Ave.	236	1.5	H	4.97	87.06	/	/
2437.00	96.92	PK	351	2.4	V	4.97	101.89	/	/
2437.00	93.43	Ave.	351	2.4	V	4.97	98.40	/	/
2385.47	44.04	PK	289	2.1	H	4.97	49.01	74	24.99
2385.47	29.08	Ave.	289	2.1	H	4.97	34.05	54	19.95
2496.52	41.07	PK	272	2.0	H	6.29	47.36	74	26.64
2496.52	20.52	Ave.	272	2.0	H	6.29	26.81	54	27.19
2491.97	46.18	PK	341	1.4	H	6.29	52.47	74	21.53
2491.97	44.11	Ave.	341	1.4	H	6.29	50.40	54	3.60
4874.00	47.07	PK	68	2.2	V	16.91	63.98	74	10.02
4874.00	32.39	Ave.	68	2.2	V	16.91	49.30	54	4.70
7311.00	39.54	PK	89	2.1	V	19.40	58.94	74	15.06
7311.00	22.41	Ave.	89	2.1	V	19.40	41.81	54	12.19
9748.00	37.92	PK	347	1.5	V	22.72	60.64	74	13.36
9748.00	22.07	Ave.	347	1.5	V	22.72	44.79	54	9.21

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
250.0	59.24	QP	248	1.2	H	-14.6	44.64	46	1.36
2452.00	90.84	PK	69	1.2	H	6.29	97.13	/	/
2452.00	82.19	Ave.	69	1.2	H	6.29	88.48	/	/
2452.00	97.08	PK	89	2.0	V	6.29	103.37	/	/
2452.00	92.77	Ave.	89	2.0	V	6.29	99.06	/	/
2383.30	44.28	PK	47	1.1	H	4.97	49.25	74	24.75
2383.30	29.46	Ave.	47	1.1	H	4.97	34.43	54	19.57
2496.37	41.02	PK	329	1.4	H	6.29	47.31	74	26.69
2496.37	20.52	Ave.	329	1.4	H	6.29	26.81	54	27.19
2495.26	45.32	PK	334	1.1	H	6.29	51.61	74	22.39
2495.26	43.43	Ave.	334	1.1	H	6.29	49.72	54	4.28
4904.00	47.34	PK	176	1.7	V	16.91	64.25	74	9.75
4904.00	32.35	Ave.	176	1.7	V	16.91	49.26	54	4.74
7356.00	40.05	PK	129	1.5	H	18.34	58.39	74	15.61
7356.00	21.86	Ave.	129	1.5	H	18.34	40.20	54	13.80
9808.00	37.86	PK	111	1.5	V	23.79	61.65	74	12.35
9808.00	23.49	Ave.	111	1.5	V	23.79	47.28	54	6.72

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

PRODUCT SIMILARITY DECLARATION LETTER



ShenZhen Foscam Intelligent Technology Co.,Ltd.
5/F, Block 1, Vision Business Park, Nanshan District, Shenzhen, PRC
Tel: 0755-26745668 Fax: 0755-26745168

September 28, 2015

Product Similarity Declaration

To Whom It May Concern,

We, ShenZhen Foscam Intelligent Technology Co.,Ltd., hereby declare that we have a product named as Outdoor HD IP Camera (Model number: FI9800P) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (FC5415P, FI9800P V2, FC5415P V2, FI9803P V2, FC5410P V2, FI9803P V3, FC5410P V3, FI9800XE, FI9851XE, FI9851P V2, FC6411P V2, HT9873P, FC7411P, HT9852P, FC6401P, FI9801P, FC5512P, FI9801W, FC5512W, FI9801EP, FC5512EP, FI9902P, FC5713P, FI9902W, FC5713W, FI9902EP, FC5713EP) on reports and certificate, all the models are identical schematics, only named differently.

No other changes are made to them

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Sincerely,

Signature

YIDONG XU

Manager

***** END OF REPORT *****