

# FCC Test Report

## Client Information:

Applicant: Ultmost Technology Corp.  
Applicant add.: 4F, No.52, Ming Chuang Rd., Hsintien, Taipei, Taiwan, R.O.C

## EUT Information:

EUT Name: Media Tablet  
Model No.: PT-08A9, PT-XXYZ Series  
(XX=05, 07, 08, 85, 89, 10; Y=A-K ; Z=1, 2, 3, 6, 8, 9)  
Brand Name: N/A  
FCC ID: ZDOPT-08A9

## Prepared By:

NTEK Testing Technology Co., Ltd.  
Add. : 1/F, Building E, Fenda Science Park, Sanwei Community  
Xixiang Street, Bao'an District, Shenzhen P.R. China  
Date of Receipt: Mar. 12, 2011      Date of Test: Mar. 13, 2011~ Mar. 17, 2011  
Date of Issue: Mar. 18, 2011      Test Result: **Pass**

## Test procedure used: ANSI C63.4-2003

This device described above has been tested by NTEK Testing Technology Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

\*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by: Take Wang

Approved by: Ada Li  
Technical director

# 1 Contents

	Page
<b>COVER PAGE</b>	
<b>1 CONTENTS</b>	<b>2</b>
<b>TEST SUMMARY</b>	<b>4</b>
1.1 COMPLIANCE WITH FCC PART 15 SUBPART C	4
1.2 MEASUREMENT UNCERTAINTY	4
<b>2 TEST FACILITY</b>	<b>5</b>
2.1 DEVIATION FROM STANDARD	5
2.2 ABNORMALITIES FROM STANDARD CONDITIONS	5
<b>3 GENERAL INFORMATION</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST CONDITIONS	7
3.3 PERIPHERAL LIST	8
<b>4 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>8</b>
<b>5 TEST RESULT</b>	<b>9</b>
5.1 ANTENNA REQUIREMENT	9
5.1.1 Standard requirement	9
5.1.2 EUT Antenna	9
5.2 CONDUCTION EMISSIONS MEASUREMENT	10
5.2.1 limit	10
5.2.2 Test result	10
5.2.3 Test result	11
5.3 OCCUPIED BANDWIDTH	13
5.3.1 limit	13
5.3.2 Test procedure	13
5.3.3 Test result	13
5.4 PEAK POWER DENSITY	18
5.4.1 limit	18
5.4.2 Test procedure	18
5.4.3 Test result	18
5.5 MAXIMUM PEAK OUTPUT POWER	23
5.5.1 limit	23
5.5.2 Test procedure	23
5.5.3 Test result	23
5.6 BAND EDGE	28
5.6.1 limit	28
5.6.2 Test procedure	28
5.6.3 Test result	28
5.7 CONDUCTED SPURIOUS EMISSIONS	31
5.7.1 limit	31
5.7.2 Test procedure	31
5.7.3 Test result	31

---

5.8	RADIATED EMISSIONS MEASUREMENT .....	38
5.8.1	Limit.....	38
5.8.2	Test procedure.....	38
5.8.3	Test Result.....	39
5.9	RF EXPOSURE REQUIREMENT .....	46
5.9.1	Limits.....	46
5.9.2	Result.....	46
<b>6</b>	<b>TEST SETUP PHOTOGRAPH.....</b>	<b>47</b>
<b>7</b>	<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS .....</b>	<b>47</b>

## Test Summary

### 1.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result
Conduction Emissions	FCC Part 15 C:2009	Section 15.203	<b>PASS</b>
Antenna Requirement	FCC Part 15 C:2009	Section 15.247(c)	<b>PASS</b>
Occupied Bandwidth	FCC Part 15 C:2009	Section 15.247(a)(2)	<b>PASS</b>
Peak power density	FCC Part 15 C:2009	Section 15.215(e)	<b>PASS</b>
Maximum Peak Output Power	FCC Part 15 C:2009	Section 15.215(b)(3)	<b>PASS</b>
Band edge	FCC Part 15 C:2009	Section 15.215(d)	<b>PASS</b>
Conducted Spurious Emissions	FCC Part 15 C:2009	Section 15.215(d)	<b>PASS</b>
Radiated Emissions	FCC Part 15 C:2009	Section 15.215(d)	<b>PASS</b>
RF Exposure requirement	FCC Part 15 C:2009	Section 15.247(i)	<b>PASS</b>

### 1.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Level have estimated based on ANSI C63.4:2003, the maximum value of the uncertainty as below

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	Radiated Emission Test	$\pm 3.57\text{dB}$

## 2 Test Facility

**The test facility is recognized, certified or accredited by the following organizations:**

Asia Institute Technology (Dongguan) Limited

Add. : No.6 Binhe Road, Tianxin Village, Huangjiang, Dongguan, Guangdong, China.

FCC Registered No.: 248337 IC Registered No.: IC6819A-1 & IC6819A-2

### 2.1 Deviation from standard

None

### 2.2 Abnormalities from standard conditions

None


### 3 General Information

#### 3.1 General Description of EUT

<b>Manufacturer:</b>	World electronic (shenzhen) co.,ltd.		
<b>Manufacturer Address:</b>	No.160,longping Road West., Central Town,longgang district,shenzhen , china		
<b>EUT Name:</b>	Media Tablet		
<b>Model No:</b>	PT-08A9, PT-XXYZ Series (XX=05, 07, 08, 85, 89, 10; Y=A-K : Z=1, 2, 3, 6, 8, 9)		
<b>Model Difference:</b>	All the model are identical except the model name.		
<b>Operation frequency:</b>	2412 MHz to 2462 MHz		
<b>Channel Number:</b>	11		
<b>Modulation Technology:</b>	DSSS		
<b>AntennaType:</b>	Print on PCB		
<b>Brand Name:</b>	N/A		
<b>Serial No:</b>	N/A		
<b>Power Supply Range:</b>	N/A		
<b>Power Supply:</b>	DC 9V from adapter AC 120V/60Hz		
<b>Power Cord:</b>	DC Line: 1.5m/ Unshielded / Undetachable / Without ferrite core		
<b>Signal Cable:</b>	N/A		
Description of Channel:			
channel	Frequency (MHz)	channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

## 3.2 Description of Test conditions

- (1) EUT was tested in normal configuration (Please See following Block diagram)

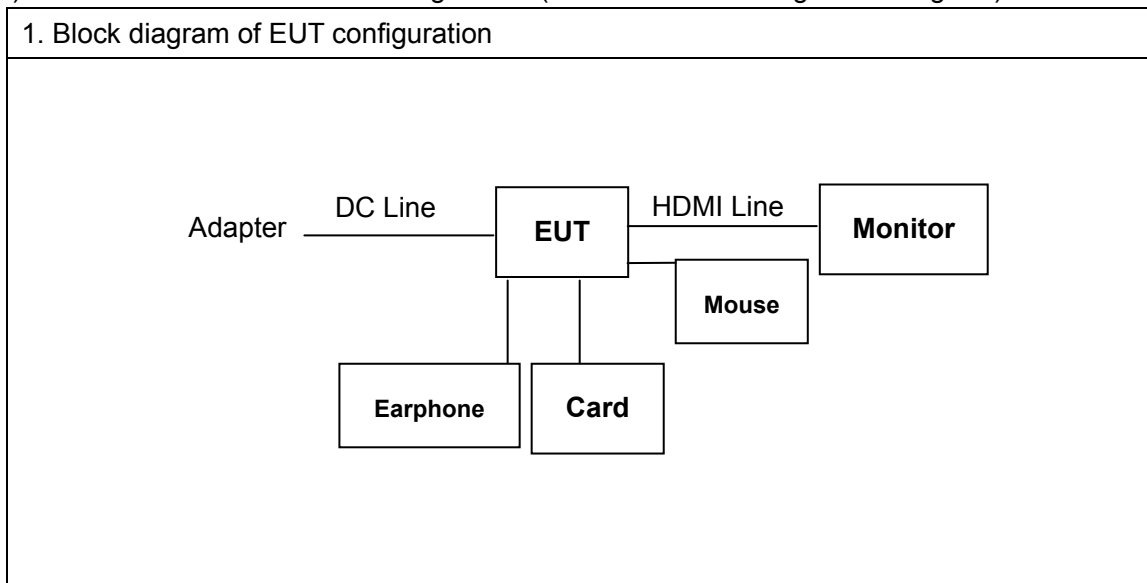

- (2) E.U.T. test conditions:

15.31(e) :For intentional radiators, measurements of the variation of the input power or the adiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% ofthe nominal rated supply voltage. For battery operated equipment, theequipment tests shall be performed using a new battery.

- (3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. if required. reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

- (4) Frequency range of radiated measurements:

According to the 15.33,The test range will be upto the tenth harmonic of the highest fundamental frequency

### 3.3 Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	AC/DC ADAPTOR	JD	JD-1230	N/A	1.5m/ Unshielded / Undetachable	N/A
2	Earphone	N.A	N.A	N.A	N.A	1.5m/ Unshielded / detachable
3	Card	Sandisk	64M	N.A	N.A	N.A
4	Monitor	AOV	X235	N.A	1.5m/ Unshielded / detachable	1.5m/ shielded / detachable

## 4 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	Agilent	E4446A	MY43360458	2009.04.17	2011.04.16
2	EMI Measuring Receiver	Schaffner	SCR3501	235	2009.04.08	2011.04.07
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2009.09.08	2012.03.07
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2009.04.08	2011.04.07
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2009.07.15	2011.07.14
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120A	451	2009.07.15	2011.07.14
7	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2009.09.08	2012.03.07
8	EMI Test Receiver	R&S	ESCI	100124	2009.12.28	2011.12.27
9	LISN	Kyoritsu	KNW-242	8-837-4	2009.04.08	2011.04.07
10	LISN	Kyoritsu	KNW-407	8-1789-3	2009.04.08	2011.04.07
11	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2009.09.08	2012.03.07
12	Loop Antenna	ARA	PLA-1030/B	1029	2010.07.15	2011.07.14



## 5 Test Result

### 5.1 Antenna Requirement

#### 5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### 5.1.2 EUT Antenna

The antenna is print on PCB. antenna gain is 0dbi max

## 5.2 Conduction Emissions Measurement

### 5.2.1 limit

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

### 5.2.2 Test result

EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

### 5.2.3 Test result

Test Data: 2011-3-14

Operating Environment: 20.3°C, 52% RH, 102 Kpa

#### Line

Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Quasi peak (dBμV)	Limit (dBμV)	Margin (dB)	Reading Level (dBuV)	Average (dBμV)	Limit (dBμV)	Margin (dB)
0.1580	31.48	11.75	43.23	65.57	-22.34	19.84	31.59	55.57	-23.98
*0.3100	37.18	10.71	47.89	59.97	-12.08	28.24	38.95	49.97	-11.02
0.4060	27.92	10.53	38.45	57.73	-19.28	19.20	29.73	47.49	-17.76
0.6180	27.57	10.29	37.86	56.00	-18.14	13.20	23.49	46.00	-22.51
0.9420	28.20	10.19	38.39	56.00	-17.61	18.42	28.61	46.00	-17.39
29.1340	30.39	10.79	41.18	60.00	-18.82	20.18	30.97	50.00	-19.03

#### Neutral


Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Quasi peak (dBμV)	Limit (dBμV)	Margin (dB)	Reading Level (dBuV)	Average (dBμV)	Limit (dBμV)	Margin (dB)
0.1540	32.25	11.85	44.10	65.78	-21.68	21.00	32.85	55.78	-22.93
0.1900	29.55	11.26	40.81	64.04	-23.23	13.51	24.77	54.03	-29.26
*0.3100	31.37	10.71	42.08	59.97	-17.89	20.50	31.21	49.97	-18.76
0.3940	20.92	10.55	31.47	57.98	-26.51	12.95	23.50	47.98	-24.48
0.6300	21.46	10.29	31.75	56.00	-24.25	9.26	19.55	46.00	-26.45
28.3060	28.05	10.73	38.78	60.00	-21.22	16.80	27.53	50.00	-22.47

Note: “\*” means the worst case


Quasi peak/Average = Reading Level + Factor

Factor= Cable Loss + LISN insertion loss

### Line --Operating mode: Running

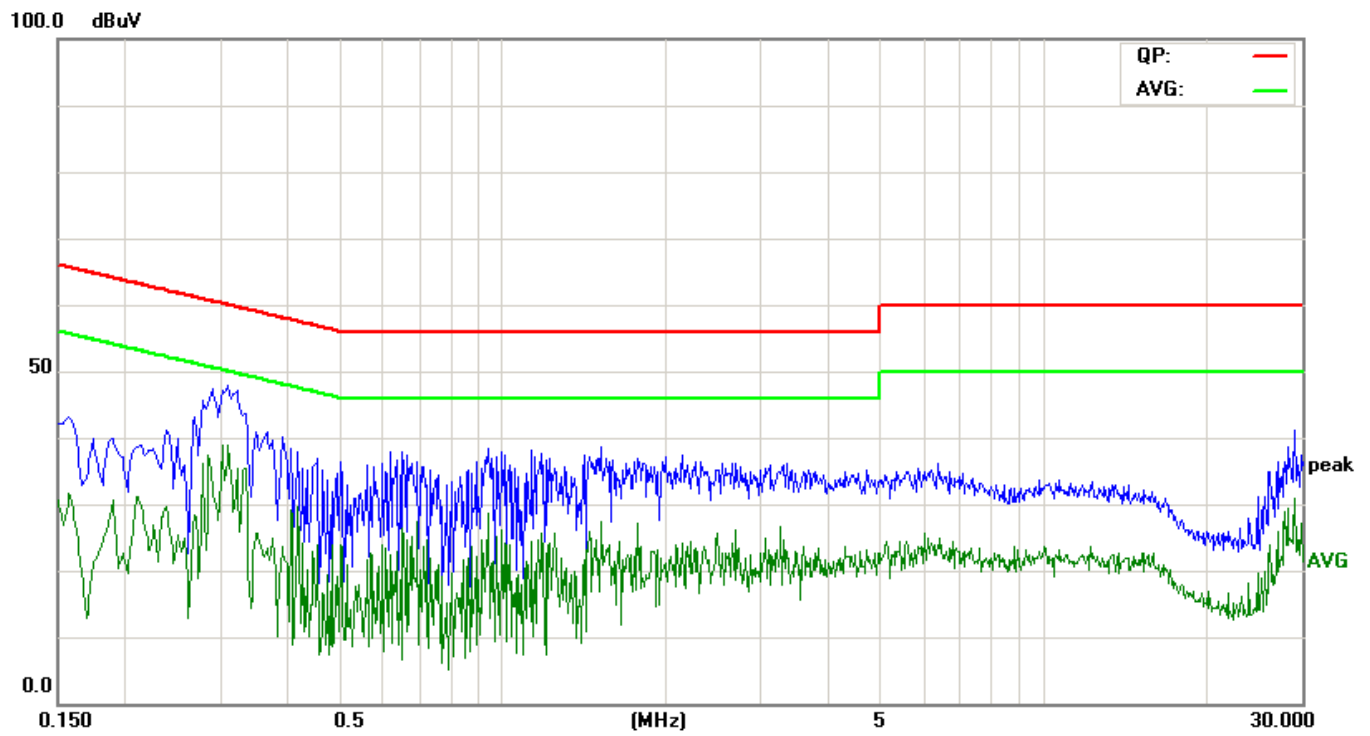

### Neutral --Operating mode: Running

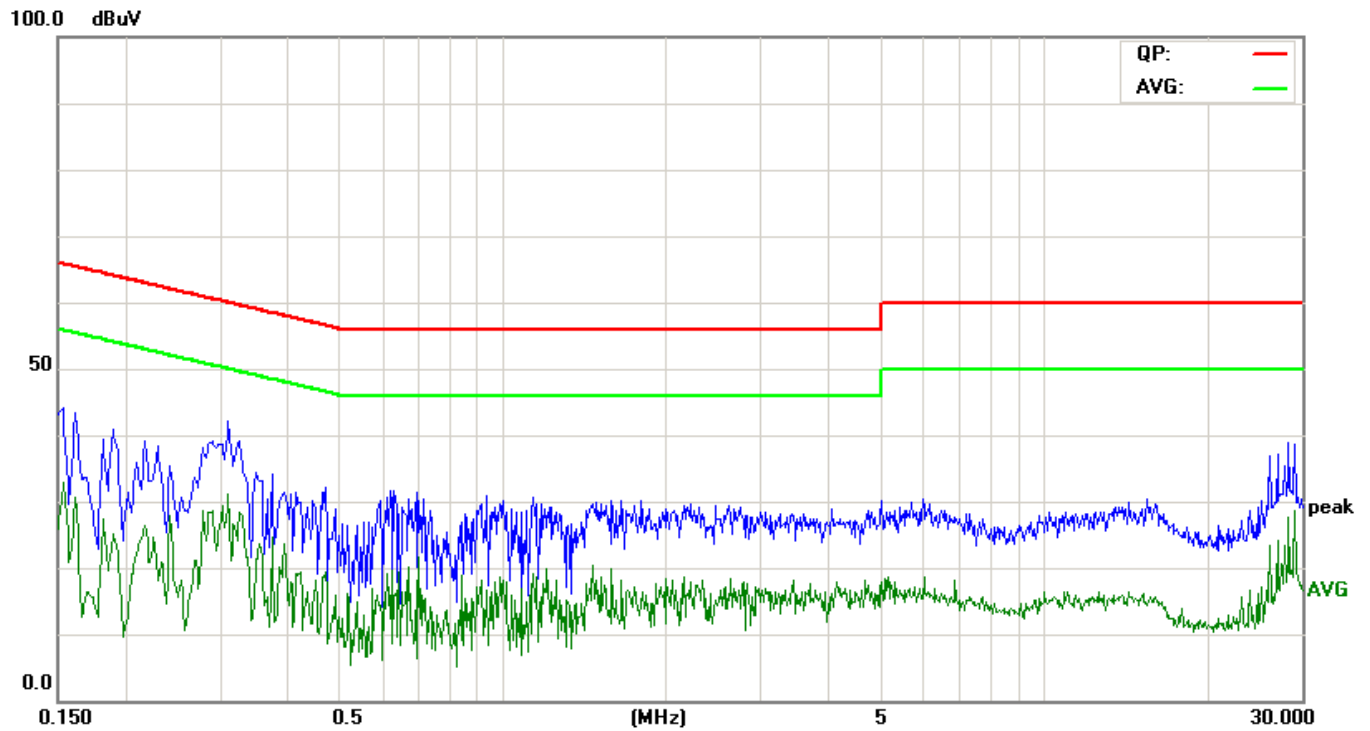

## 5.3 Occupied Bandwidth

### 5.3.1 limit

15.247(a) (2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.3.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as RBW=100kHz,VBW $\geq$ RBW,Sweep time=Auto, Detector Function=Peak
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation

### 5.3.3 Test result


802.11 b

channel	Channel frequency (MHz)	6dB bandwidth (MHz)	Limit (KHz)	Conclusion
Low	2412	9.65	500	Pass
Middle	2437	9.20	500	Pass
Highest	2462	9.20	500	Pass


802.11 g

channel	Channel frequency (MHz)	6dB bandwidth (MHz)	Limit (KHz)	Conclusion
Low	2412	16.40	500	Pass
Middle	2437	16.40	500	Pass
Highest	2462	16.45	500	Pass


Low (802.11 b)

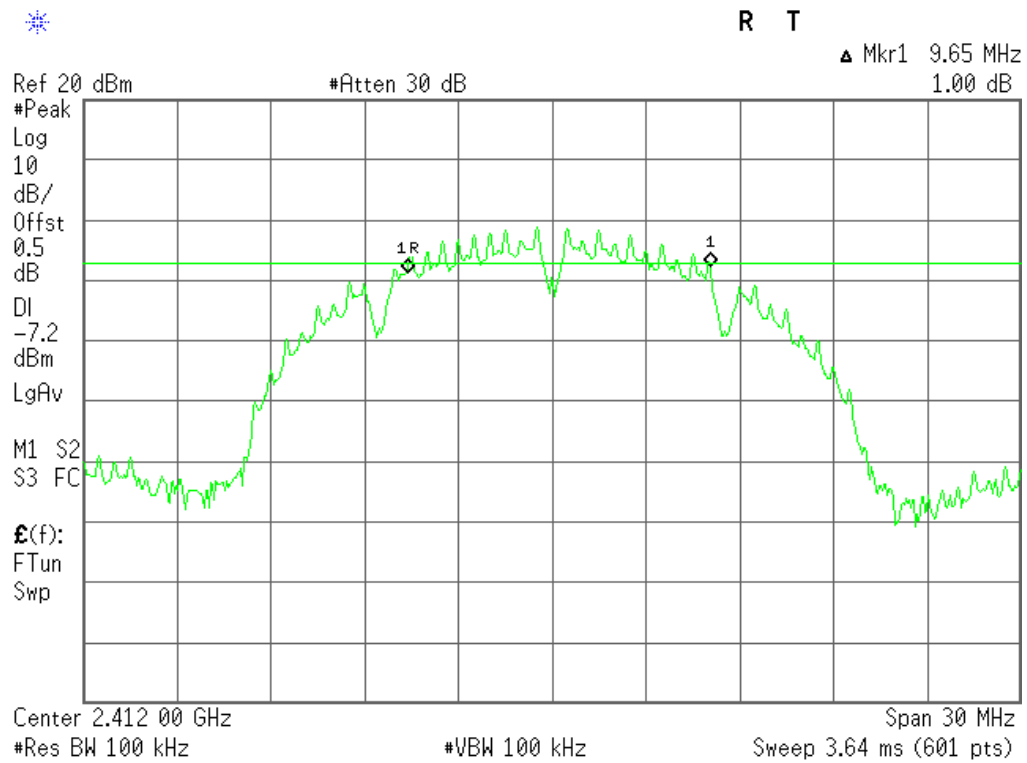


Middle (802.11 b)

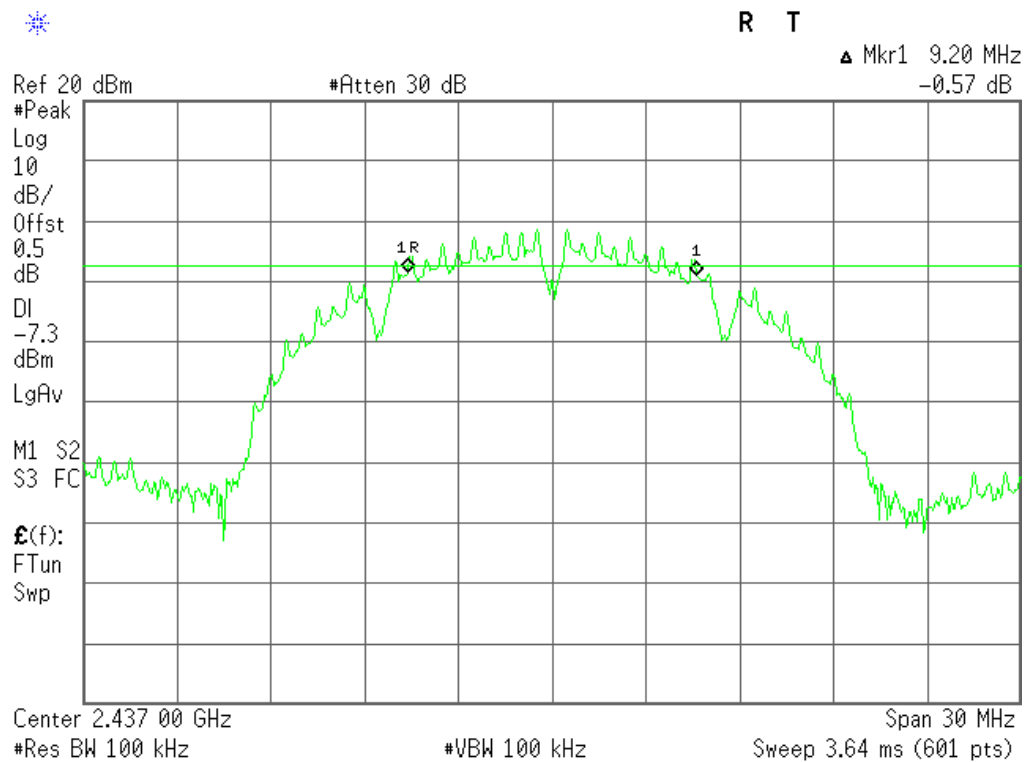


Highest (802.11 b)

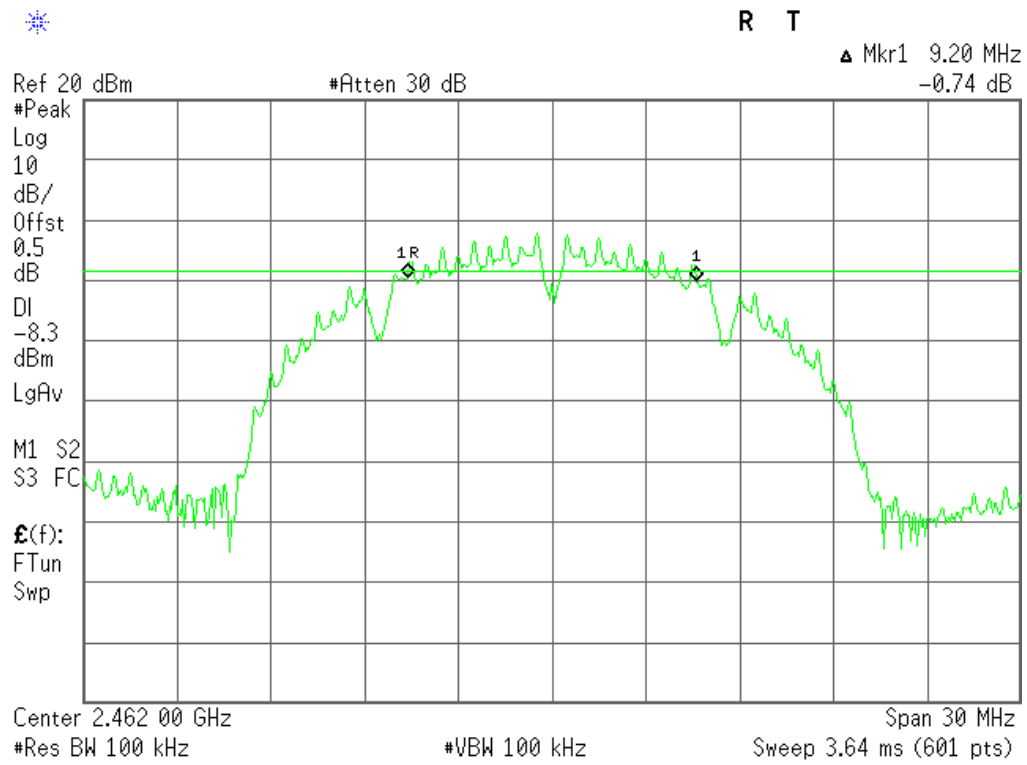

Low (802.11 g)

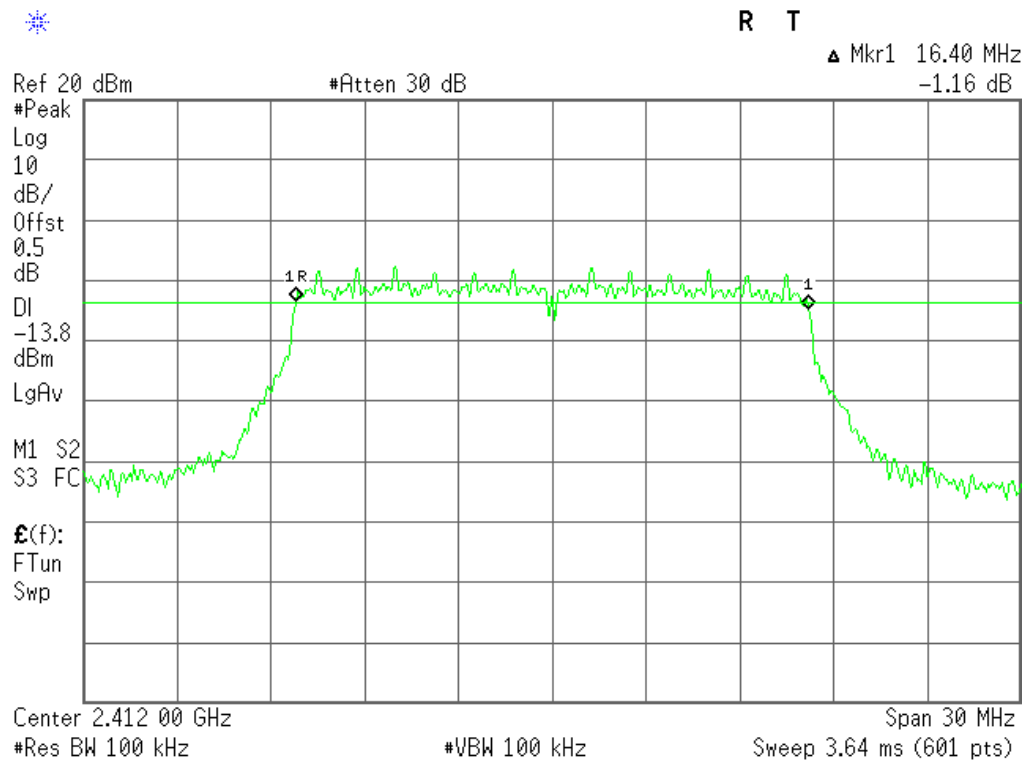


Middle (802.11 g)

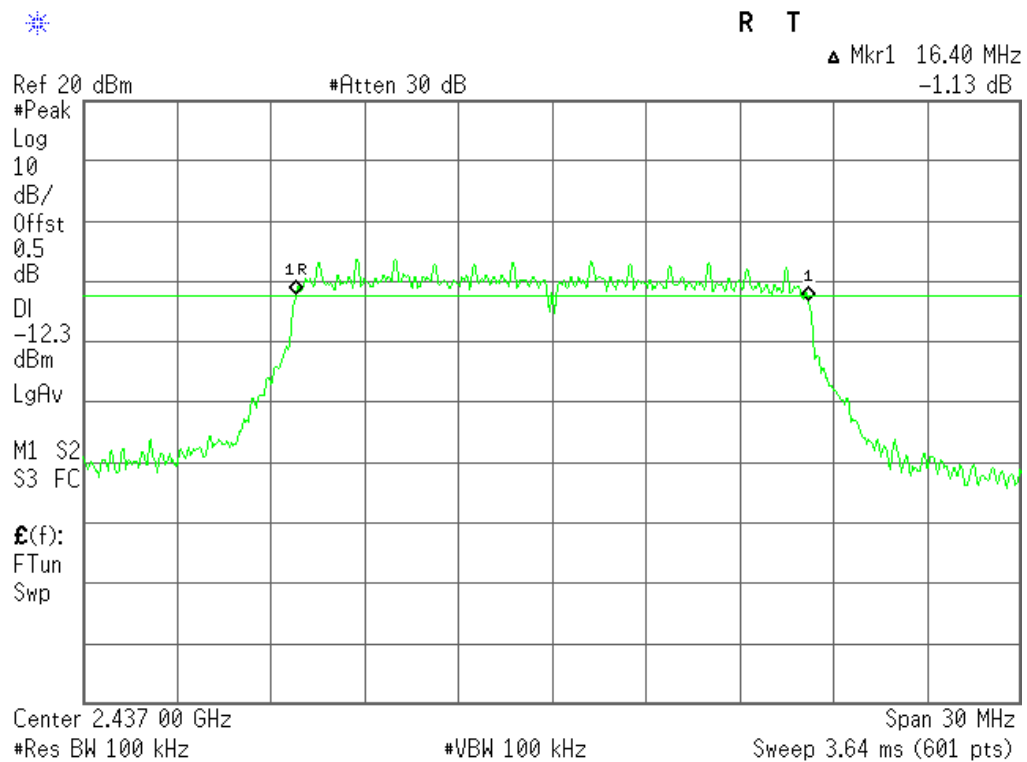



Highest (802.11 g)

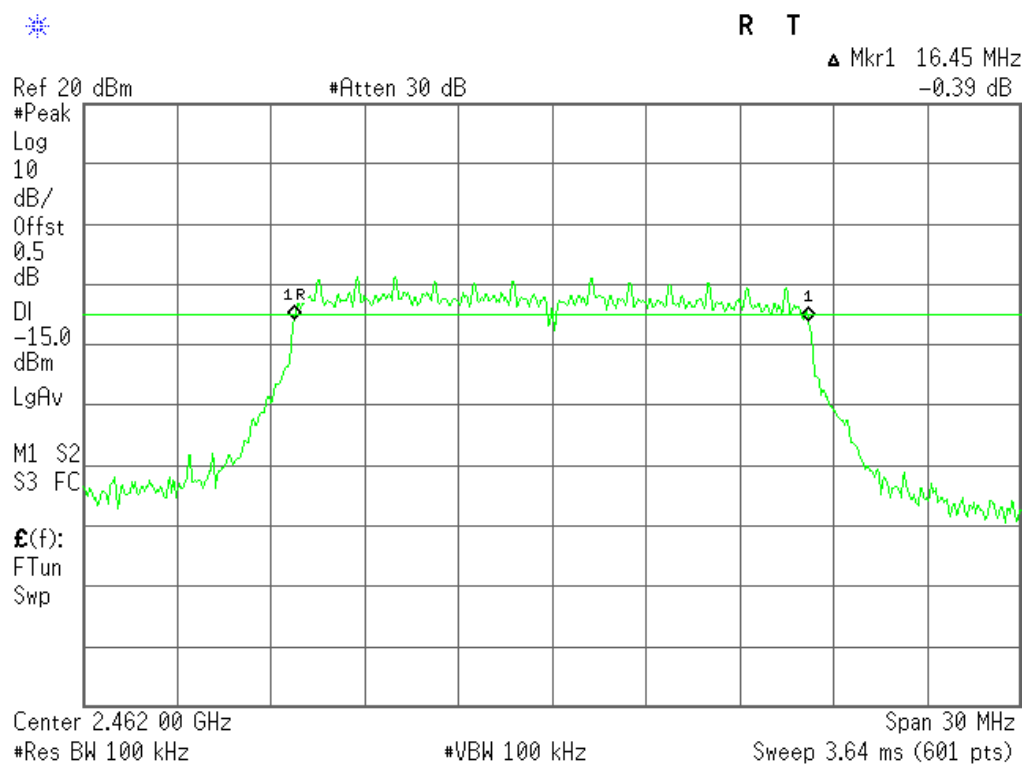

## 5.4 Peak Power Density

### 5.4.1 limit

15.247(a) (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 5.4.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=3kHz,VBW=10kHz,Sweep time=100s, Detector Function=Peak
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-peak function to set the marker to the peak of the emission
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation

### 5.4.3 Test result


802.11 b

channel	Channel frequency (MHz)	Peak power density (dBm)	Limit (dBm)	Conclusion
Low	2412	-10.87	8	Pass
Middle	2437	-11.28	8	Pass
Highest	2462	-12.77	8	Pass


802.11 g

channel	Channel frequency (MHz)	Peak power density (dBm)	Limit (dBm)	Conclusion
Low	2412	-12.35	8	Pass
Middle	2437	-13.33	8	Pass
Highest	2462	-13.31	8	Pass


### Low (802.11 b)

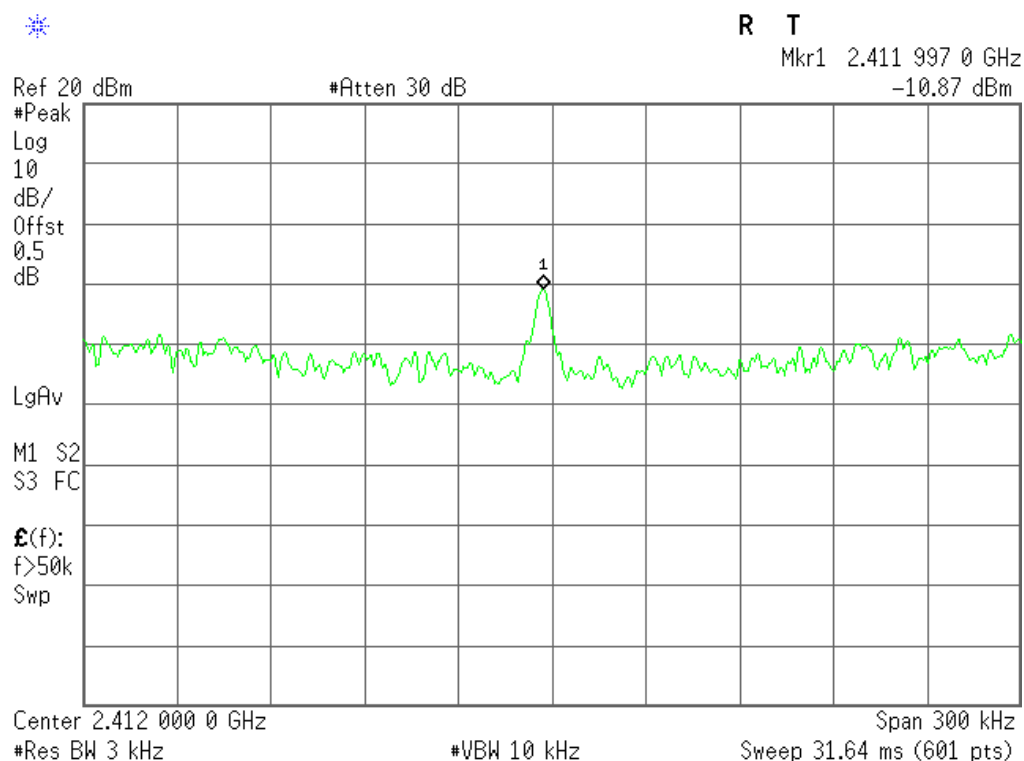


### Middle (802.11 b)

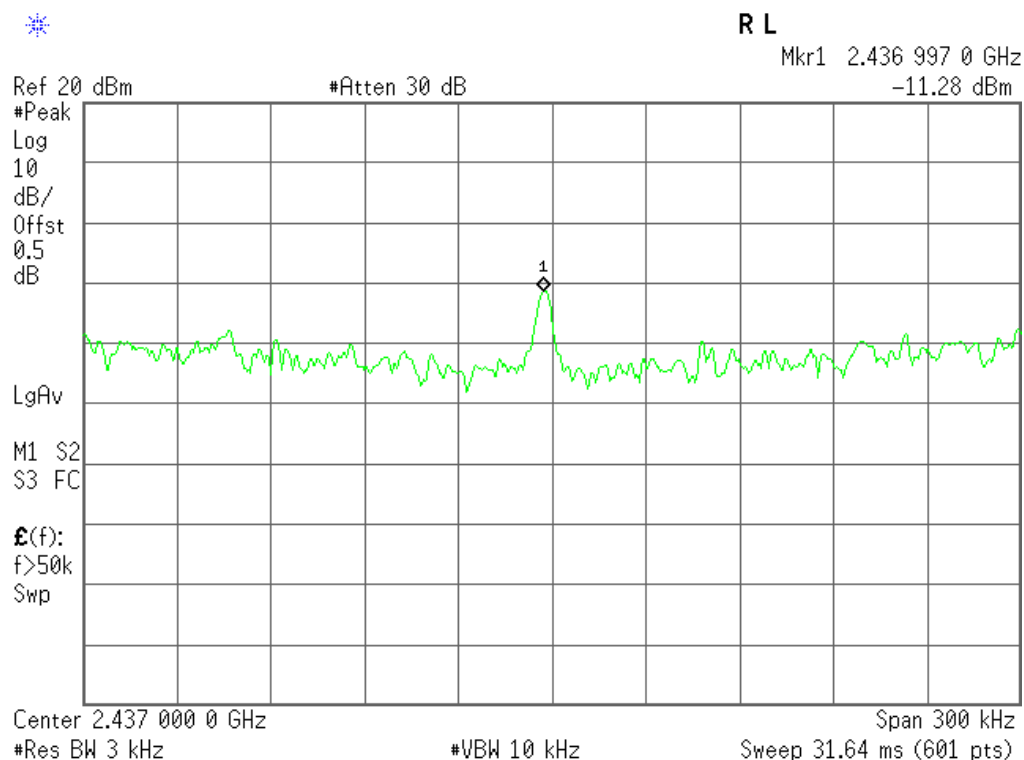


# Highest (802.11 b)

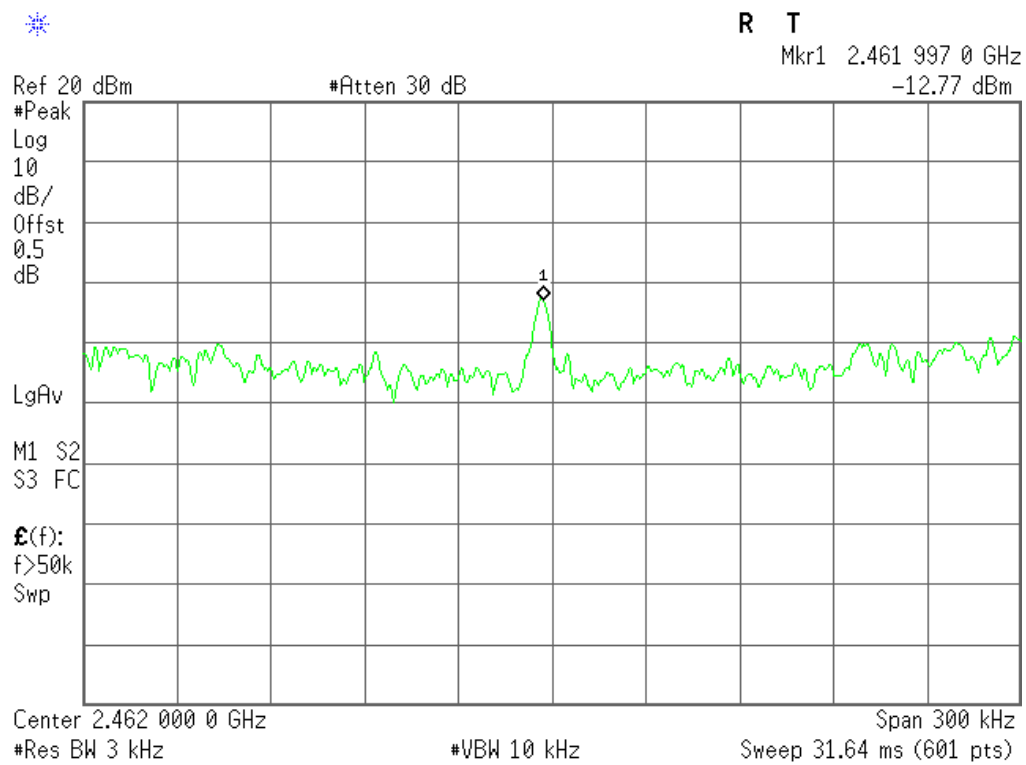


### Low (802.11 g)

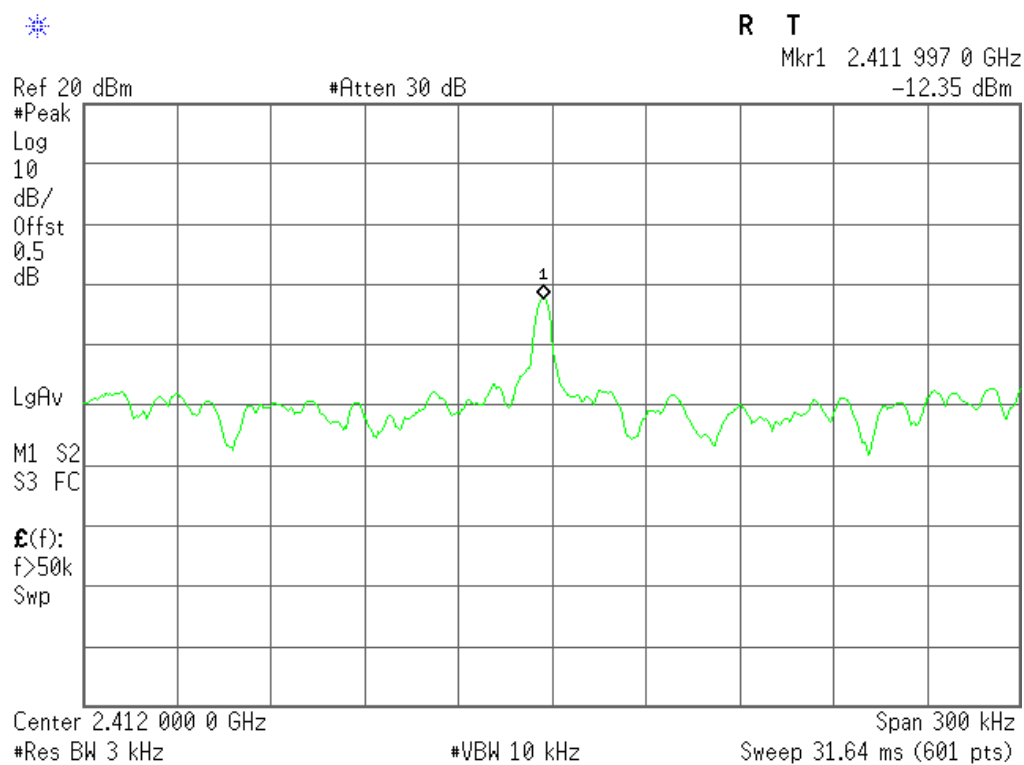

### Middle (802.11 g)

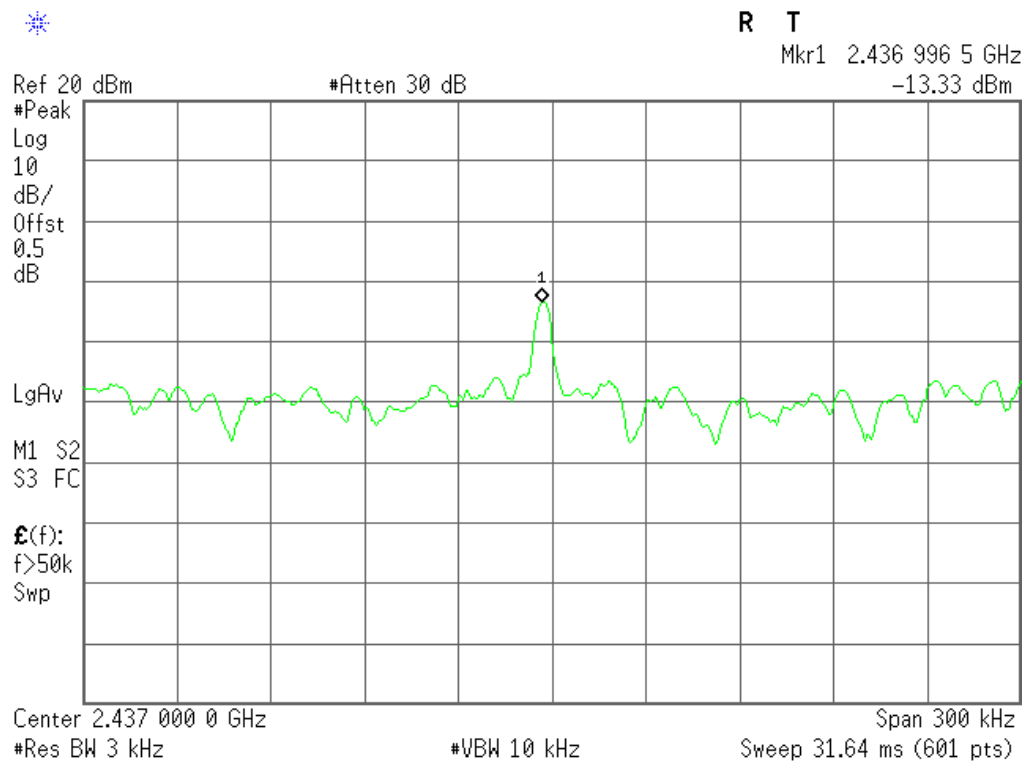

Highest (802.11 g)

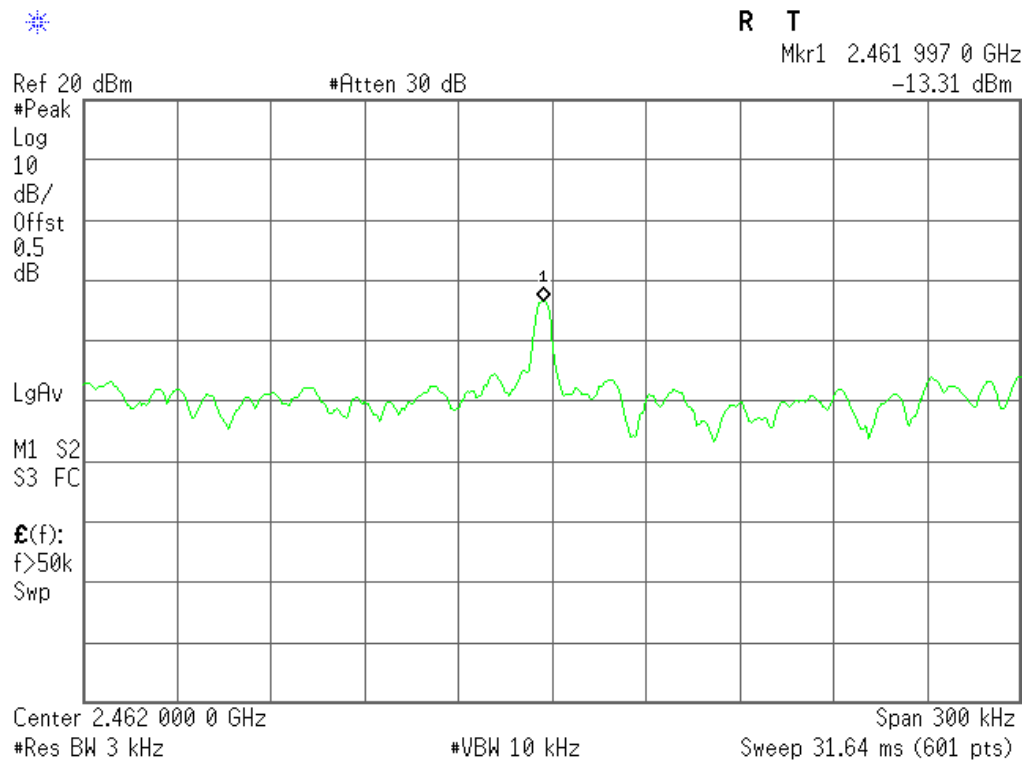

## 5.5 Maximum Peak Output Power

### 5.5.1 limit

15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 5.5.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=1MHz,VBW $\geq$ RBW,Sweep time=Auto, Detector Function=Peak
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use channel function to find Maximum power. The indicated level is the output power
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation

### 5.5.3 Test result


802.11 b

channel	Channel frequency (MHz)	Read Power (dBm)	Limit (dBm)	Conclusion
Low	2412	13.09	30	Pass
Middle	2437	13.01	30	Pass
Highest	2462	12.22	30	Pass

802.11 g

channel	Channel frequency (MHz)	Read Power (dBm)	Limit (dBm)	Conclusion
Low	2412	9.58	30	Pass
Middle	2437	10.32	30	Pass
Highest	2462	10.10	30	Pass

### Low (802.11 b)

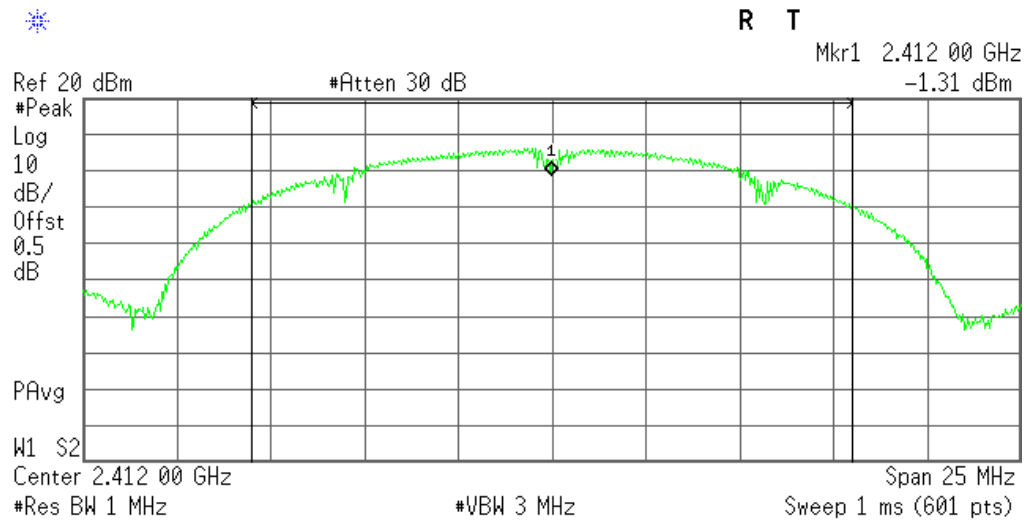


**Channel Power**

13.09 dBm /16.0000 MHz

**Power Spectral Density**

-57.95 dBm/Hz

### Middle (802.11 b)

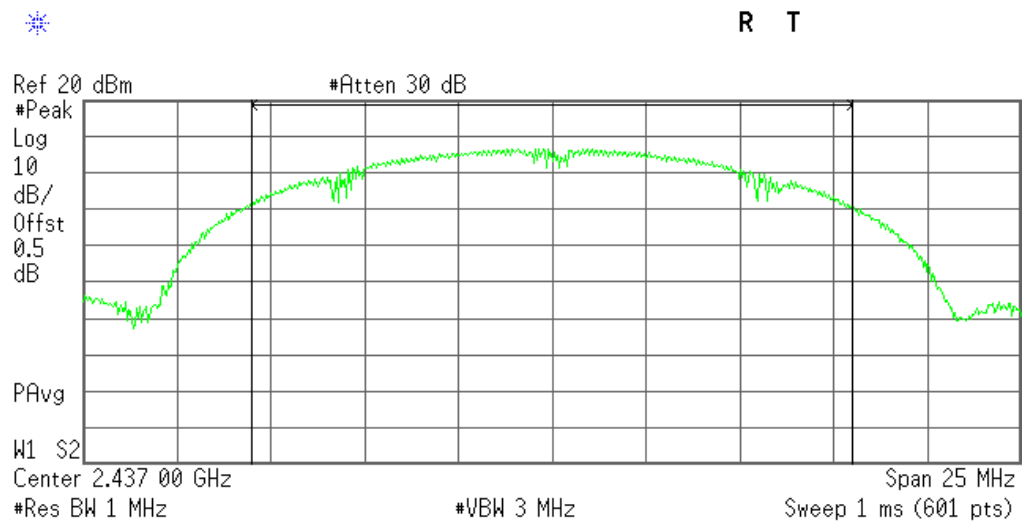

**Channel Power**

13.01 dBm /16.0000 MHz

**Power Spectral Density**


-57.33 dBm/Hz



Highest (802.11 b)



R T

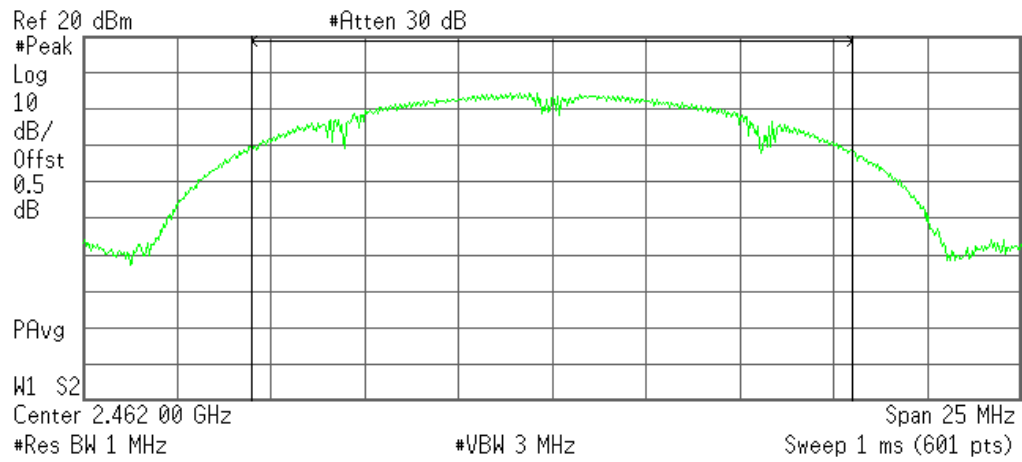


**Channel Power**

12.22 dBm /16.0000 MHz


**Power Spectral Density**

-59.82 dBm/Hz

### Low (802.11 g)

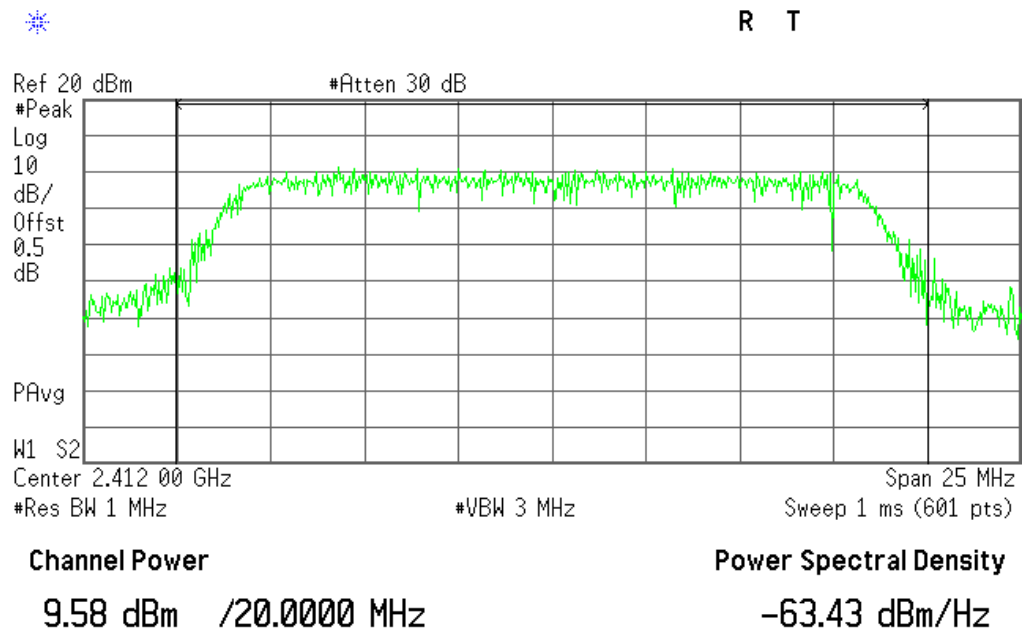


### Middle (802.11 g)

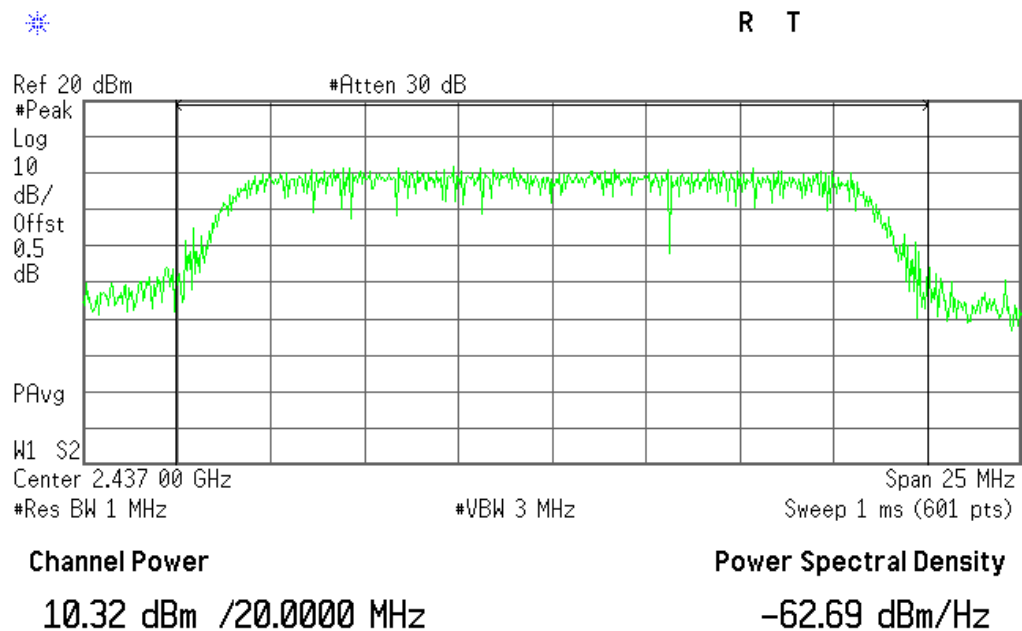

Highest (802.11 g)



R T

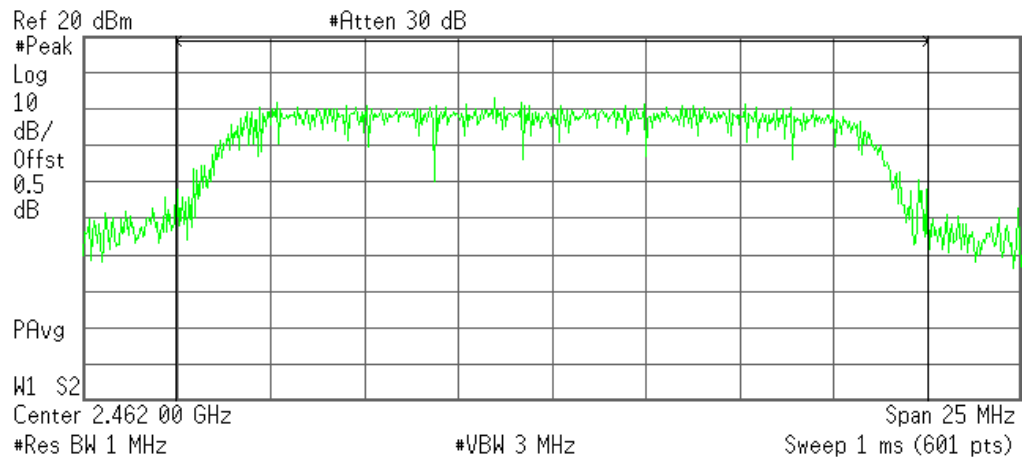

Channel Power

10.10 dBm /20.0000 MHz

Power Spectral Density

-62.91 dBm/Hz

## 5.6 Band edge

### 5.6.1 limit


15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.6.2 Test procedure


- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=100kHz, VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. And then marker the bandedge Level.
- (3) The above procedure shall be repeated at the lowest, and the highest frequency of the stated frequency range with modulated mode.

### 5.6.3 Test result


Low (802.11 b)

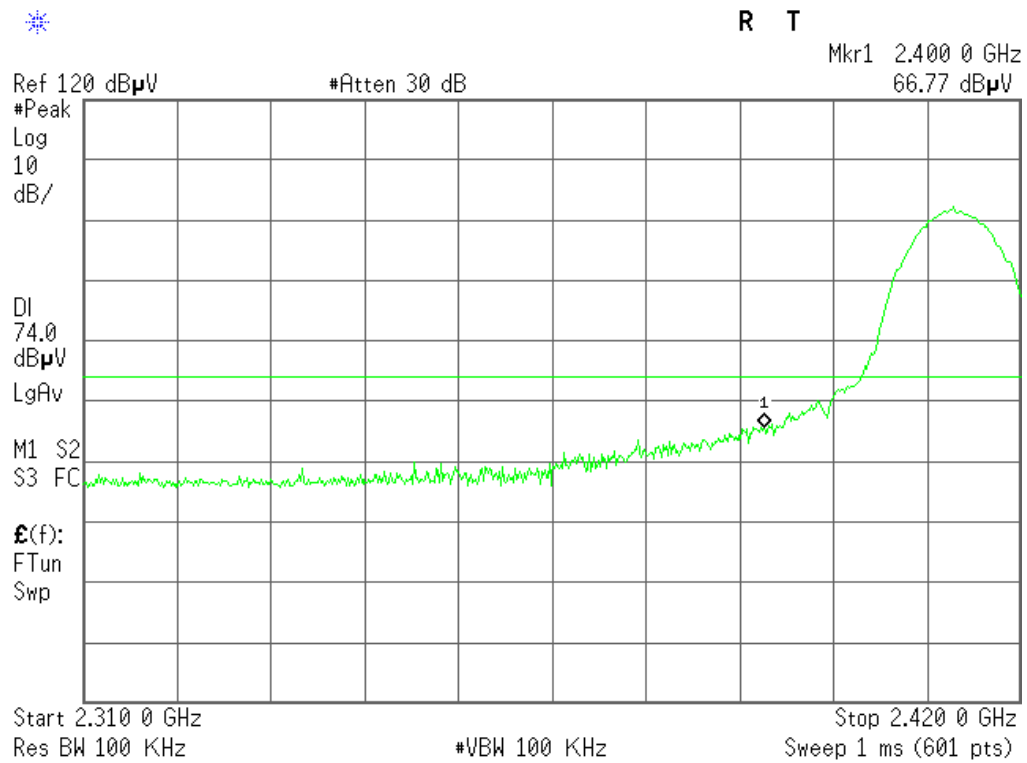


Highest (802.11 b)

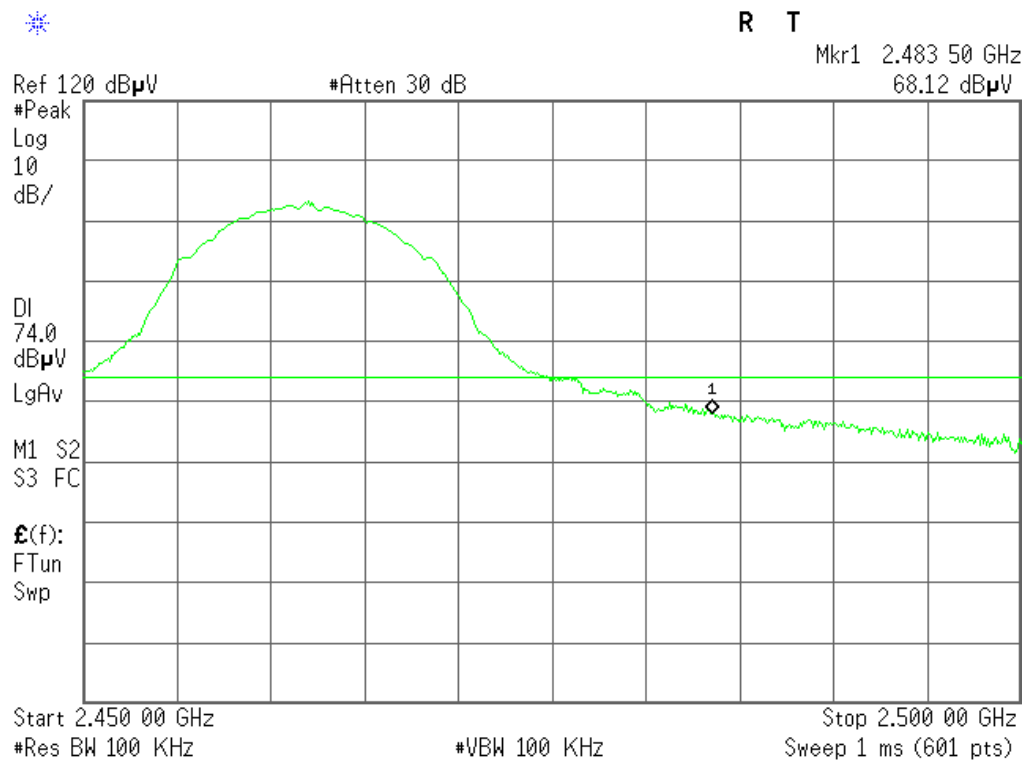

Low (802.11 g)

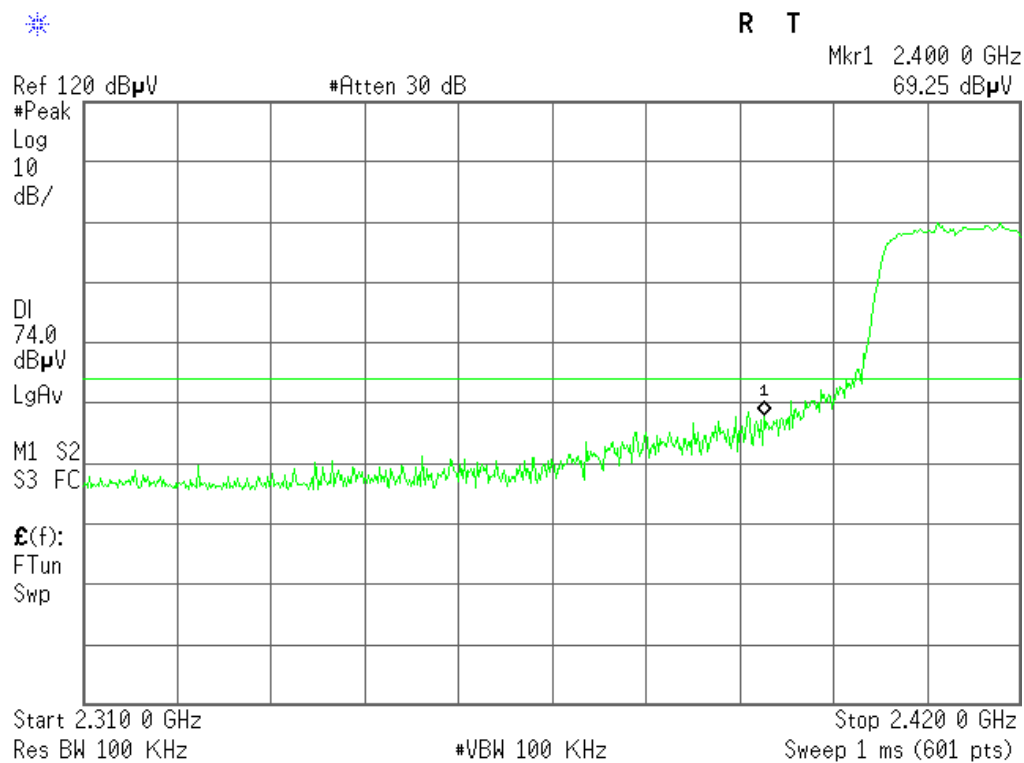

Highest (802.11 g)

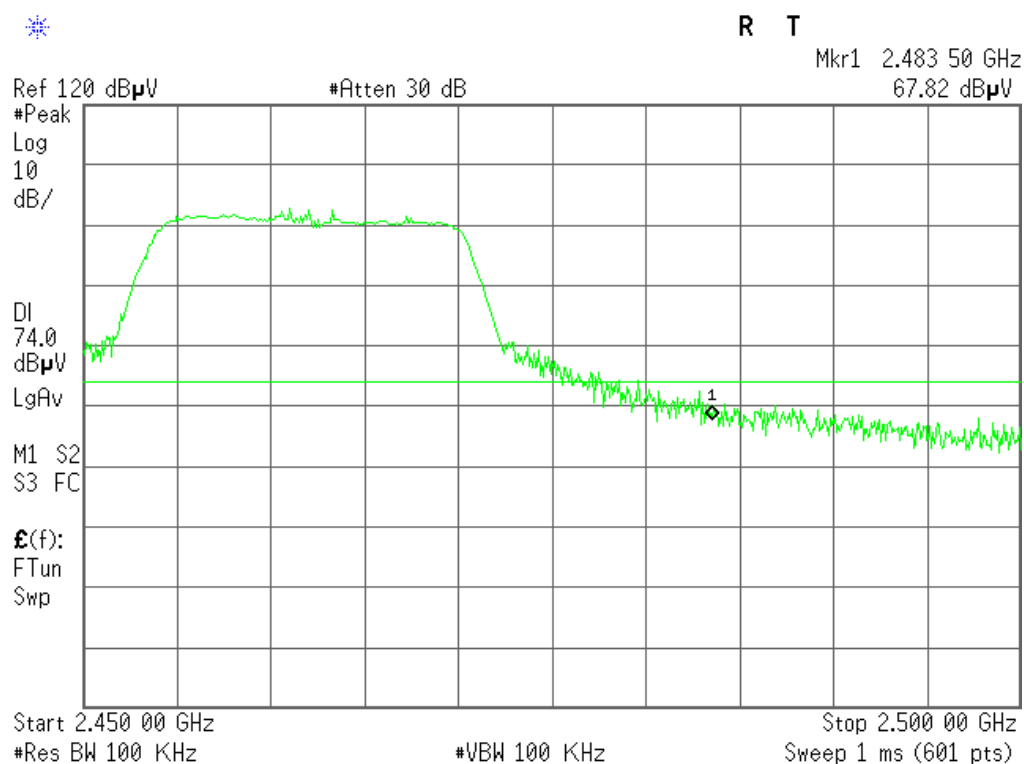

## 5.7 Conducted Spurious Emissions

### 5.7.1 limit



15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.7.2 Test procedure

- (4) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=100kHz,VBW $\geq$ RBW,Sweep time=Auto, Detector Function=Peak
- (5) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. And then marker the bandedge Level.
- (6) The above procedure shall be repeated at the lowest, and the highest frequency of the stated frequency range with modulated mode.



### 5.7.3 Test result

Low (802.11 b)

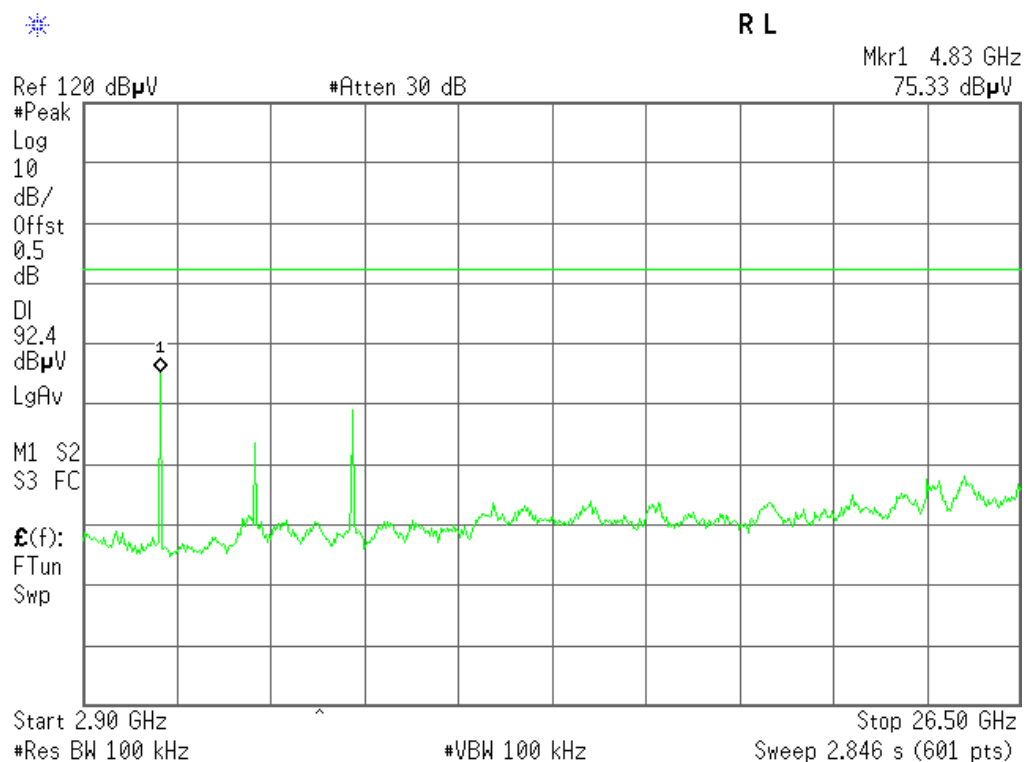
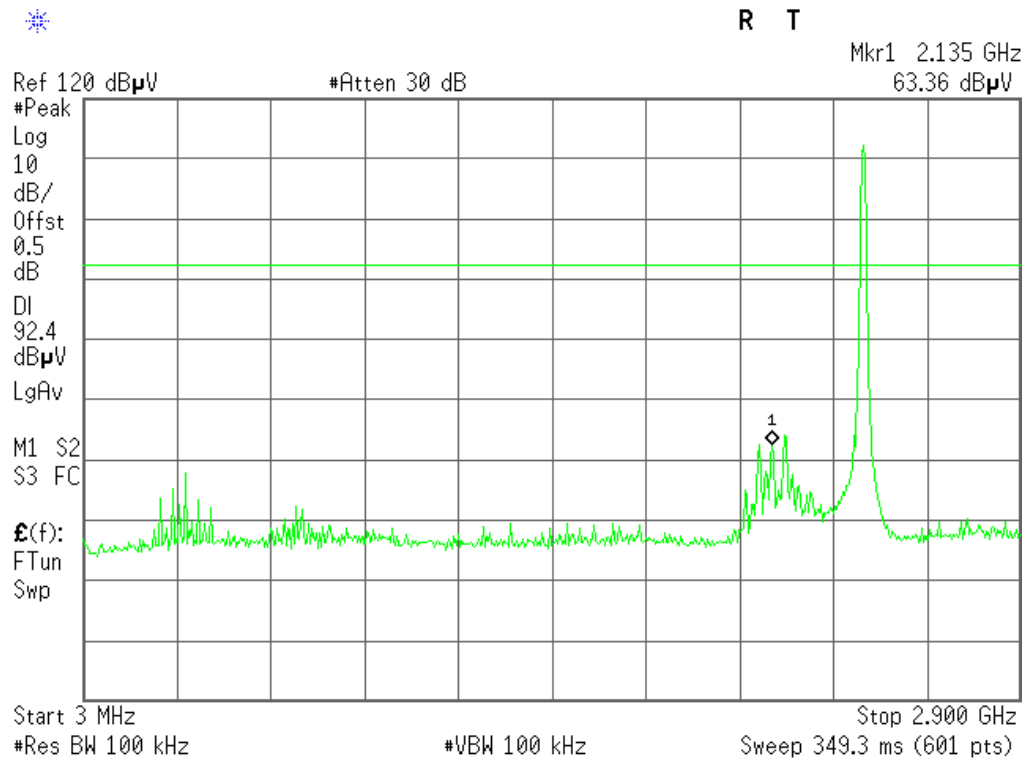






Middle (802.11 b)

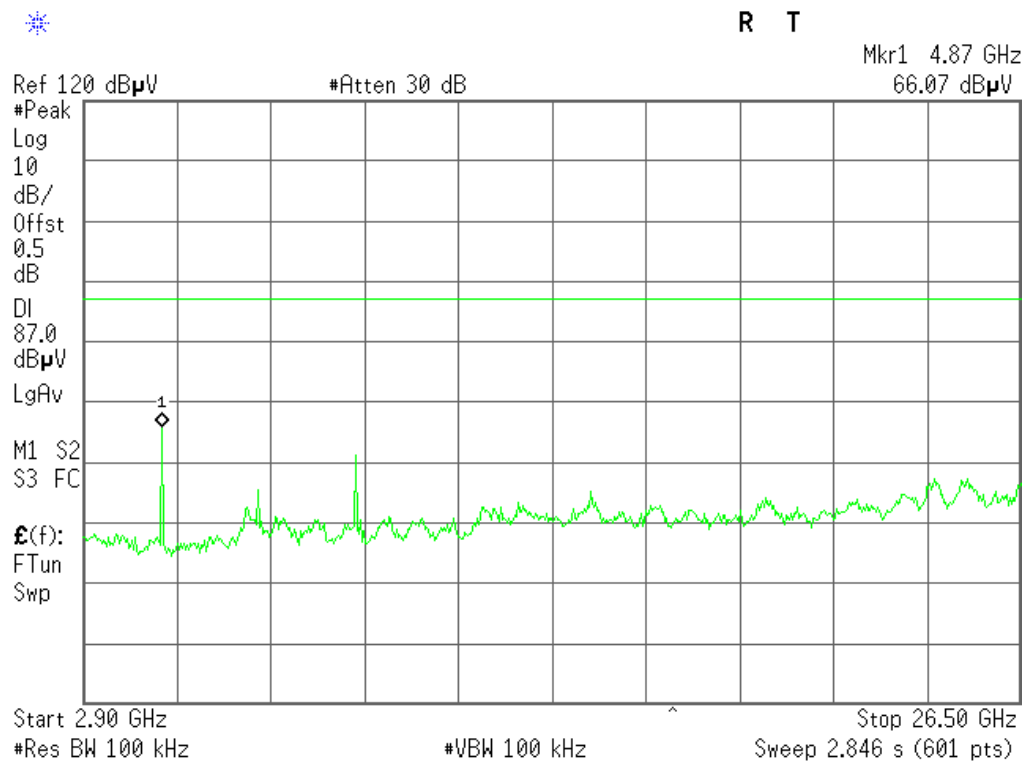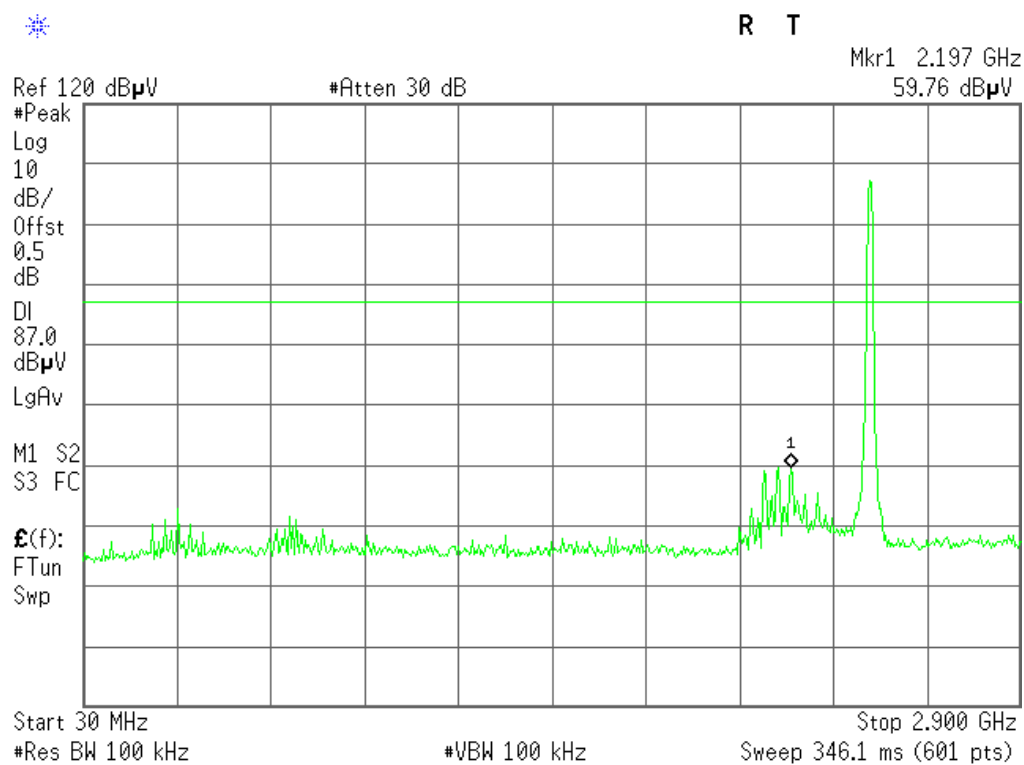



Highest (802.11 b)

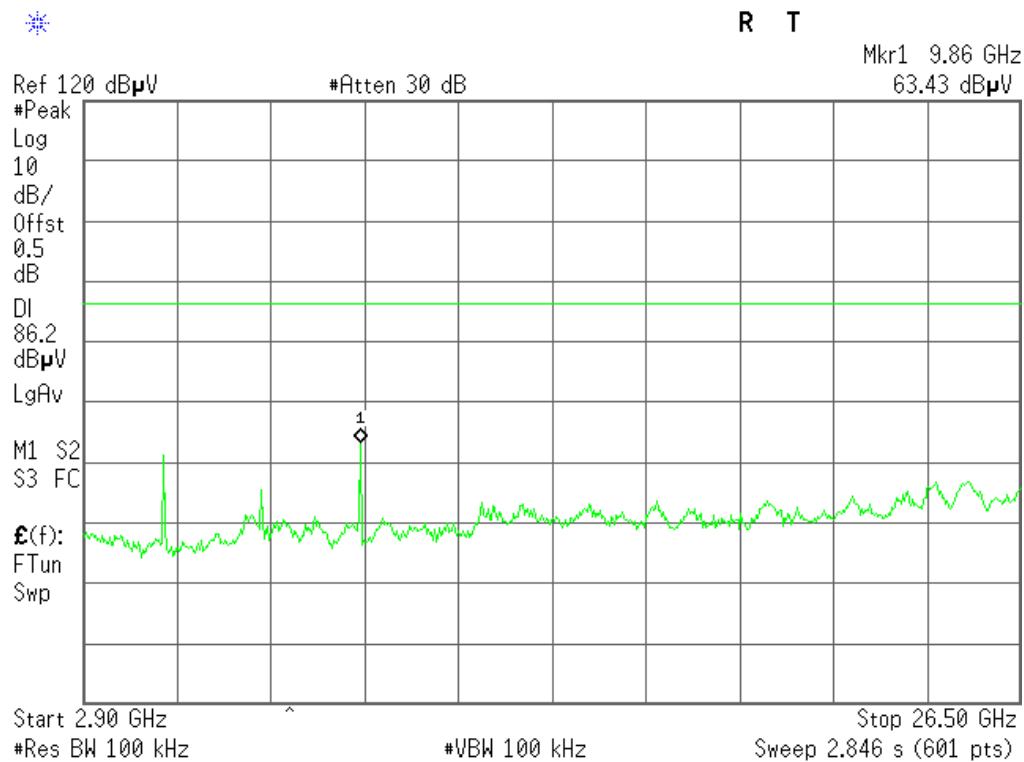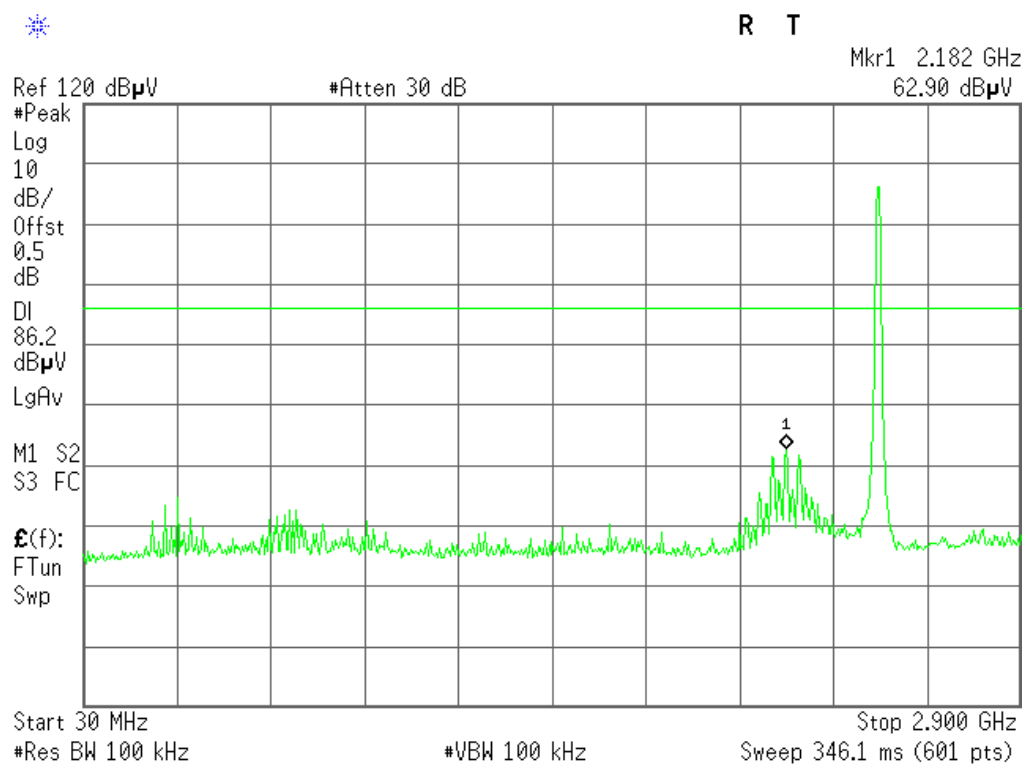



Low (802.11 g)

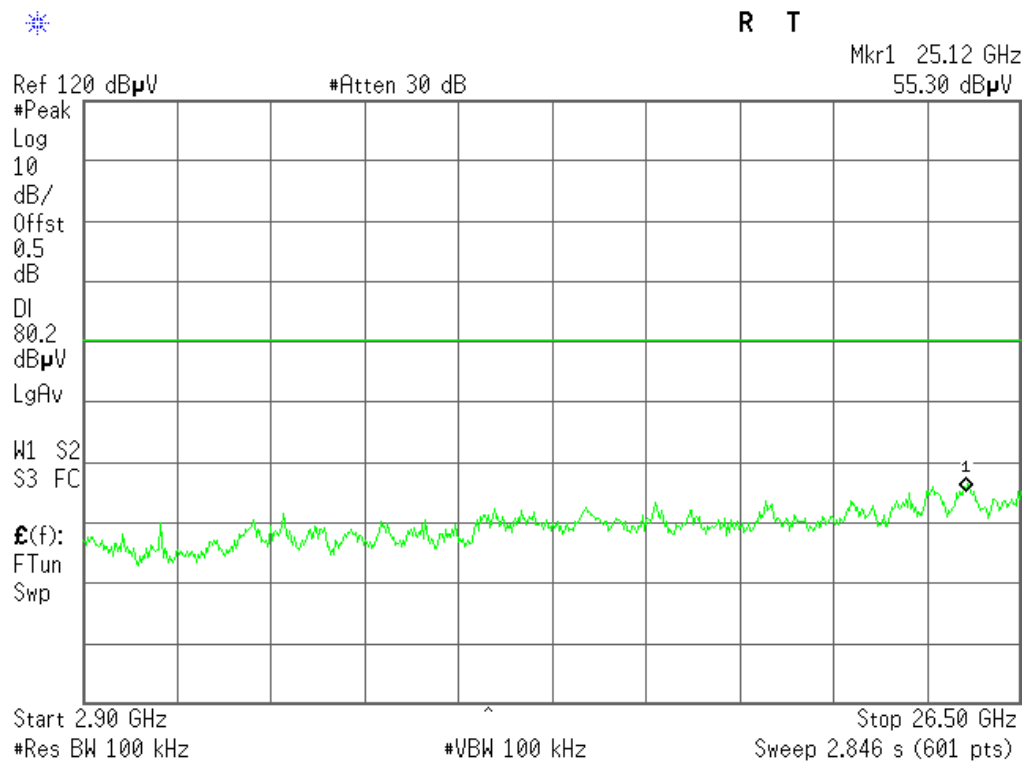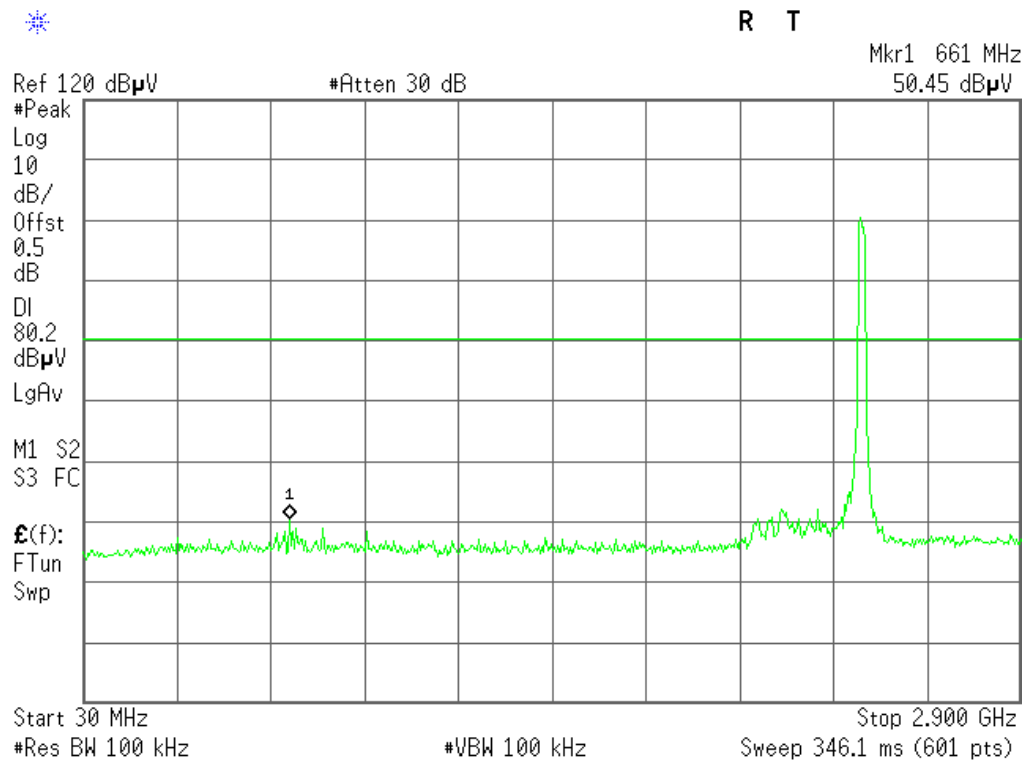

Middle (802.11 g)

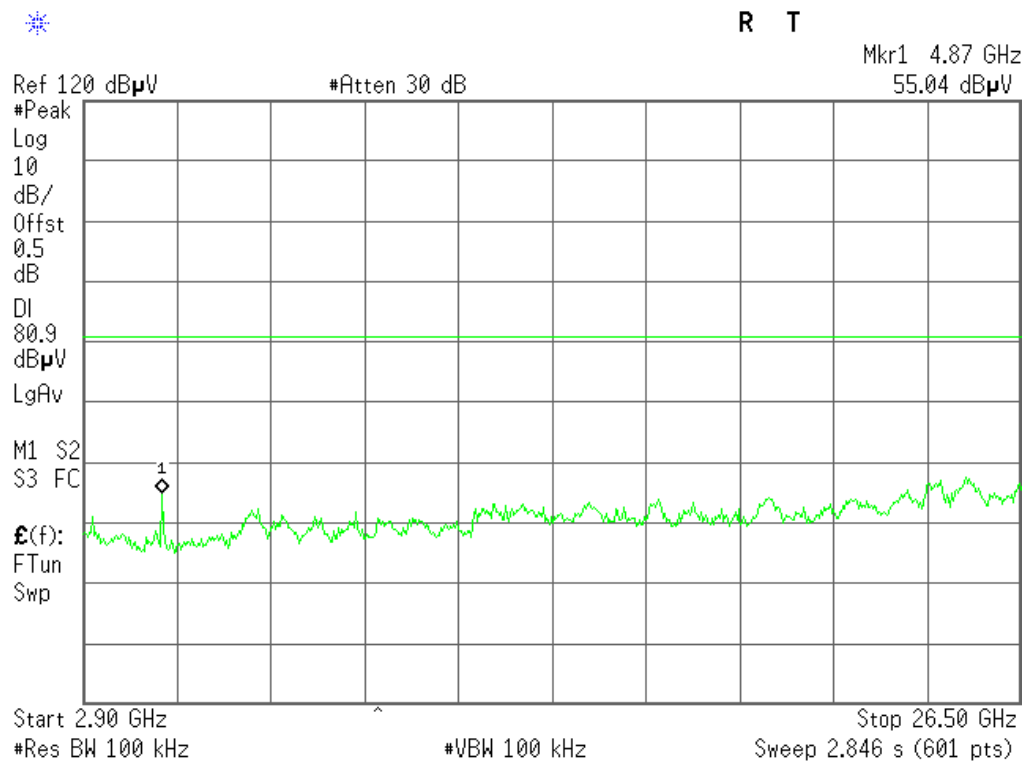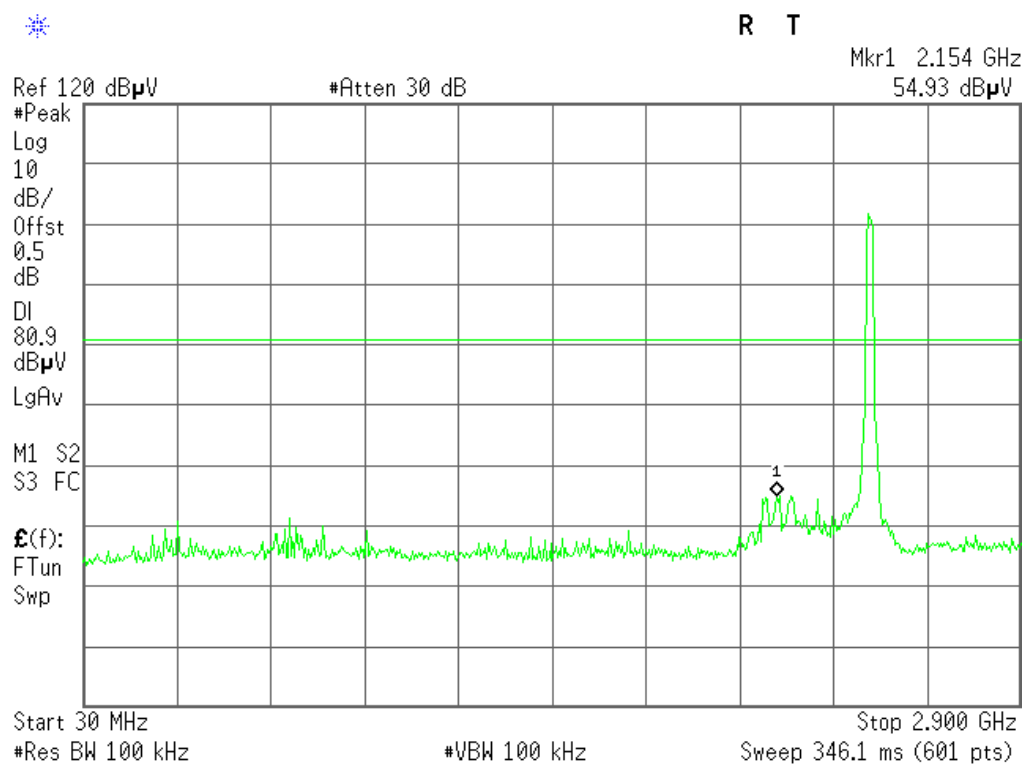

Highest (802.11 g)

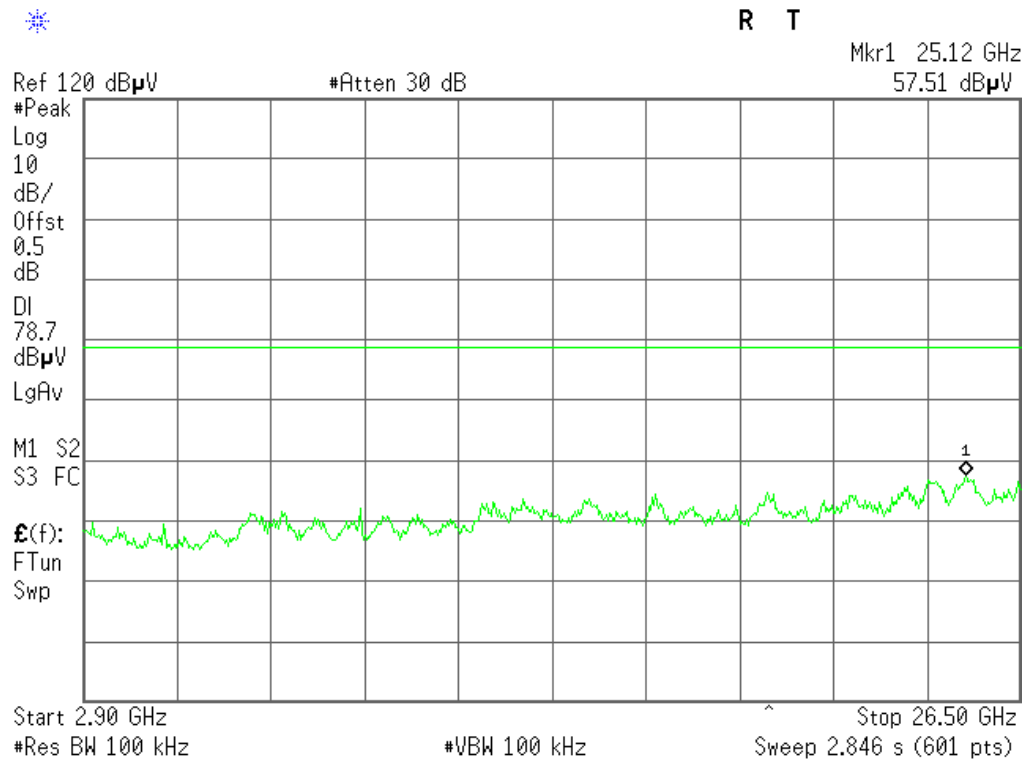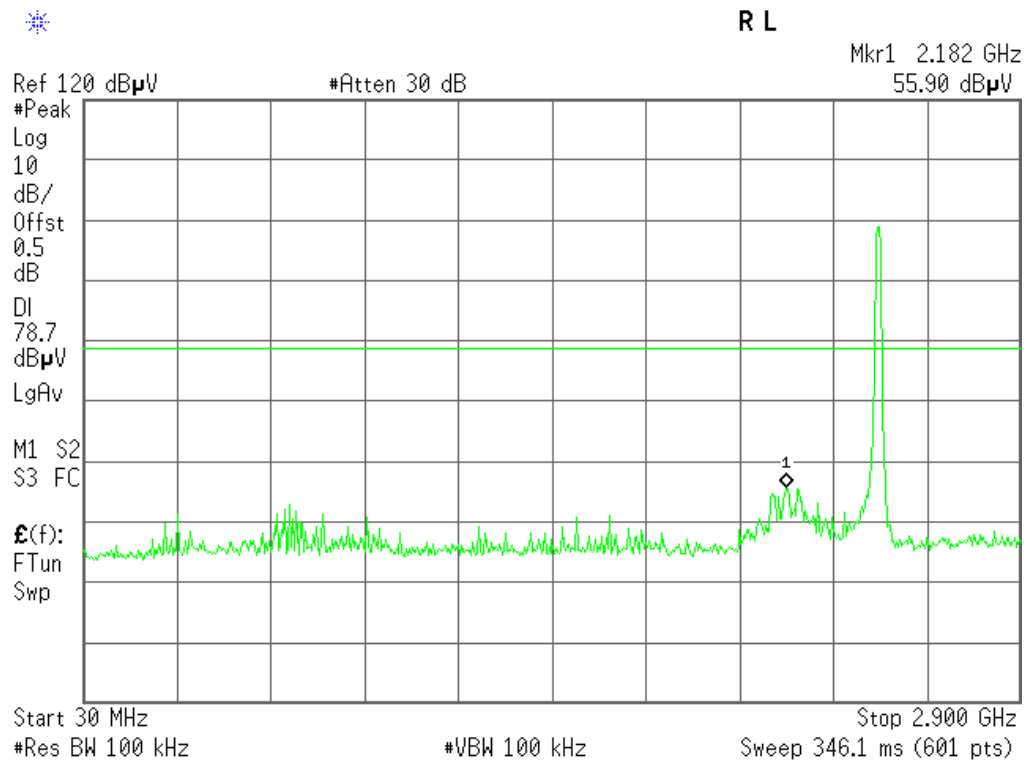

## 5.8 Radiated Emissions Measurement

### 5.8.1 Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))

Frequency of Emission (MHz)	Field Strength		Measurement Distance (meters)
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 5.8.2 Test procedure

EUT was placed upon a wooden test table which was placed on the turn table 0.8m above the horizontal metal ground plane, and operating in the mode as mentioned above. A receiving antenna was placed 3m away from the EUT. During testing, turn around the turn table and move the antenna from 1m to 4m to find the maximum field-strength reading. All peripherals were placed at a distance of 10cm between each other. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 5.8.3 Test Result

Test Data:2011-3-16

Frenqucy Range:9KHz to 1GHz

Measurement Distance: 3 m

Operating Environment: 22.1°C, 50% RH ,102 Kpa

(a) Antenna polarization: Horizontal

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
150.280	16.560	15.045	31.605	-11.895	43.500	QUASIPeAK
232.730	14.760	27.325	42.085	-3.915	46.000	QUASIPeAK
689.600	26.210	15.388	41.598	-4.402	46.000	QUASIPeAK
838.010	28.960	13.760	42.720	-3.280	46.000	QUASIPeAK
741.200	26.730	8.194	34.924	-11.076	46.000	QUASIPeAK
890.390	29.500	10.570	40.070	-5.930	46.000	QUASIPeAK
<b>899.120</b>	<b>29.710</b>	<b>12.479</b>	<b>42.189</b>	<b>-3.811</b>	<b>46.000</b>	<b>QUASIPeAK</b>

(b) Antenna polarization: vertical

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
180.350	15.390	20.127	35.517	-7.983	43.500	QUASIPeAK
232.730	14.760	22.497	37.257	-8.743	46.000	QUASIPeAK
643.040	25.190	11.471	36.661	-9.339	46.000	QUASIPeAK
689.600	26.210	12.002	38.212	-7.788	46.000	QUASIPeAK
741.200	26.730	5.285	32.015	-13.985	46.000	QUASIPeAK
840.920	28.980	13.725	42.705	-3.295	46.000	QUASIPeAK
<b>900.090</b>	<b>29.730</b>	<b>12.901</b>	<b>42.631</b>	<b>-3.369</b>	<b>46.000</b>	<b>QUASIPeAK</b>

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

Test Data: 2011-3-16

Frequency Range: 1GHz to 25GHz

Measurement Distance: 3 m

Operating Environment: 20.5°C, 51% RH, 102 Kpa

(a) Antenna polarization: Horizontal

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.15	4.24	48.10	52.34	-21.66	74.00	PEAK
2288.15	4.24	37.09	41.33	-12.67	54.00	AVERAGE
2390.10	4.92	47.13	52.05	-21.95	74.00	PEAK
2390.10	4.92	39.17	44.09	-9.91	54.00	AVERAGE
2400.00	5.12	58.55	63.67	-7.33	74	PEAK
<b>*2400.00</b>	<b>5.12</b>	<b>45.62</b>	<b>50.74</b>	<b>-3.26</b>	<b>54</b>	<b>AVERAGE</b>
4823.33	11.01	45.76	56.77	-17.23	74.00	PEAK
4823.33	11.01	32.23	43.24	-10.76	54.00	AVERAGE
7236.56	18.44	35.80	54.24	-19.76	74.00	PEAK
7236.56	18.44	22.54	40.98	-13.02	54.00	AVERAGE

(b) Antenna polarization: vertical

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.13	4.24	48.98	53.22	-20.78	74.00	PEAK
2288.13	4.24	36.97	41.21	-12.79	54.00	AVERAGE
2390.10	4.92	47.33	52.25	-21.75	74.00	PEAK
2390.10	4.92	36.41	41.33	-12.67	54.00	AVERAGE
2400.00	5.12	55.00	60.12	-13.88	74	PEAK
<b>*2400.00</b>	<b>5.12</b>	<b>43.10</b>	<b>48.32</b>	<b>-5.68</b>	<b>54</b>	<b>AVERAGE</b>
4825.00	11.01	46.83	57.84	-16.16	74.00	PEAK
<b>*4825.00</b>	<b>11.01</b>	<b>34.31</b>	<b>45.32</b>	<b>-8.68</b>	<b>54.00</b>	<b>AVERAGE</b>
7233.45	18.42	37.20	55.62	-18.38	74.00	PEAK
7233.45	18.42	23.38	41.80	-12.20	54.00	AVERAGE

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

Low Channel:2412 MHz (802.11 b)



## (a) Antenna polarization: Horizontal

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBUV)	Measure Level (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector Type
2288.17	4.24	46.65	50.89	-23.11	74.00	PEAK
2288.17	4.24	36.78	41.02	-12.98	54.00	AVERAGE
4875.00	11.08	46.68	57.76	-16.24	74.00	PEAK
<b>*4875.00</b>	<b>11.08</b>	<b>33.24</b>	<b>44.32</b>	<b>-9.68</b>	<b>54.00</b>	<b>AVERAGE</b>
7311.34	18.22	34.67	52.89	-21.11	74.00	PEAK
7311.34	18.22	21.52	39.74	-14.26	54.00	AVERAGE

## (b) Antenna polarization: vertical

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBUV)	Measure Level (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector Type
2288.22	4.24	47.94	52.18	-21.82	74.00	PEAK
2288.22	4.24	37.05	41.29	-12.71	54.00	AVERAGE
4874.67	11.08	47.08	58.16	-15.84	74.00	PEAK
<b>*4874.67</b>	<b>11.08</b>	<b>35.27</b>	<b>46.35</b>	<b>-7.65</b>	<b>54.00</b>	<b>AVERAGE</b>
7312.45	18.22	36.06	54.28	-19.72	74.00	PEAK
7312.45	18.22	23.88	42.10	-11.90	54.00	AVERAGE

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

Middle Channel :2437 MHz (802.11 b)

## (a) Antenna polarization: Horizontal

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.17	4.24	45.65	49.89	-24.11	74.00	PEAK
2288.17	4.24	35.75	39.99	-14.01	54.00	AVERAGE
2483.50	4.92	45.60	50.52	-23.48	74.00	PEAK
2483.50	4.92	35.92	40.84	-13.16	54.00	AVERAGE
4925.00	11.15	45.28	56.43	-17.57	74.00	PEAK
<b>*4925.00</b>	<b>11.15</b>	<b>32.12</b>	<b>43.27</b>	<b>-10.73</b>	<b>54.00</b>	<b>AVERAGE</b>
7389.97	17.99	33.21	51.20	-22.80	74.00	PEAK
7389.97	17.99	20.76	38.75	-15.25	54.00	AVERAGE

## (b) Antenna polarization: vertical

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.35	4.24	47.67	51.91	-22.09	74.00	PEAK
2288.35	4.24	36.03	40.27	-13.73	54.00	AVERAGE
2483.50	4.92	44.65	49.57	-24.43	74.00	PEAK
2483.50	4.92	34.85	39.77	-14.23	54.00	AVERAGE
4924.67	11.15	46.78	57.93	-16.07	74.00	PEAK
<b>*4924.67</b>	<b>11.15</b>	<b>33.93</b>	<b>45.08</b>	<b>-8.92</b>	<b>54.00</b>	<b>AVERAGE</b>
7388.66	17.99	35.77	53.76	-20.24	74.00	PEAK
7388.66	17.99	23.29	41.28	-12.72	54.00	AVERAGE

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

High Channel :2462 MHz (802.11 b)

Test Data: 2011-3-16

Frequency Range: 1GHz to 25GHz

Measurement Distance: 3 m

Operating Environment: 21°C, 53% RH, 102 Kpa

(a) Antenna polarization: Horizontal

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.16	4.24	48.47	52.71	-21.29	74.00	PEAK
2288.16	4.24	35.03	39.27	-14.73	54.00	AVERAGE
<b>*2390.10</b>	<b>4.92</b>	<b>65.68</b>	<b>70.60</b>	<b>-3.40</b>	<b>74.00</b>	<b>PEAK</b>
2390.10	4.92	44.23	49.15	-4.85	54.00	AVERAGE
2400.00	5.12	56.57	61.69	-12.31	74	PEAK
2400.00	5.12	43.72	48.84	-5.16	54	AVERAGE
4825.00	11.01	45.73	56.74	-17.26	74.00	PEAK
4825.00	11.01	30.24	41.25	-12.75	54.00	AVERAGE
7235.43	18.43	35.69	54.12	-19.88	74.00	PEAK
7235.43	18.43	21.02	39.45	-14.55	54.00	AVERAGE

(b) Antenna polarization: vertical

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.32	4.24	48.47	52.71	-21.29	74.00	PEAK
2288.32	4.24	36.87	41.11	-12.89	54.00	AVERAGE
2390.10	4.92	59.05	63.97	-10.03	74.00	PEAK
<b>*2390.10</b>	<b>4.92</b>	<b>40.80</b>	<b>45.72</b>	<b>-8.28</b>	<b>54.00</b>	<b>AVERAGE</b>
2400.00	5.12	54.55	59.67	-14.33	74	PEAK
<b>*2400.00</b>	<b>5.12</b>	<b>41.85</b>	<b>46.97</b>	<b>-7.03</b>	<b>54</b>	<b>AVERAGE</b>
4824.33	11.01	45.73	56.74	-17.26	74.00	PEAK
4824.33	11.01	32.25	43.26	-10.74	54.00	AVERAGE
7234.56	18.42	35.69	54.11	-19.89	74.00	PEAK
7234.56	18.42	22.31	40.73	-13.27	54.00	AVERAGE

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

Low Channel:2412 MHz (802.11 g)

## (a) Antenna polarization: Horizontal

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.23	4.24	45.98	50.22	-23.78	74.00	PEAK
2288.23	4.24	35.54	39.78	-14.22	54.00	AVERAGE
4875.00	11.08	44.71	55.79	-18.21	74.00	PEAK
<b>*4875.00</b>	<b>11.08</b>	<b>32.73</b>	<b>43.81</b>	<b>-10.19</b>	<b>54.00</b>	<b>AVERAGE</b>
7315.42	18.22	34.53	52.75	-21.25	74.00	PEAK
7315.42	18.22	21.50	39.72	-14.28	54.00	AVERAGE

## (b) Antenna polarization: vertical

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.17	4.24	47.58	51.82	-22.18	74.00	PEAK
2288.17	4.24	35.91	40.15	-13.85	54.00	AVERAGE
4873.67	11.08	45.85	56.93	-17.07	74.00	PEAK
<b>*4873.67</b>	<b>11.08</b>	<b>33.04</b>	<b>44.12</b>	<b>-9.88</b>	<b>54.00</b>	<b>AVERAGE</b>
7312.56	18.22	35.05	53.27	-20.73	74.00	PEAK
7312.56	18.22	21.93	40.15	-13.85	54.00	AVERAGE

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

Middle Channel :2437 MHz (802.11 g)

## (a) Antenna polarization: Horizontal

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.21	4.24	45.58	49.82	-24.18	74.00	PEAK
2288.21	4.24	33.61	37.85	-16.15	54.00	AVERAGE
2483.50	4.92	58.99	63.91	-10.09	74.00	PEAK
<b>*2483.50</b>	<b>4.92</b>	<b>39.68</b>	<b>44.60</b>	<b>-9.40</b>	<b>54.00</b>	<b>AVERAGE</b>
4924.53	11.15	43.71	54.86	-19.14	74.00	PEAK
4924.53	11.15	30.19	41.34	-12.66	54.00	AVERAGE
7383.45	18.01	35.70	53.71	-20.29	74.00	PEAK
7383.45	18.01	21.94	39.95	-14.05	54.00	AVERAGE

## (b) Antenna polarization: vertical

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
2288.12	4.24	47.74	51.98	-22.02	74.00	PEAK
2288.12	4.24	36.05	40.29	-13.71	54.00	AVERAGE
2483.50	4.92	54.33	59.25	-14.75	74.00	PEAK
<b>*2483.50</b>	<b>4.92</b>	<b>36.88</b>	<b>41.80</b>	<b>-12.20</b>	<b>54.00</b>	<b>AVERAGE</b>
4925.00	11.15	44.63	55.78	-18.22	74.00	PEAK
4925.00	11.15	30.64	41.79	-12.21	54.00	AVERAGE
7385.00	18.01	36.98	54.99	-19.01	74.00	PEAK
7385.00	18.01	22.86	40.87	-13.13	54.00	AVERAGE

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss

High Channel :2462 MHz (802.11 g)