

# FCC Part 15B Measurement and Test Report

For

**Matsunichi Digital Development (Shenzhen) Co., Ltd**

**F/22, Matsunichi Building, No.9996, Shennan Boulevard, Nanshan District,**

**Shenzhen, China**

**FCC ID: ZDRTC978**

**Test Standards:** FCC Part 15 Subpart B

**Product Description:** Tablet PC

**Tested Model:** M97

**Report No.:** STR12128162I-3

**Tested Date:** 2012-12-13 to 2012-12-18

**Issued Date:** 2012-12-19

**Tested By:** Vigoss Xiong / Engineer

**Reviewed By:** Lahm Peng / EMC Manager

**Approved & Authorized By:** Jandy so / PSQ Manager

**Prepared By:**

**SEM.Test Compliance Service Co., Ltd**

3/F, Jinbao Commerce Building, Xin'an Fanshen Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND OPERATION MODE .....	5
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. CONDUCTED EMISSIONS .....</b>	<b>7</b>
3.1 MEASUREMENT UNCERTAINTY .....	7
3.2 TEST EQUIPMENT LIST AND DETAILS .....	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS .....	8
3.6 SUMMARY OF TEST RESULTS/PLOTS .....	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>11</b>
4.1 MEASUREMENT UNCERTAINTY .....	11
4.2 TEST EQUIPMENT LIST AND DETAILS .....	11
4.3 TEST PROCEDURE.....	11
4.4 TEST RECEIVER SETUP .....	12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.6 ENVIRONMENTAL CONDITIONS .....	12
4.7 SUMMARY OF TEST RESULTS/PLOTS .....	12

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Matsunichi Digital Development (Shenzhen) Co., Ltd  
Address of applicant: F/22, Matsunichi Building, No.9996, Shennan  
Boulevard, Nanshan District, Shenzhen, China  
Manufacturer: Matsunichi Digital Development (Shenzhen) Co., Ltd  
Address of manufacturer: F/22, Matsunichi Building, No.9996, Shennan  
Boulevard, Nanshan District, Shenzhen, China

General Description of EUT	
Product Name:	Tablet PC
Trade Name:	Matsunichi
Model No.:	M97
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	AC 100-240V Adapter 5.0V DC 3.7V Battery
Rated Current:	2.0A
Rated Power:	10W
Power Adapter Model:	ASSA1B-050200
Highest Internal Frequency:	1.0GHz
Classification of ITE:	Class B
Support Interface:	30 Pin Connector

## 1.2 Test Standards

The following report is prepared on behalf of the Matsunichi Digital Development (Shenzhen) Co., Ltd in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Playing	Color Bar with 1kHz Audio
TM2	Downloading	Connect to PC
TM3	/	/
TM4	/	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Shielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	SAMSUNG	NP-R20	124V93FP300082V
Earphone	PHILIPS	SHM1500	N/A

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Earphone Cable	1.5	Shielded	Without Core

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.


#### 3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2012-03-28	2013-03-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2012-03-28	2013-03-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2012-03-28	2013-03-27

#### 3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.4 Basic Test Setup Block Diagram

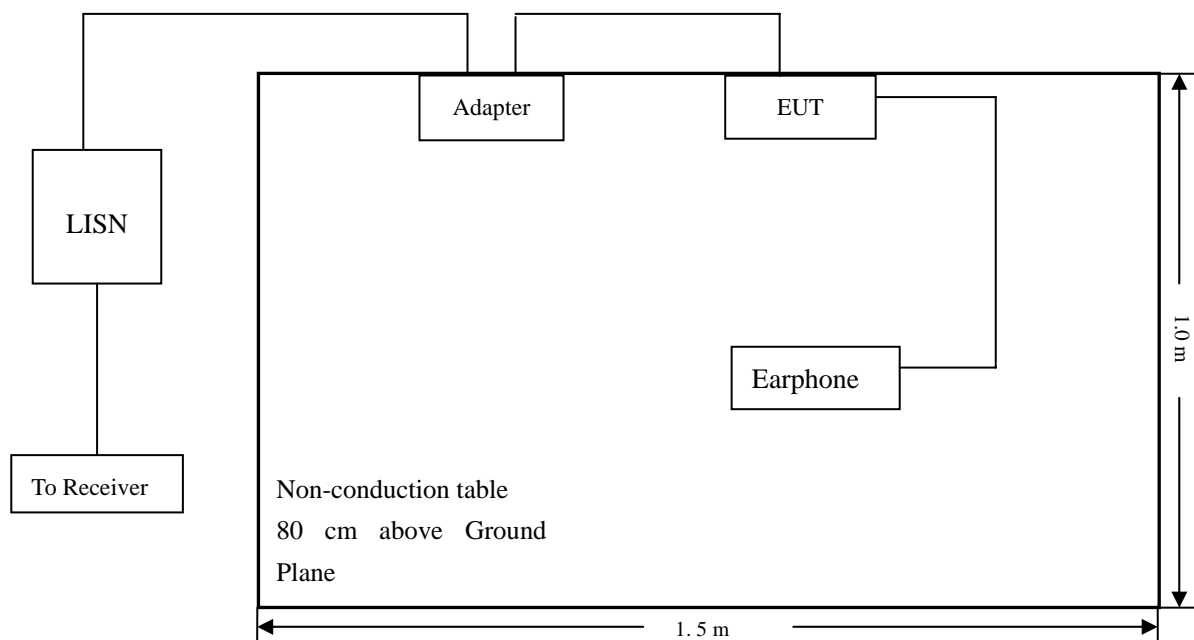

### 3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-3.70 dB** at **0.174 MHz** in the **Line, Quasi Peak** detector, 0.15-30MHz


### 3.7 Conducted Emissions Test Data



Plot of Conducted Emissions Test Data


EUT: Tablet PC  
Tested Model: M97  
Operating Condition: Playing  
Comment: AC 120V/60Hz; Adapter 5V

Test Specification: Neutral

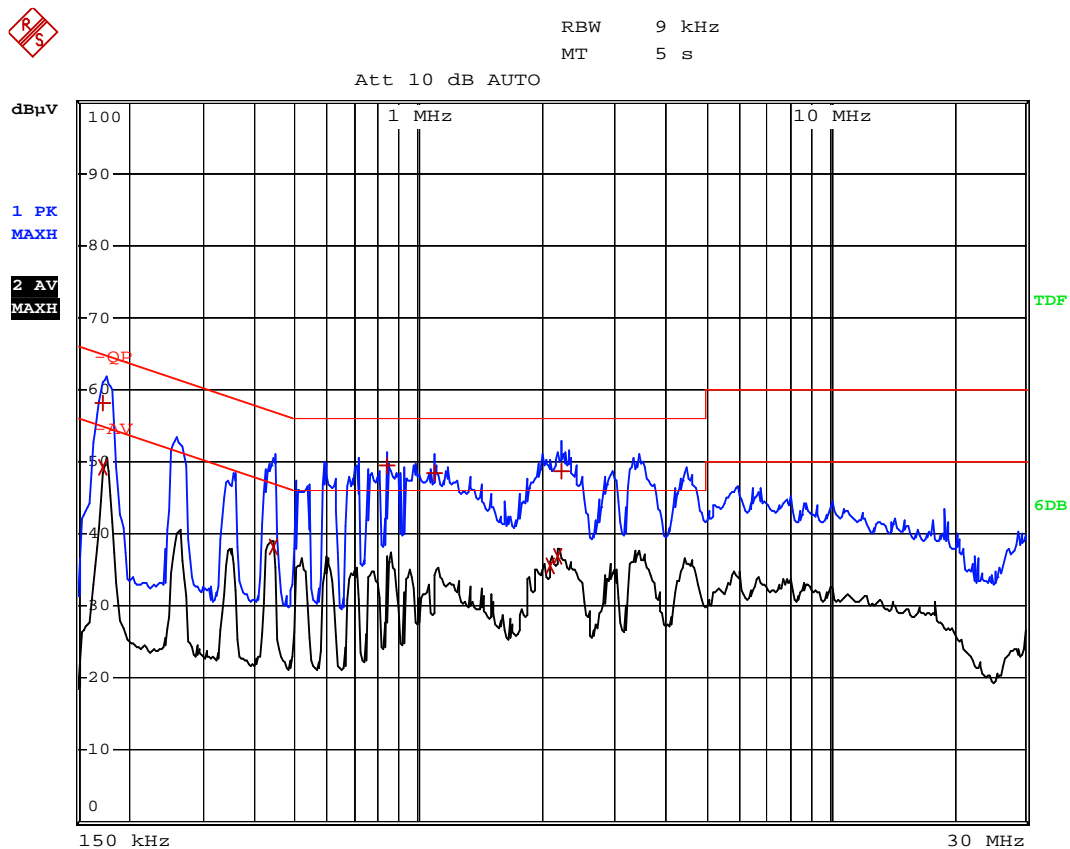

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	174 kHz	58.26	-6.50
2 Average	174 kHz	49.12	-5.64
2 Average	442 kHz	38.15	-8.87
1 Quasi Peak	842 kHz	49.46	-6.53
1 Quasi Peak	1.094 MHz	48.30	-7.69
2 Average	2.106 MHz	35.47	-10.52
2 Average	2.186 MHz	36.99	-9.00
1 Quasi Peak	2.238 MHz	48.67	-7.32

Test Specification: Line

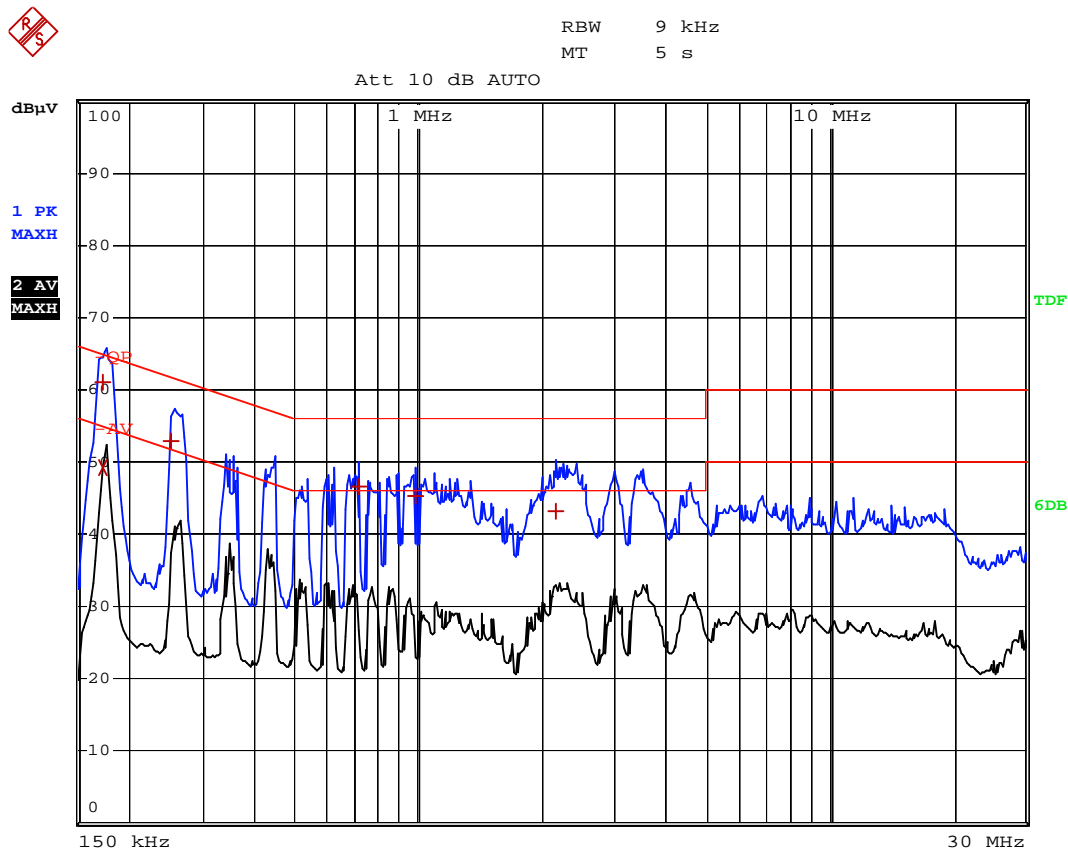

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	174 kHz	61.06	-3.70
2 Average	174 kHz	49.26	-5.50
1 Quasi Peak	254 kHz	52.83	-8.79
1 Quasi Peak	714 kHz	46.62	-9.37
1 Quasi Peak	982 kHz	45.19	-10.80
1 Quasi Peak	2.174 MHz	43.14	-12.85

## 4. Radiated Emissions

### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24

### 4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

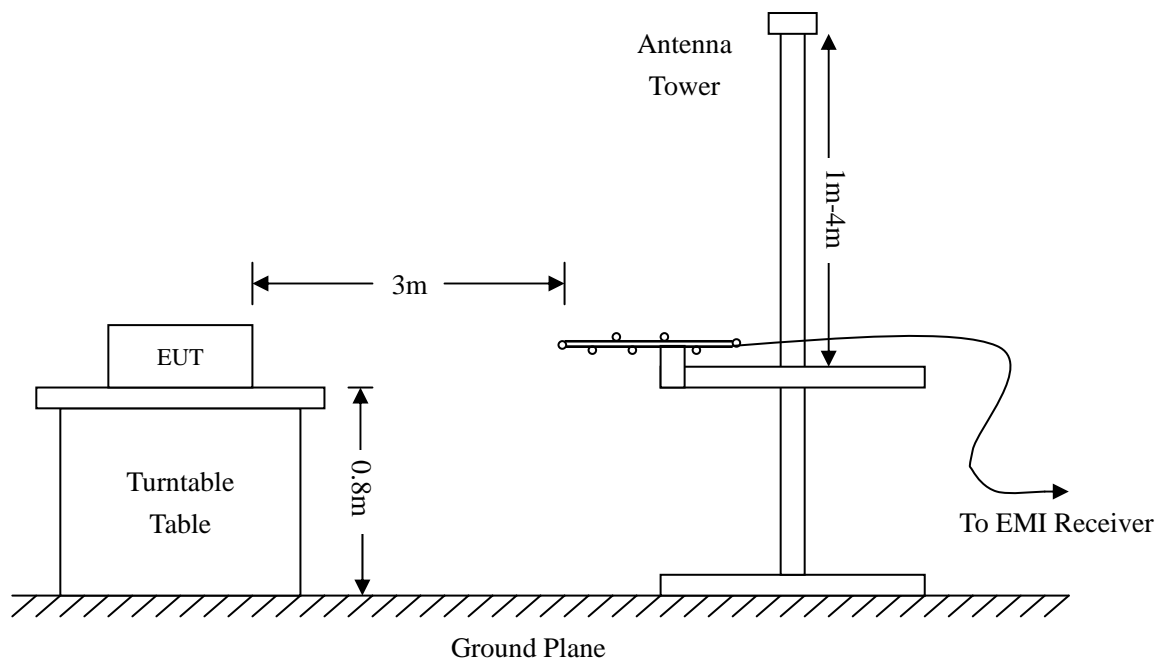

#### 4.4 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

#### 4.6 Environmental Conditions


Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

#### 4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:


**-3.25 dB at 30.6379 MHz in the Vertical polarization, Playing Mode, 30 MHz to 6 GHz, 3Meters**

**-2.19 dB at 240.8304 MHz in the Horizontal polarization, Downloading Mode, 30 MHz to 6 GHz, 3Meters**

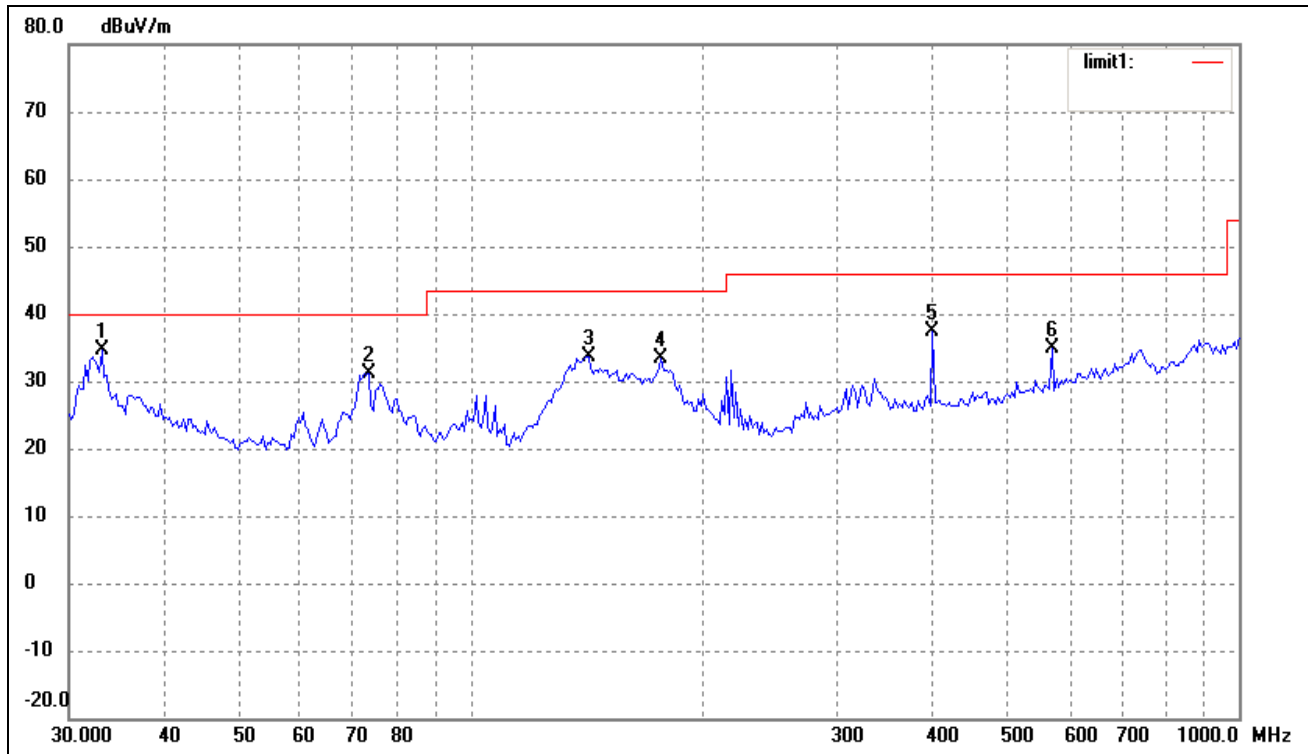**Plot of Radiated Emissions Test Data***EUT:* Tablet PC*Tested Model:* M97*Operating Condition:* Playing*Comment:* AC 120V/60Hz; Adapter 5V; 30MHz to 1GHz*Test Specification:* Horizontal

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	33.0950	26.03	8.56	34.59	40.00	-5.41	359	200	peak
2	73.6170	29.01	2.10	31.11	40.00	-8.89	359	200	peak
3	142.3244	30.27	3.42	33.69	43.50	-9.81	359	200	peak
4	176.8878	29.58	3.73	33.31	43.50	-10.19	359	200	peak
5	399.0302	25.85	11.50	37.35	46.00	-8.65	359	200	peak
6	570.6100	21.10	13.77	34.87	46.00	-11.13	359	200	peak


Test Specification: Vertical

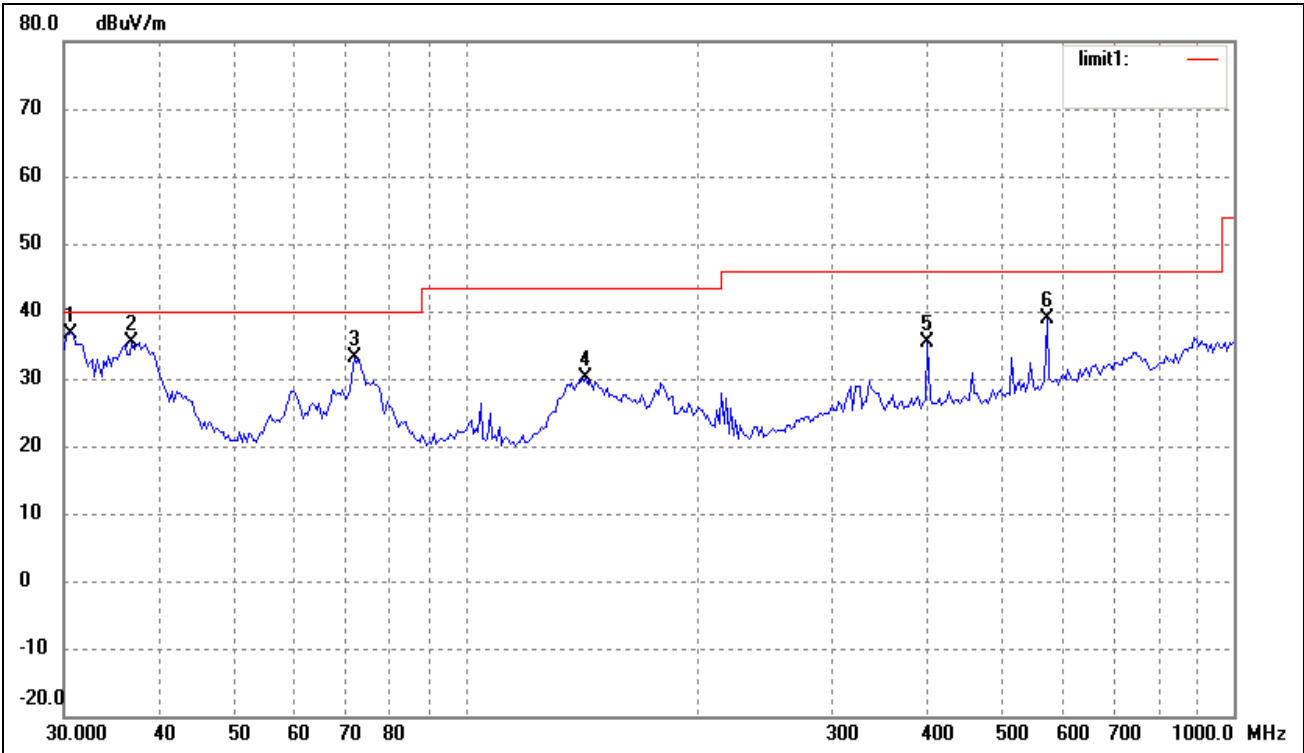

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	30.6379	28.60	8.15	36.75	40.00	-3.25	359	100	peak
2	36.7662	26.25	9.16	35.41	40.00	-4.59	359	100	peak
3	71.5806	30.74	2.34	33.08	40.00	-6.92	359	100	peak
4	143.3261	26.66	3.45	30.11	43.50	-13.39	359	100	peak
5	399.0302	23.88	11.50	35.38	46.00	-10.62	359	100	peak
6	570.6100	25.01	13.77	38.78	46.00	-7.22	359	100	peak


Plot of Radiated Emissions Test Data

EUT: Tablet PC  
Tested Model: M97  
Operating Condition: Downloading  
Comment: AC 120V/60Hz; Connect to PC; USB 5V; 30MHz to 1GHz  
  
Test Specification: Horizontal

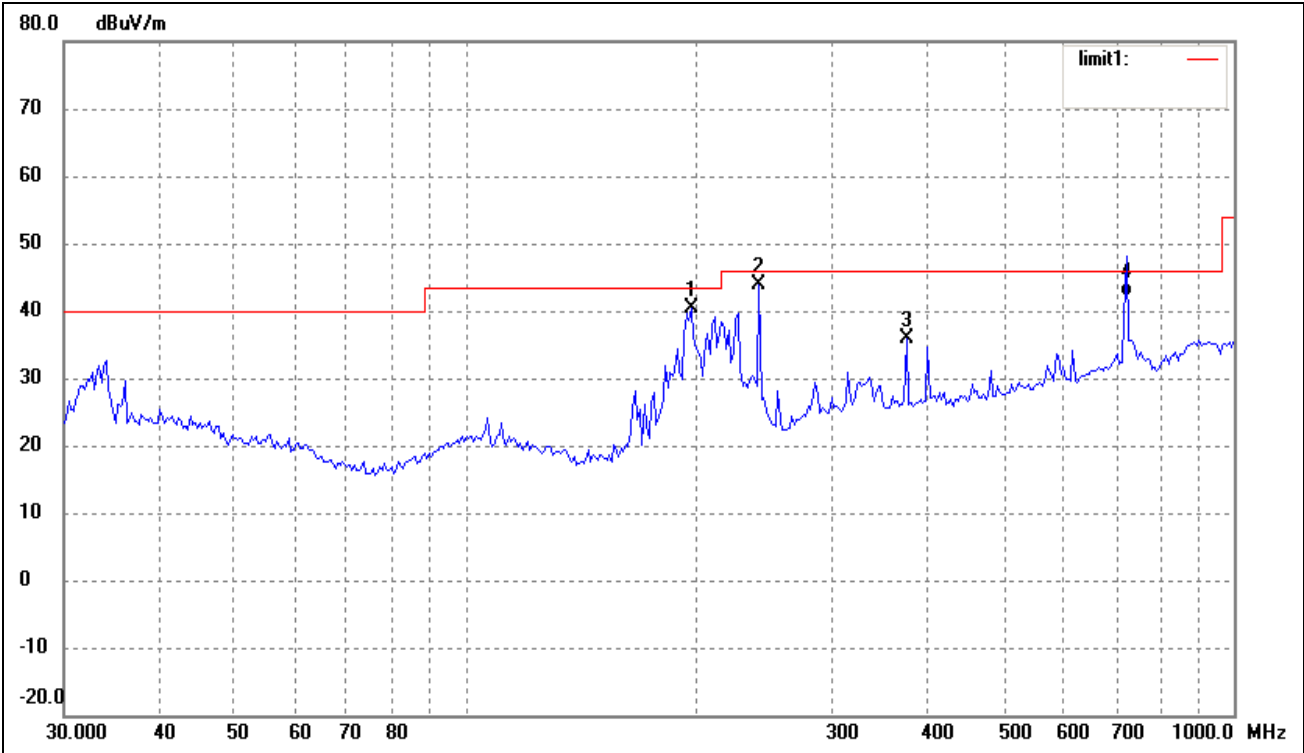

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	196.5098	35.91	4.49	40.40	43.50	-3.10	359	200	peak
2	240.8304	36.79	7.02	43.81	46.00	-2.19	359	200	peak
3	374.6225	25.13	10.64	35.77	46.00	-10.23	359	200	peak
4	720.0000	25.46	16.62	42.08	46.00	-3.92	359	200	QP

Test Specification: Vertical

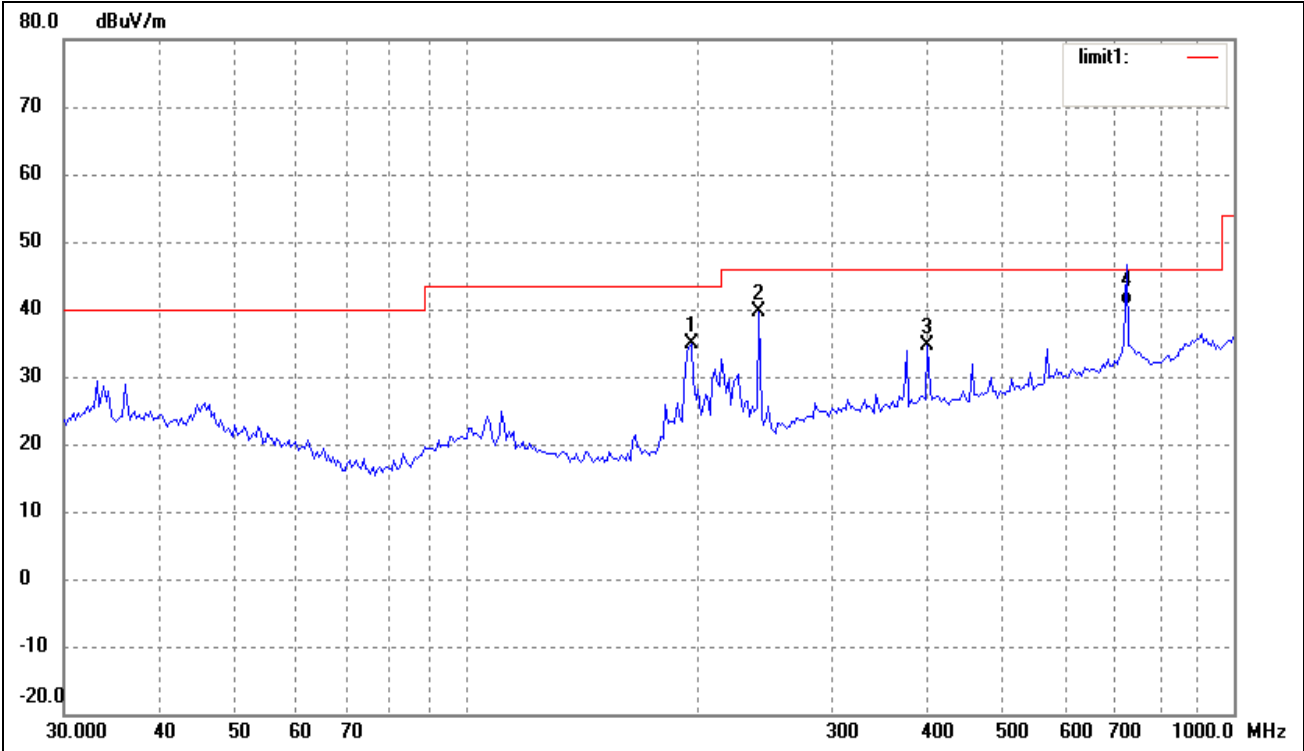

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	196.5098	30.37	4.49	34.86	43.50	-8.64	359	100	peak
2	240.8304	32.59	7.02	39.61	46.00	-6.39	359	100	peak
3	399.0302	23.04	11.50	34.54	46.00	-11.46	359	100	peak
4	720.0000	23.90	16.62	40.52	46.00	-5.48	359	100	QP



**Plot of Radiated Emissions Test Data**


EUT: Tablet PC

Tested Model: M97

Operating Condition: Playing


Comment: AC 120V/60Hz; Adapter 5V; Above 1G

Test Specification: Horizontal

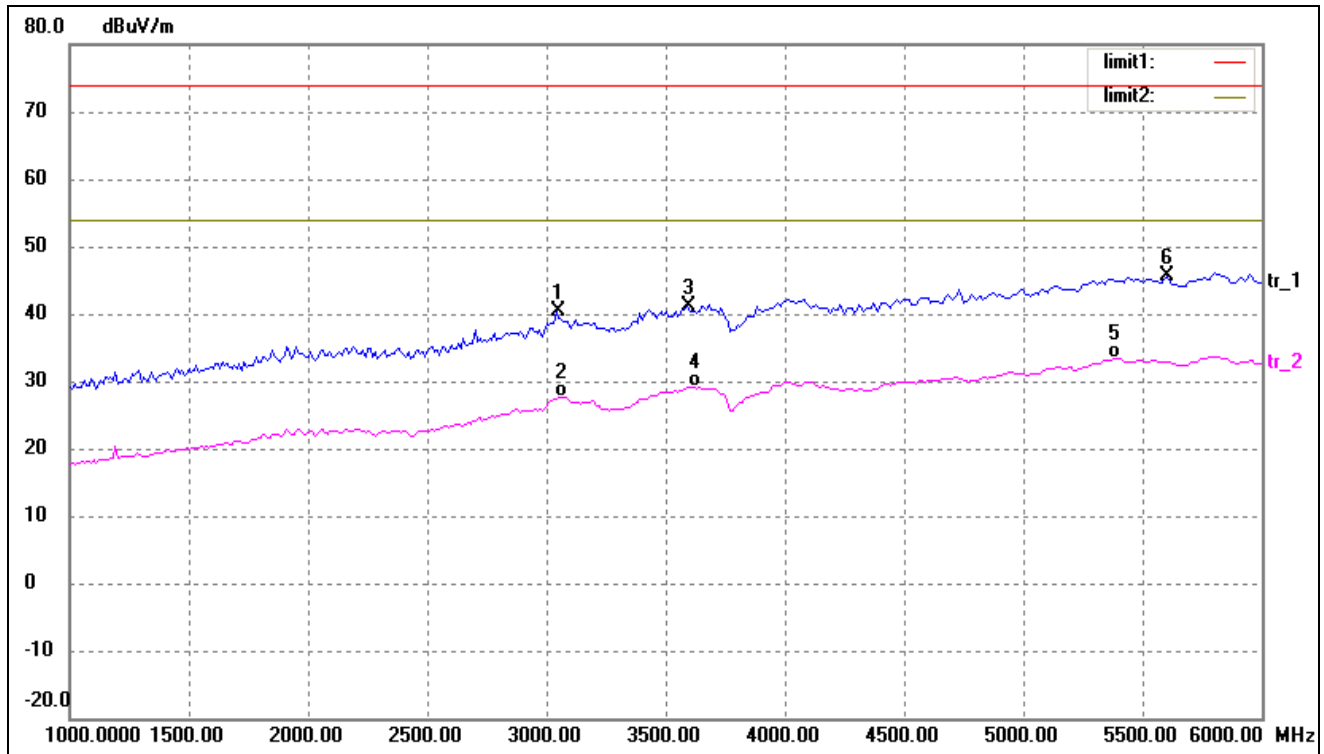

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	3047.966	48.01	-7.71	40.30	74.00	-33.70	58	150	peak
2	3069.889	35.25	-7.66	27.59	54.00	-26.41	326	100	AVG
3	3594.181	47.23	-6.22	41.01	74.00	-32.99	29	120	peak
4	3620.034	35.16	-6.13	29.03	54.00	-24.97	209	100	AVG
5	5388.429	35.32	-1.94	33.38	54.00	-20.62	359	200	AVG
6	5605.076	47.22	-1.61	45.61	74.00	-28.39	359	100	peak

Test Specification: Vertical

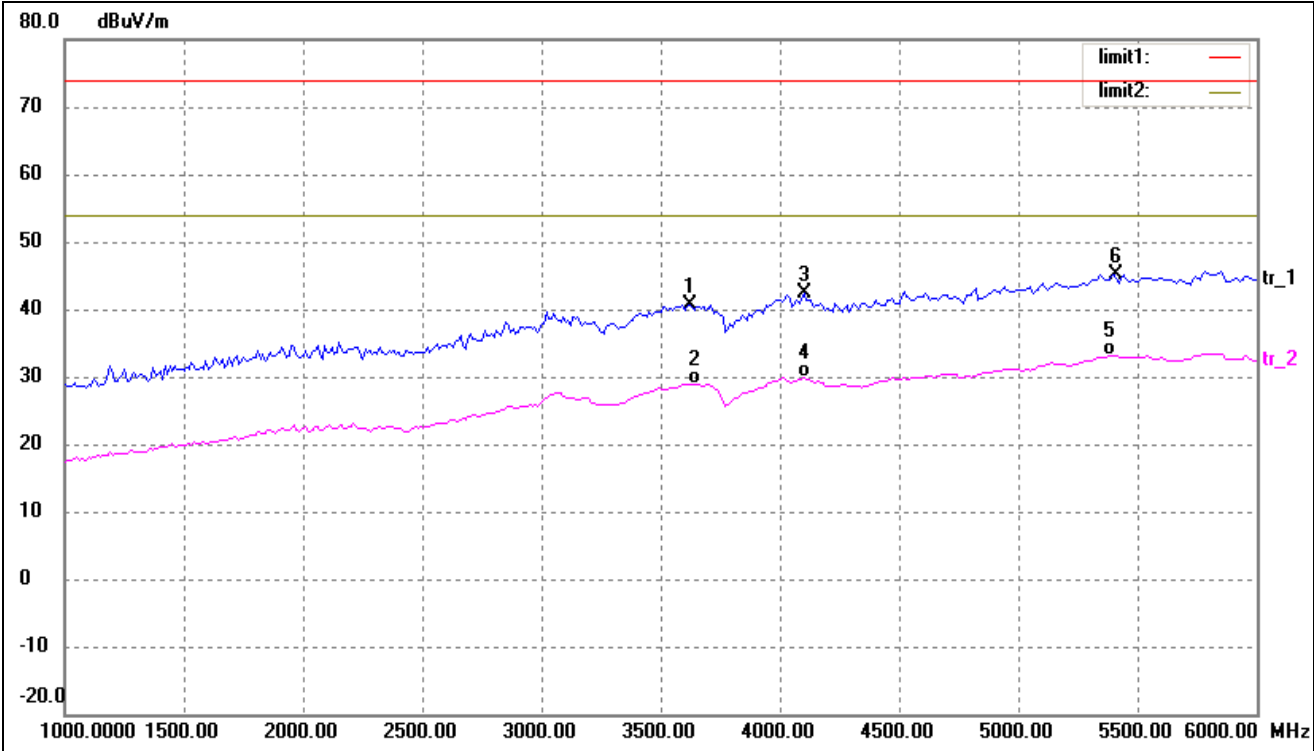

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	3620.034	46.86	-6.13	40.73	74.00	-33.27	51	100	peak
2	3646.072	35.02	-6.05	28.97	54.00	-25.03	308	100	AVG
3	4103.772	47.24	-4.93	42.31	74.00	-31.69	120	100	peak
4	4103.772	34.84	-4.93	29.91	54.00	-24.09	359	100	AVG
5	5388.429	35.09	-1.94	33.15	54.00	-20.85	359	100	AVG
6	5407.773	47.11	-1.87	45.24	74.00	-28.76	359	100	peak

**Plot of Radiated Emissions Test Data**


EUT: Tablet PC

Tested Model: M97

Operating Condition: Downloading


Comment: AC 120V/60Hz; Connect to PC; USB 5V; Above 1G

Test Specification: Horizontal

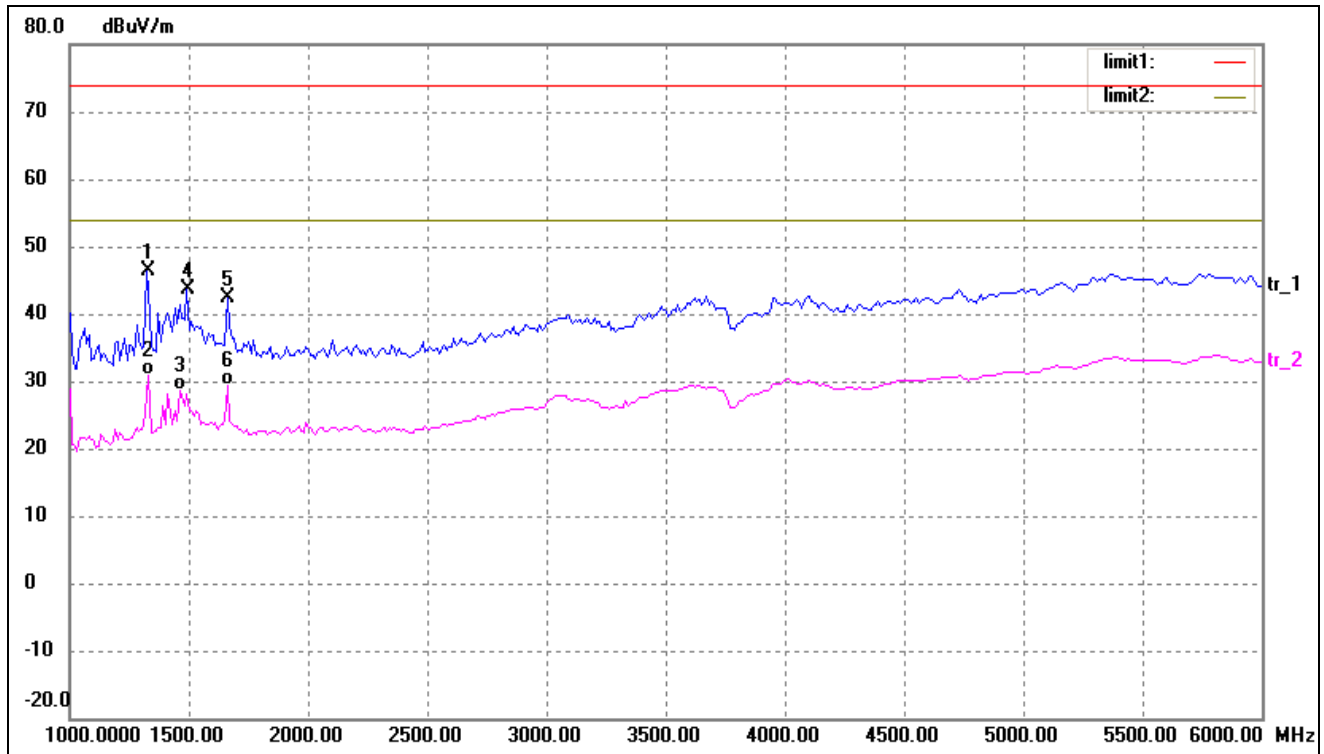

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	1327.235	61.65	-15.36	46.29	74.00	-27.71	58	150	peak
2	1332.000	46.31	-15.34	30.97	54.00	-23.03	326	100	AVG
3	1467.318	43.28	-14.66	28.62	54.00	-25.38	29	120	AVG
4	1499.209	58.21	-14.50	43.71	74.00	-30.29	209	100	peak
5	1663.393	55.83	-13.56	42.27	74.00	-31.73	359	200	peak
6	1663.393	42.93	-13.56	29.37	54.00	-24.63	359	100	AVG

Test Specification: Vertical

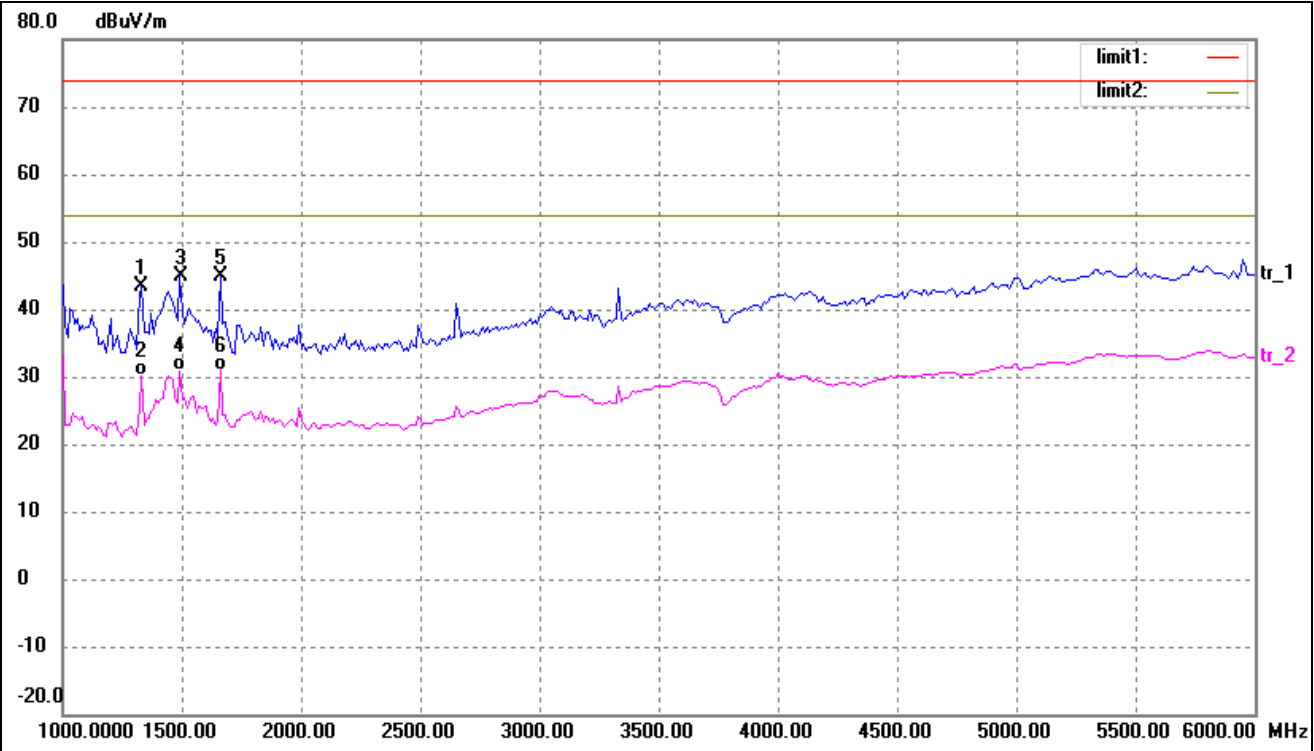

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	1332.000	58.75	-15.34	43.41	74.00	-30.59	51	100	peak
2	1332.000	45.56	-15.34	30.22	54.00	-23.78	308	100	AVG
3	1493.846	59.48	-14.53	44.95	74.00	-29.05	120	100	peak
4	1499.209	45.28	-14.50	30.78	54.00	-23.22	359	100	AVG
5	1663.393	58.38	-13.56	44.82	74.00	-29.18	359	100	peak
6	1663.393	44.56	-13.56	31.00	54.00	-23.00	359	100	AVG

Note: Testing is carried out with frequency rang 9kHz to the 6GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.  
The measurements greater than 20dB below the limit from 9kHz to 30MHz.

\*\*\*\*\* END OF REPORT \*\*\*\*\*