

FCC REPORT

Applicant: TOP PC INTERNATIONAL LTD.

Address of Applicant: 4F., NO. 103, LIDE ST., ZHONGHE DIST., NEW TAIPEI CITY
235, TAIWAN

Equipment Under Test (EUT)

Product Name: ~2.4G wireless mouse

Model No.: PD910P, WOM-085, WOM-086, WOM-230, WOM-921,
WOM-922, WOM-337, WOM-802, WOM-780,
WOM-220, WOM-350, MSWG-802, MSWG-110,
MSWG-880, MSWG-920, MSWG-925, MSWG-935,
MSWG-928

FCC ID: ZH7110428R

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2010

Date of sample receipt: 29 Apr., 2011

Date of Test: 29 Apr.- 04 May., 2011

Date of report issued: 05 May., 2011

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A handwritten signature in black ink, appearing to read "Robinson Lo", is written over a light blue horizontal line.

Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

| Version No. | Date | Description |
|-------------|------------|-------------|
| 00 | 2011-05-05 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:

Collin.He

Date:

2011-05-05

Project Engineer

Check By:

Hans. Hu

Date:

2011-05-05

Reviewer

3 Contents

| | Page |
|---|------|
| 1 COVER PAGE..... | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION | 5 |
| 5.2 GENERAL DESCRIPTION OF E.U.T. | 5 |
| 5.3 TEST MODE | 7 |
| 5.4 TEST FACILITY..... | 7 |
| 5.5 TEST LOCATION | 7 |
| 5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 7 |
| 5.7 TEST INSTRUMENTS LIST | 8 |
| 6 TEST RESULTS AND MEASUREMENT DATA | 9 |
| 6.1 ANTENNA REQUIREMENT: | 9 |
| 6.2 CONDUCTED EMISSIONS..... | 10 |
| 6.3 RADIATED EMISSION | 13 |
| 6.3.1 <i>Field Strength Of The Fundamental Signal</i> | 15 |
| 6.3.2 <i>Spurious Emissions</i> | 15 |
| 6.3.3 <i>Band edge (Radiated Emission)</i> | 19 |
| 6.4 20dB BANDWIDTH..... | 21 |
| 7 TEST SETUP PHOTO | 24 |
| 8 EUT CONSTRUCTIONAL DETAILS | 27 |

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--|-----------------------|--------|
| Antenna requirement | 15.203 | Pass |
| Field strength of the fundamental signal | 15.249 (a) | Pass |
| Spurious emissions | 15.249 (a) (d)/15.209 | Pass |
| Band edge (Radiated Emission) | 15.249 (d)/15.205 | Pass |
| 20dB Occupied Bandwidth | 15.215 (c) | Pass |

Remark:

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

| | |
|-----------------------------------|---|
| Applicant: | TOP PC INTERNATIONAL LTD. |
| Address of Applicant: | 4F., NO. 103, LIDE ST., ZHONGHE DIST., NEW TAIPEI CITY 235, TAIWAN |
| Manufacturer/ Factory: | Shenzhen Doking Electronic Technology Co., Ltd. |
| Address of Manufacturer/ Factory: | Dingfeng Hi-Tech Estate, Shapu, Songgang Town, Baoan District, Shenzhen, GD |

5.2 General Description of E.U.T.

| | |
|----------------------|--|
| Product Name: | ~2.4G wireless mouse |
| Model No.: | PD910P, WOM-085, WOM-086, WOM-230, WOM-921, WOM-922, WOM-337, WOM-802, WOM-780, WOM-220, WOM-350, MSWG-802, MSWG-110, MSWG-880, MSWG-920, MSWG-925, MSWG-935, MSWG-928 |
| Operation Frequency: | ~2.4G wireless mouse |
| Channel numbers: | 12 |
| Modulation type: | GFSK |
| Antenna Type: | Integral |
| Antenna gain: | 2dBi |
| Power supply: | DC 5.0V (USB port supply) |
| Remark: | Only the model No. PD910P was tested. WOM-085, WOM-086, WOM-230, WOM-921, WOM-922, WOM-337, WOM-802, WOM-780, WOM-220, WOM-350, MSWG-802, MSWG-110, MSWG-880, MSWG-920, MSWG-925, MSWG-935, MSWG-928 and PD910P are identical in interior structure, electrical circuits, and components, with different color for the appearance. |

| Operation Frequency each of channel | | | | | | | |
|--|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2403MHz | 4 | 2415MHz | 7 | 2435MHz | 10 | 2460MHz |
| 2 | 2406MHz | 5 | 2421MHz | 8 | 2444MHz | 11 | 2471MHz |
| 3 | 2410MHz | 6 | 2430MHz | 9 | 2450MHz | 12 | 2474MHz |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel | Frequency |
|---------------------|-----------|
| The lowest channel | 2403MHz |
| The middle channel | 2435MHz |
| The Highest channel | 2474MHz |

5.3 Test mode

| | | | |
|---|--|-------|-------|
| Operation mode: | Keep the EUT in normal operation mode. | | |
| Pre-Test Mode: (lowest channel=2403MHz) | | | |
| GTS has verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows: | | | |
| Axis | X | Y | Z |
| Field Strength(dBuV/m) | 91.39 | 89.23 | 84.25 |
| Final Test Mode: | | | |
| According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”: Y axis (see the test setup photo) | | | |

5.4 Test Facility

| | |
|---|--|
| The test facility is recognized, certified, or accredited by the following organizations: | |
| ● FCC —Registration No.: 600491 | |
| Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010. | |
| ● Industry Canada (IC) | |
| The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1. | |

5.5 Test Location

| | |
|---|------|
| All tests were performed at: | |
| Global United Technology Services Co., Ltd. | |
| Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China | |
| Tel: 0755-27798480 | Fax: |
| 0755-27798960 | |

5.6 Other Information Requested by the Customer

| |
|-------|
| None. |
|-------|


5.7 Test Instruments list

| Radiated Emission: | | | | | | |
|---------------------------|-------------------------------|--------------------------------|-----------------------|----------------------|----------------------------|--------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (dd-mm-yy) | Cal.Due date (dd-mm-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS201 | Mar. 30 2011 | Mar. 30 2012 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS202 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | Sept. 10 2010 | Sept. 10 2011 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS204 | Feb. 26 2011 | Feb. 26 2012 |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | 9120D-829 | GTS205 | June 30 2010 | June 30 2011 |
| 6 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 7 | Coaxial Cable | GTS | N/A | GTS400 | Apr. 01 2011 | Apr. 01 2012 |
| 8 | Coaxial Cable | GTS | N/A | GTS401 | Apr. 01 2011 | Apr. 01 2012 |
| 9 | Coaxial cable | GTS | N/A | GTS402 | Apr. 01 2011 | Apr. 01 2012 |
| 10 | Coaxial Cable | GTS | N/A | GTS407 | Apr. 01 2011 | Apr. 01 2012 |
| 11 | Coaxial Cable | GTS | N/A | GTS408 | Apr. 01 2011 | Apr. 01 2012 |
| 12 | Amplifier(100KHz-3GHz) | HP | 8347A | GTS210 | Aug. 03 2010 | Aug. 03 2011 |
| 13 | Amplifier(2GHz-20GHz) | HP | 8349B | GTS224 | Aug. 03 2010 | Aug. 03 2011 |

| Conducted Emission: | | | | | | |
|----------------------------|-----------------------|--------------------------------|----------------------|----------------------|----------------------------|--------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (dd-mm-yy) | Cal.Due date (dd-mm-yy) |
| 1 | Shielding Room | ZhongYu Electron | 7.0(L)x3.0(W)x3.0(H) | GTS206 | Apr. 10 2011 | Apr. 10 2012 |
| 2 | EMI Test Receiver | Rohde & Schwarz | ESCS30 | GTS208 | Sept. 14 2011 | Sept. 14 2012 |
| 3 | 10dB Pulse Limita | Rohde & Schwarz | N/A | GTS209 | Sept. 14 2011 | Sept. 14 2012 |
| 4 | LISN | SCHWARZBECK MESS-ELEKTRONIK | NSLK 8127 | GTS207 | Apr. 14 2011 | Apr. 14 2012 |
| 5 | Coaxial Cable | GTS | N/A | GTS406 | Apr. 01 2011 | Apr. 01 2012 |
| 6 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |

6 Test results and Measurement Data

6.1 Antenna requirement:
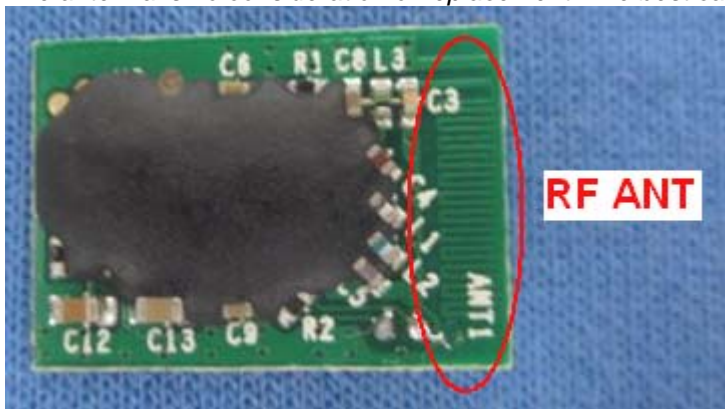
| | |
|--|-----------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 |
| 15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> | |
| E.U.T Antenna: | |
| The antenna is no consideration of replacement. The best case gain of the antenna is 2dBi. <div data-bbox="245 804 973 1211" data-label="Image">  </div> | |


6.2 Conducted Emissions

| | | | |
|--|--|--------------|-----------|
| Test Requirement: | FCC Part15 C Section 15.207 | | |
| Test Method: | ANSI C63.4:2003 | | |
| Test Frequency Range: | 150kHz to 30MHz | | |
| Class / Severity: | Class B | | |
| Receiver setup: | RBW=9kHz, VBW=30kHz | | |
| Limit: | Frequency range (MHz) | Limit (dBuV) | |
| | | Quasi-peak | Average |
| | 0.15-0.5 | 66 to 56* | 56 to 46* |
| | 0.5-5 | 56 | 46 |
| | 5-30 | 60 | 50 |
| * Decreases with the logarithm of the frequency. | | | |
| Test procedure | <p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</p> | | |
| Test setup: | <div><div><div><div><div></div><div>Reference Plane</div></div><div><div><div>LISN</div><div>AUX Equipment</div><div>E.U.T</div></div><div>40cm</div><div>80cm</div><div><div>LISN</div><div>Filter</div><div>EMI Receiver</div></div><div>AC power</div></div><div>Test table/Insulation plane</div></div></div><div><p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div></div> | | |
| Test Instruments: | Refer to section 5.7 for details | | |
| Test mode: | Refer to section 5.3 for details | | |
| Test results: | Passed | | |

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live Line:

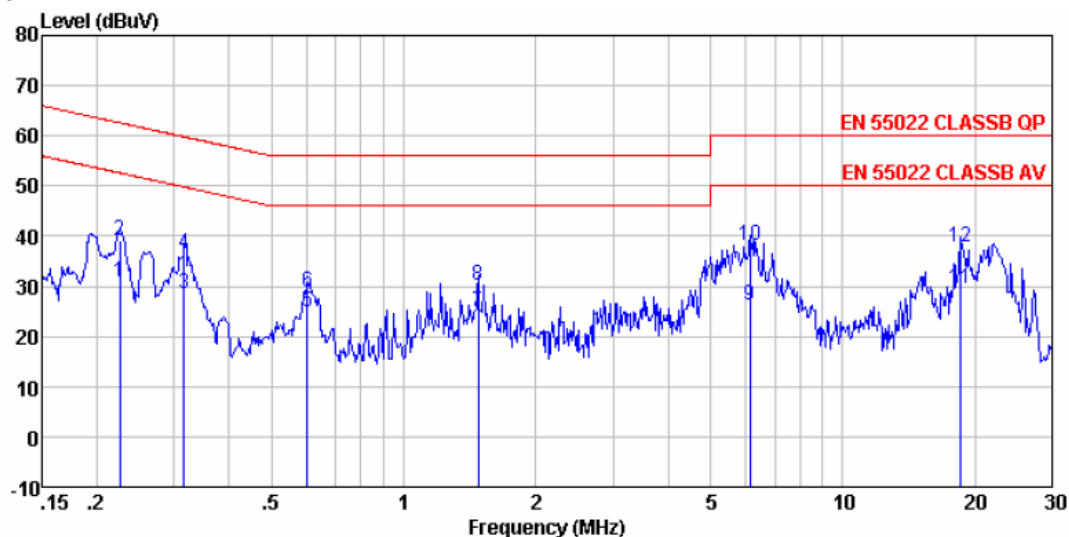

Condition : EN 55022 CLASSB QP LISN(2011) LINE
 Job No : 269RF
 Test mode : PC mode
 Test engineer: Collin

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.226 | 30.14 | 0.64 | 0.10 | 30.88 | 52.61 | -21.73 | Average |
| 2 | 0.226 | 38.51 | 0.64 | 0.10 | 39.25 | 62.61 | -23.36 | QP |
| 3 | 0.317 | 27.98 | 0.60 | 0.10 | 28.68 | 49.80 | -21.12 | Average |
| 4 | 0.317 | 35.63 | 0.60 | 0.10 | 36.33 | 59.80 | -23.47 | QP |
| 5 | 0.604 | 24.30 | 0.53 | 0.10 | 24.93 | 46.00 | -21.07 | Average |
| 6 | 0.604 | 28.20 | 0.53 | 0.10 | 28.83 | 56.00 | -27.17 | QP |
| 7 | 1.480 | 24.31 | 0.43 | 0.10 | 24.84 | 46.00 | -21.16 | Average |
| 8 | 1.480 | 29.70 | 0.43 | 0.10 | 30.23 | 56.00 | -25.77 | QP |
| 9 | 6.153 | 25.64 | 0.28 | 0.12 | 26.04 | 50.00 | -23.96 | Average |
| 10 | 6.153 | 37.68 | 0.28 | 0.12 | 38.08 | 60.00 | -21.92 | QP |
| 11 | 18.622 | 29.26 | 0.15 | 0.21 | 29.62 | 50.00 | -20.38 | Average |
| 12 | 18.622 | 37.30 | 0.15 | 0.21 | 37.66 | 60.00 | -22.34 | QP |

Neutral Line:

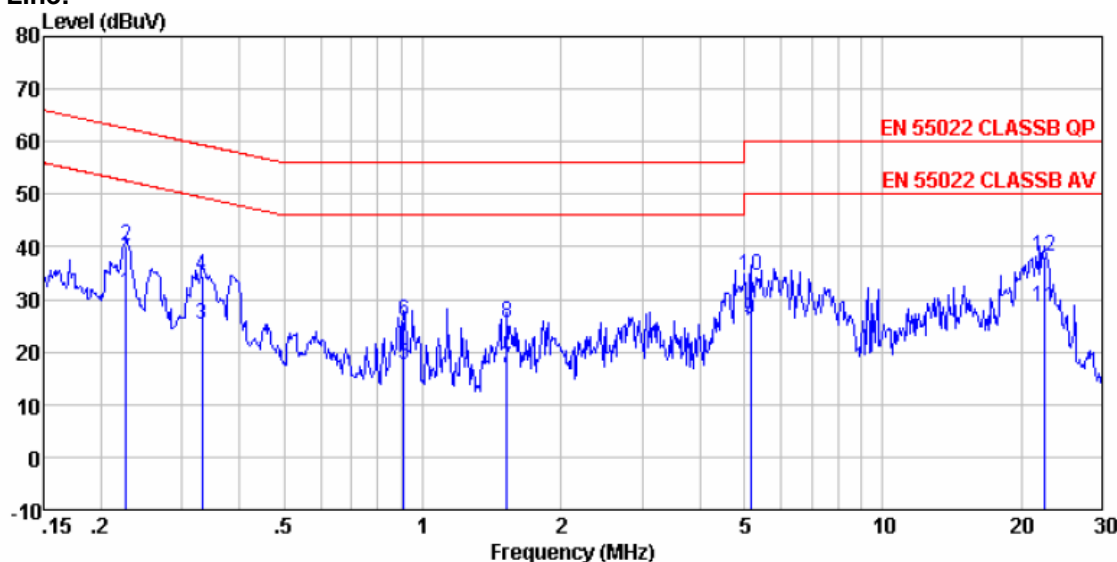

Condition : EN 55022 CLASSB QP LISN(2011) NEUTRAL
Job No : 269RF
Test mode : PC mode
Test engineer: Collin



| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.227 | 30.33 | 0.64 | 0.10 | 31.07 | 52.57 | -21.50 | Average |
| 2 | 0.227 | 39.51 | 0.64 | 0.10 | 40.25 | 62.57 | -22.32 | QP |
| 3 | 0.332 | 24.58 | 0.60 | 0.10 | 25.28 | 49.40 | -24.12 | Average |
| 4 | 0.332 | 33.85 | 0.60 | 0.10 | 34.55 | 59.40 | -24.85 | QP |
| 5 | 0.909 | 16.89 | 0.49 | 0.10 | 17.48 | 46.00 | -28.52 | Average |
| 6 | 0.909 | 25.12 | 0.49 | 0.10 | 25.71 | 56.00 | -30.29 | QP |
| 7 | 1.527 | 16.51 | 0.43 | 0.10 | 17.04 | 46.00 | -28.96 | Average |
| 8 | 1.527 | 25.09 | 0.43 | 0.10 | 25.62 | 56.00 | -30.38 | QP |
| 9 | 5.166 | 25.81 | 0.30 | 0.10 | 26.21 | 50.00 | -23.79 | Average |
| 10 | 5.166 | 34.02 | 0.30 | 0.10 | 34.42 | 60.00 | -25.58 | QP |
| 11 | 22.535 | 28.11 | 0.13 | 0.21 | 28.45 | 50.00 | -21.55 | Average |
| 12 | 22.535 | 37.89 | 0.13 | 0.21 | 38.23 | 60.00 | -21.77 | QP |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

6.3 Radiated Emission

| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|------------------|--------|------------------|-----------|--------------------|----------|-------------------|------|------------------|--------------|------------|------------------|---------------|------------------|------------------|-------------|------|------------------|------------|------|---------------|------|---------------|--|--|--|
| Test Requirement: | FCC Part15 C Section 15.249 and 15.209 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Method: | ANSI C63.4:2003 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Frequency Range: | 30MHz to 25000MHz | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test site: | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Receiver setup: | <table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr></table> | | | | | Frequency | Detector | RBW | VBW | Remark | 30MHz-1GHz | Quasi-peak | 100kHz | 300kHz | Quasi-peak Value | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | Peak | 1MHz | 10Hz | Average Value | | | |
| Frequency | Detector | RBW | VBW | Remark | | | | | | | | | | | | | | | | | | | | | | | |
| 30MHz-1GHz | Quasi-peak | 100kHz | 300kHz | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | | | | | | | | | | | | | | | | | | | | | | | |
| | Peak | 1MHz | 10Hz | Average Value | | | | | | | | | | | | | | | | | | | | | | | |
| Limit: (Field strength of the fundamental signal) | <table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td rowspan="2">2400MHz-2483.5MHz</td><td>94.0</td><td>Average Value</td></tr><tr><td>114.0</td><td>Peak Value</td></tr></table> | | | | Frequency | Limit (dBuV/m @3m) | Remark | 2400MHz-2483.5MHz | 94.0 | Average Value | 114.0 | Peak Value | | | | | | | | | | | | | | | |
| Frequency | Limit (dBuV/m @3m) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2400MHz-2483.5MHz | 94.0 | Average Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 114.0 | Peak Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit: (Spurious Emissions) | <table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>74.0</td><td>Peak Value</td></tr></table> | | | | Frequency | Limit (dBuV/m @3m) | Remark | 30MHz-88MHz | 40.0 | Quasi-peak Value | 88MHz-216MHz | 43.5 | Quasi-peak Value | 216MHz-960MHz | 46.0 | Quasi-peak Value | 960MHz-1GHz | 54.0 | Quasi-peak Value | Above 1GHz | 54.0 | Average Value | 74.0 | Peak Value | | | |
| Frequency | Limit (dBuV/m @3m) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30MHz-88MHz | 40.0 | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| 88MHz-216MHz | 43.5 | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| 216MHz-960MHz | 46.0 | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| 960MHz-1GHz | 54.0 | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| Above 1GHz | 54.0 | Average Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 74.0 | Peak Value | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit: (band edge) | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Procedure: | <p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-</p> | | | | | | | | | | | | | | | | | | | | | | | | | | |
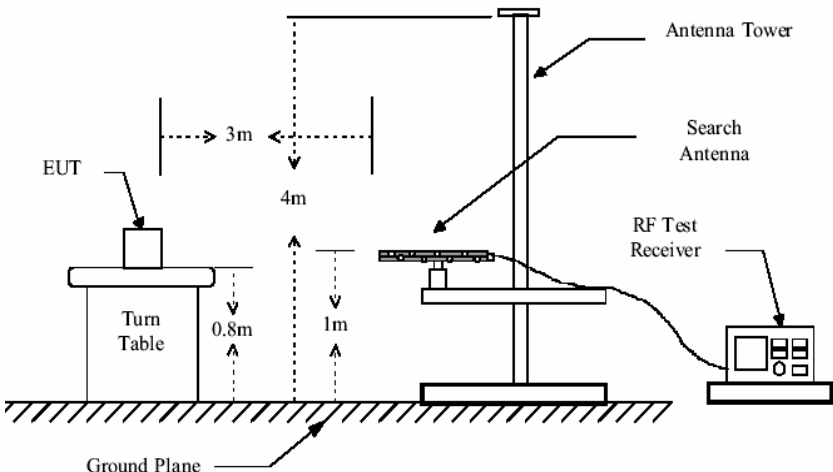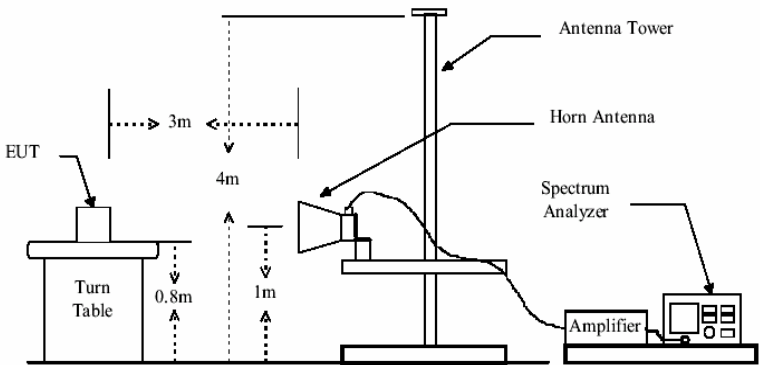
| | |
|-------------------|---|
| | peak or average method as specified and then reported in a data sheet. |
| Test setup: | <p>Below 1GHz</p>  <p>Above 1GHz</p>  |
| Test Instruments: | Refer to section 5.7 |
| Test mode: | Refer to section 5.3 |
| Test results: | Passed |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

Measurement Data
6.3.1 Field Strength Of The Fundamental Signal

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2403.00 | 90.54 | 27.58 | 3.37 | 30.10 | 91.39 | 114.00 | -22.61 | Horizontal |
| 2403.00 | 88.47 | 27.58 | 3.37 | 30.10 | 89.32 | 114.00 | -24.68 | Vertical |
| 2435.00 | 90.42 | 27.48 | 3.43 | 29.99 | 91.34 | 114.00 | -22.66 | Horizontal |
| 2435.00 | 86.19 | 27.48 | 3.43 | 29.99 | 87.11 | 114.00 | -26.89 | Vertical |
| 2474.00 | 87.59 | 27.52 | 3.49 | 29.93 | 88.67 | 114.00 | -25.33 | Horizontal |
| 2474.00 | 85.95 | 27.52 | 3.49 | 29.93 | 87.03 | 114.00 | -26.97 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2403.00 | 82.59 | 27.58 | 3.37 | 30.10 | 83.44 | 94.00 | -10.56 | Horizontal |
| 2403.00 | 75.85 | 27.58 | 3.37 | 30.10 | 76.70 | 94.00 | -17.30 | Vertical |
| 2435.00 | 79.85 | 27.48 | 3.43 | 29.99 | 80.77 | 94.00 | -13.23 | Horizontal |
| 2435.00 | 77.68 | 27.48 | 3.43 | 29.99 | 78.60 | 94.00 | -15.40 | Vertical |
| 2474.00 | 80.24 | 27.52 | 3.49 | 29.93 | 81.32 | 94.00 | -12.68 | Horizontal |
| 2474.00 | 76.69 | 27.52 | 3.49 | 29.93 | 77.77 | 94.00 | -16.23 | Vertical |

6.3.2 Spurious Emissions
30MHz~1GHz

Test mode: Transmitting

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamplifier Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-----------------|-----------------------|--------------------------|-------------------|----------------|---------------------|-----------------|--------------|
| 44.28 | 37.85 | 16.31 | 0.66 | 32.08 | 22.74 | 40.00 | -17.26 | Vertical |
| 70.34 | 40.48 | 13.32 | 0.84 | 31.89 | 22.75 | 40.00 | -17.25 | Vertical |
| 91.82 | 39.26 | 13.08 | 1.08 | 31.73 | 21.69 | 43.50 | -21.81 | Vertical |
| 189.07 | 37.59 | 10.60 | 1.72 | 32.20 | 17.71 | 43.50 | -25.79 | Vertical |
| 517.25 | 37.76 | 18.38 | 2.46 | 31.55 | 27.05 | 46.00 | -18.95 | Vertical |
| 33.10 | 40.13 | 15.65 | 0.61 | 32.23 | 24.16 | 40.00 | -15.84 | Horizontal |
| 47.66 | 38.58 | 14.80 | 0.67 | 32.05 | 22.00 | 40.00 | -18.00 | Horizontal |
| 116.95 | 38.88 | 11.00 | 1.29 | 31.79 | 19.38 | 43.50 | -24.12 | Horizontal |
| 230.91 | 38.34 | 11.98 | 1.90 | 32.28 | 19.94 | 46.00 | -26.06 | Horizontal |
| 465.60 | 38.35 | 20.00 | 2.35 | 31.85 | 28.85 | 46.00 | -17.15 | Horizontal |

Above 1GHz

| | | | | | |
|------------|--------------|---------------|--------|---------|------|
| Test mode: | Transmitting | Test channel: | Lowest | Remark: | Peak |
|------------|--------------|---------------|--------|---------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4806.00 | 36.73 | 31.78 | 5.32 | 24.09 | 49.74 | 74.00 | -24.26 | Vertical |
| 7209.00 | 33.09 | 36.15 | 6.87 | 26.38 | 49.73 | 74.00 | -24.27 | Vertical |
| 9612.00 | 29.46 | 37.95 | 8.94 | 25.40 | 50.95 | 74.00 | -23.05 | Vertical |
| 12015.00 | 27.56 | 39.08 | 10.34 | 25.19 | 51.79 | 74.00 | -22.21 | Vertical |
| 14418.00 | 24.75 | 42.41 | 11.64 | 24.28 | 54.52 | 74.00 | -19.48 | Vertical |
| 4806.00 | 38.72 | 31.78 | 5.32 | 24.09 | 52.17 | 74.00 | -21.83 | Horizontal |
| 7209.00 | 34.16 | 36.15 | 6.87 | 26.38 | 51.37 | 74.00 | -22.63 | Horizontal |
| 9612.00 | 33.01 | 37.95 | 8.94 | 25.40 | 55.20 | 74.00 | -18.8 | Horizontal |
| 12015.00 | 29.95 | 39.08 | 10.34 | 25.19 | 55.01 | 74.00 | -18.99 | Horizontal |
| 14418.00 | 26.48 | 42.41 | 11.64 | 24.28 | 57.21 | 74.00 | -16.79 | Horizontal |

| | | | | | |
|------------|--------------|---------------|--------|---------|---------|
| Test mode: | Transmitting | Test channel: | Lowest | Remark: | average |
|------------|--------------|---------------|--------|---------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4806.00 | 28.30 | 31.78 | 5.32 | 24.09 | 41.31 | 54.00 | -12.69 | Vertical |
| 7209.00 | 20.93 | 36.15 | 6.87 | 26.38 | 37.57 | 54.00 | -16.43 | Vertical |
| 9612.00 | 17.79 | 37.95 | 8.94 | 25.40 | 39.28 | 54.00 | -14.72 | Vertical |
| 12015.00 | 15.36 | 39.08 | 10.34 | 25.19 | 39.59 | 54.00 | -14.41 | Vertical |
| 14418.00 | 11.14 | 42.41 | 11.64 | 24.28 | 40.91 | 54.00 | -13.09 | Vertical |
| 4806.00 | 29.87 | 31.78 | 5.32 | 24.09 | 43.32 | 54.00 | -10.68 | Horizontal |
| 7209.00 | 19.84 | 36.15 | 6.87 | 26.38 | 37.05 | 54.00 | -16.95 | Horizontal |
| 9612.00 | 16.22 | 37.95 | 8.94 | 25.40 | 38.41 | 54.00 | -15.59 | Horizontal |
| 12015.00 | 15.38 | 39.08 | 10.34 | 25.19 | 40.44 | 54.00 | -13.56 | Horizontal |
| 14418.00 | 12.35 | 42.41 | 11.64 | 24.28 | 43.08 | 54.00 | -10.92 | Horizontal |

Remark:

1. Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | | | |
|------------|--------------|---------------|--------|---------|------|
| Test mode: | Transmitting | Test channel: | Middle | Remark: | Peak |
|------------|--------------|---------------|--------|---------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4870.00 | 35.65 | 31.85 | 5.40 | 24.01 | 48.89 | 74.00 | -25.11 | Vertical |
| 7305.00 | 33.00 | 36.37 | 6.91 | 26.62 | 49.66 | 74.00 | -24.34 | Vertical |
| 9740.00 | 30.87 | 38.35 | 9.01 | 25.29 | 52.94 | 74.00 | -21.06 | Vertical |
| 12175.00 | 28.64 | 38.92 | 10.39 | 25.02 | 52.93 | 74.00 | -21.07 | Vertical |
| 14610.00 | 26.52 | 42.51 | 11.71 | 24.33 | 56.41 | 74.00 | -17.59 | Vertical |
| 4870.00 | 38.31 | 31.85 | 5.40 | 24.01 | 52.11 | 74.00 | -21.89 | Horizontal |
| 7305.00 | 32.81 | 36.37 | 6.91 | 26.62 | 50.22 | 74.00 | -23.78 | Horizontal |
| 9740.00 | 30.57 | 38.35 | 9.01 | 25.29 | 53.58 | 74.00 | -20.42 | Horizontal |
| 12175.00 | 28.25 | 38.92 | 10.39 | 25.02 | 53.67 | 74.00 | -20.33 | Horizontal |
| 14610.00 | 27.44 | 42.51 | 11.71 | 24.33 | 58.65 | 74.00 | -15.35 | Horizontal |

| | | | | | |
|------------|--------------|---------------|--------|---------|---------|
| Test mode: | Transmitting | Test channel: | Middle | Remark: | average |
|------------|--------------|---------------|--------|---------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4870.00 | 27.18 | 31.85 | 5.40 | 24.01 | 40.42 | 54.00 | -13.58 | Vertical |
| 7305.00 | 21.76 | 36.37 | 6.91 | 26.62 | 38.42 | 54.00 | -15.58 | Vertical |
| 9740.00 | 16.58 | 38.35 | 9.01 | 25.29 | 38.65 | 54.00 | -15.35 | Vertical |
| 12175.00 | 15.78 | 38.92 | 10.39 | 25.02 | 40.07 | 54.00 | -13.93 | Vertical |
| 14610.00 | 12.89 | 42.51 | 11.71 | 24.33 | 42.78 | 54.00 | -11.22 | Vertical |
| 4870.00 | 29.35 | 31.85 | 5.4 | 24.01 | 43.15 | 54.00 | -10.85 | Horizontal |
| 7305.00 | 19.67 | 36.37 | 6.91 | 26.62 | 37.08 | 54.00 | -16.92 | Horizontal |
| 9740.00 | 16.73 | 38.35 | 9.01 | 25.29 | 39.74 | 54.00 | -14.26 | Horizontal |
| 12175.00 | 13.48 | 38.92 | 10.39 | 25.02 | 38.9 | 54.00 | -15.1 | Horizontal |
| 14610.00 | 11.79 | 42.51 | 11.71 | 24.33 | 43.00 | 54.00 | -11.00 | Horizontal |

Remark:

1. Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | | | |
|------------|--------------|---------------|---------|---------|------|
| Test mode: | Transmitting | Test channel: | Highest | Remark: | Peak |
|------------|--------------|---------------|---------|---------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4948.00 | 34.63 | 31.93 | 5.47 | 23.93 | 48.1 | 74.00 | -25.90 | Vertical |
| 7422.00 | 32.38 | 36.59 | 6.95 | 26.95 | 48.97 | 74.00 | -25.03 | Vertical |
| 9896.00 | 30.48 | 38.81 | 9.07 | 25.22 | 53.14 | 74.00 | -20.86 | Vertical |
| 12370.00 | 30.54 | 38.76 | 10.44 | 24.74 | 55.00 | 74.00 | -19.00 | Vertical |
| 14844.00 | 25.51 | 42.21 | 11.94 | 24.47 | 55.19 | 74.00 | -18.81 | Vertical |
| 4948.00 | 37.92 | 31.93 | 5.47 | 23.93 | 52.08 | 74.00 | -21.92 | Horizontal |
| 7422.00 | 34.2. | 36.59 | 6.95 | 26.95 | 51.56 | 74.00 | -22.44 | Horizontal |
| 9896.00 | 29.61 | 38.81 | 9.07 | 25.22 | 53.12 | 74.00 | -20.88 | Horizontal |
| 12370.00 | 30.39 | 38.76 | 10.44 | 24.74 | 55.78 | 74.00 | -18.22 | Horizontal |
| 14844.00 | 26.71 | 42.21 | 11.94 | 24.47 | 57.40 | 74.00 | -16.60 | Horizontal |

| | | | | | |
|------------|--------------|---------------|---------|---------|---------|
| Test mode: | Transmitting | Test channel: | Highest | Remark: | average |
|------------|--------------|---------------|---------|---------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4948.00 | 26.08 | 31.93 | 5.47 | 23.93 | 39.55 | 54.00 | -14.45 | Vertical |
| 7422.00 | 21.02 | 36.59 | 6.95 | 26.95 | 37.61 | 54.00 | -16.39 | Vertical |
| 9896.00 | 15.54 | 38.81 | 9.07 | 25.22 | 38.20 | 54.00 | -15.80 | Vertical |
| 12370.00 | 13.31 | 38.76 | 10.44 | 24.74 | 37.77 | 54.00 | -16.23 | Vertical |
| 14844.00 | 9.36 | 42.21 | 11.94 | 24.47 | 39.04 | 54.00 | -14.96 | Vertical |
| 4948.00 | 28.27 | 31.93 | 5.47 | 23.93 | 42.43 | 54.00 | -11.57 | Horizontal |
| 7422.00 | 18.85 | 36.59 | 6.95 | 26.95 | 36.21 | 54.00 | -17.79 | Horizontal |
| 9896.00 | 15.76 | 38.81 | 9.07 | 25.22 | 39.27 | 54.00 | -14.73 | Horizontal |
| 12370.00 | 14.89 | 38.76 | 10.44 | 24.74 | 40.28 | 54.00 | -13.72 | Horizontal |
| 14844.00 | 12.66 | 42.21 | 11.94 | 24.47 | 43.35 | 54.00 | -10.65 | Horizontal |

Remark:

1. Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.3.3 Band edge (Radiated Emission)

| | | | | | |
|------------|--------------|---------------|--------|---------|------|
| Test mode: | Transmitting | Test channel: | Lowest | Remark: | Peak |
|------------|--------------|---------------|--------|---------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 51.84 | 27.22 | 3.14 | 30.76 | 51.44 | 74.00 | -22.56 | Horizontal |
| 2400.00 | 53.75 | 27.58 | 3.37 | 30.10 | 54.60 | 74.00 | -19.40 | Horizontal |
| 2390.00 | 47.85 | 27.22 | 3.14 | 30.76 | 47.45 | 74.00 | -26.55 | Vertical |
| 2400.00 | 52.48 | 27.58 | 3.37 | 30.10 | 53.33 | 74.00 | -20.67 | Vertical |

| | | | | | |
|------------|--------------|---------------|--------|---------|---------|
| Test mode: | Transmitting | Test channel: | Lowest | Remark: | Average |
|------------|--------------|---------------|--------|---------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 32.28 | 27.22 | 3.14 | 30.76 | 31.88 | 54.00 | -22.12 | Horizontal |
| 2400.00 | 34.18 | 27.58 | 3.37 | 30.10 | 35.03 | 54.00 | -18.97 | Horizontal |
| 2390.00 | 31.51 | 27.22 | 3.14 | 30.76 | 31.11 | 54.00 | -22.89 | Vertical |
| 2400.00 | 33.69 | 27.58 | 3.37 | 30.10 | 34.54 | 54.00 | -19.46 | Vertical |


| | | | | | |
|------------|--------------|---------------|---------|---------|------|
| Test mode: | Transmitting | Test channel: | Highest | Remark: | Peak |
|------------|--------------|---------------|---------|---------|------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 45.28 | 27.53 | 3.49 | 29.93 | 46.37 | 74.00 | -27.63 | Horizontal |
| 2500.00 | 42.67 | 27.58 | 3.52 | 29.98 | 43.79 | 74.00 | -30.21 | Horizontal |
| 2483.50 | 42.64 | 27.53 | 3.49 | 29.93 | 43.73 | 74.00 | -30.27 | Vertical |
| 2500.00 | 39.86 | 27.58 | 3.52 | 29.98 | 40.98 | 74.00 | -33.02 | Vertical |

| | | | | | |
|------------|--------------|---------------|---------|---------|---------|
| Test mode: | Transmitting | Test channel: | Highest | Remark: | Average |
|------------|--------------|---------------|---------|---------|---------|

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 30.59 | 27.53 | 3.49 | 29.93 | 31.68 | 54.00 | -22.32 | Horizontal |
| 2500.00 | 28.65 | 27.58 | 3.52 | 29.98 | 29.77 | 54.00 | -24.23 | Horizontal |
| 2483.50 | 28.95 | 27.53 | 3.49 | 29.93 | 30.04 | 54.00 | -23.96 | Vertical |
| 2500.00 | 25.68 | 27.58 | 3.52 | 29.98 | 26.8 | 54.00 | -27.20 | Vertical |

6.4 20dB Bandwidth

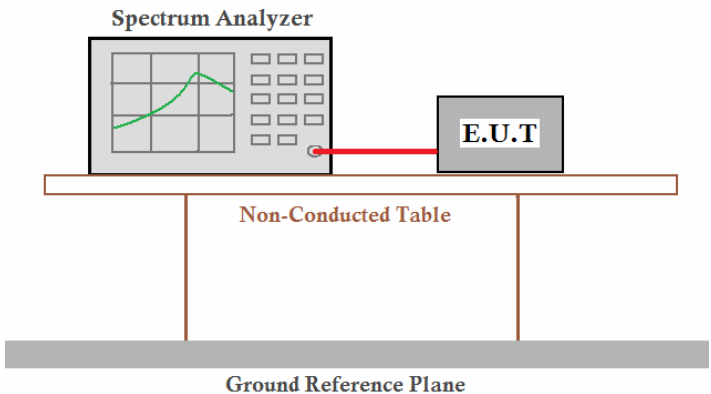
| | |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.249/15.215 |
| Test Method: | ANSI C63.4:2003 |
| Receiver setup: | RBW=10kHz, VBW=30kHz, detector: Peak |
| Limit: | Operation Frequency range 2400MHz-2483.5MHz |
| Test Procedure: | <ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth. |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.7 |
| Test mode: | Refer to section 5.3 |
| Test results: | Passed |

Measurement Data


| Test channel | 20dB bandwidth (MHz) | Results |
|--------------|----------------------|---------|
| Lowest | 1.161 | Pass |
| Middle | 1.145 | Pass |
| Highest | 1.145 | Pass |

Test plot as follows:

| | | |
|---------------|--------|--|
| Test channel: | Lowest | |
|---------------|--------|--|

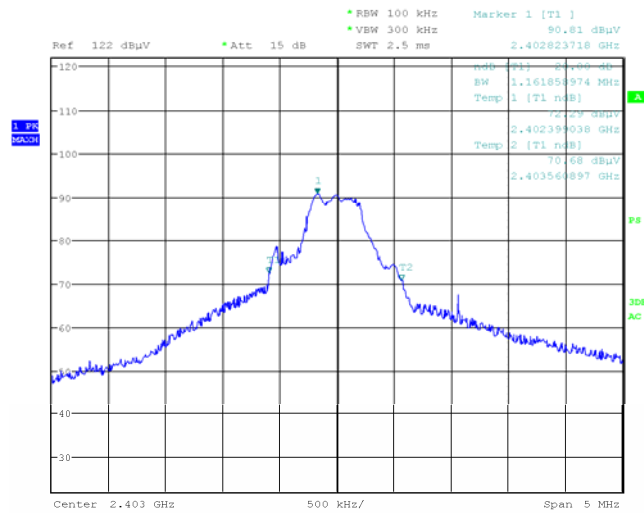

| | | |
|---------------|--------|--|
| Test channel: | Middle | |
|---------------|--------|--|

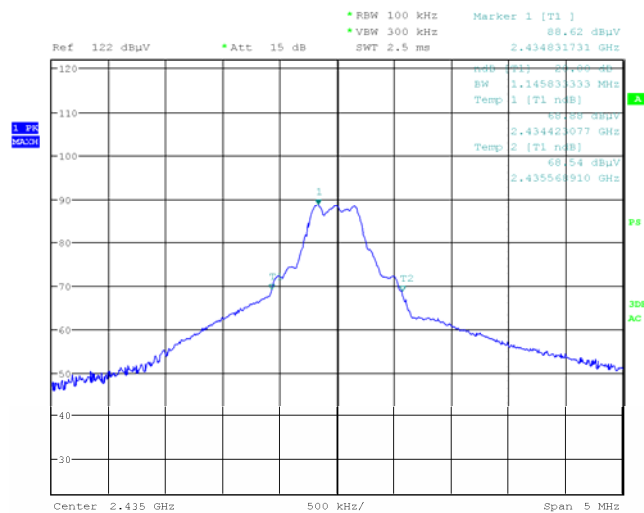

| | | |
|---------------|---------|--|
| Test channel: | Highest | |
|---------------|---------|--|

