

FCC Part 15C

Measurement and Test Report




For

Shenzhen Shenchuang Electronics Co., Ltd.

7th Floor, West Tower, Hengfanglaobing Industrial Park, Xingye Road, Xixiang

Town, Bao An District, Shenzhen, China

FCC ID: ZIEM709

Report Concerns: Original Report	Equipment Type: MID Touch Pad
Model:	<u>M709</u>
Report No.:	<u>STR11048071I-1</u>
Test Date:	<u>2011-04-08 to 2011-05-10</u>
Issue Date:	<u>2011-05-11</u>
Tested By:	<u>Jason Chen / Engineer</u> 
Reviewed By:	<u>Lahm Peng / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> 
Prepared By:	Shenzhen SEM.Test Electronic Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	3
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT EXERCISE SOFTWARE.....	4
1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS.....	4
1.7 EUT CABLE LIST AND DETAILS.....	4
2. SUMMARY OF TEST RESULTS.....	5
3. CONDUCTED EMISSIONS.....	6
3.1 MEASUREMENT UNCERTAINTY.....	6
3.2 TEST EQUIPMENT LIST AND DETAILS.....	6
3.3 TEST PROCEDURE.....	6
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	6
3.5 ENVIRONMENTAL CONDITIONS.....	7
3.6 SUMMARY OF TEST RESULTS/PLOTS.....	7
3.7 CONDUCTED EMISSIONS TEST DATA.....	7
4. §15.203 - ANTENNA REQUIREMENT.....	10
4.1 STANDARD APPLICABLE.....	10
4.2 TEST RESULT.....	10
5. POWER SPECTRAL DENSITY.....	11
5.1 STANDARD APPLICABLE.....	11
5.2 TEST EQUIPMENT LIST AND DETAILS.....	11
5.3 TEST PROCEDURE.....	11
5.4 ENVIRONMENTAL CONDITIONS.....	11
5.5 SUMMARY OF TEST RESULTS/PLOTS.....	12
6. 6-DB BANDWIDTH.....	16
6.1 STANDARD APPLICABLE.....	16
6.2 TEST EQUIPMENT LIST AND DETAILS.....	16
6.3 TEST PROCEDURE.....	16
6.4 ENVIRONMENTAL CONDITIONS.....	16
6.5 SUMMARY OF TEST RESULTS/PLOTS.....	16
7. POWER OUTPUT.....	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST EQUIPMENT LIST AND DETAILS.....	20
7.3 TEST PROCEDURE.....	20
7.4 ENVIRONMENTAL CONDITIONS.....	20
7.5 SUMMARY OF TEST RESULTS/PLOTS.....	21
8. FIELD STRENGTH OF SPURIOUS EMISSIONS.....	25
8.1 MEASUREMENT UNCERTAINTY.....	25
8.2 STANDARD APPLICABLE.....	25
8.3 TEST EQUIPMENT LIST AND DETAILS.....	25
8.4 TEST PROCEDURE.....	25
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	26
8.6 ENVIRONMENTAL CONDITIONS.....	26
8.7 SUMMARY OF TEST RESULTS/PLOTS.....	26
9. OUT OF BAND EMISSIONS.....	41
9.1 STANDARD APPLICABLE.....	41
9.2 TEST EQUIPMENT LIST AND DETAILS.....	41
9.3 TEST PROCEDURE.....	41
9.4 ENVIRONMENTAL CONDITIONS.....	41
9.5 SUMMARY OF TEST RESULTS/PLOTS.....	42

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Shenchuang Electronics Co., Ltd.
Address of applicant: 7th Floor, West Tower, Hengfanglaobing Industrial Park,
Xingye Road, Xixiang Town, Bao An District, Shenzhen,
China

Manufacturer: Shenzhen Shenchuang Electronics Co., Ltd.
Address of manufacturer: 7th Floor, West Tower, Hengfanglaobing Industrial Park,
Xingye Road, Xixiang Town, Bao An District, Shenzhen,
China

General Description of E.U.T

Items	Description
EUT Description:	MID Touch Pad
Trade Name:	/
Model No.:	M709
Add Model:	M701, M702
Rated Voltage:	DC 5V
RF Output Power	Max. 13.31dBm
Frequency range:	2412MHz~2462MHz
Number of channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Size:	20.3X13.3X1.5cm

Note: The test data is gathered from a production sample, provided by the manufacture. The others models listed in the report have different appearance only of M709 without circuit and electronic construction changed, declared by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Shenchuang Electronics Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted with Low Channel, Middle Channel and High Channel, accordingly in reference to the Operating Instructions.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components.

1.6 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

1.7 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Power Cable	1.0	Unshielded	Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203; § 15.247(c)(1)(i)	Antenna Requirement	Compliant
§ 15.207	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	Power Output	Compliant
§ 15.209(a)(d)	Radiated Emission	Compliant
§ 15.247(d)	Band edge	Compliant

3. CONDUCTED EMISSIONS

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2010-12-20	2011-12-19
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2010-12-20	2011-12-19
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2010-12-20	2011-12-19

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.4 Basic Test Setup Block Diagram

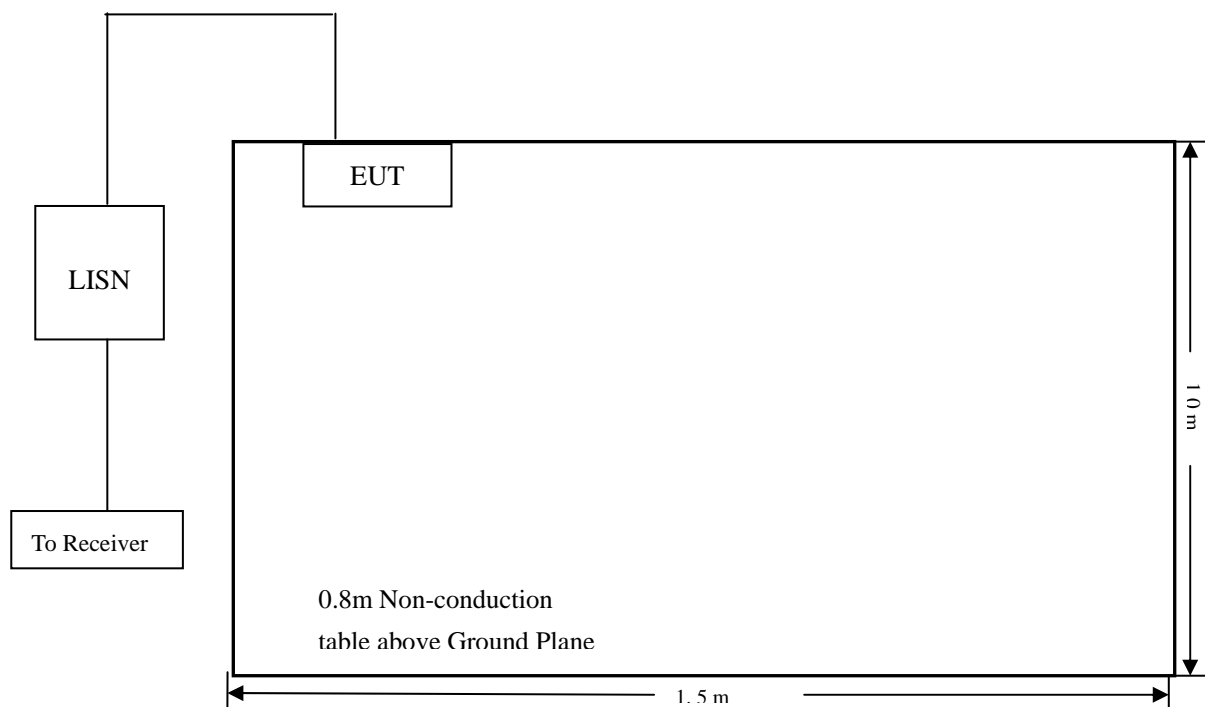

3.5 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar


3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


-5.48 dB μ V at **0.162 MHz** in the **Line Ave** Detector, 0.15-30MHz

3.7 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC 15.207	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB μ V	QP/Ave/Pk	Line/Neutral	dB μ V	dB
0.162	49.87	AV	Line	55.35	-5.48
0.178	48.08	AV	Line	54.57	-6.49
0.194	57.19	Pk	Neutral	63.85	-6.66
0.182	46.23	AV	Neutral	54.38	-8.15
0.578	37.57	AV	Neutral	46.00	-8.43
0.186	55.74	Pk	Line	64.21	-8.47
0.154	56.96	Pk	Line	65.77	-8.81
0.578	44.57	Pk	Neutral	56.00	-11.43

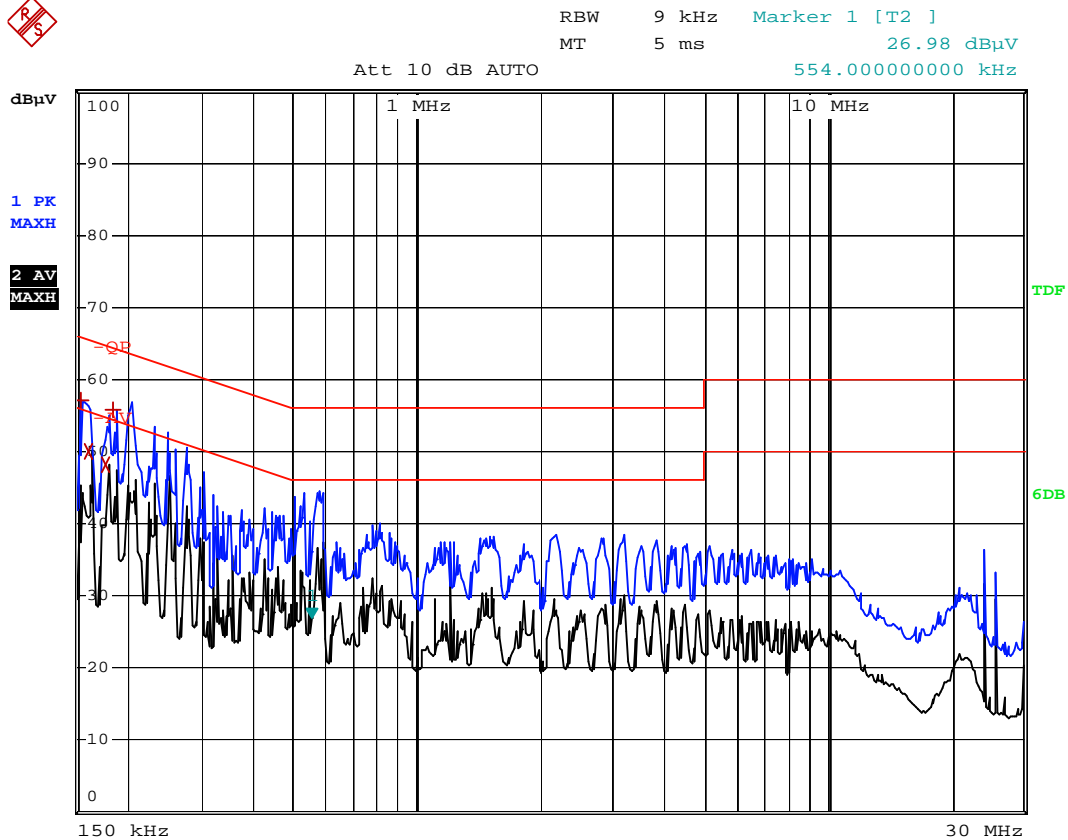Plot of Conducted Emissions Test Data*Conducted Disturbance**EUT: MID Touch Pad**M/N: M709**Operating Condition: Transmitting**Test Specification: L**Comment: AC 120V/60Hz/Adapter 5V*

Date: 5.MAY.2011 10:44:53

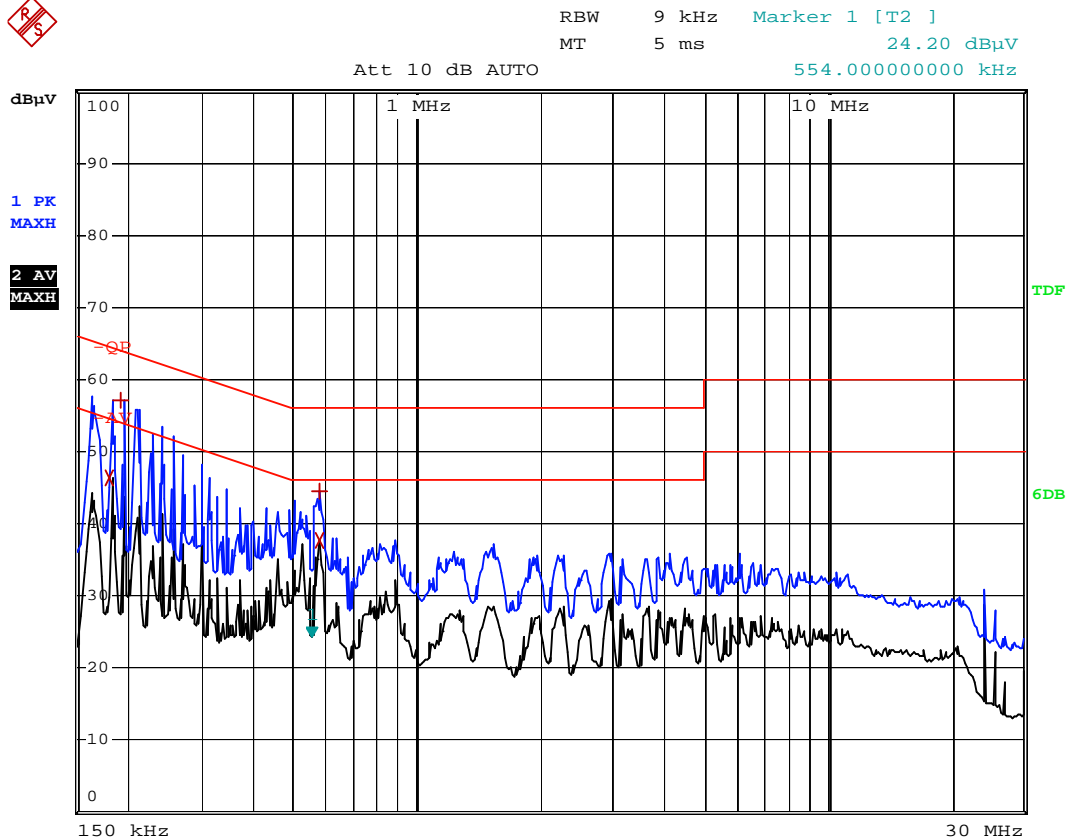Plot of Conducted Emissions Test Data*Conducted Disturbance**EUT: MID Touch Pad**M/N: M709**Operating Condition: Transmitting**Test Specification: N**Comment: AC 120V/60Hz/Adapter 5V*

Date: 5.MAY.2011 10:46:18

4. §15.203 - ANTENNA REQUIREMENT

4.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Test Result

This product has a integral antenna, fulfill the requirement of this section.

5. POWER SPECTRAL DENSITY

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-12-20	2011-12-19
Attenuator	ATTEN	ATS100-4-20	/	2010-12-20	2011-12-19

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=3KHz, Span = 20MHz.
4. Repeat above procedures until all frequency measured was complete.


5.4 Environmental Conditions

Temperature:	20° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.5 Summary of Test Results/Plots


Test mode	Test channel	Reading dBm/3kHz	Limit dBm/3kHz
802.11b	Low channel (2412MHz)	-18.73	8
	Middle channel (2437MHz)	-17.42	8
	High channel (2462MHz)	-16.87	8
802.11g	Low channel (2412MHz)	-21.16	8
	Middle channel (2437MHz)	-20.86	8
	High channel (2462MHz)	-20.49	8

For 802.11b
Low Channel:

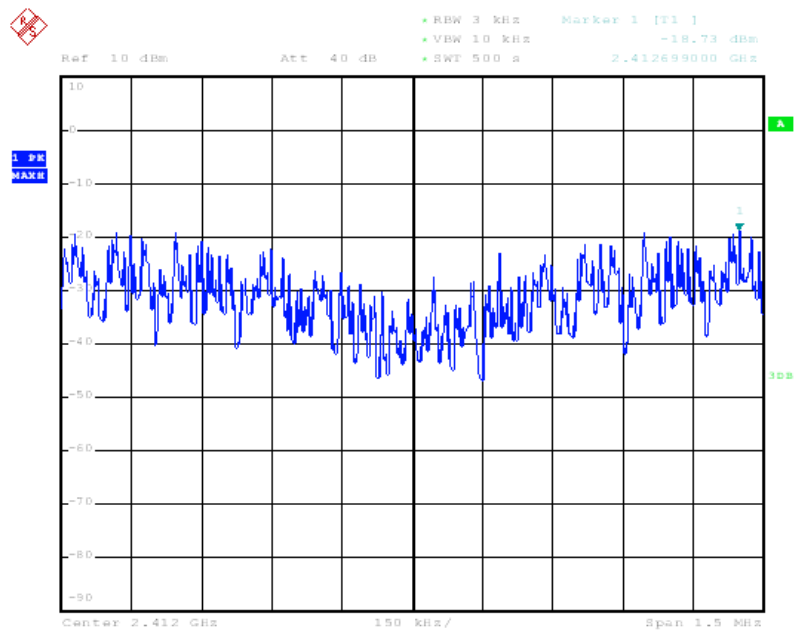


Date: 26.APR.2011 21:31:52

Middle Channel:

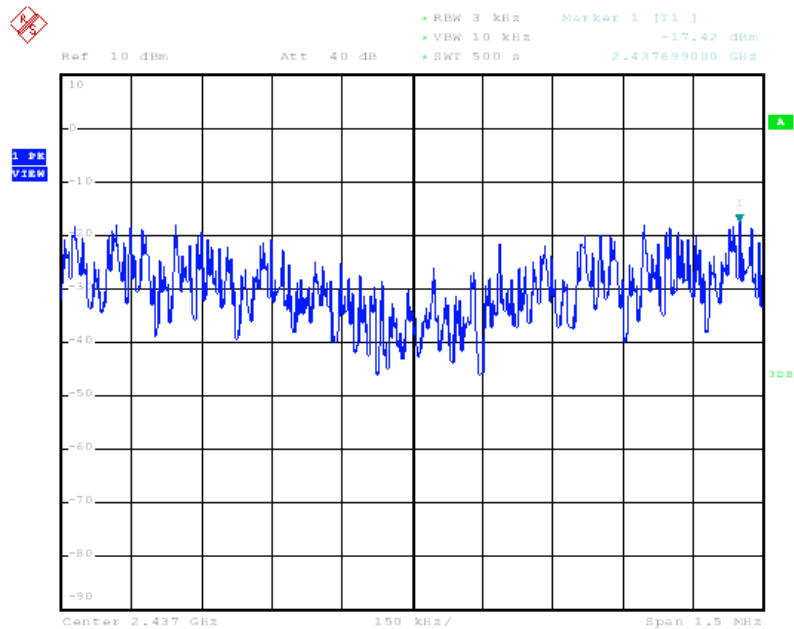


Date: 26.APR.2011 21:33:51

High Channel:

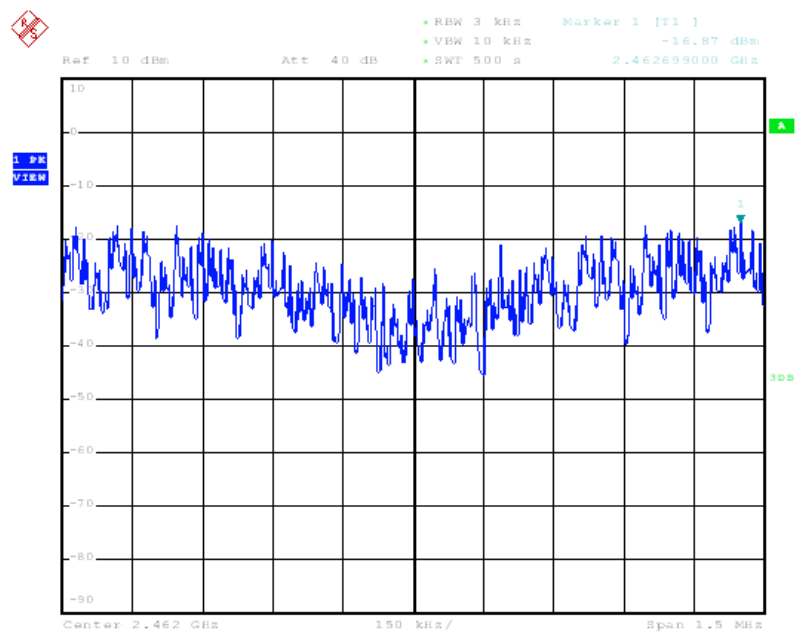


Date: 26.APR.2011 21:35:10

For 802.11g
Low Channel:

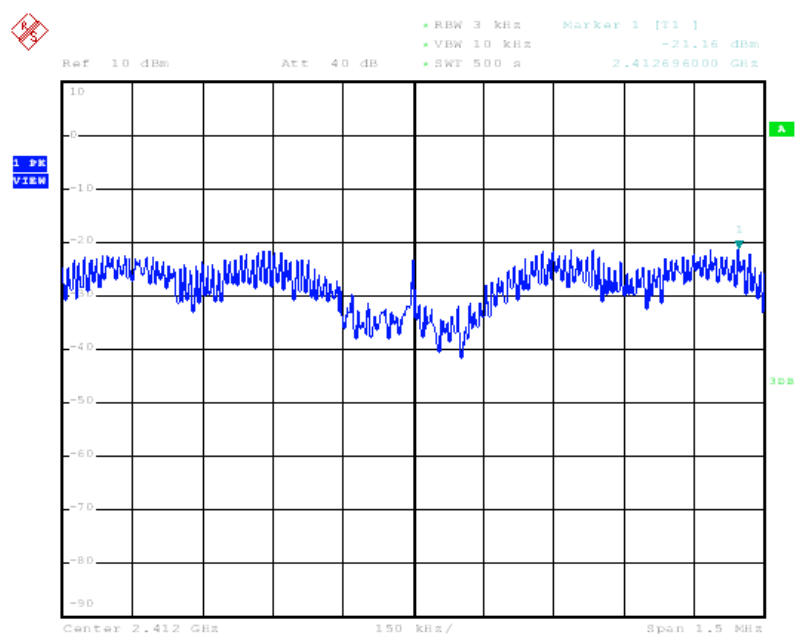


Date: 26.APR.2011 21:40:30

Middle Channel:

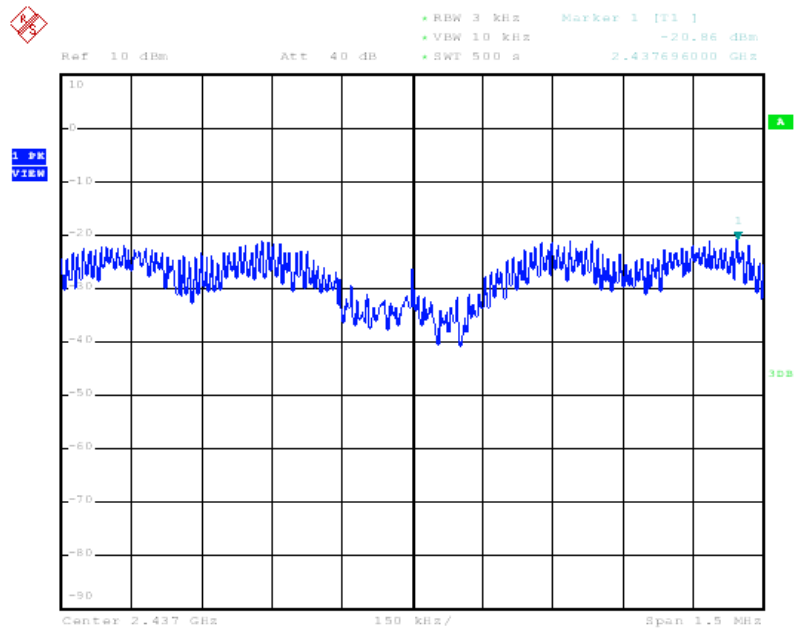

Date: 26.APR.2011 21:39:14

High Channel:

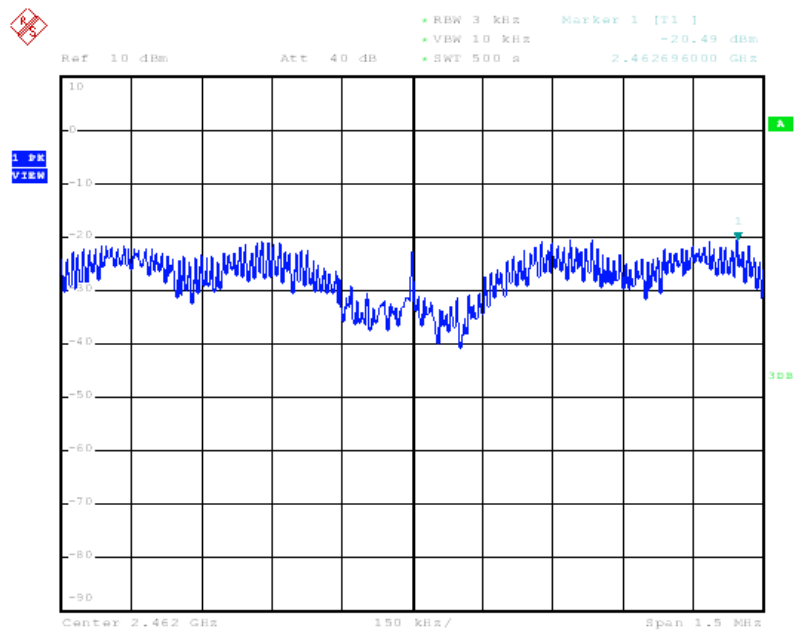

Date: 26.APR.2011 21:37:55

6. 6-dB BANDWIDTH

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-12-20	2011-12-19
Attenuator	ATTEN	ATS100-4-20	/	2010-12-20	2011-12-19

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

6.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=100KHz (1 % of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.

6.4 Environmental Conditions


Temperature:	24° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.5 Summary of Test Results/Plots

Test mode	Frequency MHz	6 dB Bandwidth kHz	Limit kHz
802.11b	2412	12560	500
	2437	12480	500
	2462	12560	500
802.11g	2412	16640	500
	2437	16720	500
	2462	16640	500


For 802.11b

Low Channel:

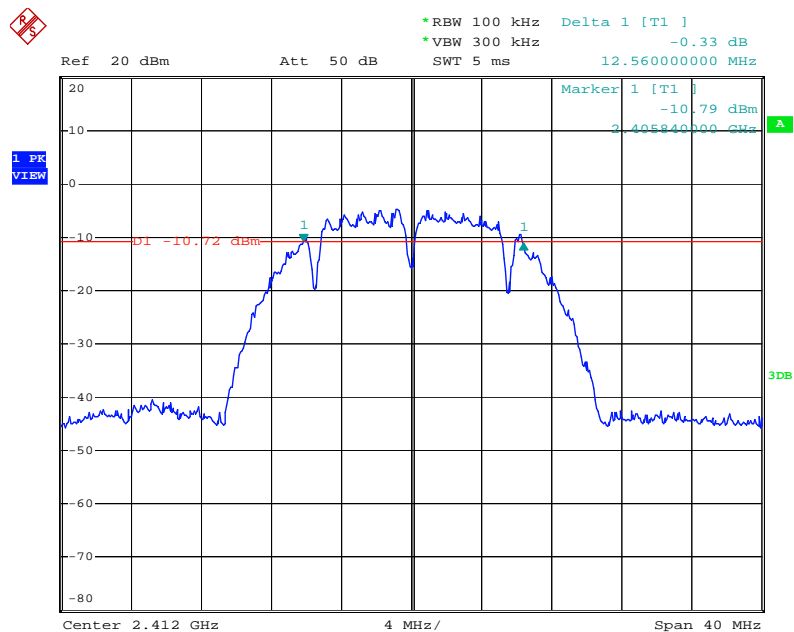


Date: 26.APR.2011 22:35:35

Mid Channel:

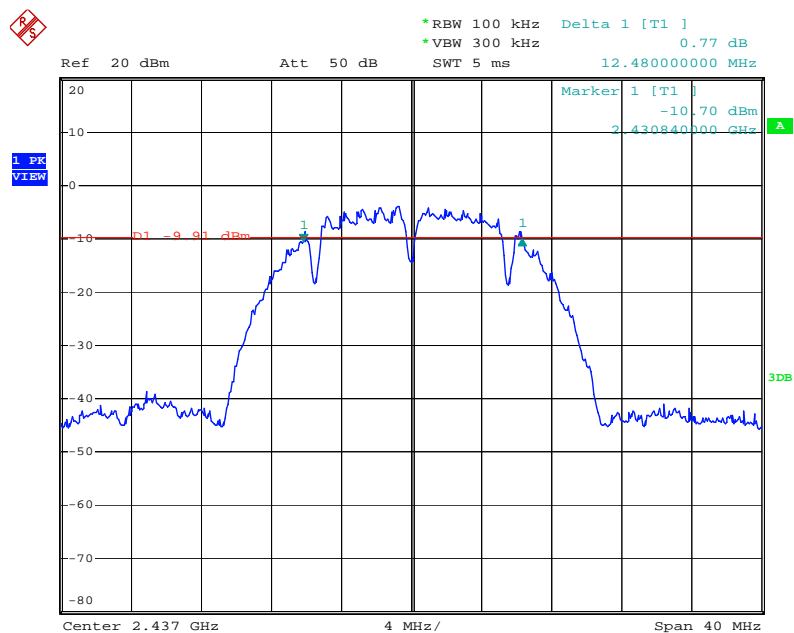


Date: 26.APR.2011 22:34:10

High Channel:

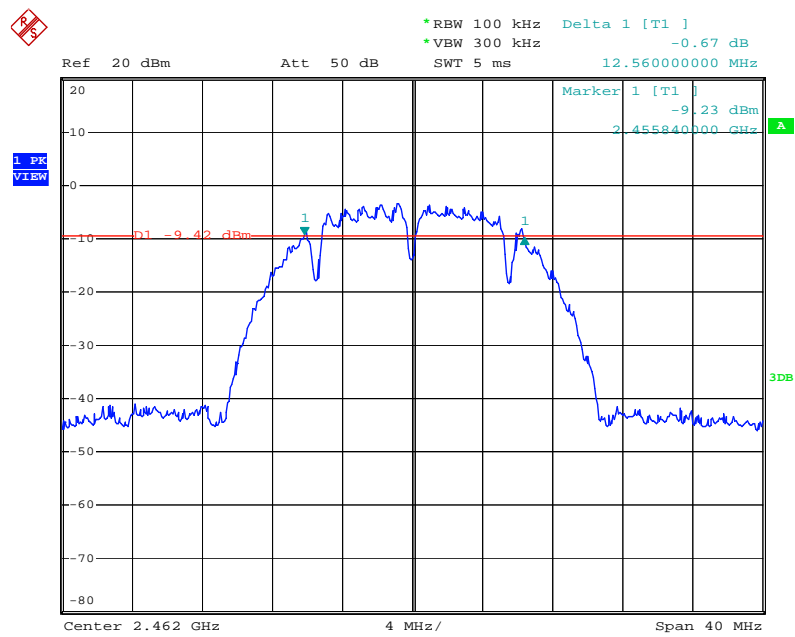


Date: 26.APR.2011 22:32:55

For 802.11g
Low Channel:

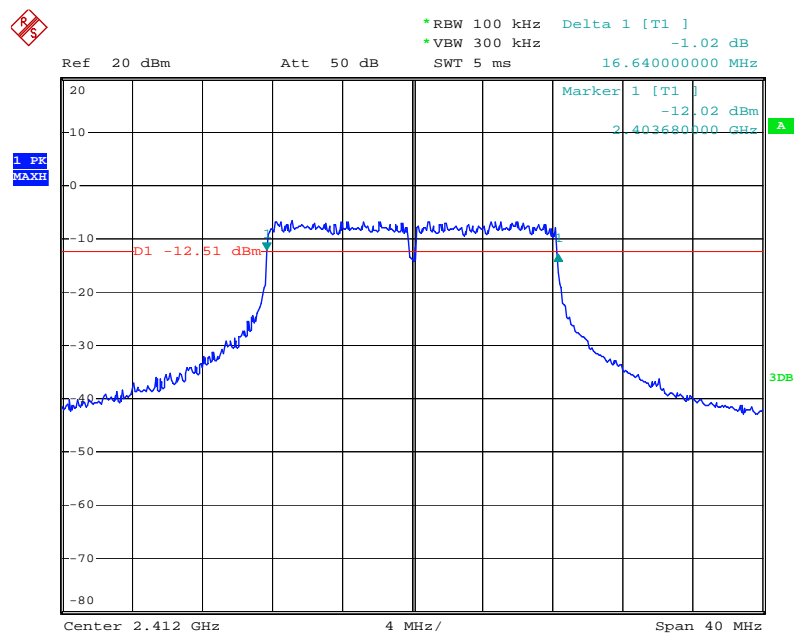


Date: 26.APR.2011 22:28:28

Mid Channel:

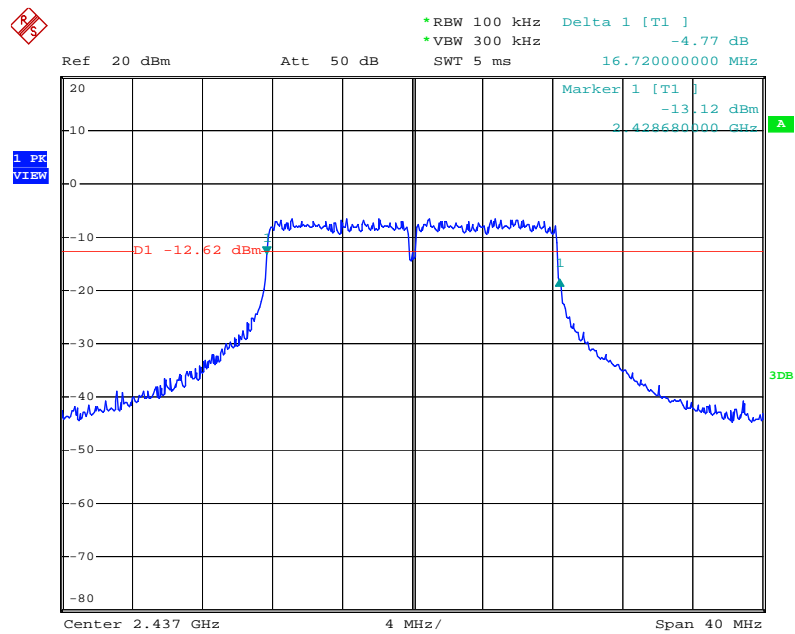

Date: 26.APR.2011 22:30:07

High Channel:

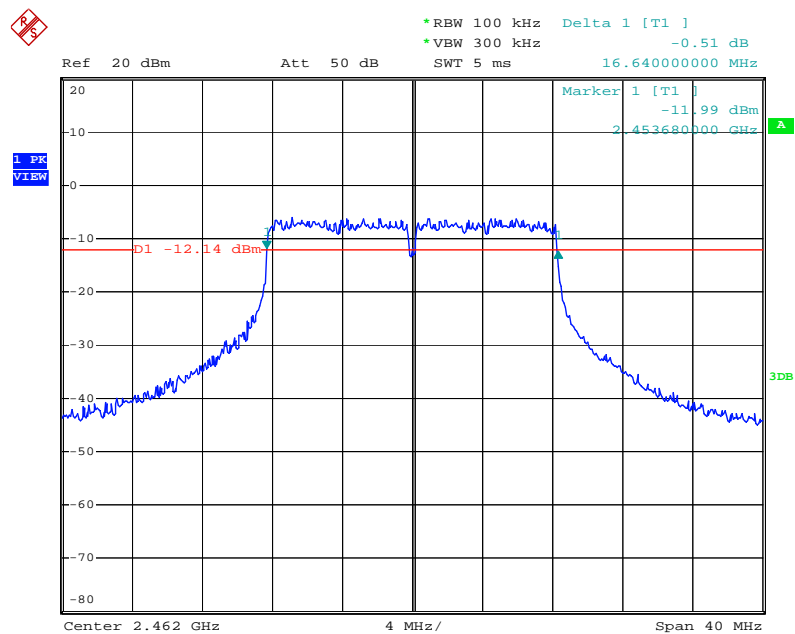

Date: 26.APR.2011 22:31:28

7. POWER OUTPUT

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-12-20	2011-12-19
Attenuator	ATTEN	ATS100-4-20	/	2010-12-20	2011-12-19

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 (2005), the method #1 of the power output option2 was used, the following is the measurement procedure.

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz.
4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) $<$ 0.5 RBW. Otherwise use peak detector mode.
5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”.
6. Trace average 100 traces in power averaging mode.
7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges.

7.4 Environmental Conditions


Temperature:	21° C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

7.5 Summary of Test Results/Plots

Test mode	Frequency MHz	Reading dBm	Output power W	Limit W
802.11b	2412	9.39	0.00869	1
	2437	9.84	0.00964	1
	2462	10.21	0.01049	1
802.11g	2412	11.27	0.01339	1
	2437	12.98	0.01986	1
	2462	13.31	0.02142	1


For 802.11b

Low Channel:

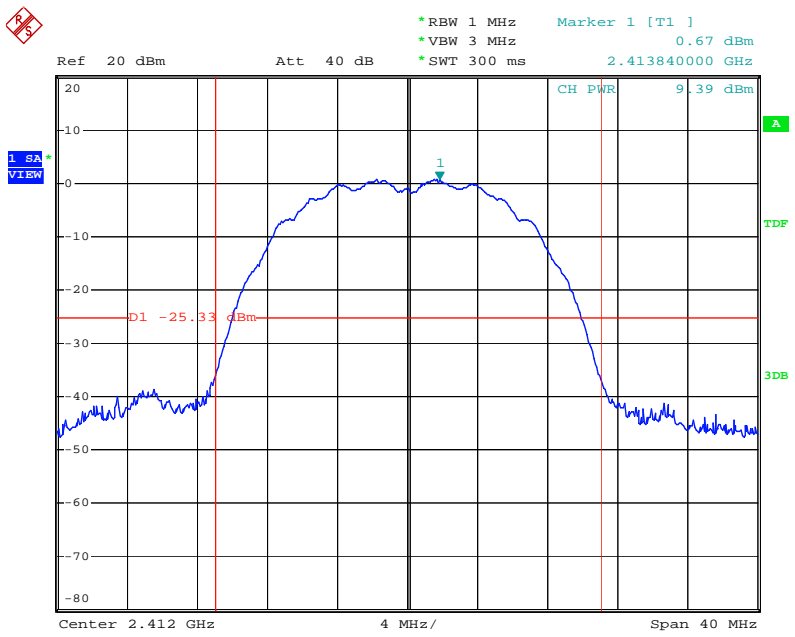


Date: 26.APR.2011 21:25:46

Middle Channel:

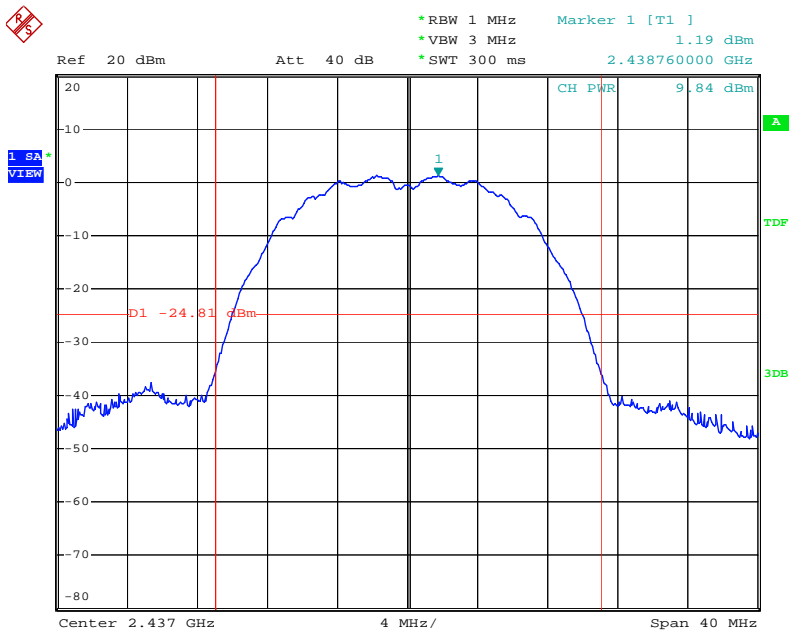

Date: 26.APR.2011 21:23:08


High Channel:

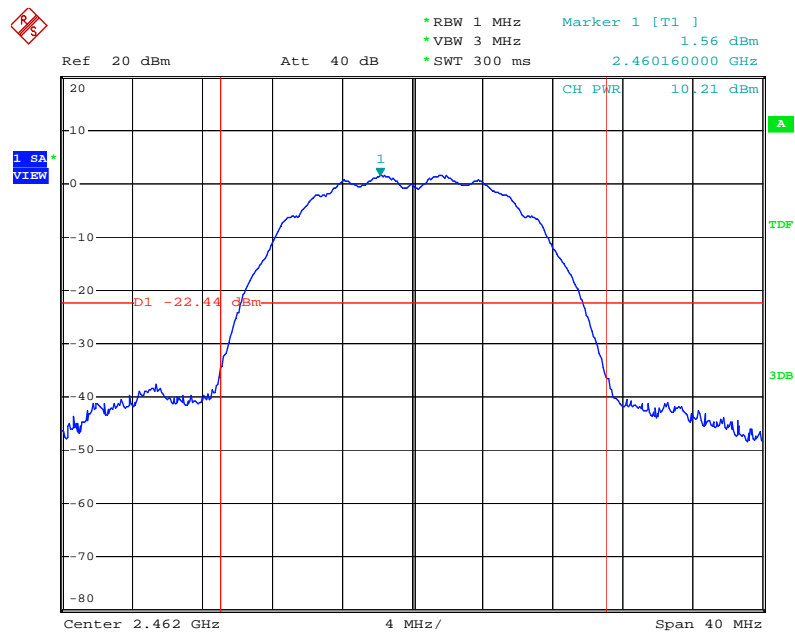

Date: 26.APR.2011 21:21:12


For 802.11g

Low Channel:

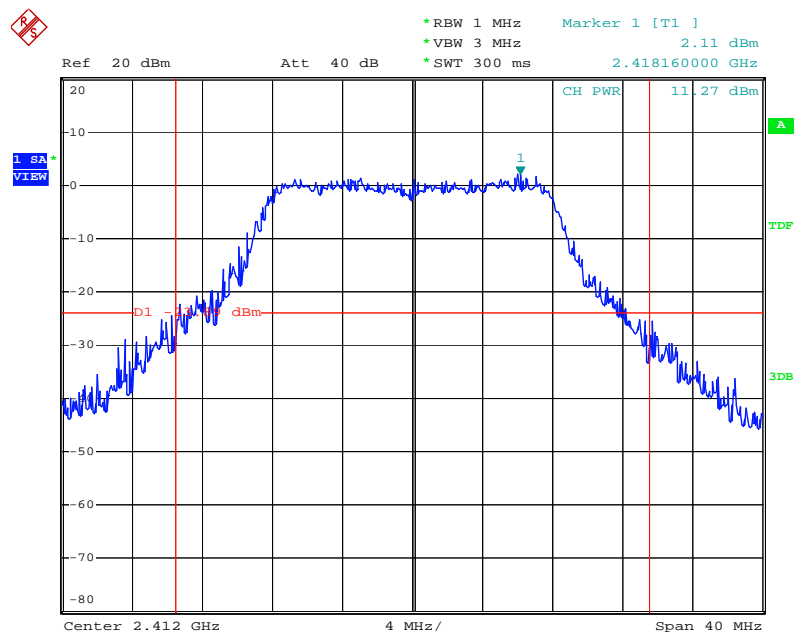


Date: 26.APR.2011 21:15:08

Middle Channel:

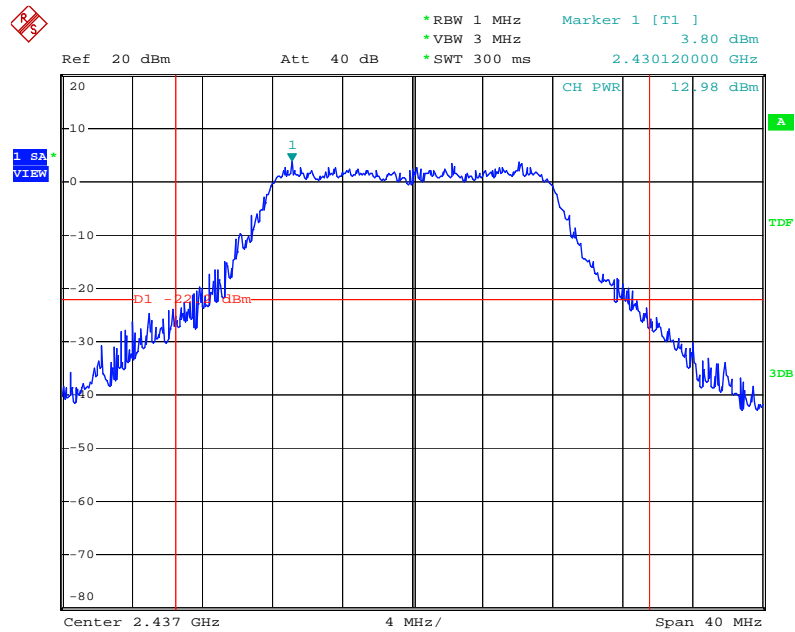

Date: 26.APR.2011 21:17:14

High Channel:

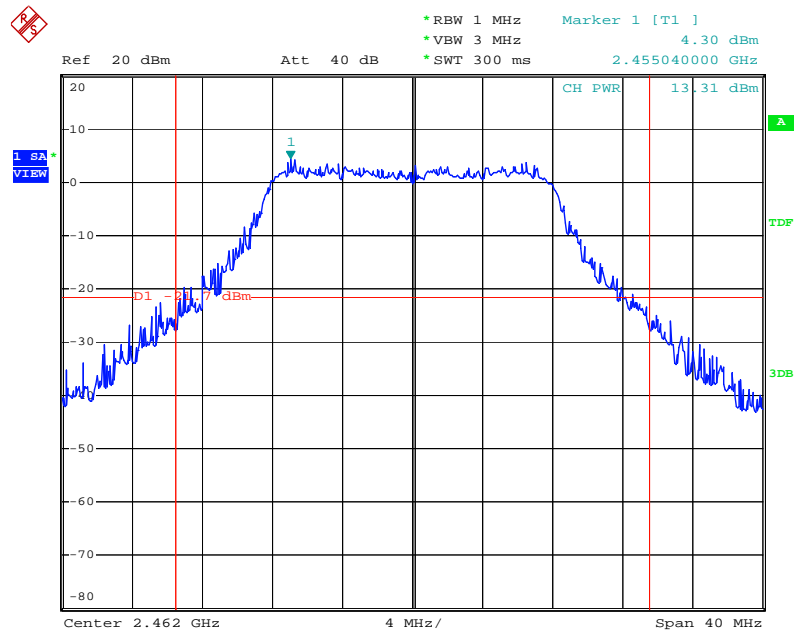

Date: 26.APR.2011 21:19:09

8. FIELD STRENGTH OF SPURIOUS EMISSIONS

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(c), 15.205 15.209(b) & 15.35 (b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Section 15.209:

30 - 88 MHz 40 dBuV/m @3M

88 -216 MHz 43.5 dBuV/m @3M

216 -960 MHz 46 dBuV/m @3M

Above 960 MHz 54dBuV/m @3M

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

8.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-12-20	2011-12-19
EMI Test Receiver	R&S	ESVB	825471/005	2010-12-20	2011-12-19
Positioning Controller	C&C	CC-C-1F	N/A	2010-12-20	2011-12-19
RF Switch	EM	EMSW18	SW060023	2010-12-20	2011-12-19
Pre-amplifier	Agilent	8447F	3113A06717	2010-12-20	2011-12-19
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-12-20	2011-12-19
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2011-01-09	2012-01-08
Horn Antenna	ETS	3117	00086197	2011-01-09	2012-01-08

8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

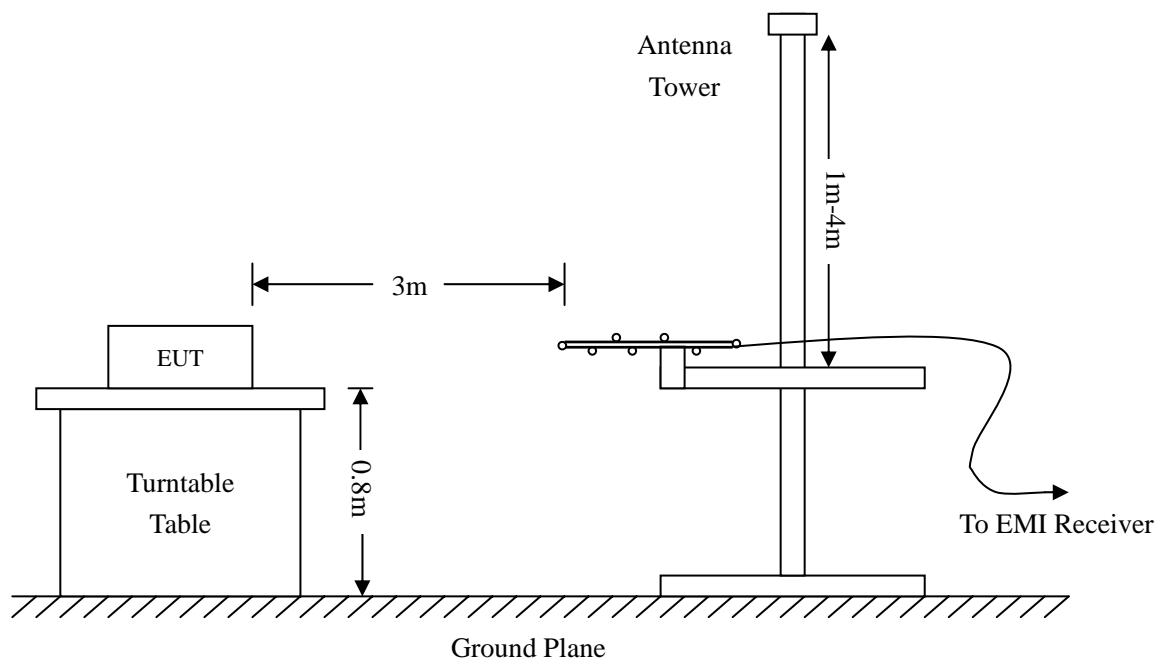

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.6 Environmental Conditions


Temperature:	22° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:


-2.53dBμV at 570.6100MHz in the Horizontal polarization, Transmitting 802.11g Middle Channel test mode with, 30 MHz to 25 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

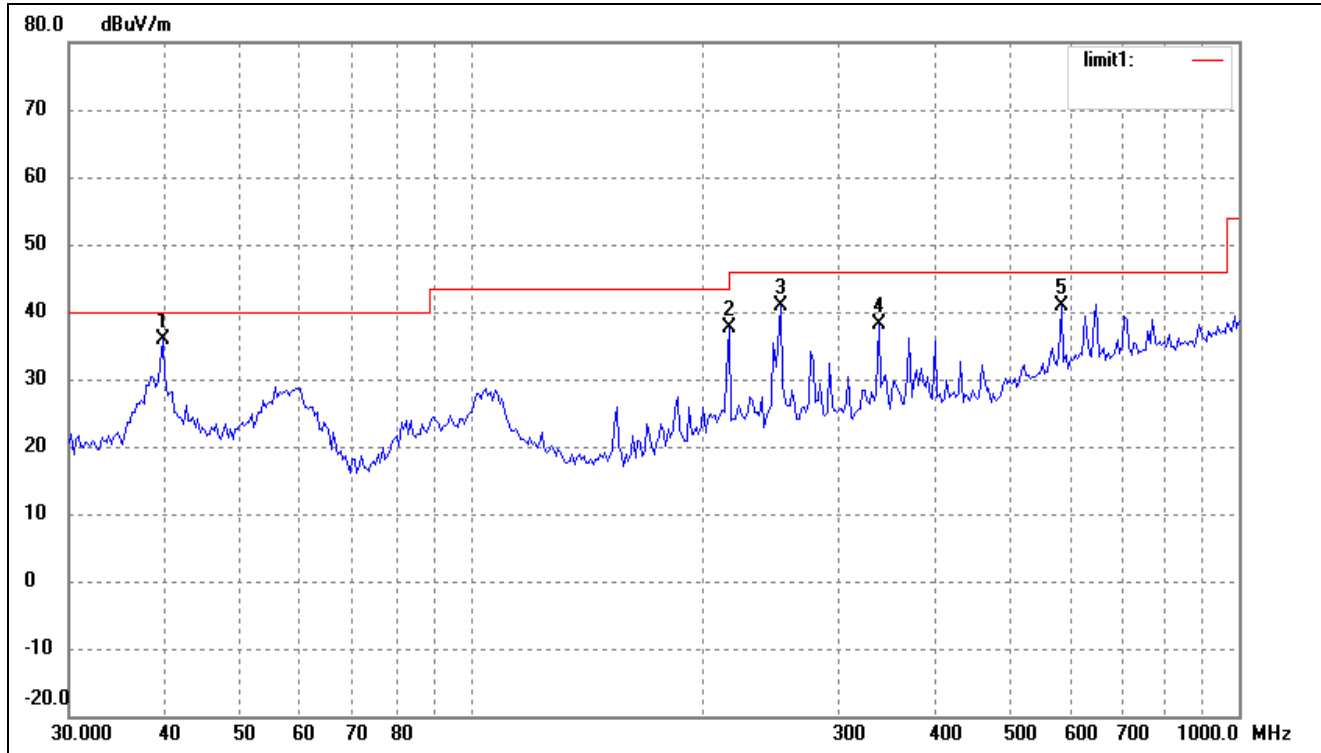*Test Result/Plots:**Spurious Emission From 30 MHz to 1 GHz**Test mode: Transmitting (802.11b) Low Channel**Comment:**Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.7147	27.83	8.07	35.90	40.00	-4.10	360	100	peak
2	216.7828	30.45	7.17	37.62	46.00	-8.38	360	100	peak
3	252.9482	32.03	8.77	40.80	46.00	-5.20	360	100	peak
4	339.5888	27.59	10.42	38.01	46.00	-7.99	360	100	peak
5	586.8437	24.39	16.38	40.77	46.00	-5.23	360	100	peak

Vertical

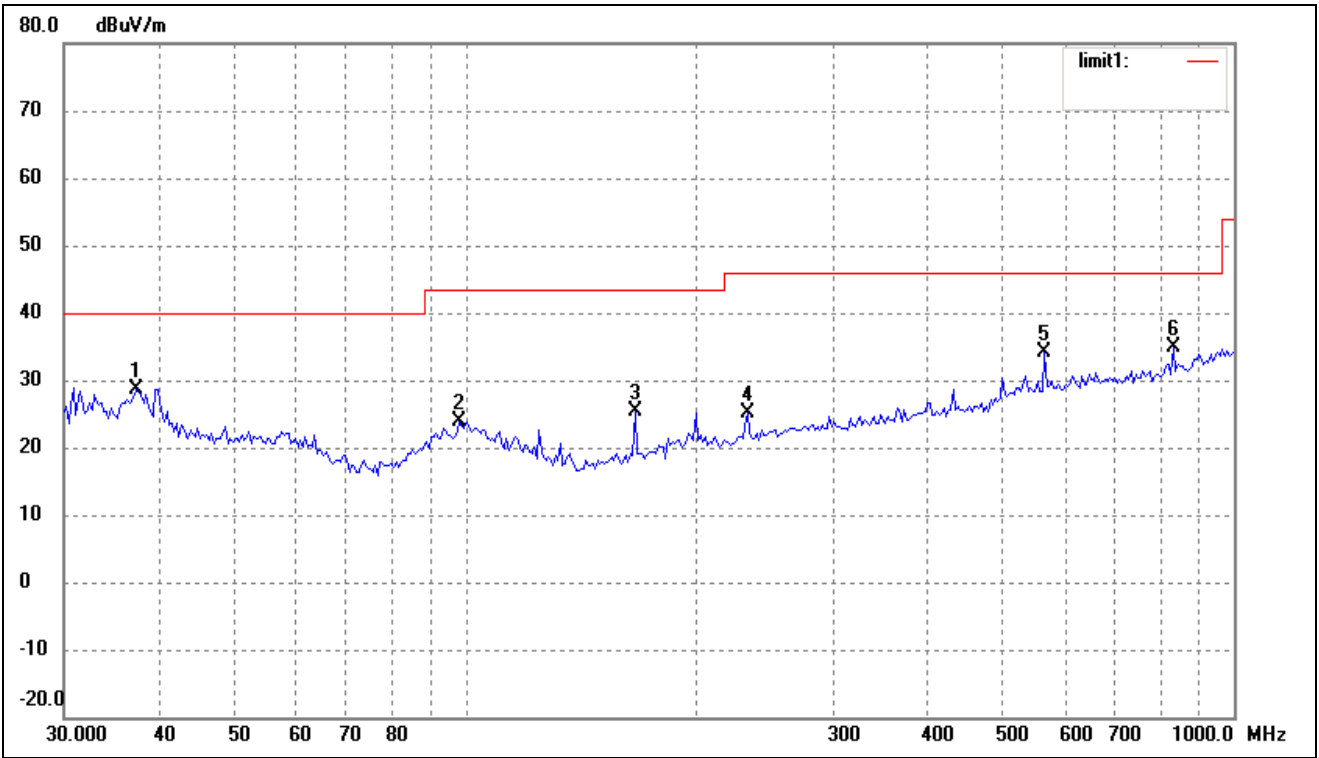


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	37.2855	21.53	7.21	28.74	40.00	-11.26	360	100	peak
2	98.1419	16.12	7.69	23.81	43.50	-19.69	360	100	peak
3	166.0680	21.45	3.93	25.38	43.50	-18.12	360	100	peak
4	232.5318	18.18	7.03	25.21	46.00	-20.79	360	100	peak
5	566.6223	20.40	13.76	34.16	46.00	-11.84	360	100	peak
6	833.3171	18.80	15.98	34.78	46.00	-11.22	360	100	peak

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11b) Middle Channel


Comment:

Horizontal

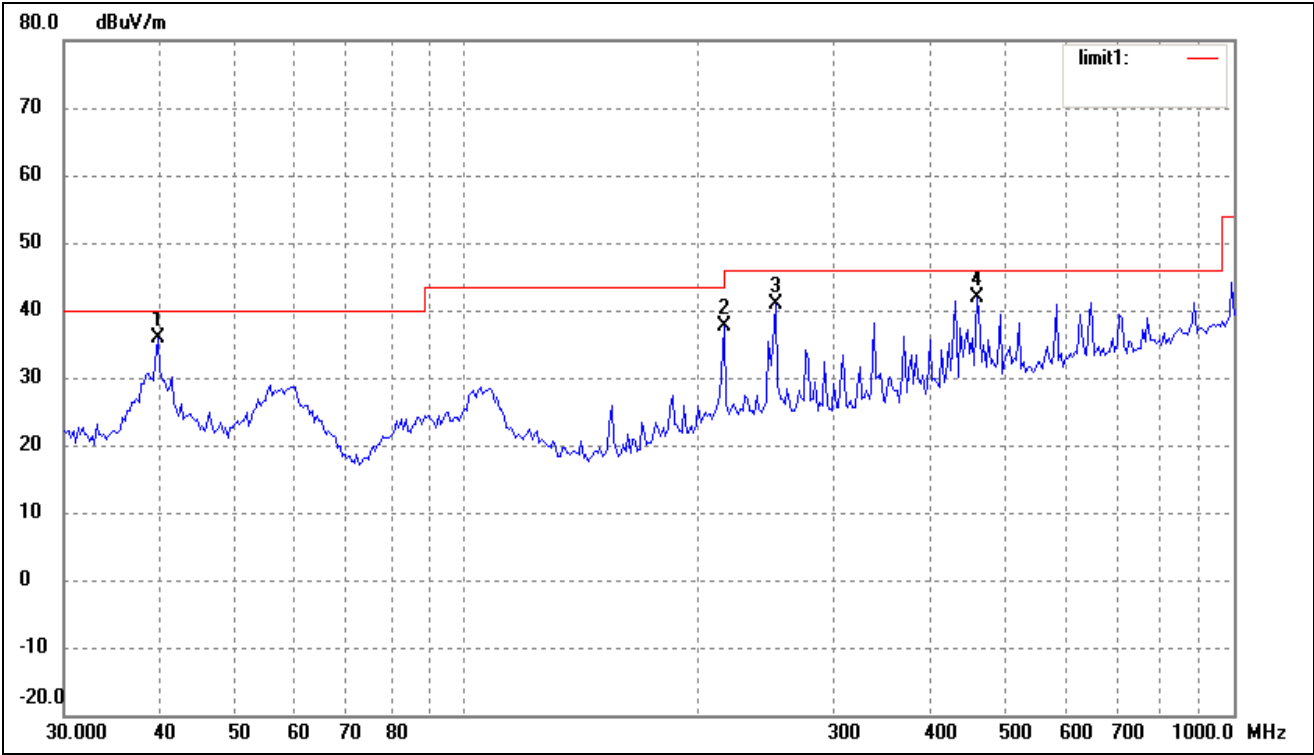

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.7147	27.83	8.07	35.90	40.00	-4.10	236	125	QP
2	216.7828	30.45	7.17	37.62	46.00	-8.38	360	100	peak
3	252.9482	32.03	8.77	40.80	46.00	-5.20	220	120	QP
4	462.3455	30.10	11.83	41.93	46.00	-4.07	109	200	QP

Vertical

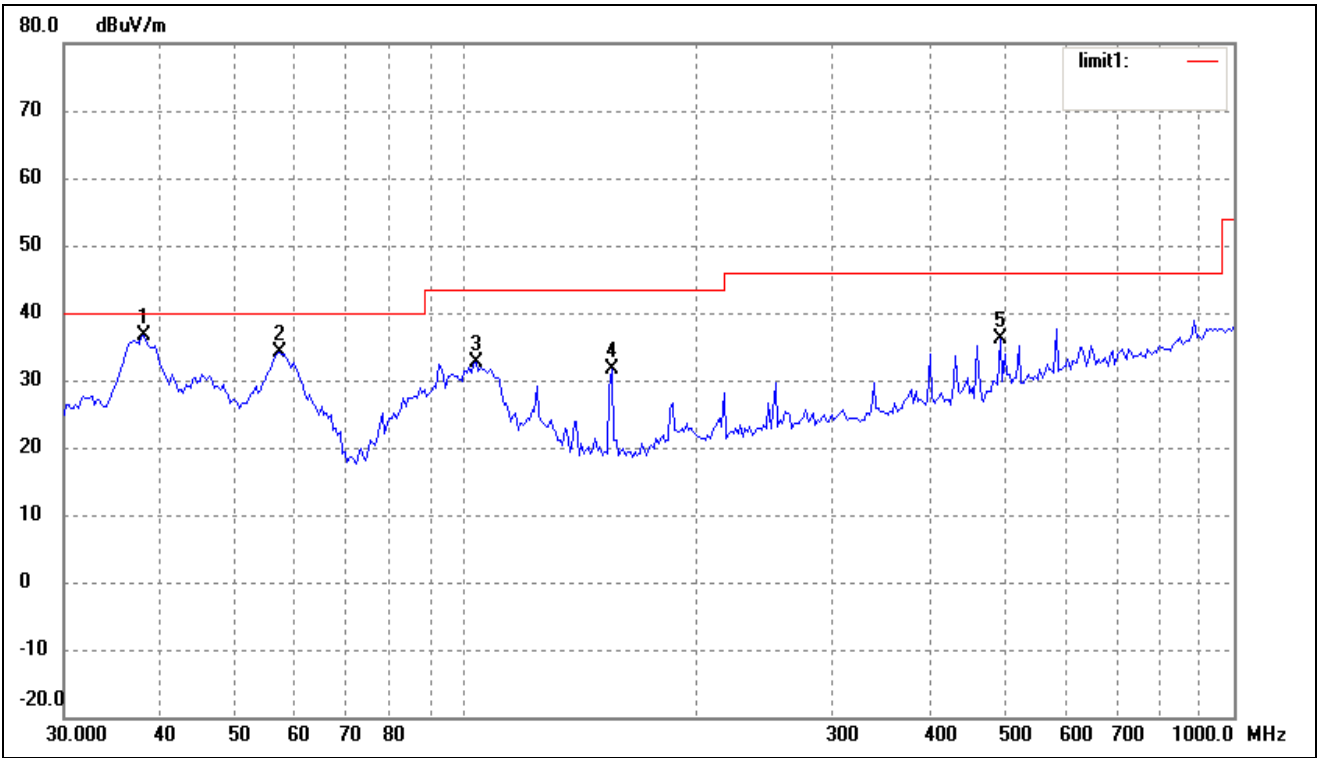


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	38.0782	29.03	7.61	36.64	40.00	-3.36	305	113	QP
2	57.1914	26.39	7.66	34.05	40.00	-5.95	201	125	QP
3	103.0799	24.35	8.18	32.53	43.50	-10.97	360	100	peak
4	154.8205	27.25	4.30	31.55	43.50	-11.95	0	100	peak
5	495.9343	22.09	14.01	36.10	46.00	-9.90	0	200	peak

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11b) High Channel


Comment:

Horizontal

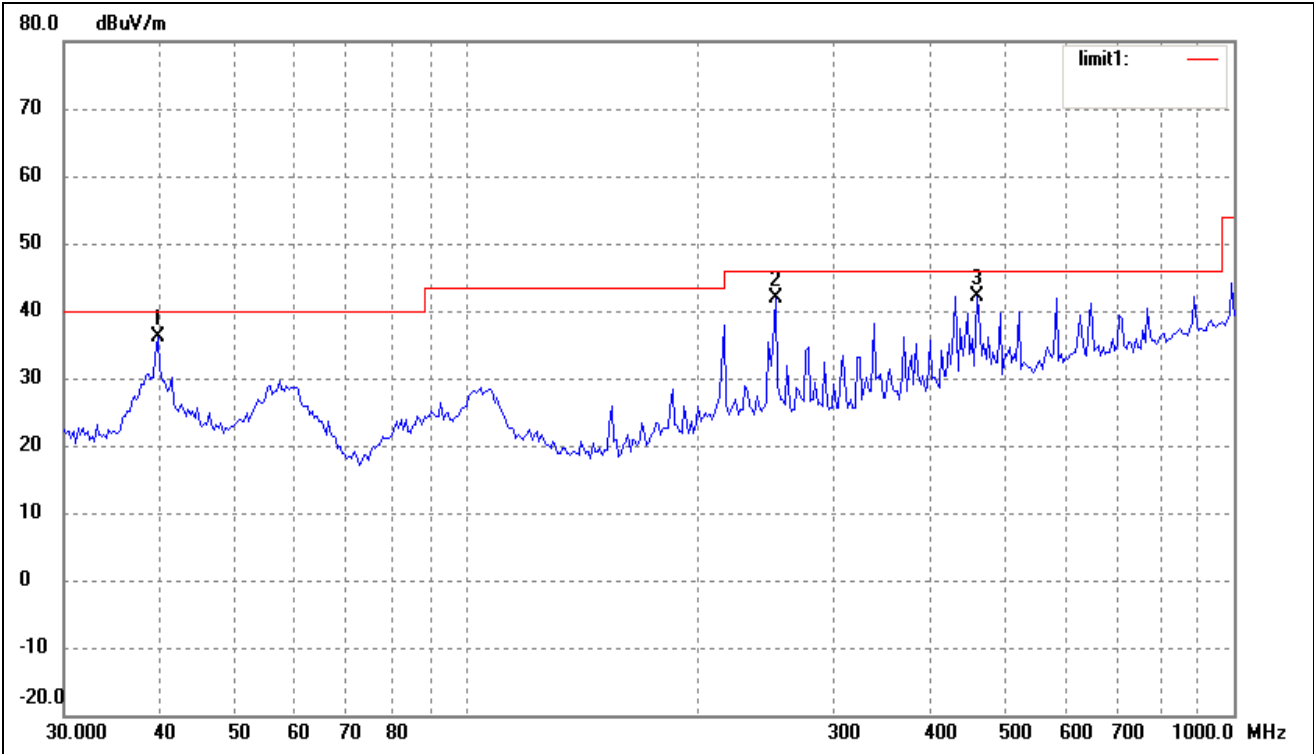

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	39.7147	28.05	8.07	36.12	40.00	-3.88	206	105	QP
2	252.9482	32.99	8.77	41.76	46.00	-4.24	223	112	QP
3	462.3455	30.37	11.83	42.20	46.00	-3.80	115	106	QP

Vertical

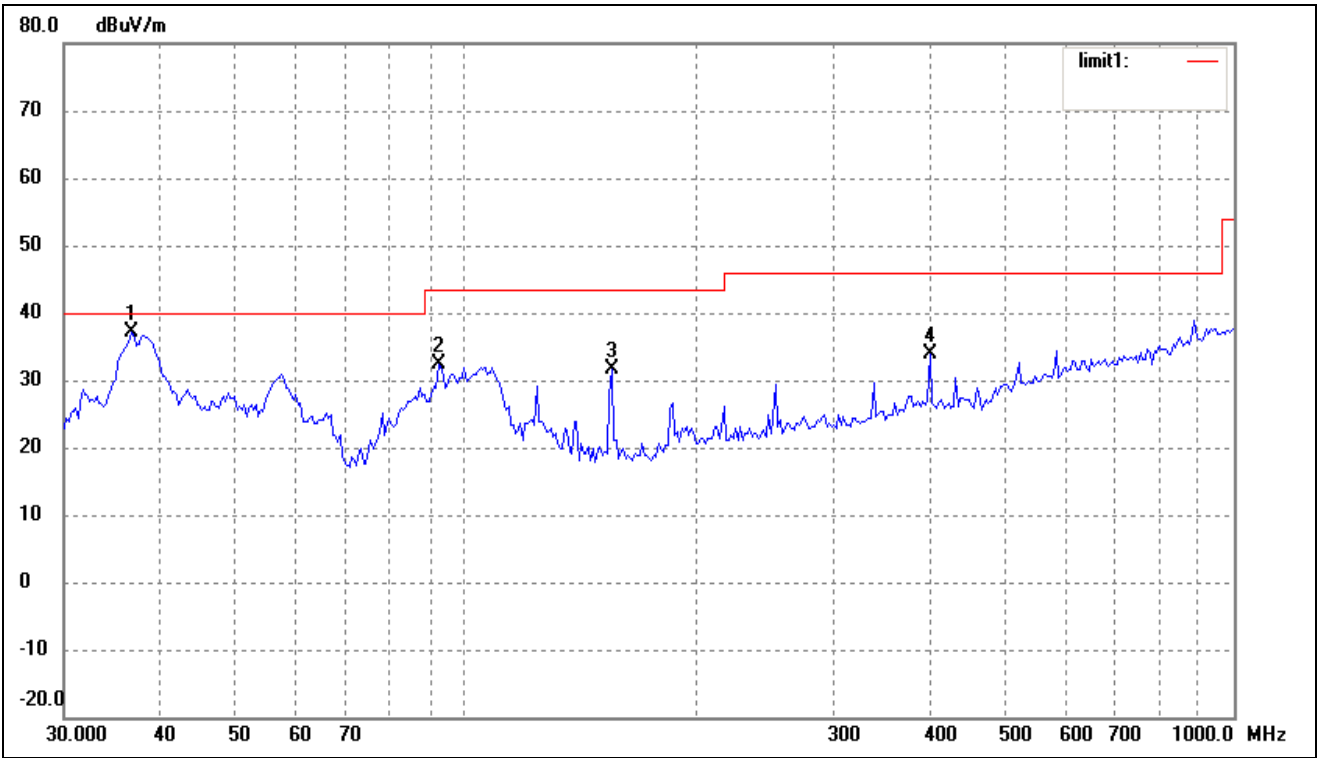


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	36.7662	29.83	7.25	37.08	40.00	-2.92	209	125	QP
2	92.1388	24.89	7.50	32.39	43.50	-11.11	0	100	peak
3	154.8205	27.25	4.30	31.55	43.50	-11.95	0	100	peak
4	401.8385	22.37	11.40	33.77	46.00	-12.23	360	200	peak

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g) Low Channel


Comment:

Horizontal

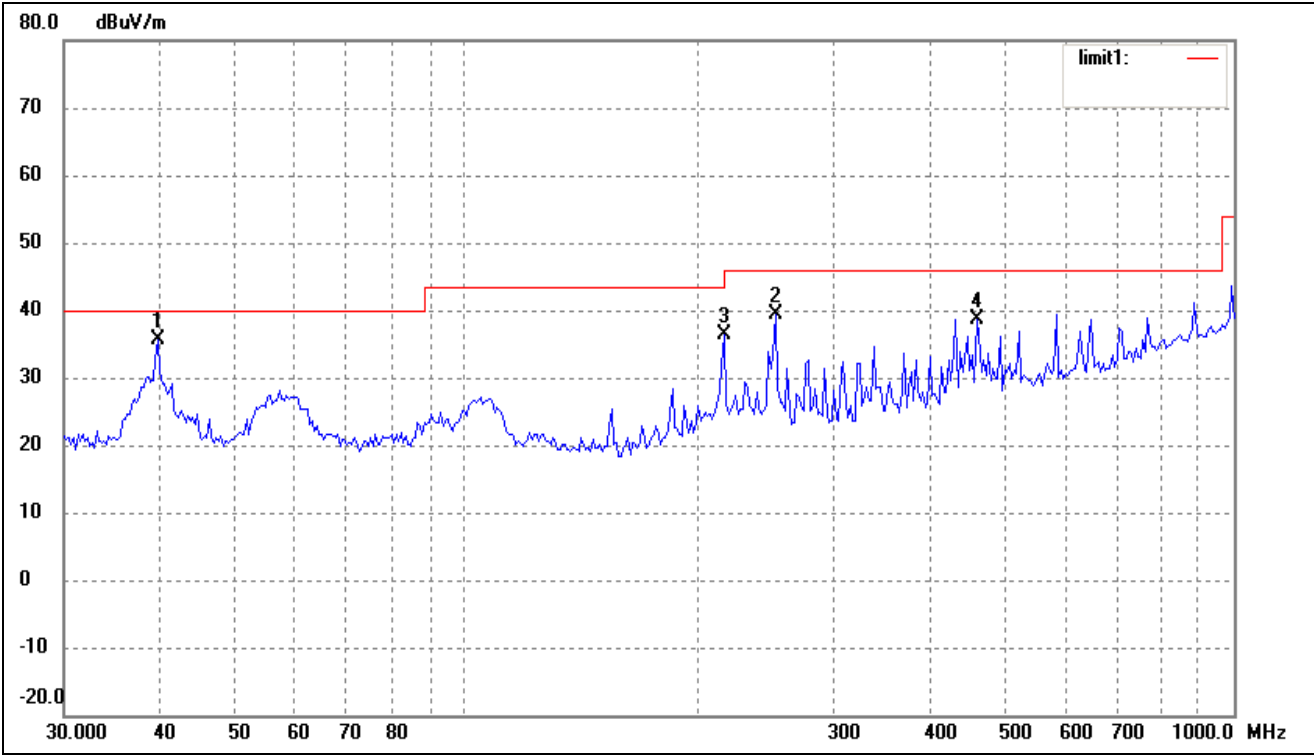


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.7147	27.55	8.07	35.62	40.00	-4.38	209	128	QP
2	252.9482	30.49	8.77	39.26	46.00	-6.74	360	200	peak
3	216.7828	29.21	7.17	36.38	46.00	-9.62	0	200	peak
4	462.3455	26.87	11.83	38.70	46.00	-7.30	0	200	peak

Vertical

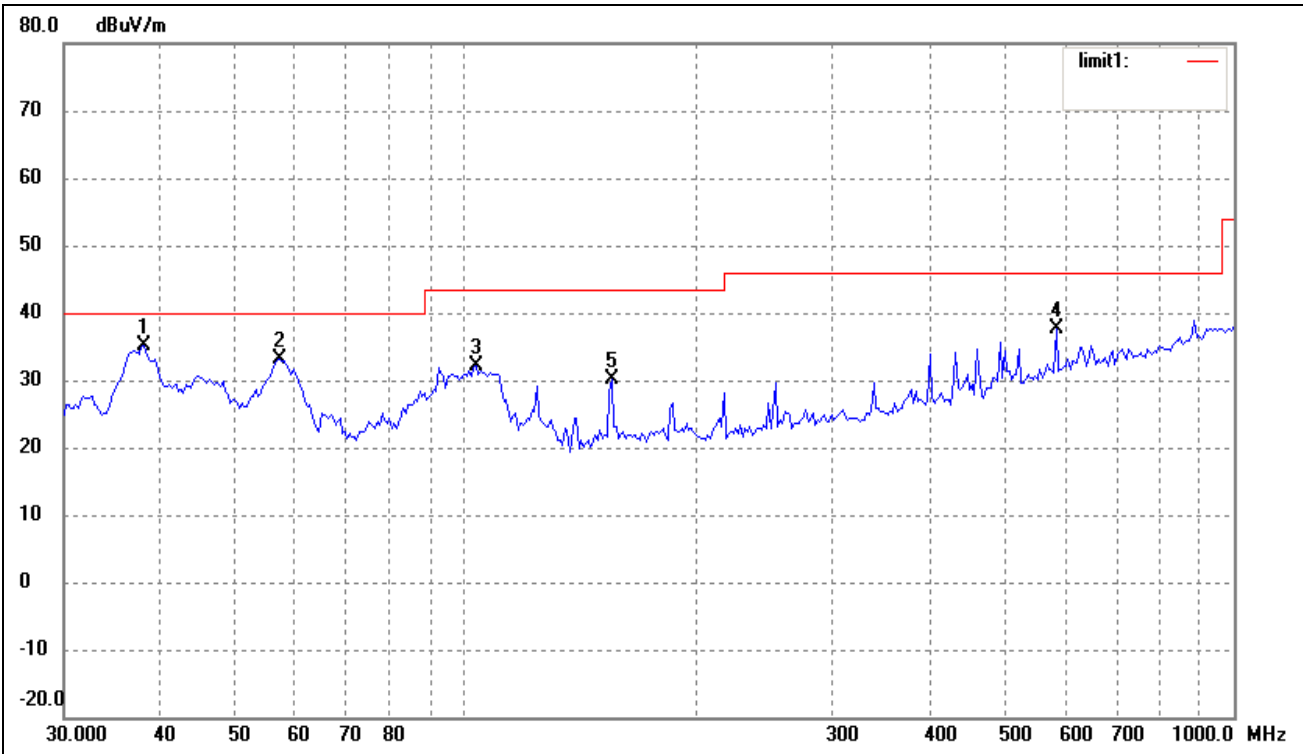


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.0782	27.53	7.61	35.14	40.00	-4.86	224	112	QP
2	57.1914	25.39	7.66	33.05	40.00	-6.95	360	100	peak
3	103.0798	23.85	8.18	32.03	43.50	-11.47	360	100	peak
4	586.8437	21.23	16.38	37.61	46.00	-8.39	0	200	peak
5	154.8205	25.75	4.30	30.05	43.50	-13.45	0	200	peak

Spurious Emission From 30 MHz to 1 GHz
Test mode: Transmitting (802.11g) Middle Channel
Comment:
Horizontal

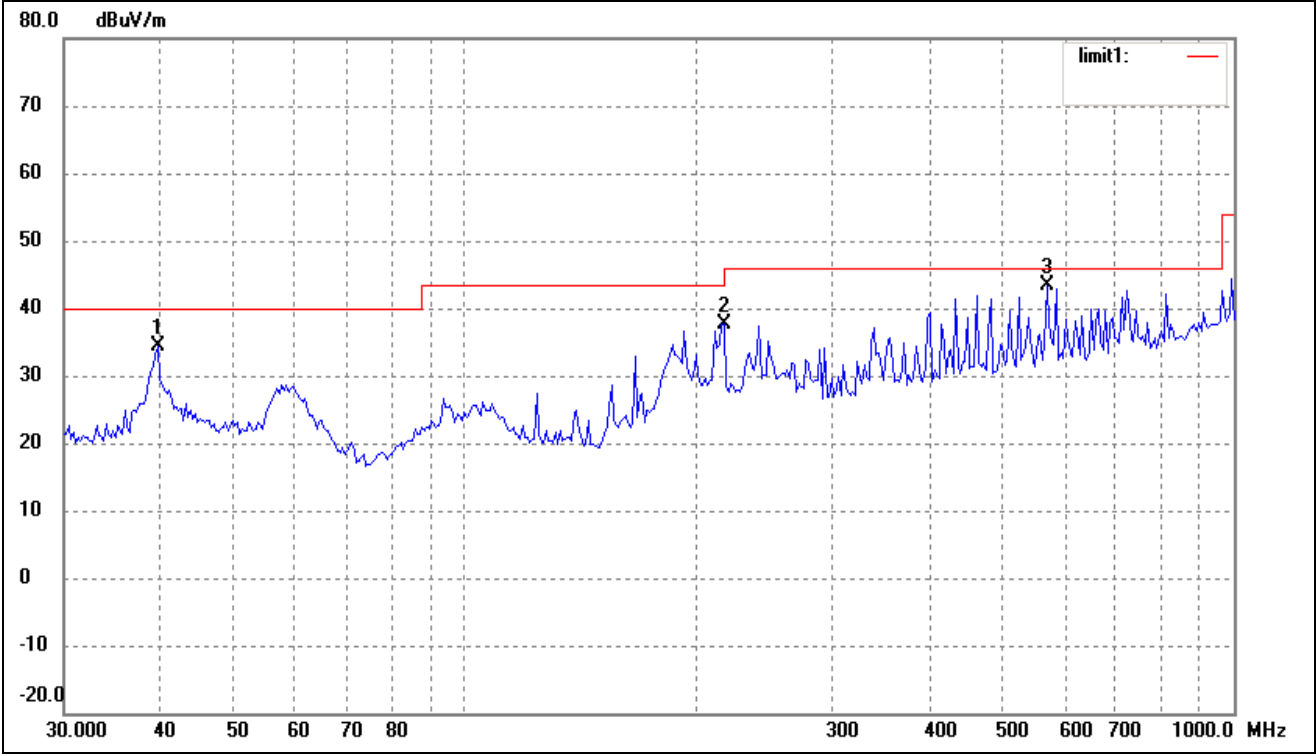


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	39.7147	26.37	8.07	34.44	40.00	-5.56	236	124	QP
2	216.7828	30.52	7.17	37.69	46.00	-8.31	360	200	peak
3	570.6100	27.46	16.01	43.47	46.00	-2.53	209	115	QP

Vertical

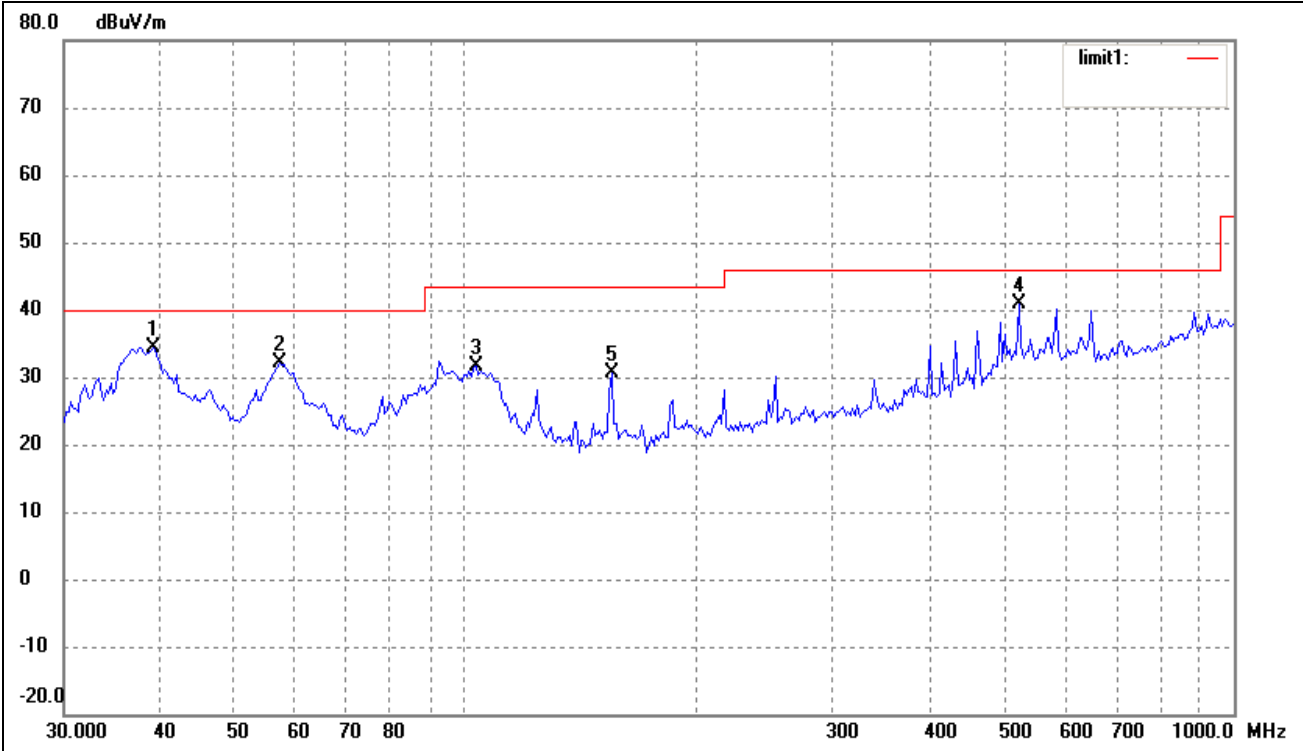


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	39.1615	26.45	7.91	34.36	40.00	-5.64	206	118	QP
2	57.1914	24.39	7.66	32.05	40.00	-7.95	360	200	peak
3	103.0799	23.35	8.18	31.53	43.50	-11.97	0	100	peak
4	524.5540	25.81	14.97	40.78	46.00	-5.22	0	200	peak
5	154.8205	26.25	4.30	30.55	43.50	-12.95	360	200	peak

Spurious Emission From 30 MHz to 1 GHz
Test mode: Transmitting (802.11g) High Channel
Comment:
Horizontal

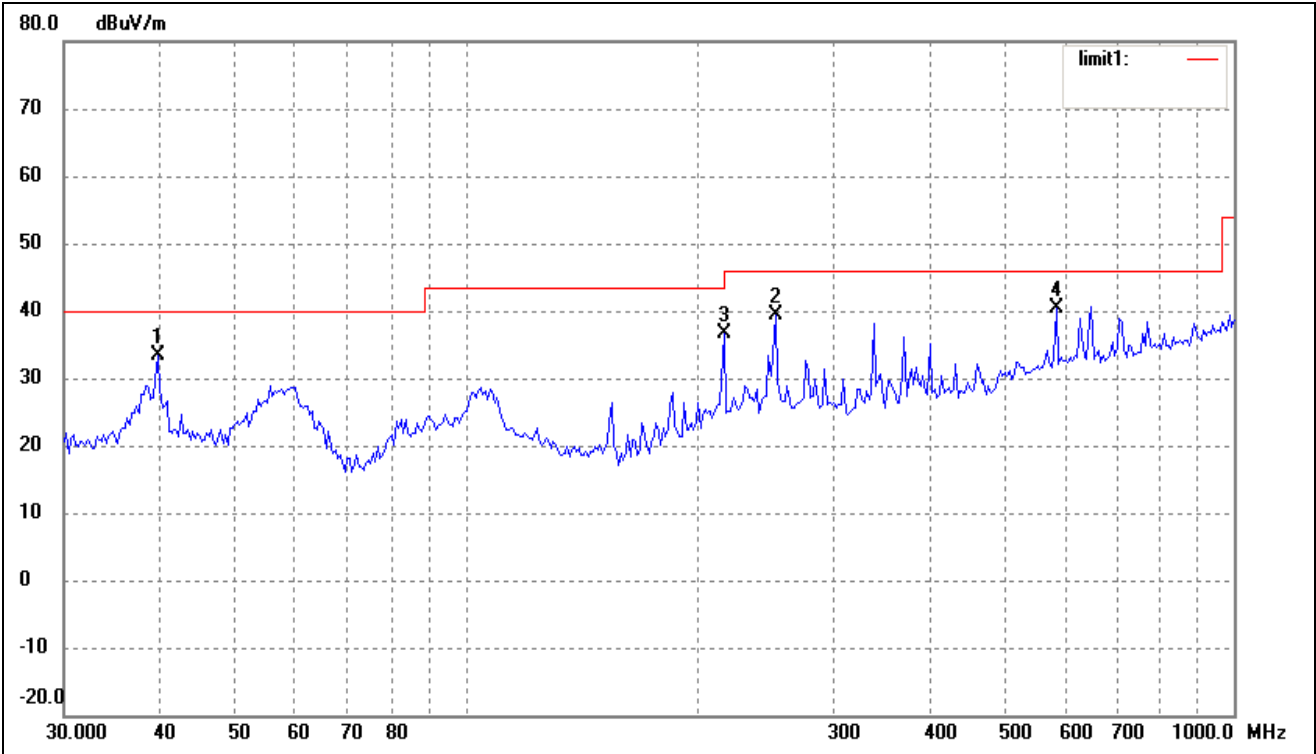

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	39.7147	25.33	8.07	33.40	40.00	-6.60	360	100	peak
2	252.9482	30.53	8.77	39.30	46.00	-6.70	0	100	peak
3	216.7828	29.45	7.17	36.62	46.00	-9.38	0	200	peak
4	586.8437	23.89	16.38	40.27	46.00	-5.73	206	223	QP

Vertical

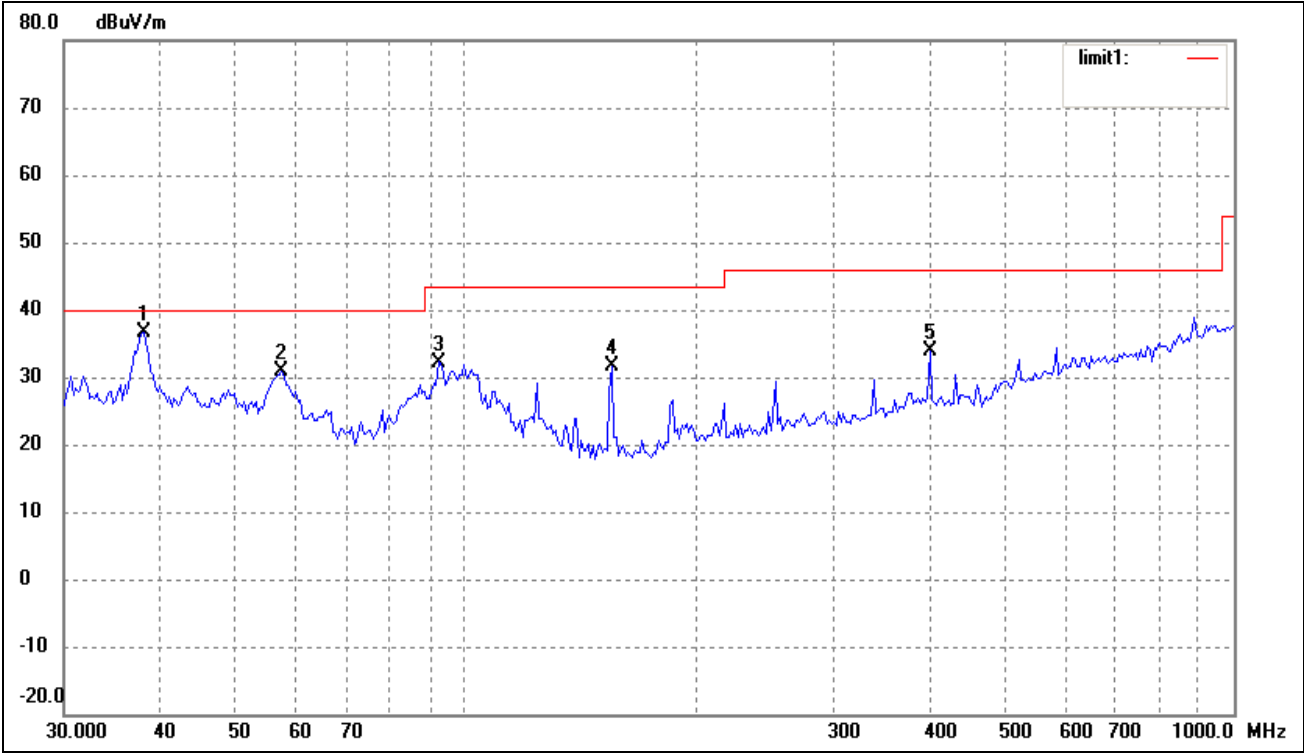

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.0782	29.03	7.61	36.64	40.00	-3.36	236	160	QP
2	57.5938	23.13	7.65	30.78	40.00	-9.22	360	200	peak
3	92.7870	24.63	7.62	32.25	43.50	-11.25	0	100	peak
4	154.8205	27.25	4.30	31.55	43.50	-11.95	0	200	peak
5	401.8385	22.37	11.40	33.77	46.00	-12.23	360	200	peak

*Spurious Emission above 1GHz**Test Mode: Transmitting (802.11b)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	71.56	90	V	34.1	5.2	33.0	65.26	74	-8.74
4824.0	PK	73.07	270	H	34.1	5.2	33.0	66.77	74	-7.23
7236.0	PK	52.05	180	V	37.4	6.1	33.5	42.05	74	31.95
7236.0	PK	54.43	45	H	37.4	6.1	33.5	44.43	74	-29.57
4824.0	AV	55.01	270	V	34.1	5.2	33.0	48.71	54	-5.29
4824.0	AV	53.29	90	H	34.1	5.2	33.0	46.99	54	-7.01
7236.0	AV	36.29	45	V	37.4	6.1	33.5	26.29	54	-27.71
7236.0	AV	37.16	60	H	37.4	6.1	33.5	27.16	54	-26.84
Middle Channel (1G to 25GHz)										
4874.0	PK	68.80	45	V	34.1	5.2	33.0	62.50	74	-11.5
4874.0	PK	71.67	270	H	34.1	5.2	33.0	65.37	74	-8.63
7311.0	PK	54.54	45	V	37.4	6.1	33.5	44.54	74	-29.46
7311.0	PK	66.26	180	H	37.4	6.1	33.5	56.26	74	-17.74
4874.0	AV	50.36	270	V	34.1	5.2	33.0	44.06	54	-9.94
4874.0	AV	51.29	90	H	34.1	5.2	33.0	44.99	54	-9.01
7311.0	AV	34.69	60	V	37.4	6.1	33.5	24.69	54	-29.31
7311.0	AV	35.26	45	H	37.4	6.1	33.5	25.26	54	-28.74
High Channel (1G to 25GHz)										
4924.0	PK	66.28	270	V	34.1	5.2	33.0	59.98	74	-14.02
4924.0	PK	65.56	45	H	34.1	5.2	33.0	59.26	74	-14.74
7386.0	PK	57.13	180	V	37.4	6.1	33.5	47.13	74	-26.87
7386.0	PK	55.25	45	H	37.4	6.1	33.5	45.25	74	-28.75
4924.0	AV	50.13	90	V	34.1	5.2	33.0	42.83	54	-10.17
4924.0	AV	49.36	270	H	34.1	5.2	33.0	43.06	54	-10.94
7386.0	AV	36.13	60	V	37.4	6.1	33.5	26.13	54	-27.87
7386.0	AV	35.29	60	H	37.4	6.1	33.5	25.29	54	-28.71

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

*Spurious Emission Above 1GHz**Test Mode: Transmitting (802.11g)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	72.36	90	V	34.1	5.2	33.0	66.06	74	-7.94
4824.0	PK	70.39	270	H	34.1	5.2	33.0	64.09	74	-9.91
7236.0	PK	50.29	180	V	37.4	6.1	33.5	40.29	74	-33.71
7236.0	PK	54.55	45	H	37.4	6.1	33.5	44.55	74	-29.45
4824.0	AV	53.19	270	V	34.1	5.2	33.0	46.89	54	-7.11
4824.0	AV	54.86	90	H	34.1	5.2	33.0	48.59	54	-5.44
7236.0	AV	40.42	45	V	37.4	6.1	33.5	30.42	54	-23.58
7236.0	AV	37.08	60	H	37.4	6.1	33.5	27.08	54	-26.92
Middle Channel (1G to 25GHz)										
4874.0	PK	71.02	45	V	34.1	5.2	33.0	64.72	74	-9.28
4874.0	PK	70.89	270	H	34.1	5.2	33.0	64.59	74	-9.41
7311.0	PK	56.31	45	V	37.4	6.1	33.5	46.31	74	-27.69
7311.0	PK	54.08	180	H	37.4	6.1	33.5	44.08	74	-29.92
4874.0	AV	55.39	270	V	34.1	5.2	33.0	48.96	54	-5.04
4874.0	AV	54.26	90	H	34.1	5.2	33.0	47.96	54	-6.04
7311.0	AV	38.29	60	V	37.4	6.1	33.5	28.92	54	-25.71
7311.0	AV	34.18	45	H	37.4	6.1	33.5	24.18	54	-29.82
High Channel (1G to 25GHz)										
4924.0	PK	69.23	270	V	34.1	5.2	33.0	62.92	74	-11.08
4924.0	PK	68.01	45	H	34.1	5.2	33.0	61.71	74	-12.29
7386.0	PK	51.36	180	V	37.4	6.1	33.5	41.36	74	-32.64
7386.0	PK	51.34	45	H	37.4	6.1	33.5	41.34	74	-32.66
4924.0	AV	52.16	90	V	34.1	5.2	33.0	45.86	54	-8.14
4924.0	AV	51.42	270	H	34.1	5.2	33.0	45.12	54	-8.88
7386.0	AV	35.08	60	V	37.4	6.1	33.5	25.08	54	-28.92
7386.0	AV	34.19	60	H	37.4	6.1	33.5	24.19	54	-29.81

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

9. OUT OF BAND EMISSIONS

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-12-20	2011-12-19
EMI Test Receiver	R&S	ESVB	825471/005	2010-12-20	2011-12-19
Positioning Controller	C&C	CC-C-1F	N/A	2010-12-20	2011-12-19
RF Switch	EM	EMSW18	SW060023	2010-12-20	2011-12-19
Pre-amplifier	Agilent	8447F	3113A06717	2010-12-20	2011-12-19
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-12-20	2011-12-19
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2011-01-09	2012-01-08
Horn Antenna	ETS	3117	00086197	2011-01-09	2012-01-08

9.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW, VBW=100KHz, Span=50MHz, Sweep = auto
3. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.

9.4 Environmental Conditions


Temperature:	21° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.5 Summary of Test Results/Plots

Test mode	Frequency MHz	Limit dBuV /dB	Result
802.11b	2390.00	<54dBuV	Pass
	2400.00	>20dB ATT	Pass
	2483.50	<54dBuV	Pass
802.11g	2390.00	<54dBuV	Pass
	2400.00	>20dB ATT	Pass
	2483.50	<54dBuV	Pass


For 802.11b

Lowest Bandedge

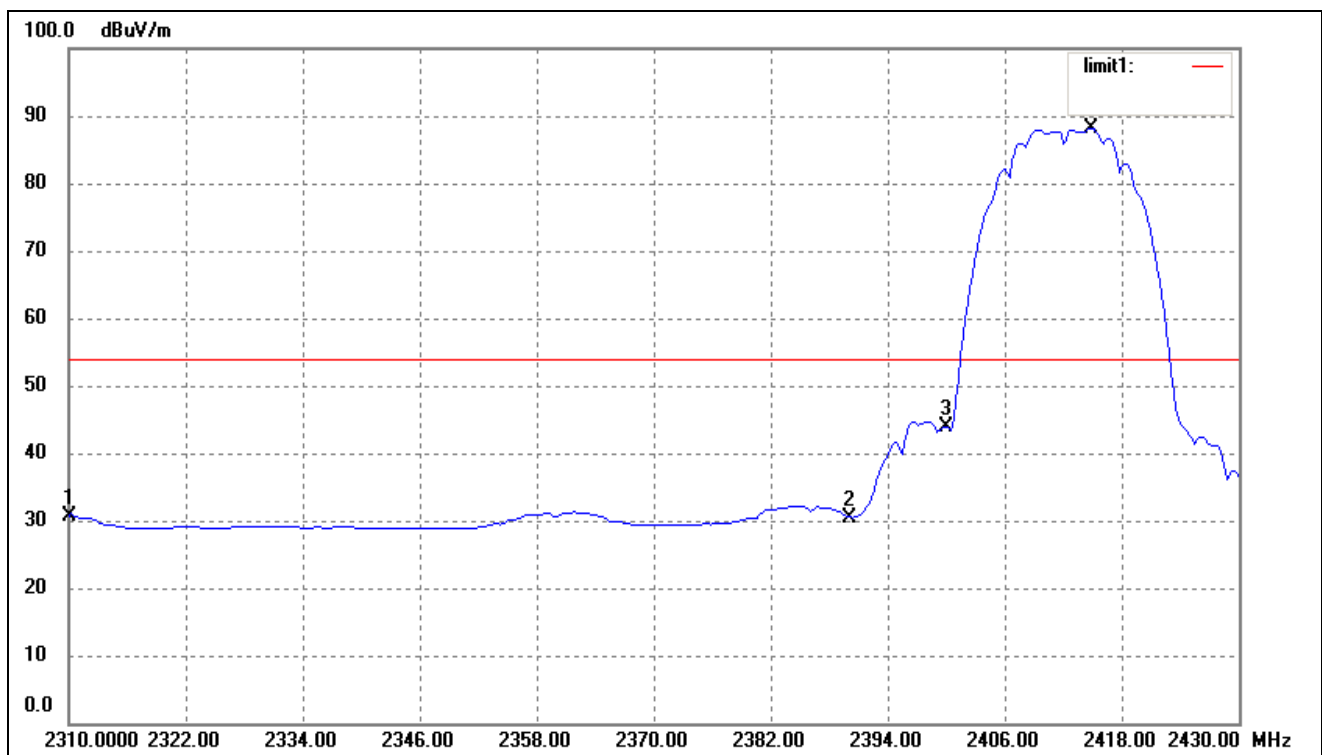


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	2310.000	38.25	-7.51	30.74	54.00	-23.26	360	100	Ave
	2310.000	52.39	-7.51	44.88	74.00	-29.12	360	200	peak
2	2390.000	37.84	-7.34	30.50	54.00	-23.50	0	100	Ave
	2390.000	56.29	-7.34	48.95	74.00	-25.05	0	200	peak
3	2400.000	51.13	-7.31	43.82	/	/	/	/	Ave
4	2414.880	95.38	-7.28	88.10	/	/	/	/	Ave

For 802.11b
Highest Bandedge

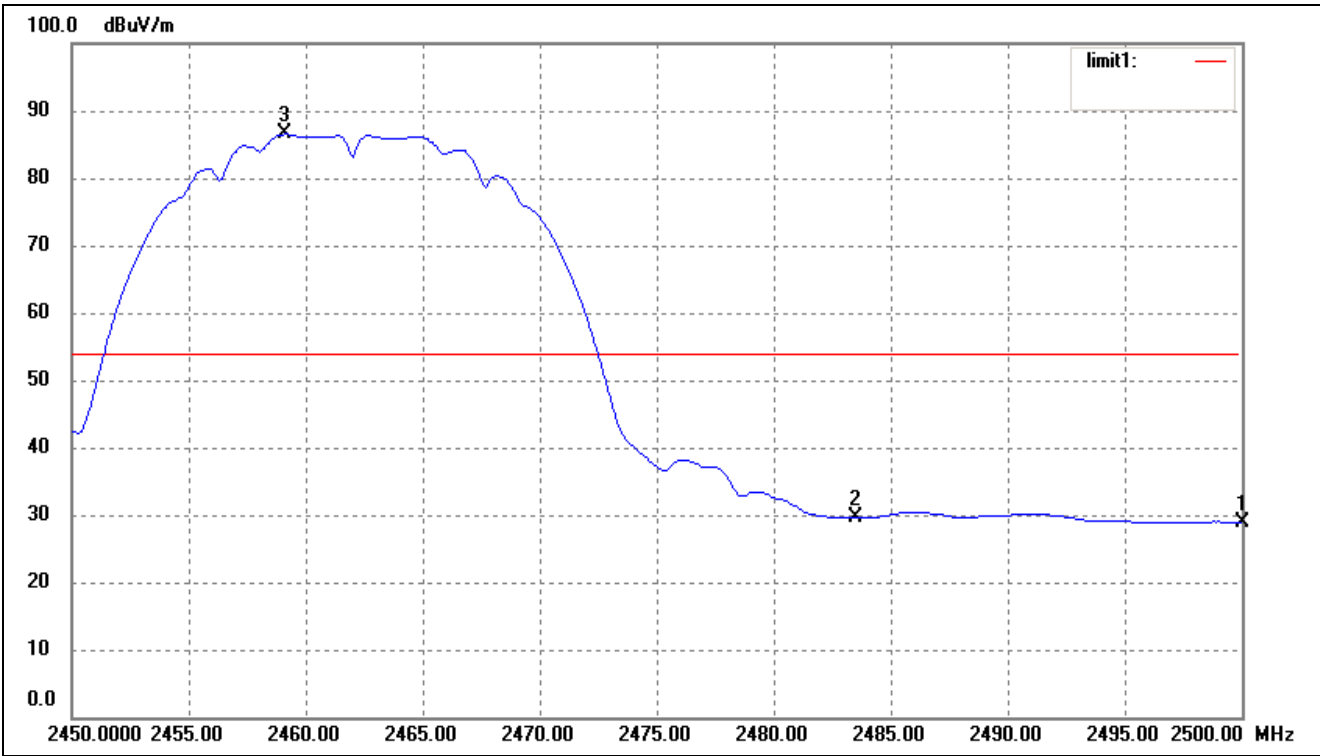


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2500.000	36.05	-7.08	28.97	54.00	-25.03	360	100	Ave
	2500.000	56.29	-7.08	49.21	74.00	-24.79	0	100	peak
2	2483.500	36.70	-7.13	29.57	54.00	-24.43	0	200	Ave
	2483.500	57.16	-7.13	50.03	74.00	-23.97	360	200	Ave
3	2459.100	93.71	-7.18	86.53	/	/	/	/	Ave

For 802.11g
Lowest Bandedge

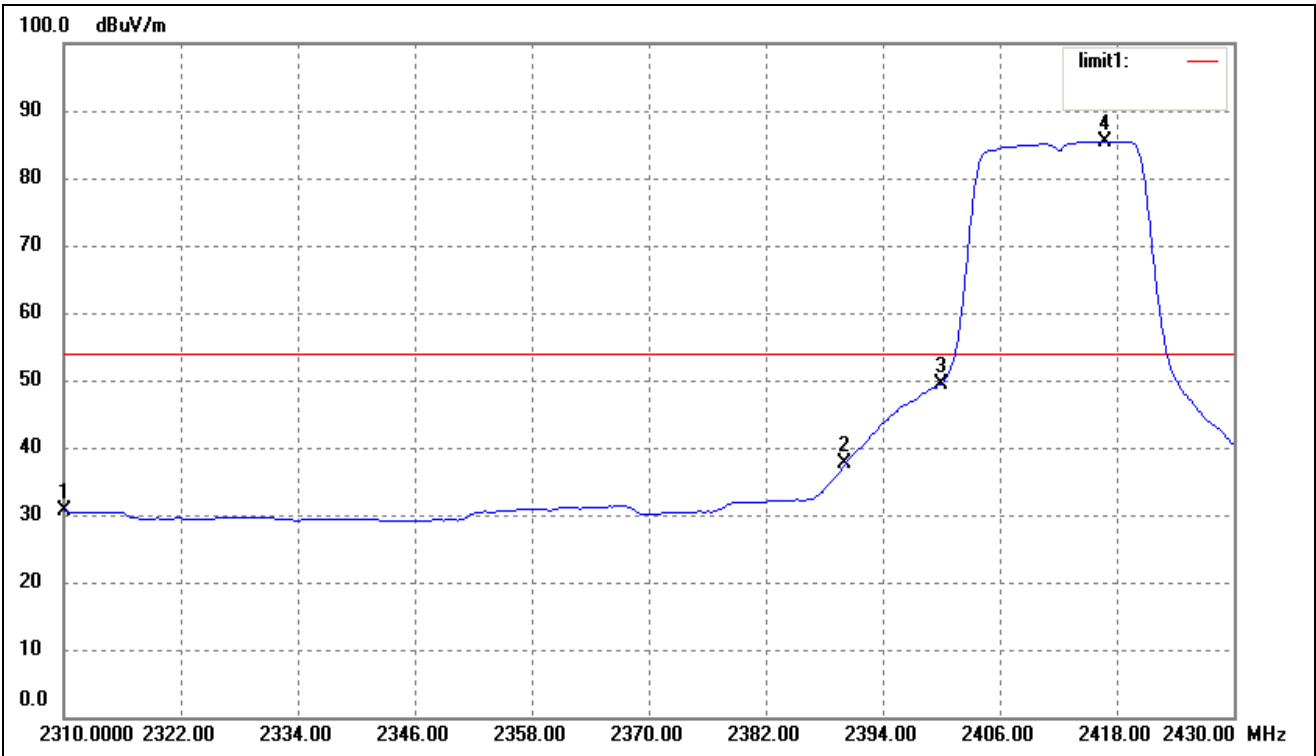

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2310.000	38.07	-7.51	30.56	54.00	-23.44	360	100	Ave
	2310.000	57.26	-7.51	49.75	74.00	-24.25	0	100	peak
2	2390.000	44.87	-7.34	37.53	54.00	-16.47	0	100	Ave
	2390.000	62.19	-7.34	54.85	74.00	-19.15	360	100	peak
3	2400.000	56.79	-7.31	49.48	/	/	/	/	Ave
4	2416.800	92.74	-7.27	85.47	/	/	/	/	Ave

Highest Bandedge

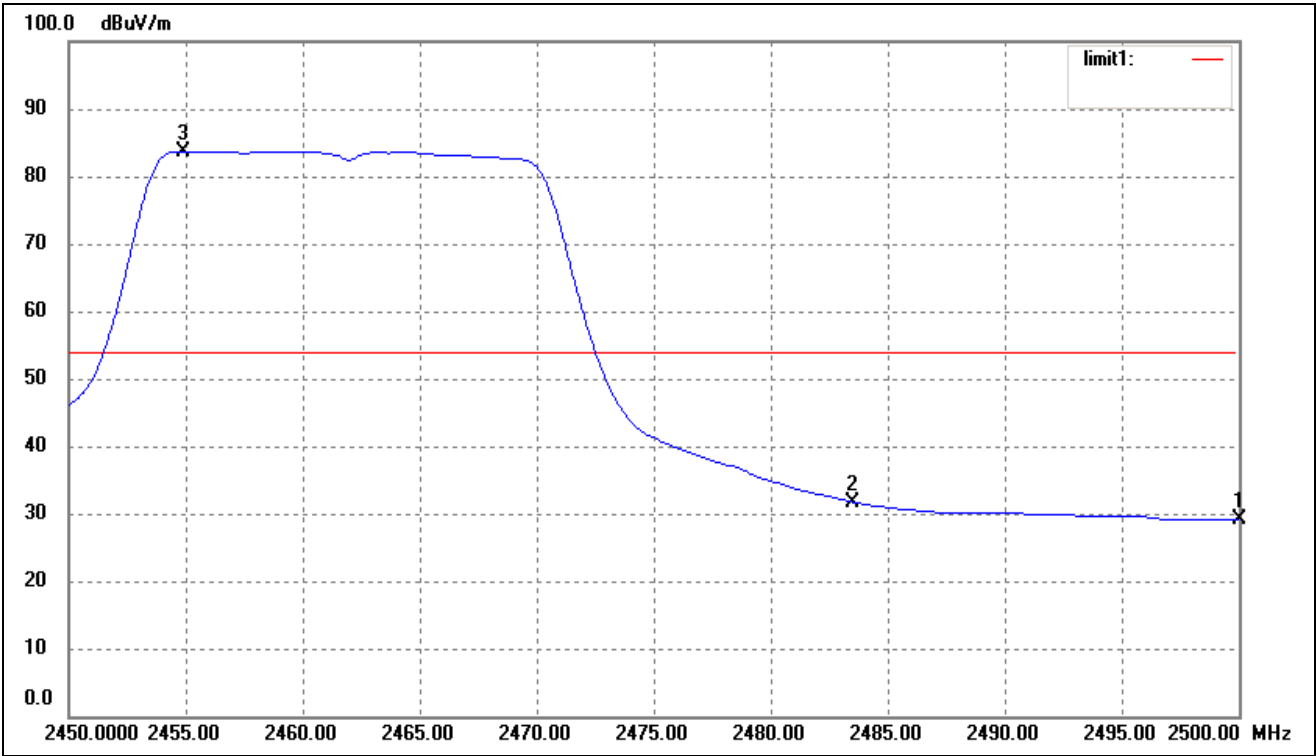

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2500.000	36.22	-7.08	29.14	54.00	-24.86	360	100	Ave
	2500.000	58.26	-7.08	51.18	74.00	-22.82	0	200	peak
2	2483.500	38.88	-7.13	31.75	54.00	-22.25	360	200	Ave
	2483.500	59.13	-7.13	52.00	74.00	-22.00	0	200	peak
3	2454.900	90.93	-7.18	83.75	/	/	/	/	Ave

***** END OF REPORT *****