



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**Portable DVD Player**

**Model: RSE-II**

**Brand: AUDI**

**Test Report Number:**

**SZ110216B01-RP**

*Prepared for*

**Jiangmen Simon Electronics Co., Ltd.**

**ChengDong Industrial Area, Xinhui District Jiangmen  
Guangdong China**

*Prepared by*

**Compliance Certification Services (Shenzhen) Inc.**

**No.10-1 Mingkeda Logistics park, No.18 Huanguan South Road.  
Guan Lan Town, Baoan District, Shenzhen, China**

**TEL: 86-755-28055000**

**FAX: 86-755-28055221**

**Issued Date: March 22,2011**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	SZ110216B01-RP	Initial Issue	ALL	Vincent Yao



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1 DESCRIPTION OF TEST MODES.....	6
<b>4. FACILITIES AND ACCREDITATIONS .....</b>	<b>7</b>
4.1 FACILITIES .....	7
4.2 ACCREDITATIONS .....	7
4.3 MEASUREMENT UNCERTAINTY .....	7
<b>5. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1 SETUP CONFIGURATION OF EUT .....	8
5.2 SUPPORT EQUIPMENT .....	8
<b>6. FCC PART 15.247 REQUIREMENTS .....</b>	<b>9</b>
6.1 20DB BANDWIDTH .....	9
6.2 PEAK POWER .....	14
6.3 PEAK POWER SPECTRAL DENSITY .....	16
6.4 BAND EDGES MEASUREMENT .....	17
6.5 FREQUENCY SEPARATION .....	27
6.6 NUMBER OF HOPPING FREQUENCY .....	30
6.7 TIME OF OCCUPANCY (DWELL TIME).....	32
6.8 SPURIOUS EMISSIONS.....	40
6.9 POWERLINE CONDUCTED EMISSIONS.....	58
<b>7. ANNEX DECLARATION FOR BLUETOOTH DEVICE ACC.....</b>	<b>61</b>



## 1. TEST RESULT CERTIFICATION

<b>Product:</b>	Portable DVD Player
<b>Model:</b>	RSE-II
<b>Brand:</b>	AUDI
<b>Tested:</b>	February 16~March 20,2011
<b>Applicant:</b>	<b>Jiangmen Simon Electronics Co., Ltd.</b> ChengDong Industrial Area, Xinhui District Jiangmen Guangdong China
<b>Manufacturer:</b>	<b>Jiangmen Simon Electronics Co., Ltd.</b> ChengDong Industrial Area, Xinhui District Jiangmen Guangdong China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

**Reviewed by:**

**Vincent Yao**  
Assistant Manager  
Compliance Certification Service Inc.

**Aven Zhou**  
Supervisor of Report Dept.  
Compliance Certification Service Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Portable DVD Player
<b>Model Number</b>	RSE-II
<b>Trade Name</b>	AUDI
<b>Model Discrepancy</b>	N/A
<b>Identify Number</b>	SZ110216B01-RP
<b>Power Supply</b>	DC 12V Supplied by the adapter or DC 7.4V Supplied by the battery Adapter Model name/ Manufacturer HON-KWANG/HK-IP18-A12 AC Input:100~240V/50~60Hz DC output:12V/1.5A DC output Cable: Unshielded 1.60m
<b>Received Date</b>	March 21,2011
<b>Frequency Range</b>	2402 ~ 2480 MH+z
<b>Transmit Power</b>	GFSK :2.12dBm 8DPSK :1.08dBm
<b>Modulation Technique</b>	FHSS(GFSK, $\pi/4$ -DQPSK, 8DPSK)
<b>Number of Channels</b>	79 Channels
<b>Antenna Specification</b>	PCB Antenna Gain: 1.50dBi (Max)
<b>Temperature Range</b>	0°C ~ +40°C

**Note:** This submittal(s) (test report) is intended for FCC ID: ZJSRSE-II filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### 3. TEST METHODOLOGY

#### DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Normal Link	■
Radiated Emission	Mode 1: Normal Link	■

Above 1G, Channel Low (2402MHz) 、Mid (2441MHz) and High (2480MHz) were chosen for full testing for GFSK.



## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ **No10-1, Mingkeda Logistics Park, No.18 Huanguan South RD. Guan Lan Town, Baoan District, Shenzhen China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2003, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>USA</b>	<b>A2LA</b>
<b>Taiwan</b>	<b>TAF</b>

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>USA</b>	<b>FCC</b>
<b>Japan</b>	<b>VCCI</b>
<b>Canada</b>	<b>INDUSTRY CANADA</b>
<b>Taiwan</b>	<b>BSMI</b>
<b>Norway</b>	<b>Nemko</b>

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

### MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
Band Edges	+/-0.182 dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 5. SETUP OF EQUIPMENT UNDER TEST

### SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	TV	19CE830ED	P0911925	N/A	SANYO	Unshielded 1.80m	Unshielded 1.80m
2	DVD	DV-410V-G	HKKD010577CN	N/A	PIONEER	Unshielded 1.50m	Unshielded 1.20m
3	EARPHONE	N/A	N/A	N/A	APPLES	Unshielded 1.20m	N/A
4	U-DISK	N/A	N/A	N/A	KINGSTON	N/A	N/A
5	SDCARD	PR-SDR01G	887549319600	N/A	PANASONIC	N/A	N/A
6	Bluetooth Headphone	HF-007	N/A	N/A	N/A	N/A	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.





## 6. FCC PART 15.247 REQUIREMENTS

### 20DB BANDWIDTH


None; for reporting purpose only.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### TEST CONFIGURATION



### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

### TEST RESULTS

No non-compliance noted




### Test plot ( GFSK)

#### 20dB Bandwidth (CH Low)

Agilent 03:31:37 Feb 28, 2011

R T

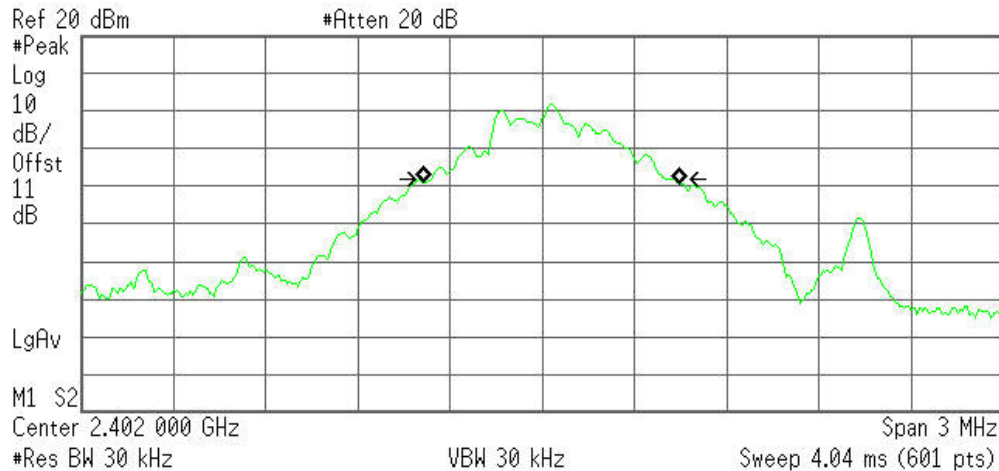


Transmit Freq Error 31.378 kHz  
x dB Bandwidth 791.467 kHz

#### 20dB Bandwidth (CH Mid)

Agilent 03:31:06 Feb 28, 2011

R T

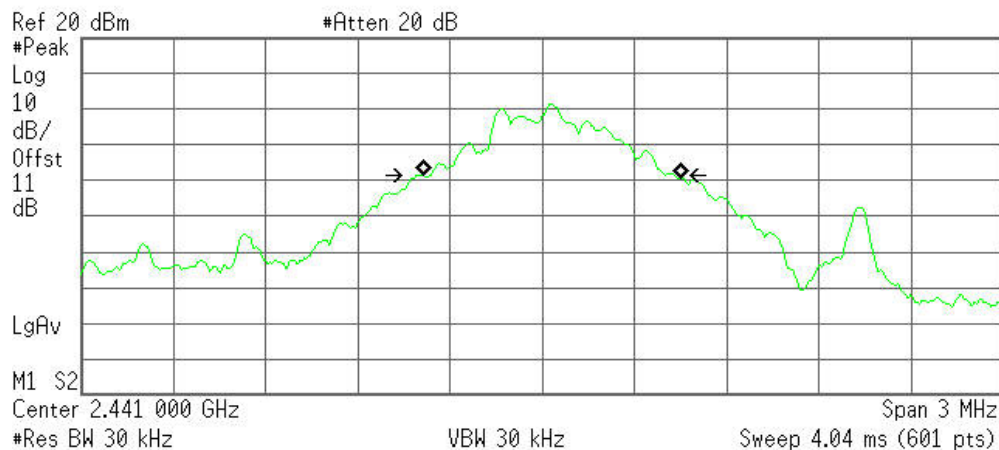


Transmit Freq Error 30.812 kHz  
x dB Bandwidth 836.882 kHz



## 20dB Bandwidth (CH High)

Agilent 03:30:31 Feb 28, 2011

R T

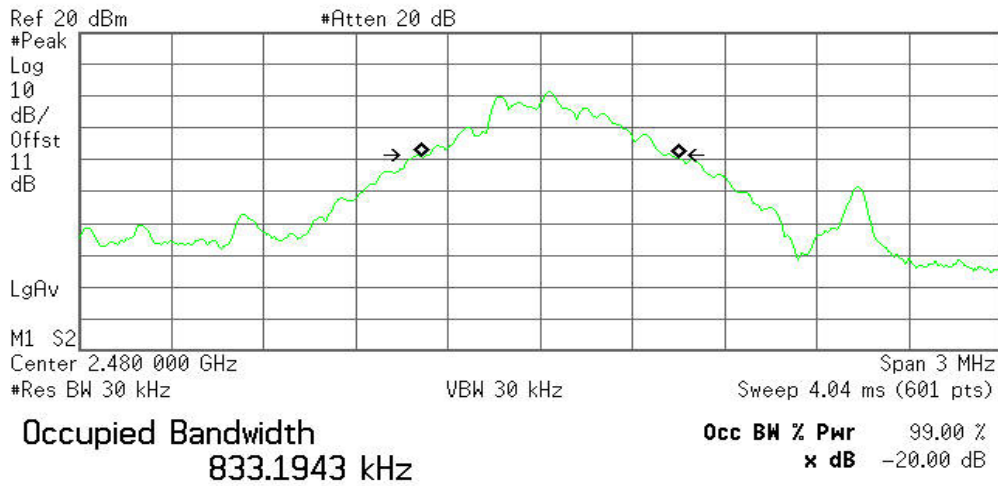

Transmit Freq Error 31.681 kHz  
x dB Bandwidth 834.407 kHz




**Test plot ( 8DPSK )**

**20dB Bandwidth (CH Low)**

Agilent 04:13:45 Mar 2, 2011

R T

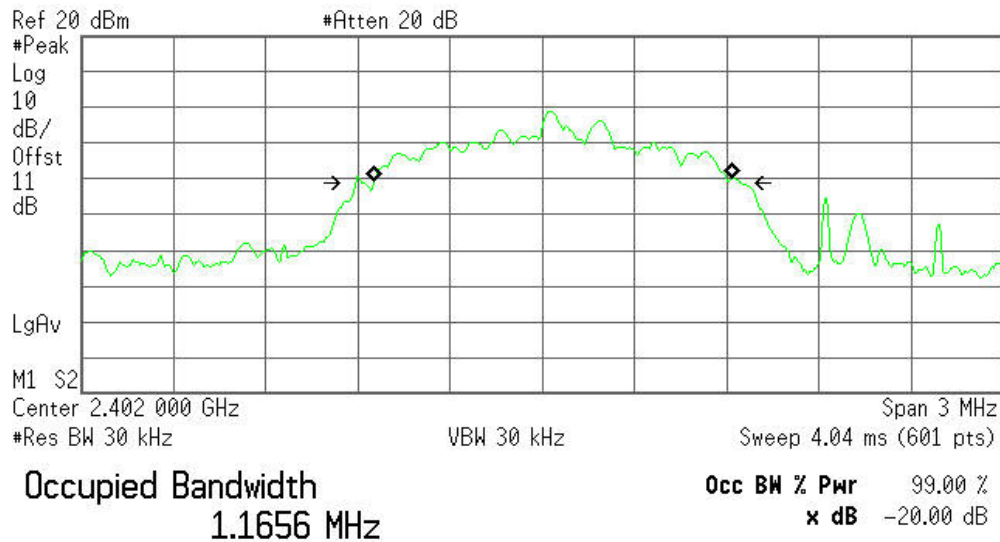


Transmit Freq Error 38.756 kHz  
x dB Bandwidth 1.253 MHz

**20dB Bandwidth (CH Mid)**

Agilent 04:05:12 Mar 2, 2011

R T

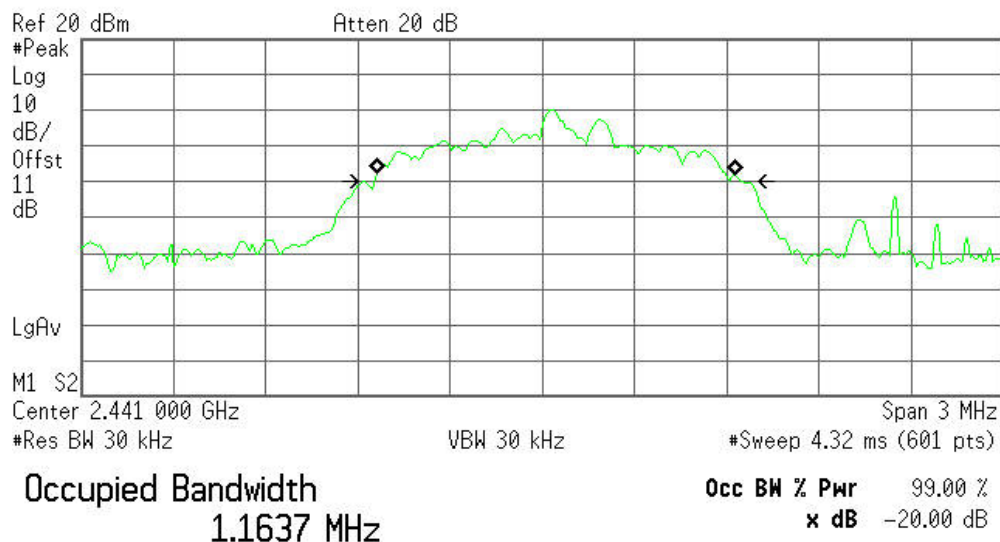


Transmit Freq Error 46.385 kHz  
x dB Bandwidth 1.199 MHz



## 20dB Bandwidth (CH High)

Agilent 04:06:51 Mar 2, 2011

R T

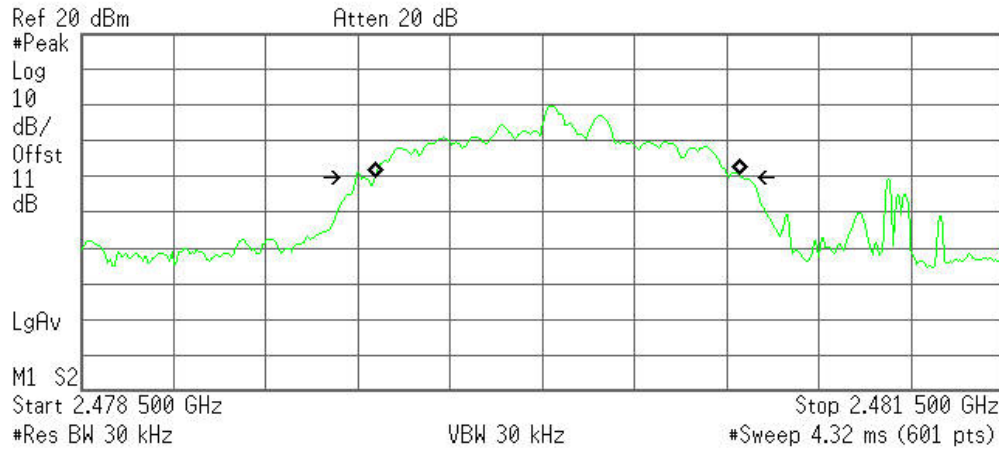

Occupied Bandwidth  
1.1846 MHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error 50.367 kHz  
x dB Bandwidth 1.261 MHz



## PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
RF Power Meter & Sensor	Anritsu	ML2487A	6K00001491	02/23/2011	02/23/2012
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

**TEST RESULTS***No non-compliance noted***Test Data****GFSK**

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	-8.88	11.00	2.12	0.00163	125	Pass
Mid	2441	-9.05	11.00	1.95	0.00157		Pass
High	2480	-9.36	11.00	1.64	0.00146		Pass

**8DPSK**

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	-9.92	11.00	1.08	0.00128	125	Pass
Mid	2441	-10.12	11.00	0.88	0.00122		Pass
High	2480	-10.53	11.00	0.47	0.00111		Pass


**PEAK POWER SPECTRAL DENSITY****LIMIT**

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

**MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

**Remark:** Each piece of equipment is scheduled for calibration once a year.

**Test Configuration****TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

**TEST RESULTS**

*Not applicable. Since EUT is the Bluetooth device.*





## BAND EDGES MEASUREMENT


### LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012	
Amplifier	MITEQ	AM-1604-3000	1411843	03/21/2011	03/21/2012	
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R	
Controller	CT	N/A	N/A	N.C.R	N.C.R	
High Noise Amplifier	Agilent	8449B	3008A01838	06/18/2010	06/18/2011	
Site NSA	C&C	N/A	N/A	N.C.R	N.C.R	
Bilog Antenna	SCHAFFNER	CBL6143	5082	06/18/2010	06/18/2011	
Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012	
Signal Generator	Anritsu	MG3694A	#050125	03/21/2011	03/21/2012	
Horn Antenna	TRC	HA0301	N/A	03/19/2011	03/19/2012	
Loop Antenna	A.R.A	PLA-1030/B	1029	03/19/2011	03/19/2012	
Power Sensor	Anritsu	MA2491A	030619	06/18/2010	06/18/2011	
Power Meter	Anritsu	ML2487A	6K00001491	06/18/2010	06/18/2011	
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/30/2010	03/30/2011	

### Test Configuration

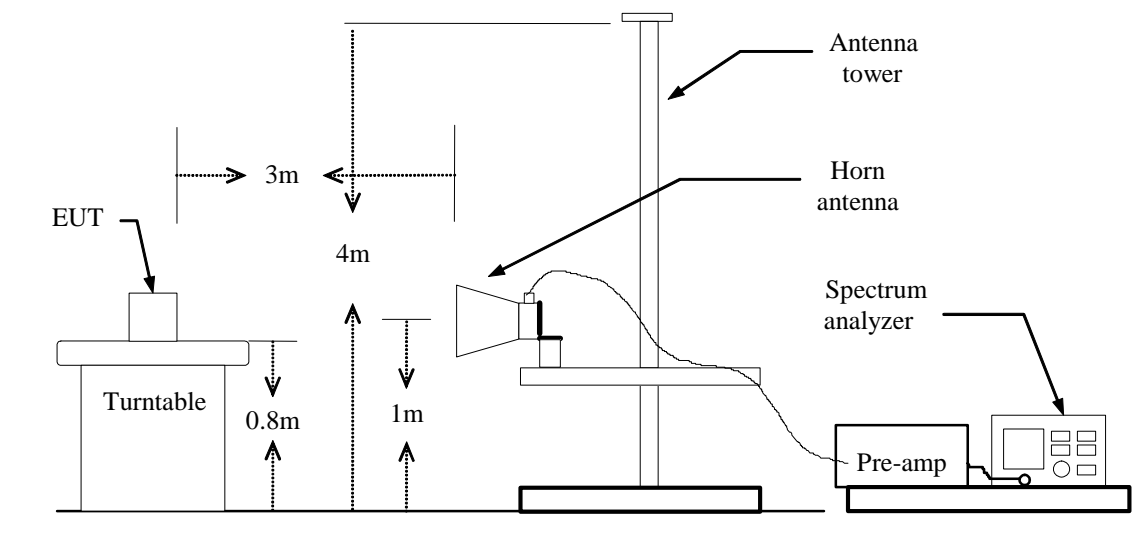



### **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### **TEST RESULTS**

Refer to attach spectrum analyzer data chart.



## Test Data ( GFSK )


### Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 07:57:41 Feb 23, 2011

R T

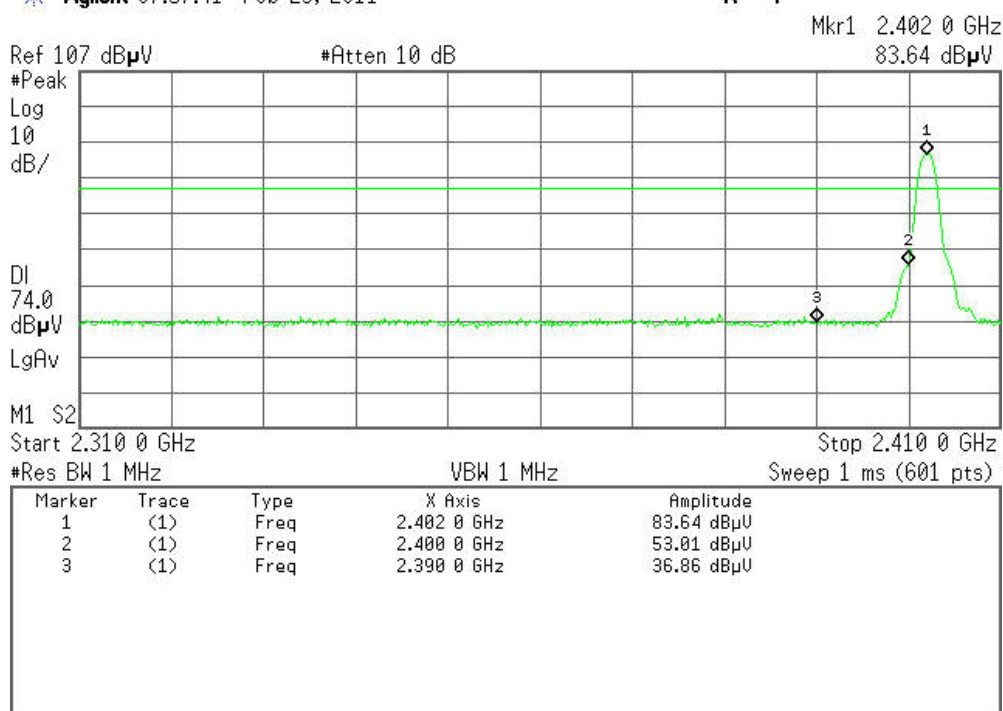


Detector mode: Average

Polarity: Vertical

Agilent 07:58:15 Feb 23, 2011

R T

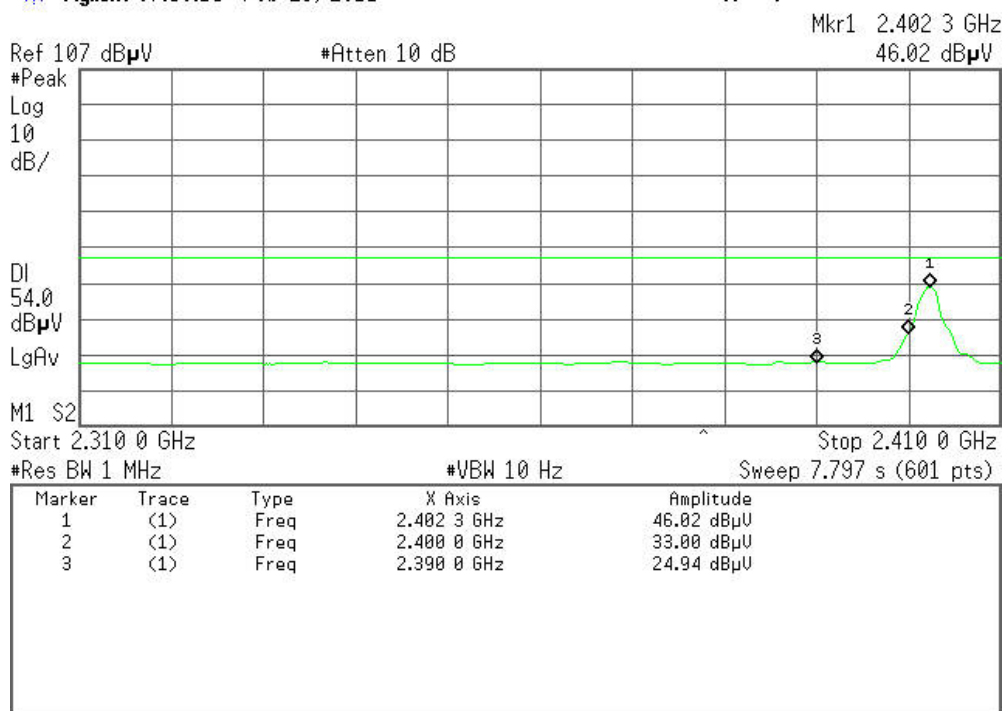




Detector mode: Peak

Polarity: Horizontal

Agilent 07:51:56 Feb 23, 2011

R T

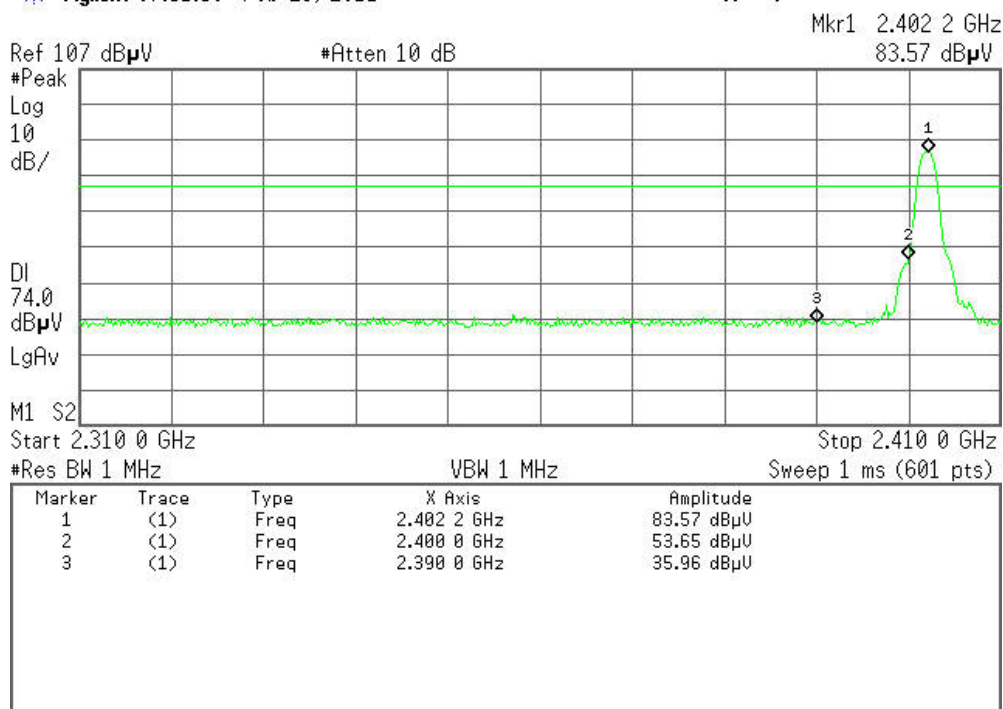


Detector mode: Average

Polarity: Horizontal

Agilent 07:52:30 Feb 23, 2011

R T

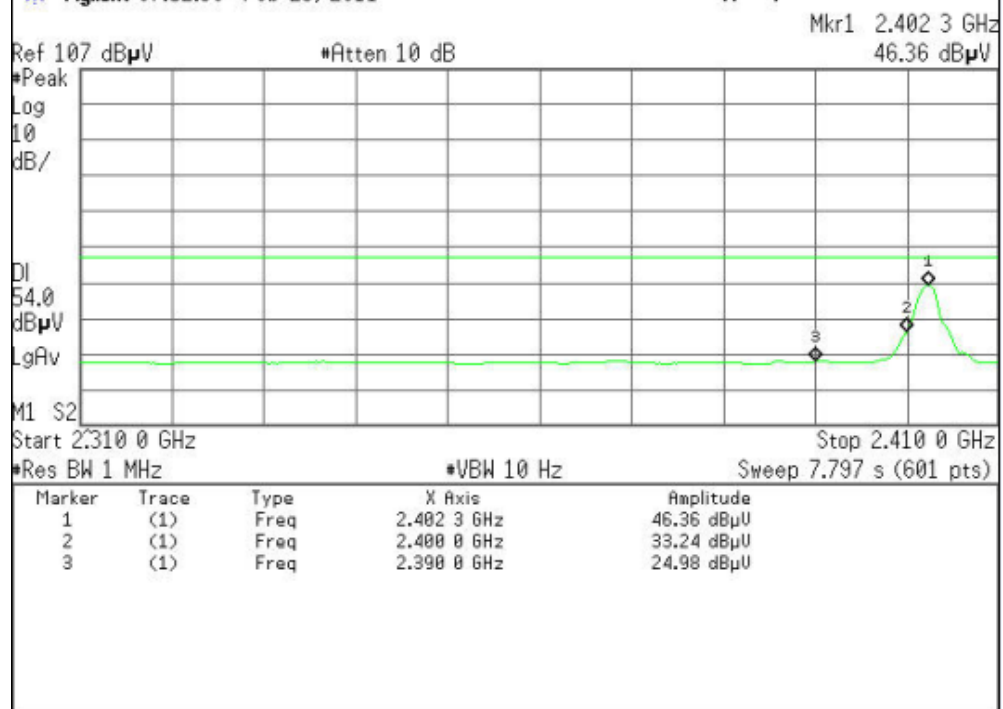



## Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 07:09:58 Feb 23, 2011

R T

Mkr1 2.480 10 GHz  
89.17 dBμV

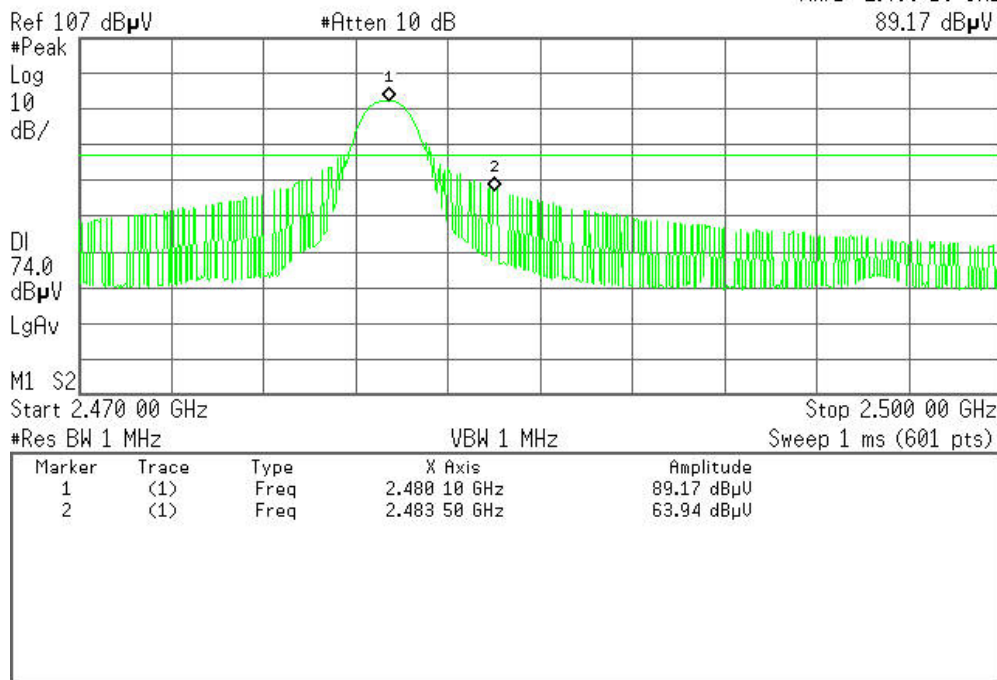


Detector mode: Average

Polarity: Vertical

Agilent 07:10:35 Feb 23, 2011

R T

Mkr1 2.480 45 GHz  
48.71 dBμV

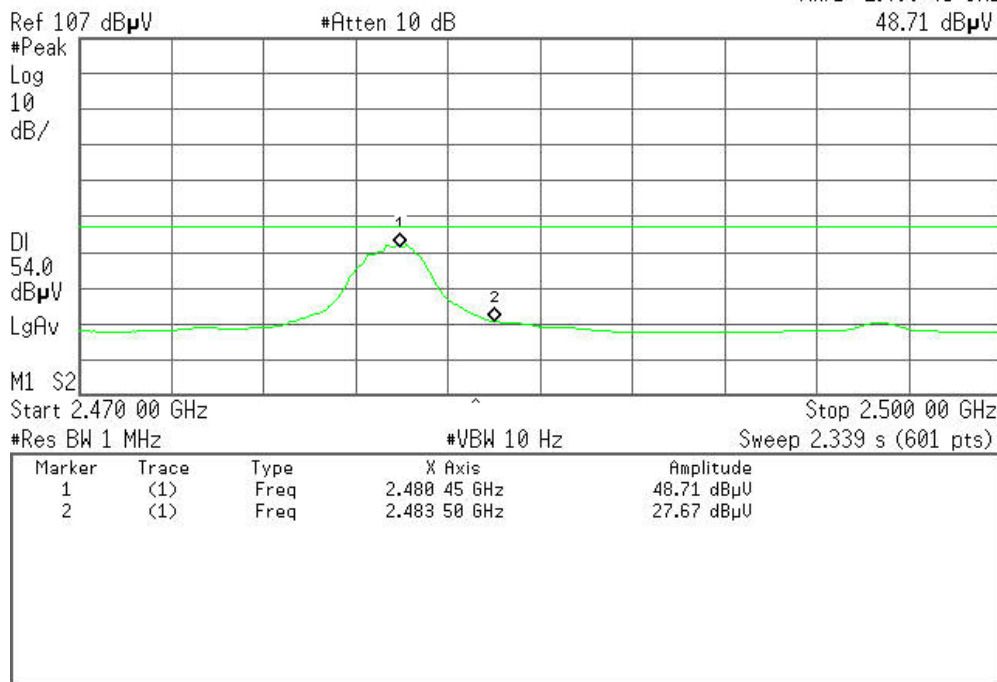




Detector mode: Peak

Polarity: Horizontal

Agilent 07:18:39 Feb 23, 2011

R T

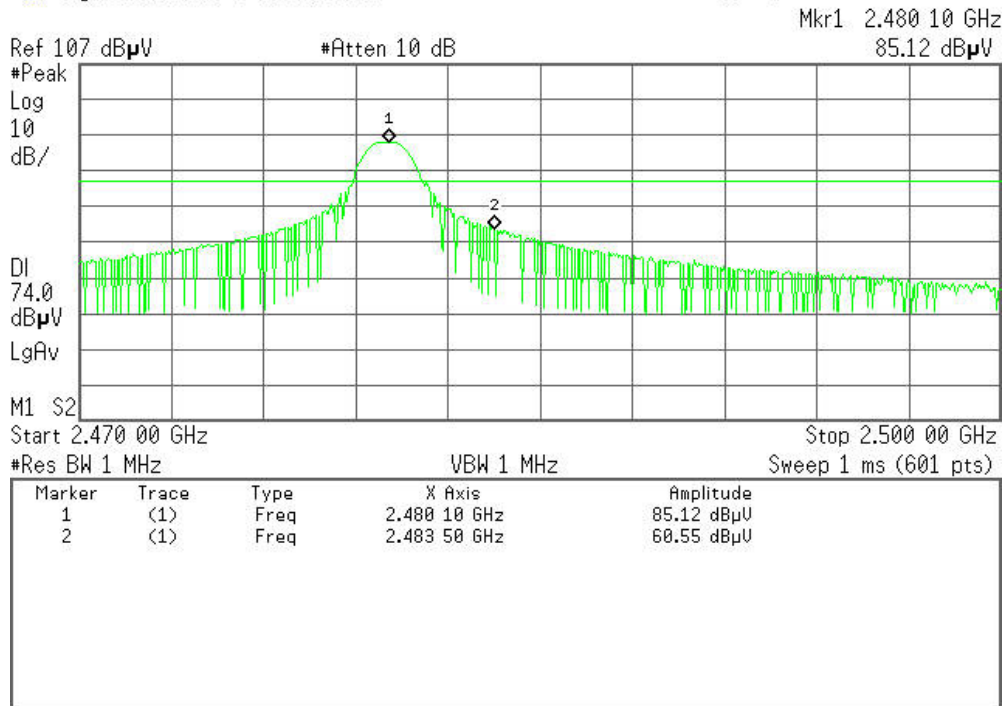


Detector mode: Average

Polarity: Horizontal

Agilent 07:19:29 Feb 23, 2011

R T

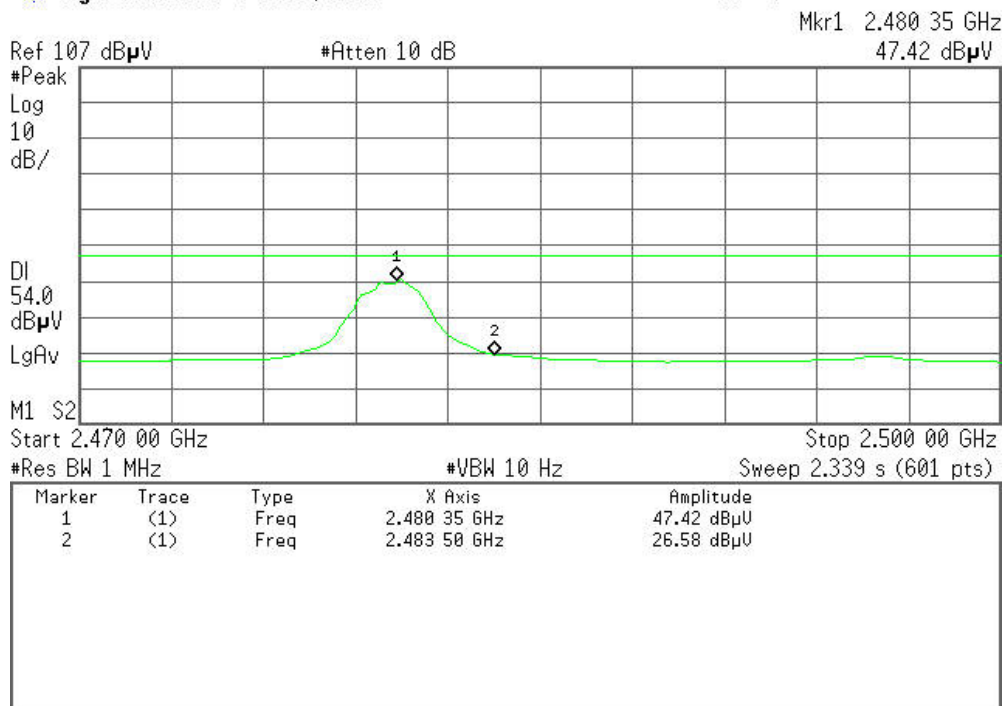



## Test Data ( 8DPSK )


### Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 07:41:22 Feb 23, 2011

R T

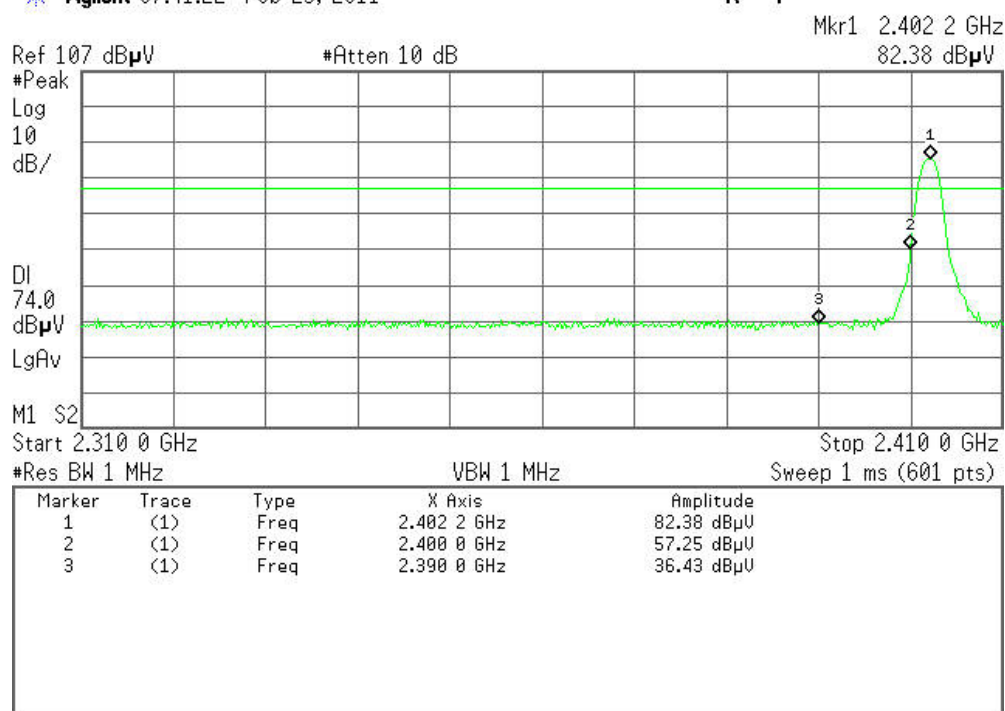


Detector mode: Average

Polarity: Vertical

Agilent 07:42:07 Feb 23, 2011

R T

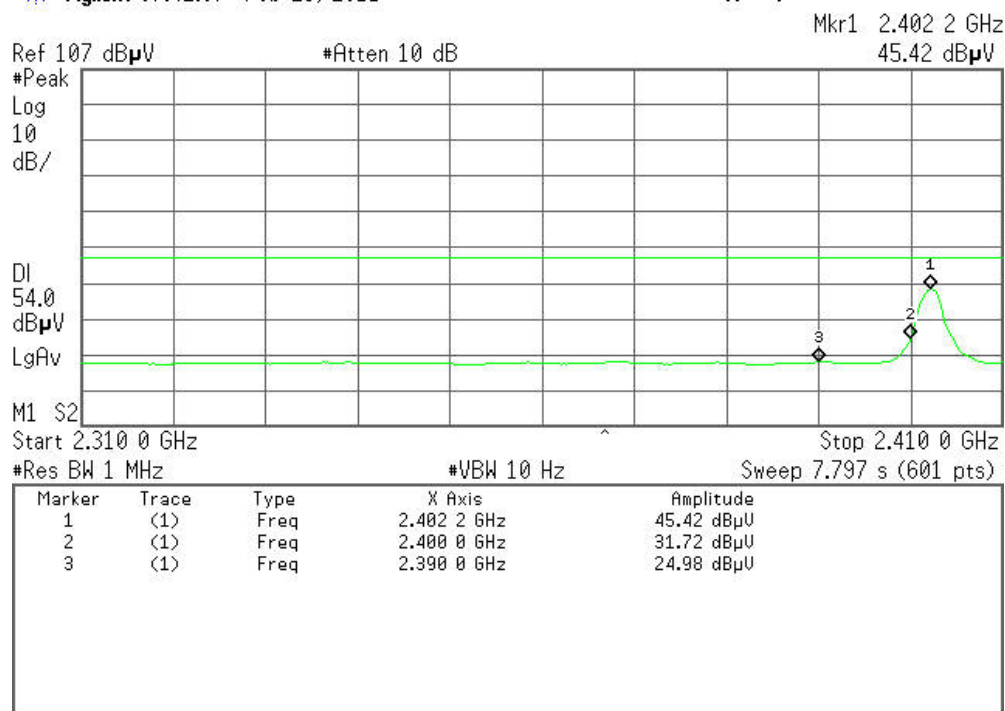






Detector mode: Peak

Polarity: Horizontal

Agilent 07:46:40 Feb 23, 2011

R T

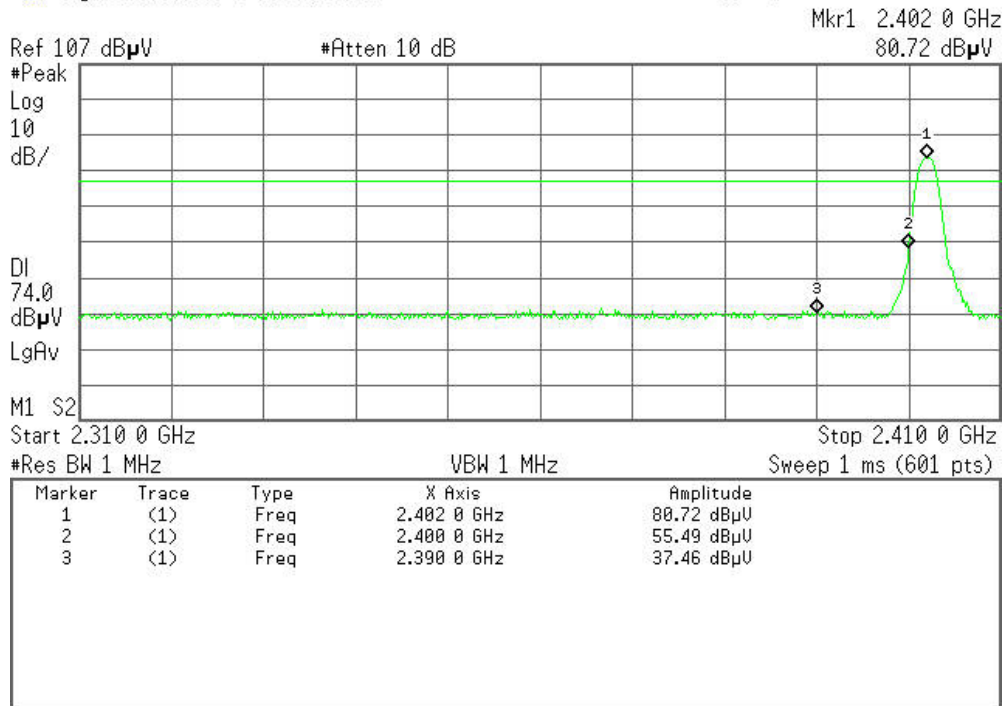


Detector mode: Average

Polarity: Horizontal

Agilent 07:47:14 Feb 23, 2011

R T

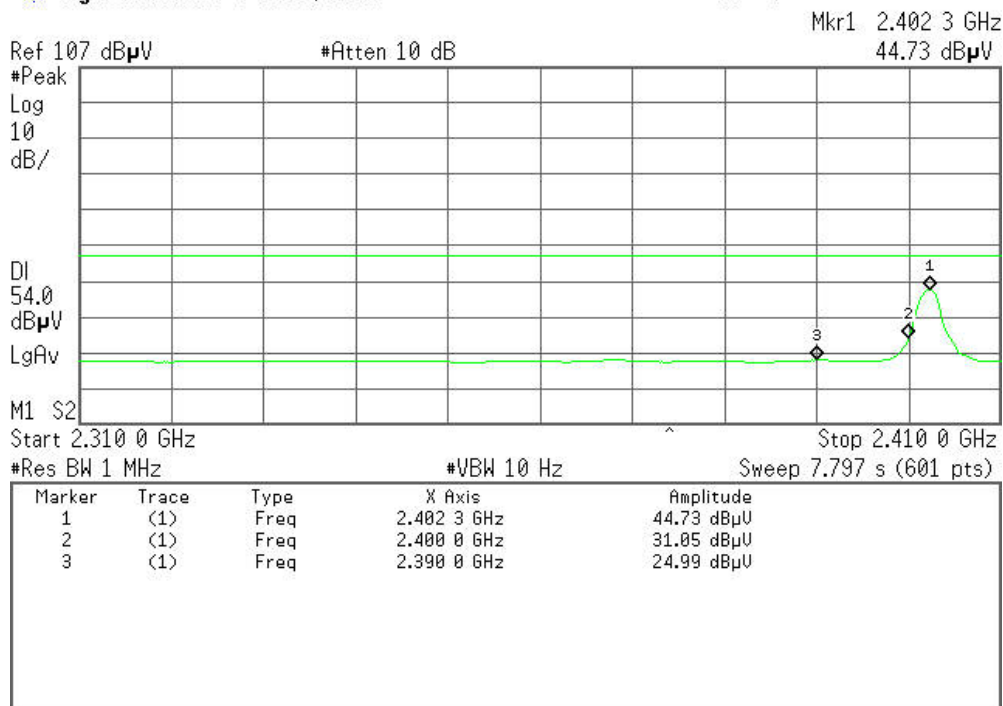





### Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 07:33:26 Feb 23, 2011

R T

Mkr1 2.480 00 GHz  
87.63 dBμV

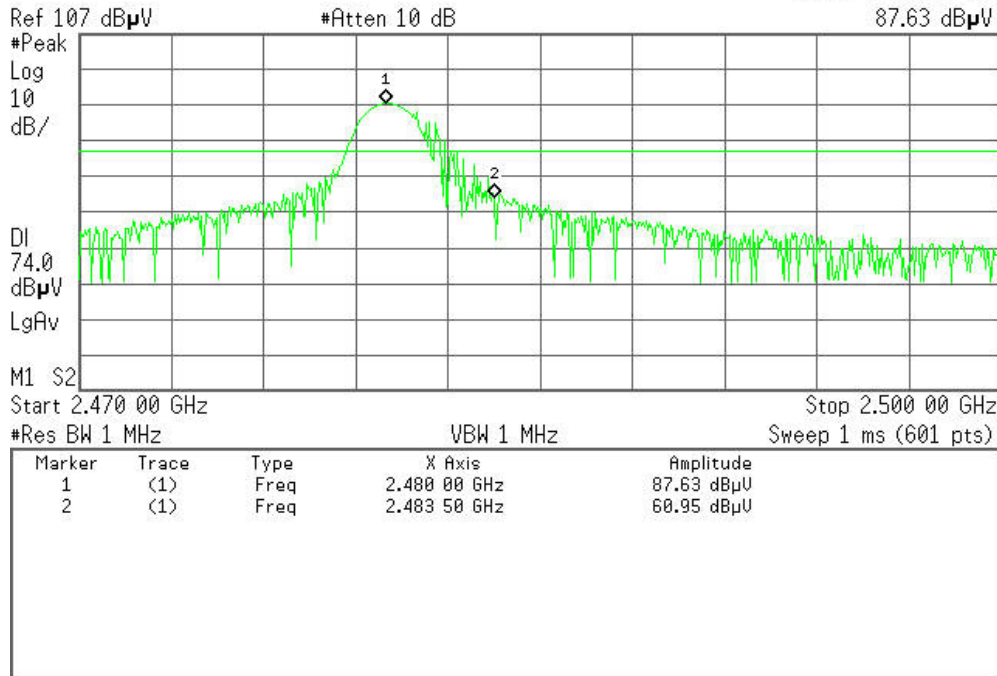


Detector mode: Average

Polarity: Vertical

Agilent 07:34:42 Feb 23, 2011

R T

Mkr1 2.480 35 GHz  
47.52 dBμV

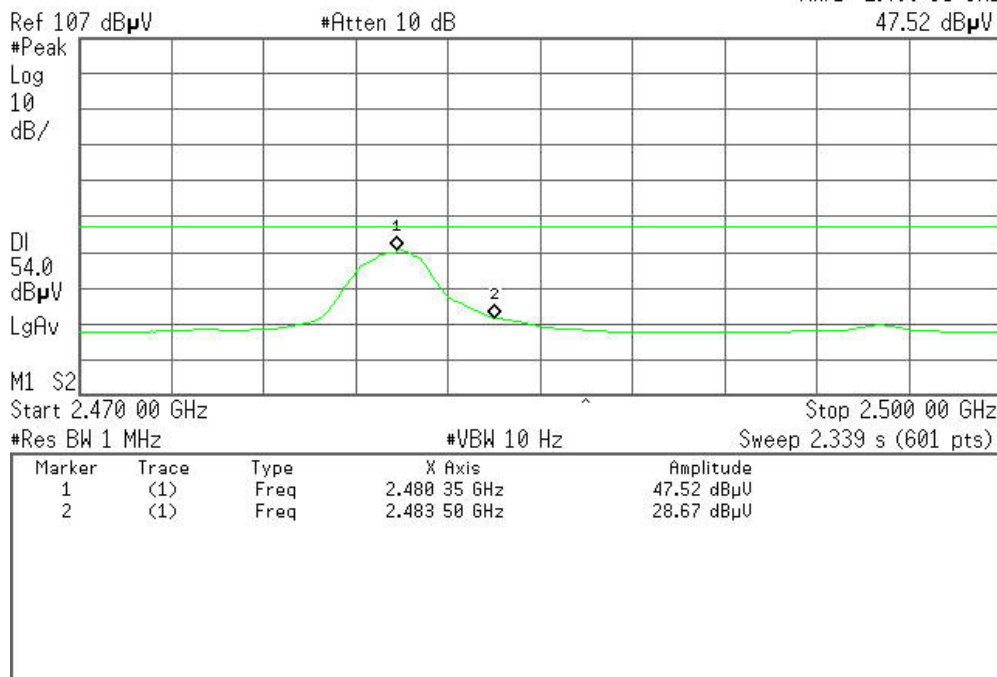




Detector mode: Peak

Polarity: Horizontal

Agilent 07:28:01 Feb 23, 2011

R T

Mkr1 2.480 05 GHz  
85.27 dBμV

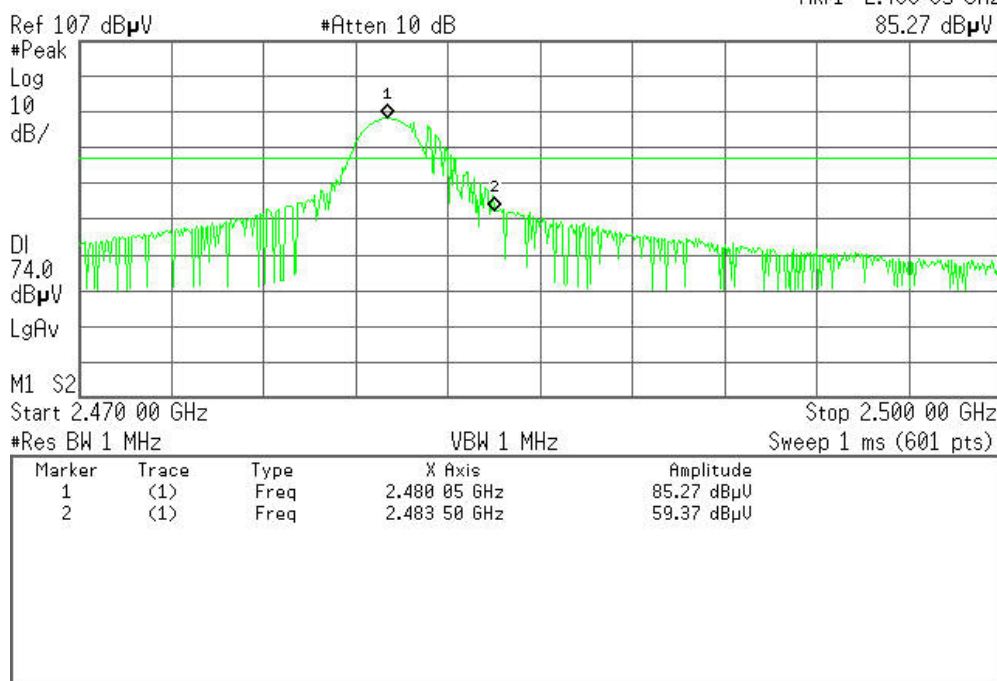


Detector mode: Average

Polarity: Horizontal

Agilent 07:28:33 Feb 23, 2011

R T

Mkr1 2.480 55 GHz  
47.10 dBμV

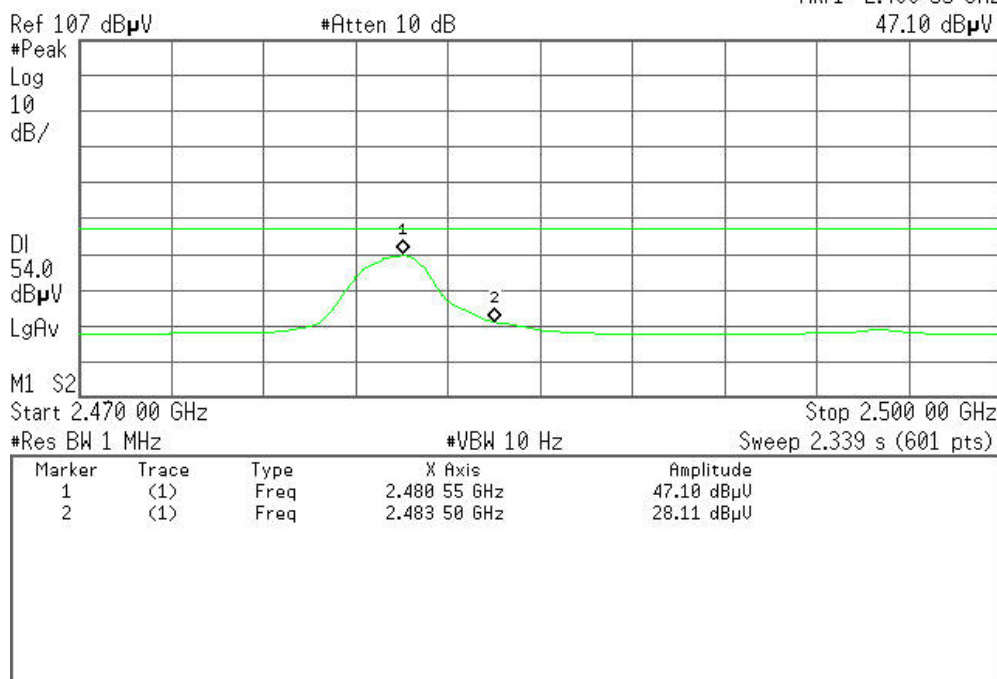



## **FREQUENCY SEPARATION**

### **LIMIT**


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **MEASUREMENT EQUIPMENT USED**

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Last Calibration</b>	<b>Due Calibration</b>
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/22/2010	07/22/2011

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### **Test Configuration**



## **TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

#### **GFSK**

<b>Channel Separation (MHz)</b>	<b>Two-thirds of the 20 dB Bandwidth (kHz)</b>	<b>Channel Separation Limit</b>	<b>Result</b>
1.000	557.92	> Two-thirds of the 20 dB Bandwidth	Pass

#### **8DPSK**

<b>Channel Separation (MHz)</b>	<b>Two-thirds of the 20 dB Bandwidth (kHz)</b>	<b>Channel Separation Limit</b>	<b>Result</b>
1.000	840.66	> Two-thirds of the 20 dB Bandwidth	Pass



## GFSK


### Test Plot

#### Measurement of Channel Separation

Agilent 04:06:36 Feb 28, 2011

R T


Δ Mkr1 -1.007 MHz  
-0.04 dB

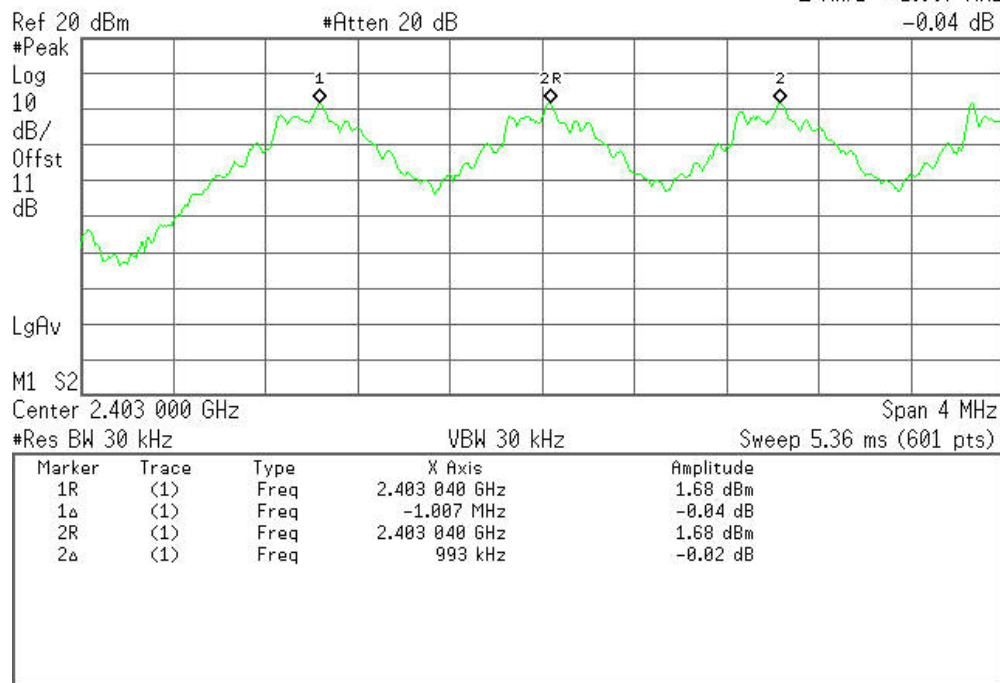

#### 20 dB bandwidth(CH Mid)

Agilent 03:31:06 Feb 28, 2011

R T

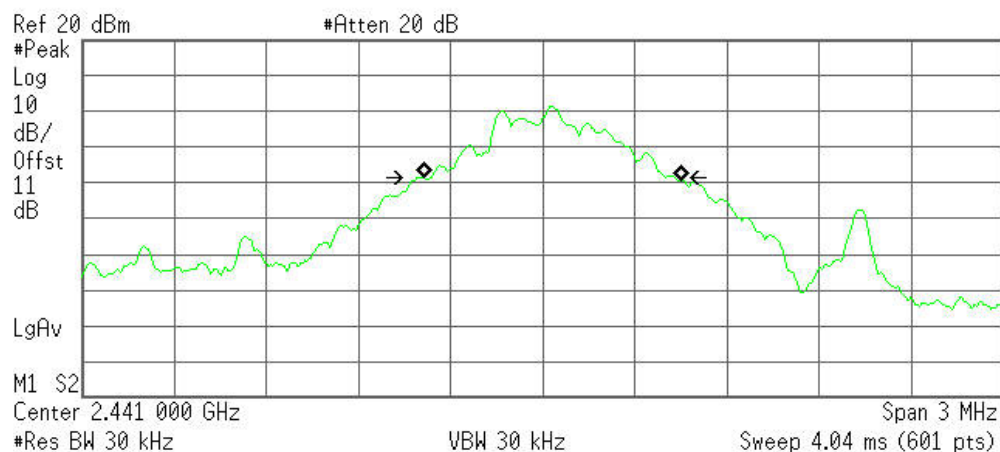

Occupied Bandwidth  
835.1528 kHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error 30.812 kHz  
x dB Bandwidth 836.882 kHz



## 8DPSK


### Test Plot

#### Measurement of Channel Separation

Agilent 04:19:09 Mar 2, 2011

R T


Mkr2 -1.147 MHz  
3.09 dB

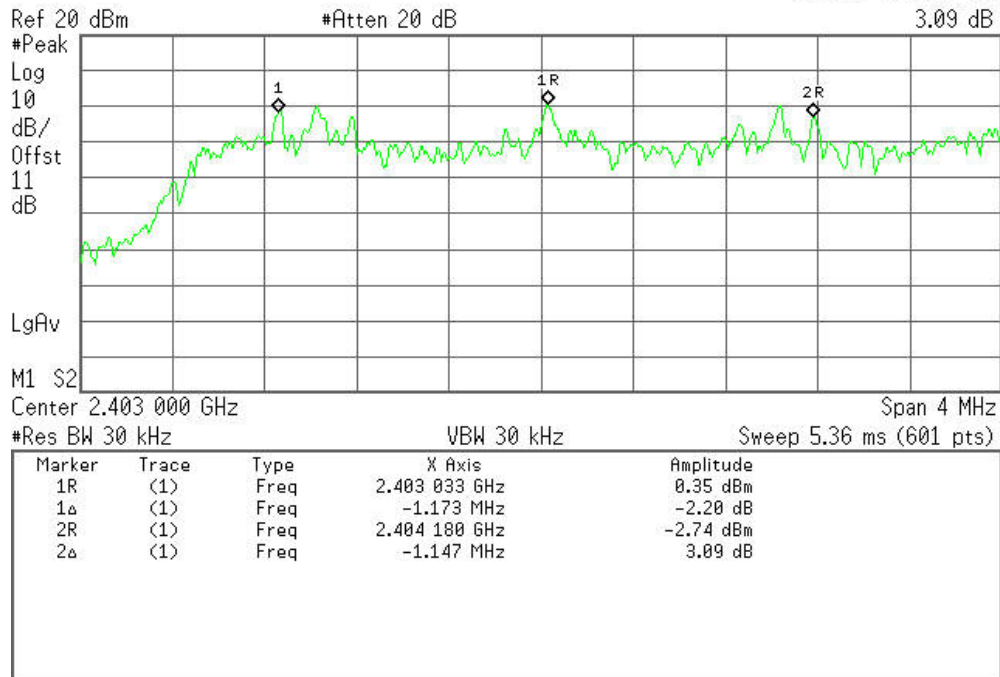

#### 20 dB bandwidth(CH High)

Agilent 04:06:51 Mar 2, 2011

R T

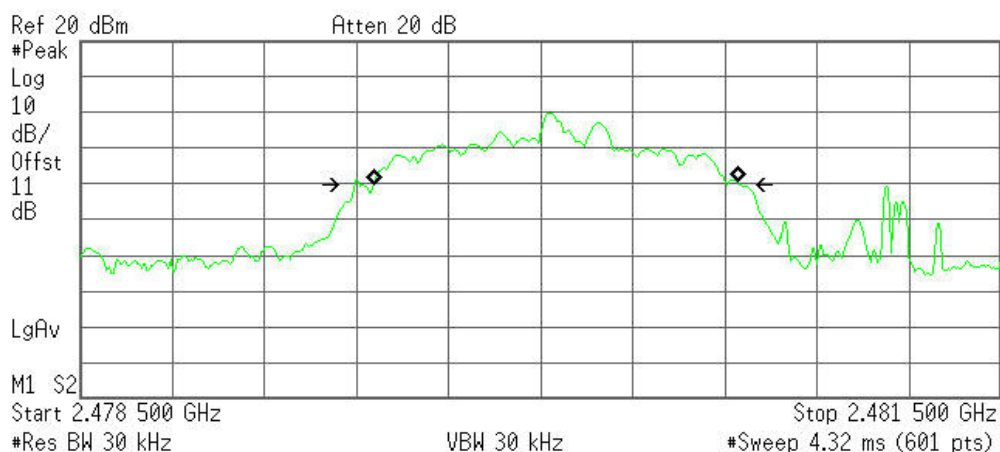

Occupied Bandwidth  
1.1846 MHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error 50.367 kHz  
x dB Bandwidth 1.261 MHz



## NUMBER OF HOPPING FREQUENCY

### LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2402MHz, Stop = 2441MHz, Sweep = 1ms and Start=2441MHz, Stop = 2480MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

*No non-compliance noted*

### Test Data

#### GFSK

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS






**Test Plot ( GFSK )**

**Channel Number**

**2.402 GHz – 2.441 GHz**

Agilent 03:39:19 Feb 28, 2011


R T

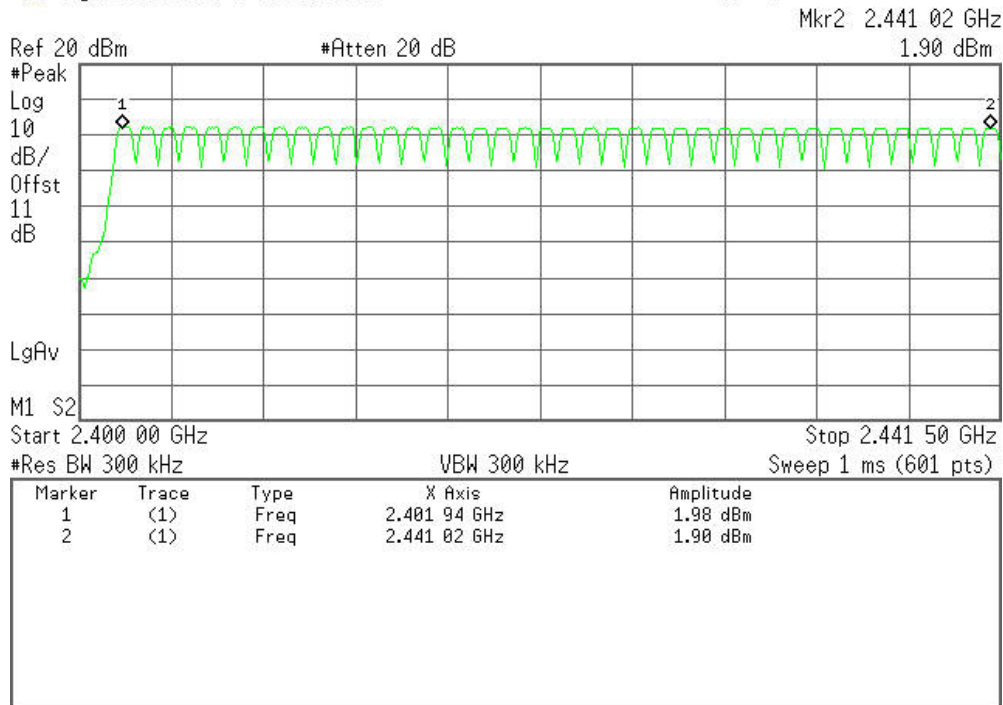

**2.441 GHz – 2.480 GHz**

Agilent 03:51:00 Feb 28, 2011

R T

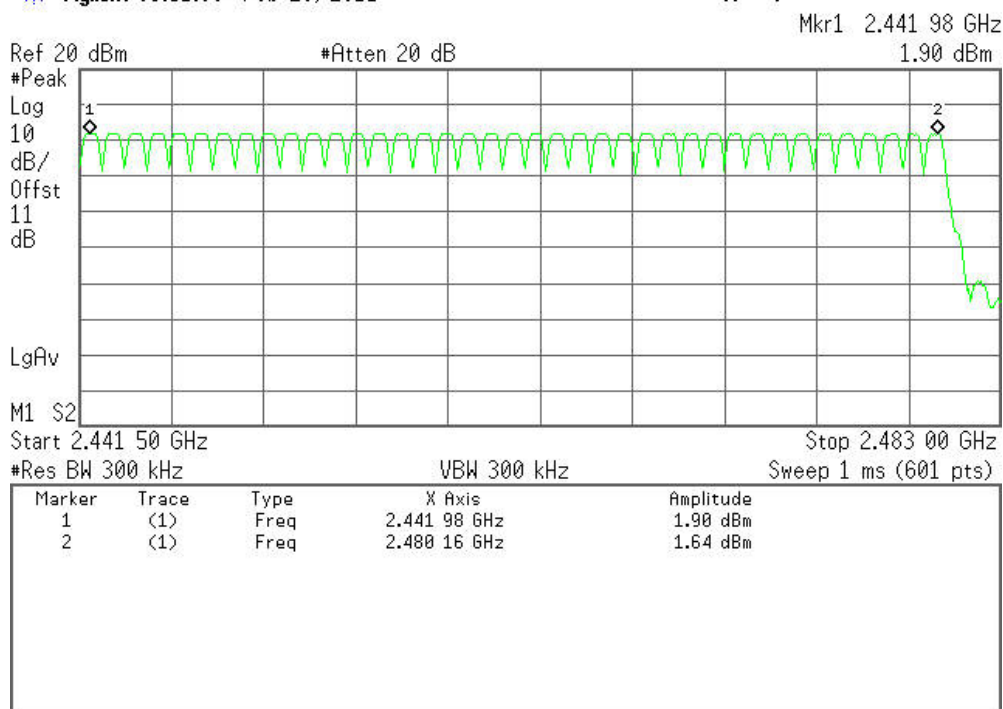




## Test Plot (8DPSK )

### Channel Number

#### 2.402 GHz – 2.441 GHz

Agilent 04:10:04 Mar 2, 2011


R T

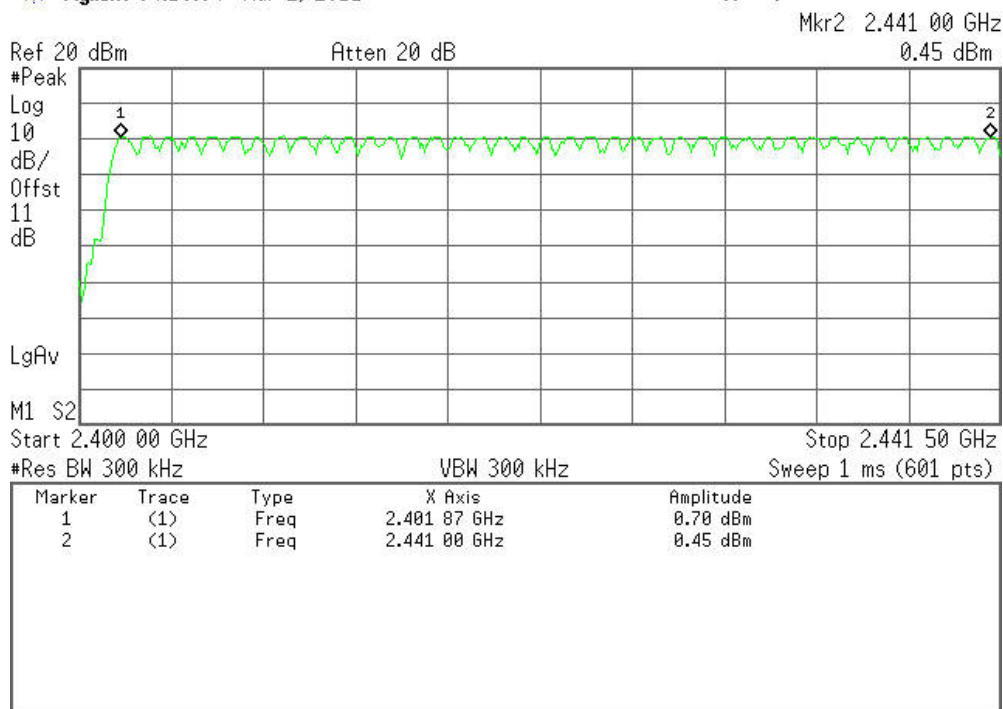

#### 2.441 GHz – 2.480 GHz

Agilent 04:12:54 Mar 2, 2011

R T

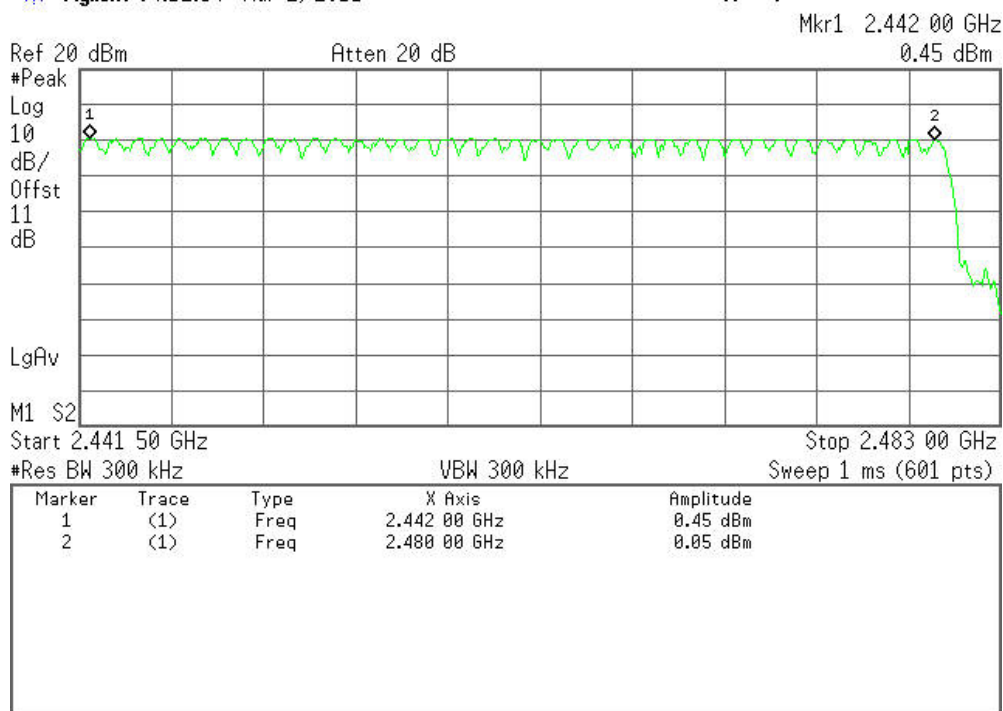





## TIME OF OCCUPANCY (DWELL TIME)

### LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

*No non-compliance noted*

**Test Data****GFSK****DH 1**

CH Mid:  $0.5017 * (1600/2)/79 * 31.6 = 160.544$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.5017	160.544	31.60	400.00	PASS

**DH 3**

CH Mid:  $1.775 * (1600/4)/79 * 31.6 = 284.0$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.775	284.0	31.60	400.00	PASS

**DH 5**

CH Mid:  $3.007 * (1600/6)/79 * 31.6 = 320.746$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.007	320.746	31.60	400.00	PASS

**Test Data****8DPSK****DH 1**

CH Mid:  $0.505 * (1600/2)/79 * 31.6 = 161.6$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.505	161.6	31.60	400.00	PASS

**DH 3**

CH Mid:  $1.763 * (1600/4)/79 * 31.6 = 282.08$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.763	282.08	31.60	400.00	PASS

**DH 5**

CH Mid:  $3.013 * (1600/6)/79 * 31.6 = 321.386$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.013	321.386	31.60	400.00	PASS



## Test Plot

### GFSK


#### DH 1

##### (CH Mid)

Agilent 04:16:38 Feb 28, 2011

R T

Δ Mkr1 501.7 μs  
50.34 dB

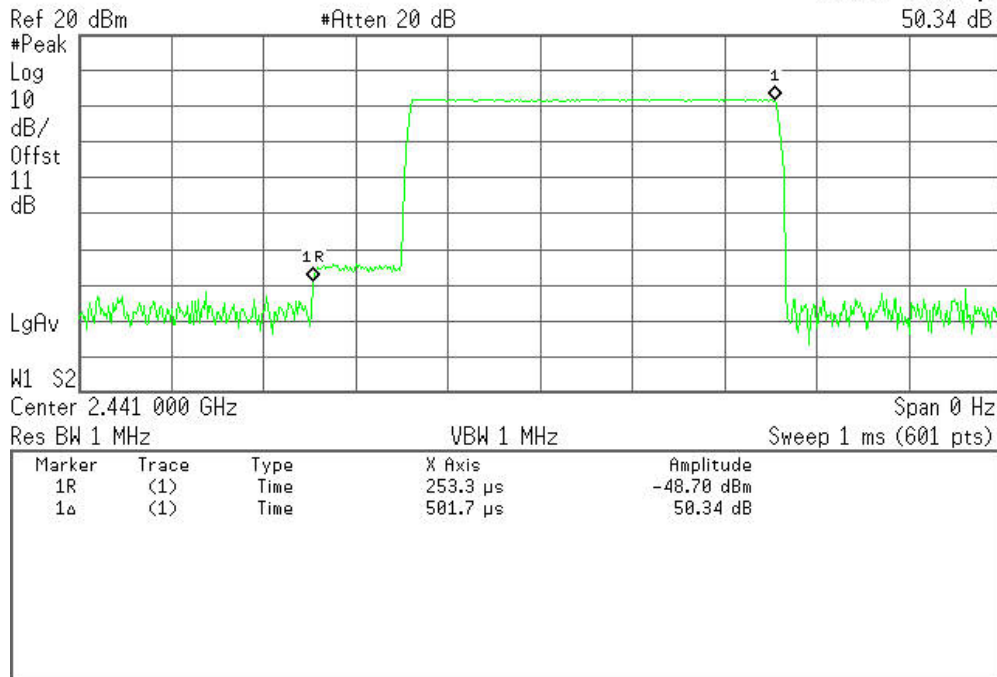


#### DH 3

##### (CH Mid)

Agilent 04:21:21 Feb 28, 2011

R T

Δ Mkr1 1.755 ms  
48.17 dB

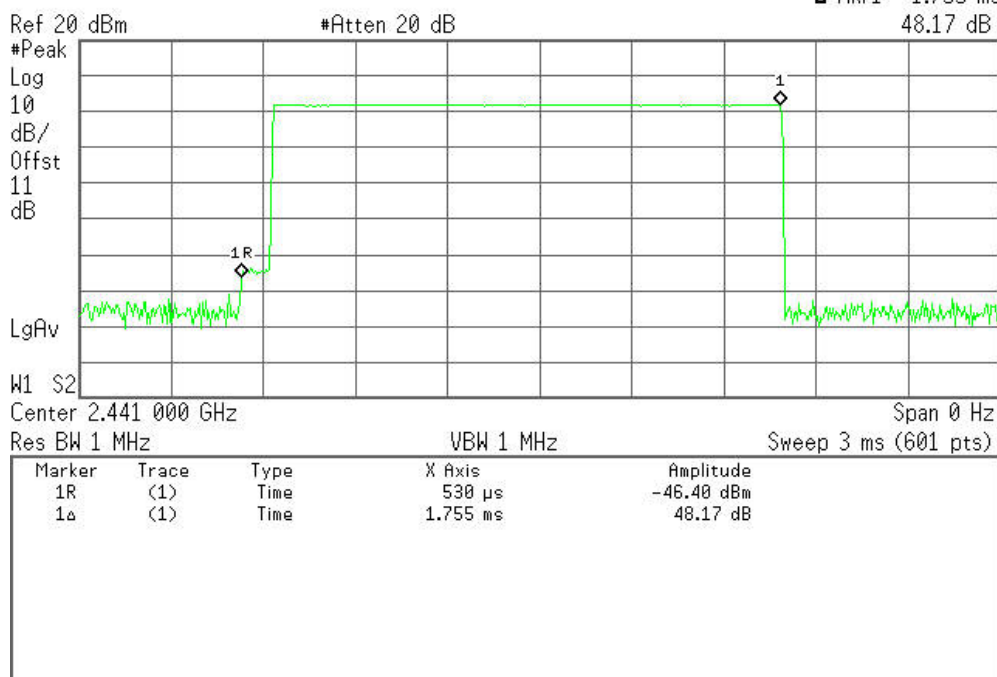



**DH 5**

**(CH Mid)**

Agilent 04:28:56 Feb 28, 2011

R T

Δ Mkr1 -3.007 ms

-46.00 dB

Ref 20 dBm

#Atten 20 dB

#Peak

Log

10

dB/

Offst

11

dB

LgAv

W1 S2

Center 2.441 000 GHz

Span 0 Hz

Res BW 1 MHz

VBW 1 MHz

Sweep 4 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	3.62 ms	1.73 dBm
1Δ	(1)	Time	-3.007 ms	-46.00 dB



**Test Plot**  
**8DPSK**


**DH 1**

**(CH Mid)**

Agilent 04:29:57 Mar 2, 2011

R T

Δ Mkr1 -505 μs  
-48.20 dB

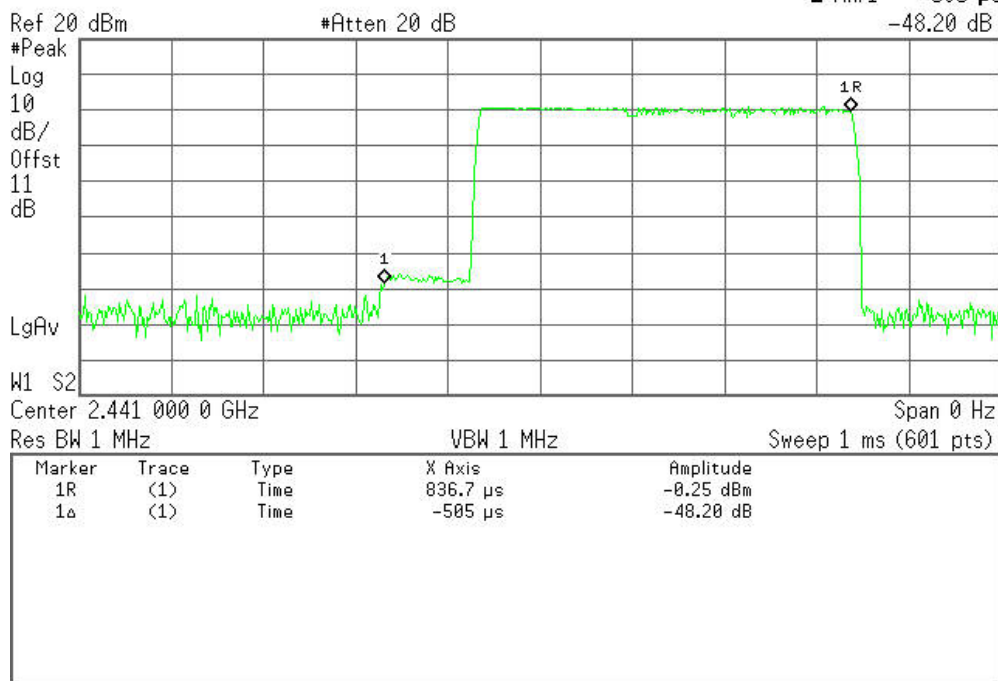


**DH 3**

**(CH Mid)**

Agilent 04:32:06 Mar 2, 2011

R T

Δ Mkr1 -1.763 ms  
-47.38 dB

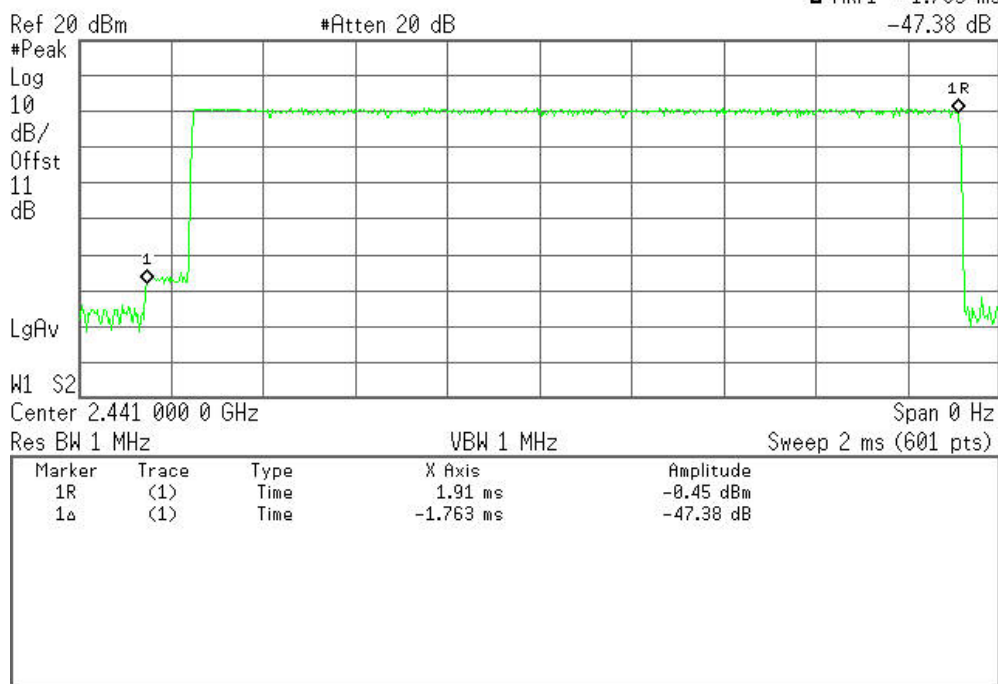




**DH 5**

**(CH Mid)**

Agilent 04:33:57 Mar 2, 2011

R T

Δ Mkr1 -3.013 ms  
-46.40 dB

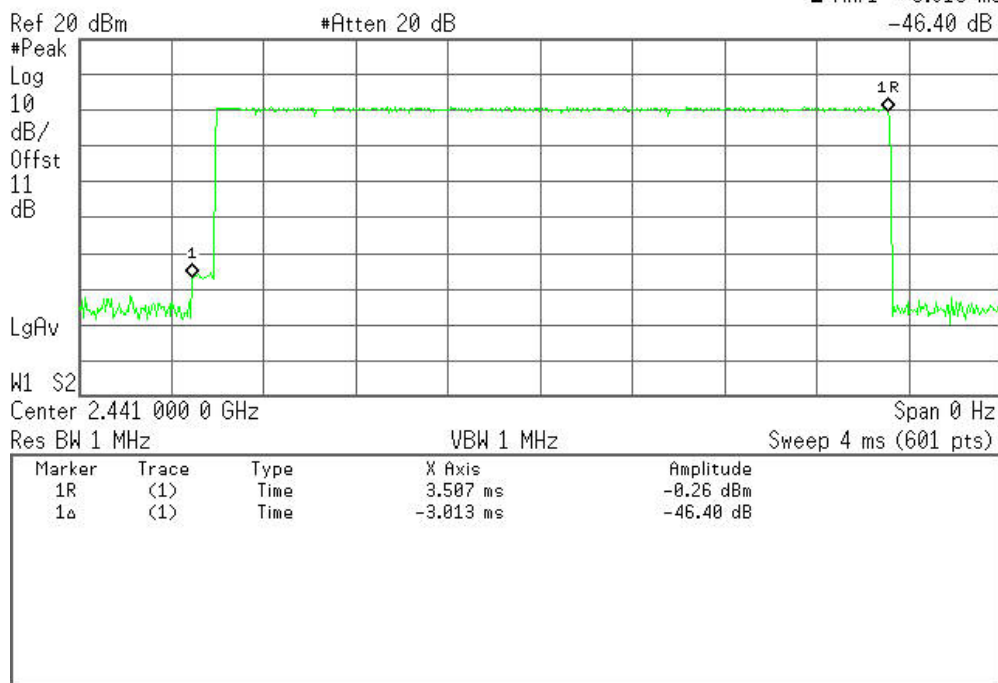



## SPURIOUS EMISSIONS

### 6.8.1. Conducted Measurement

#### LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*






**Test Plot ( GFSK )**

**CH Low**

**30MHz ~2.9GHz**

Agilent 05:46:27 Mar 2, 2011


R T

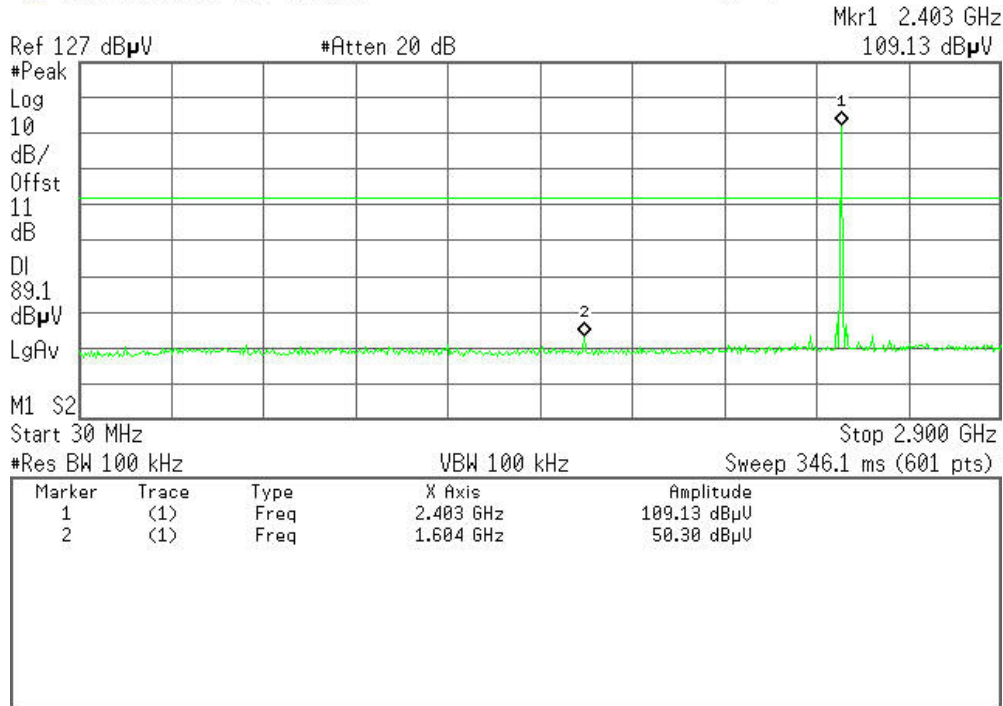

**2.9MHz ~26.5GHz**

Agilent 05:47:26 Mar 2, 2011

R T

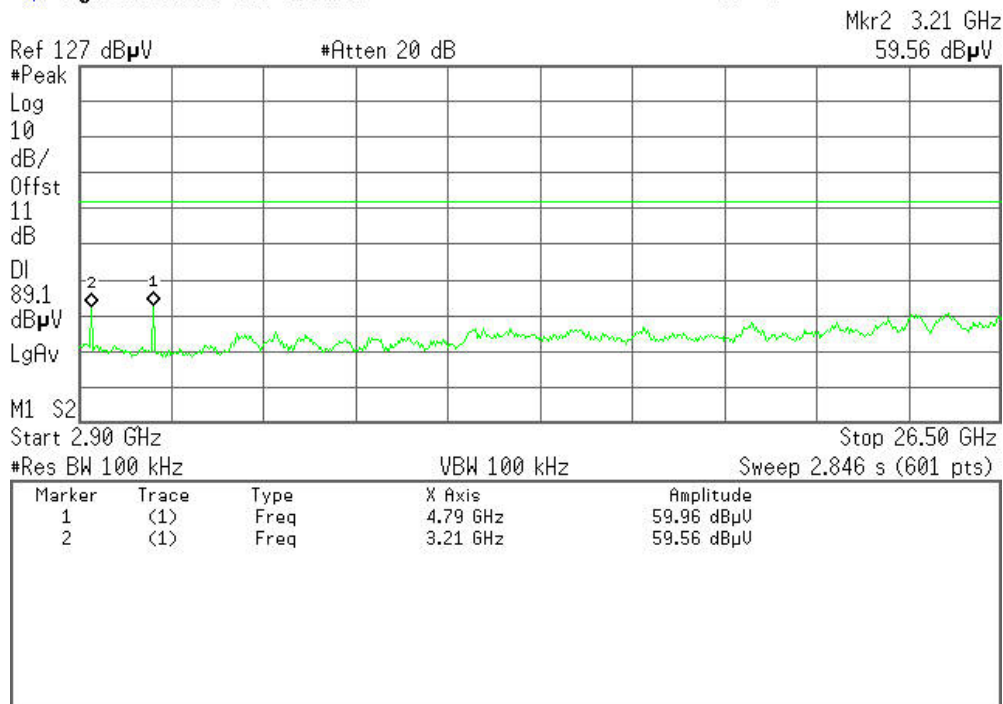




**CH Mid**

**30MHz ~ 2.9GHz**

Agilent 05:48:53 Mar 2, 2011


R T

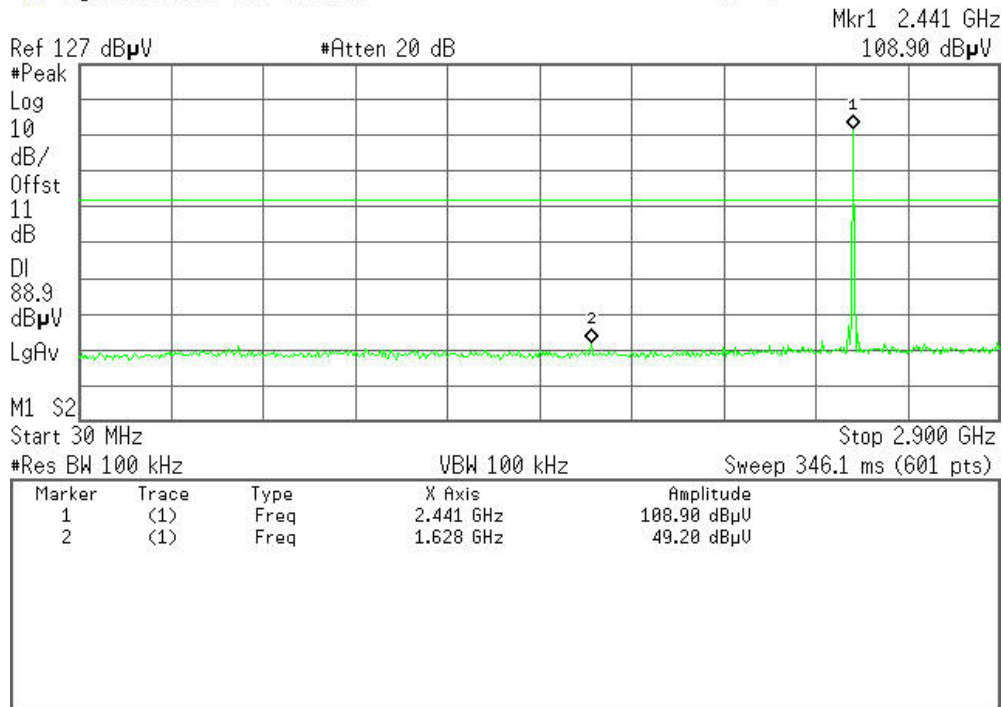

**2.9GHz ~ 26.5GHz**

Agilent 05:49:46 Mar 2, 2011

R T

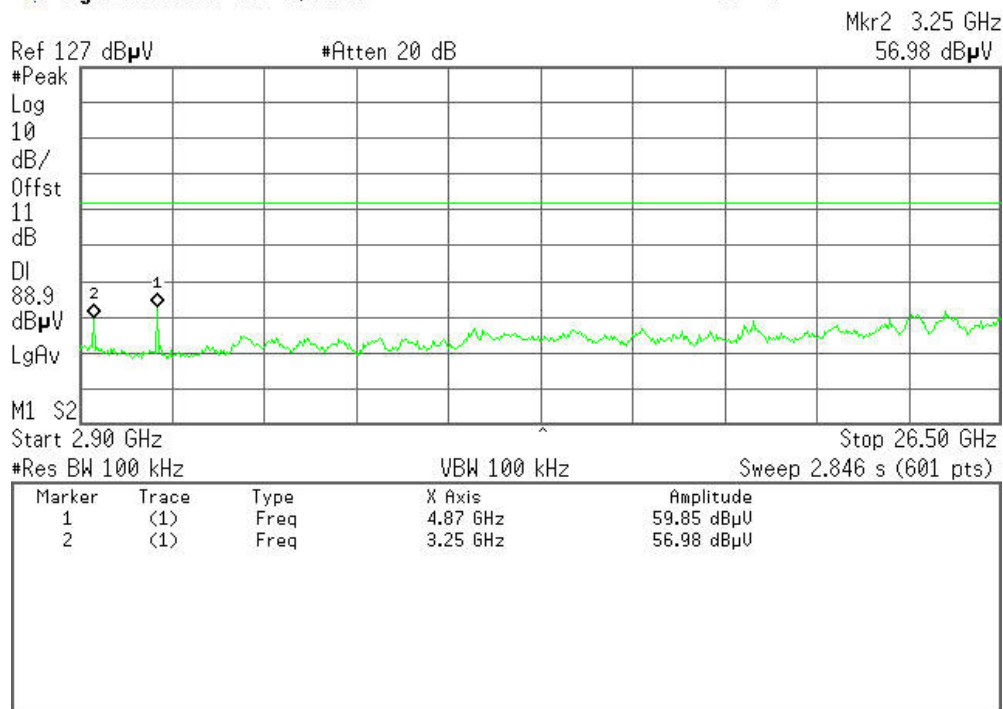




## CH High

### 30MHz ~ 2.9GHz

Agilent 05:44:00 Mar 2, 2011


R T

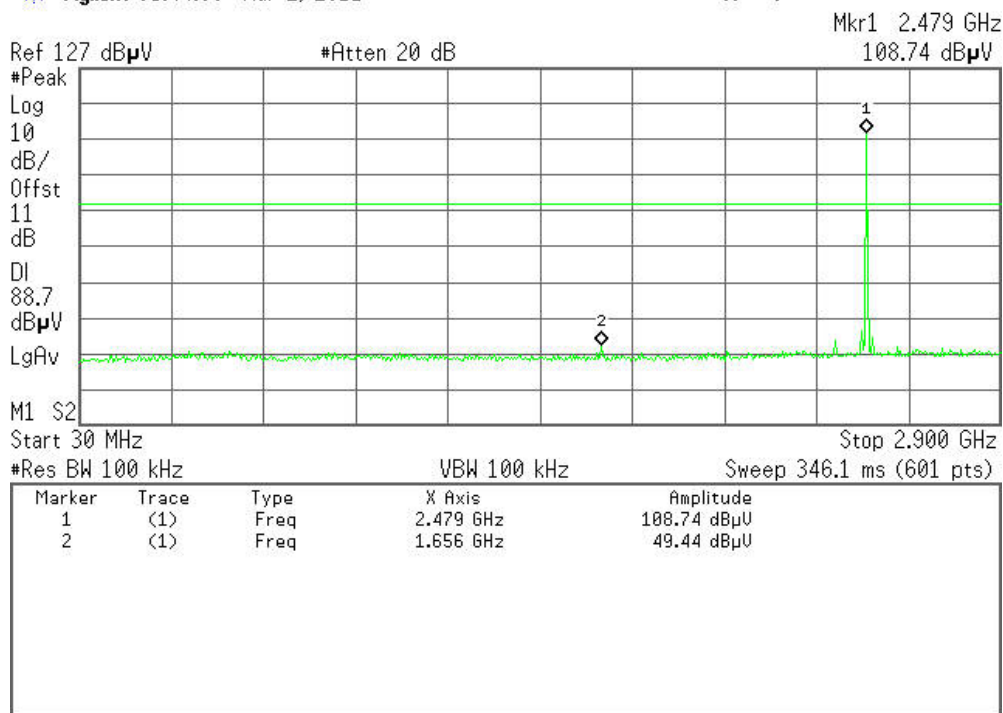

### 2.9GHz ~ 26.5GHz

Agilent 05:44:38 Mar 2, 2011

R T

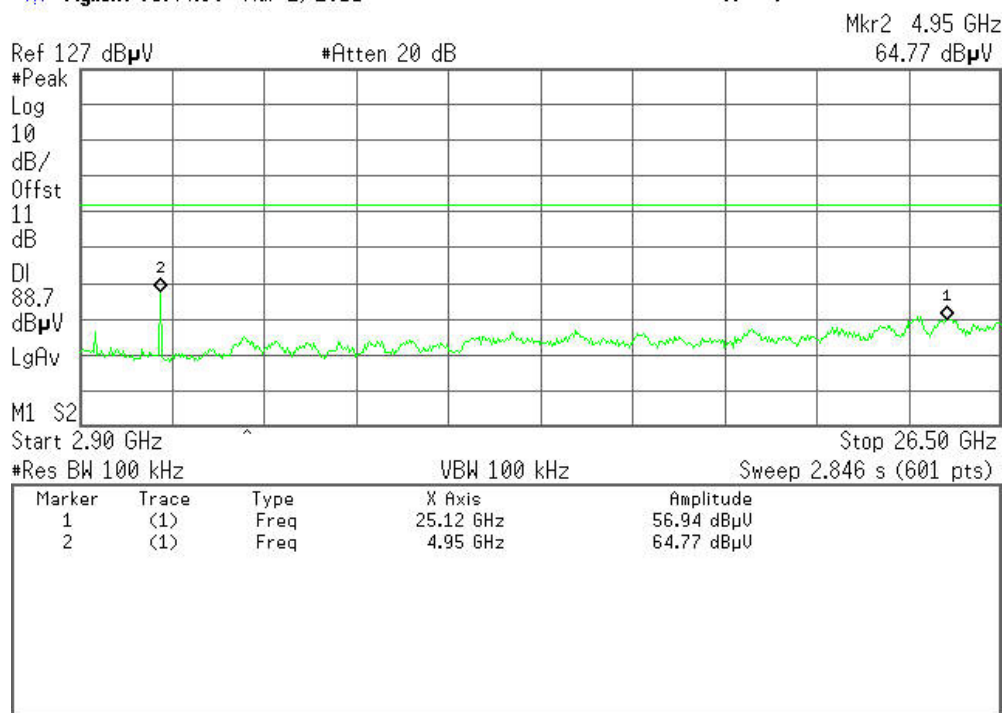




## Test Plot (8DPSK )

### CH Low

#### 30MHz ~2.9GHz

Agilent 05:38:38 Mar 2, 2011


R T

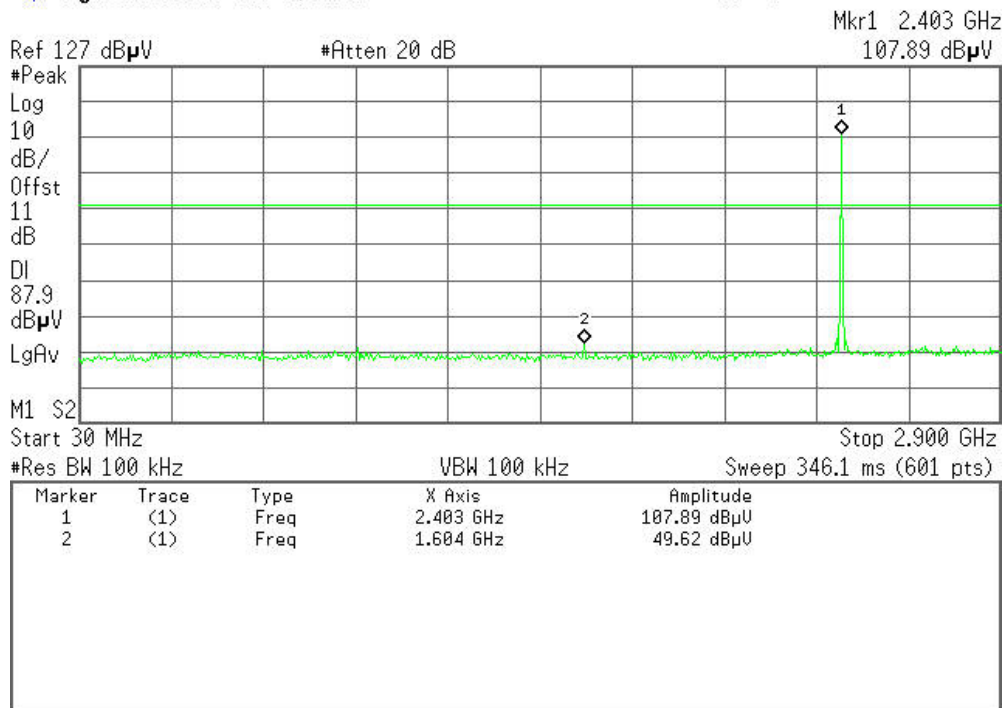

#### 2.9MHz ~26.5GHz

Agilent 05:39:25 Mar 2, 2011

R T

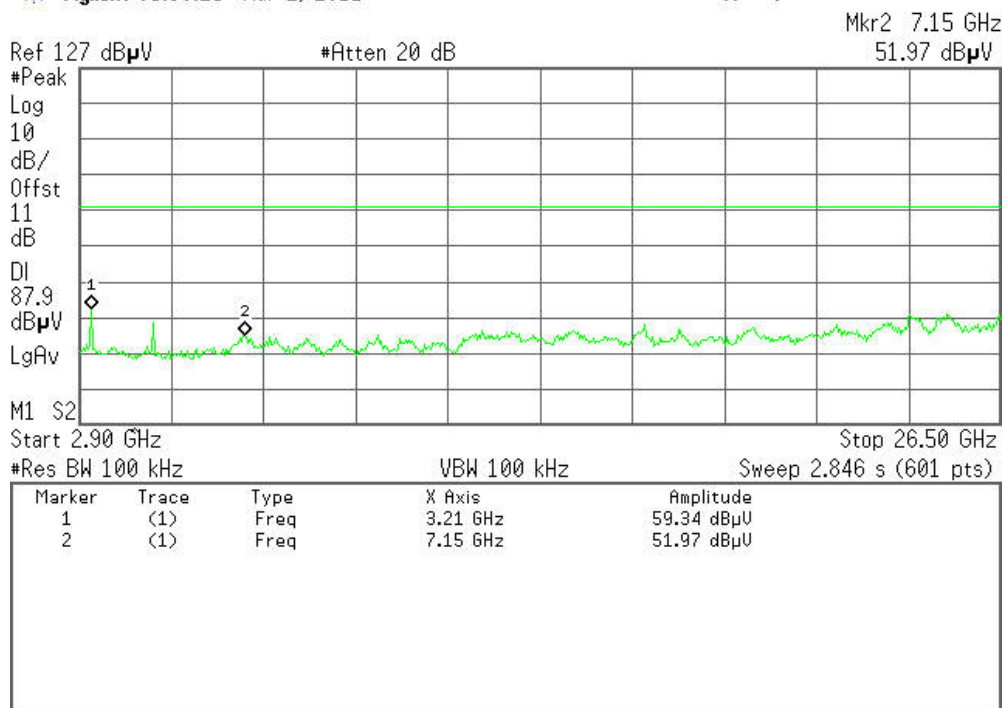




**CH Mid**

**30MHz ~ 2.9GHz**

Agilent 05:36:46 Mar 2, 2011


R T

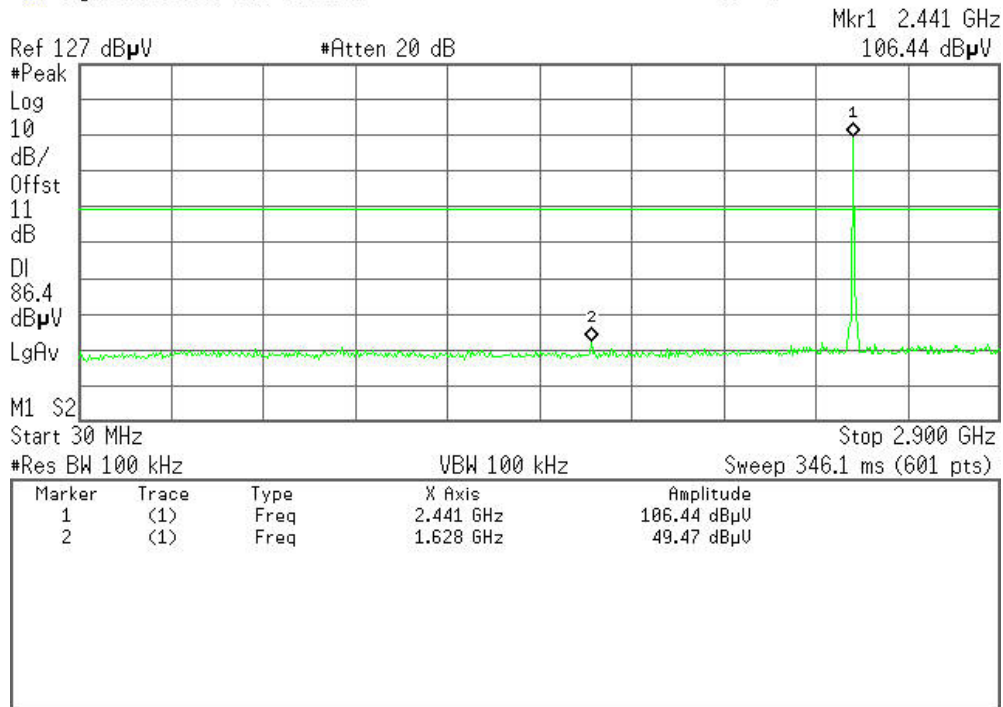

**2.9GHz ~ 26.5GHz**

Agilent 05:37:35 Mar 2, 2011

R T

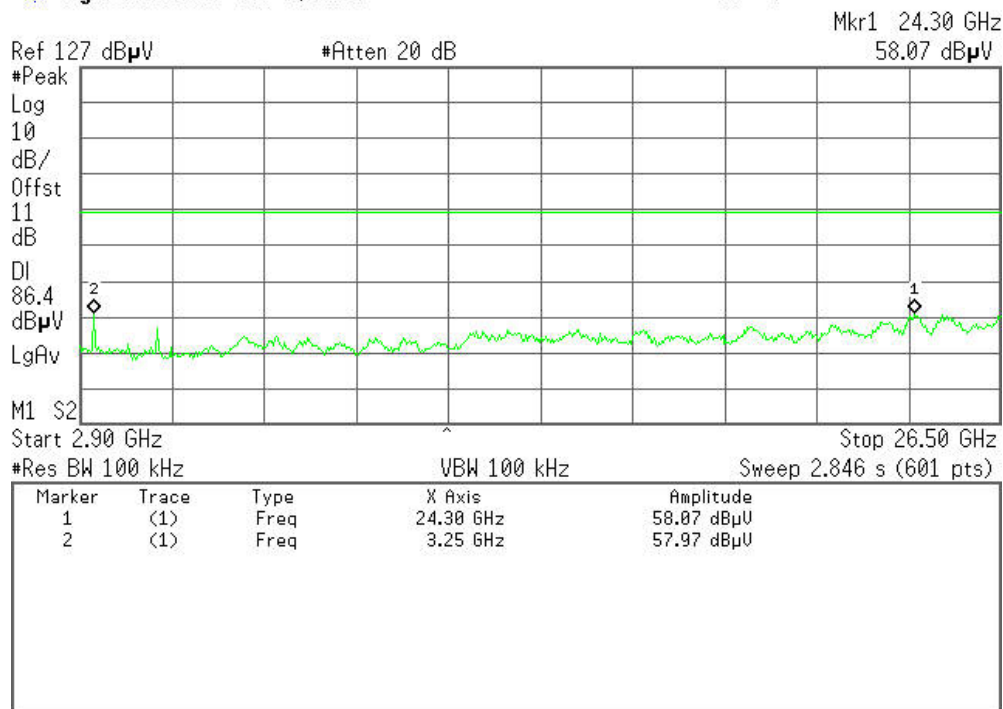




### CH High

#### 30MHz ~ 2.9GHz

Agilent 05:40:59 Mar 2, 2011


R T

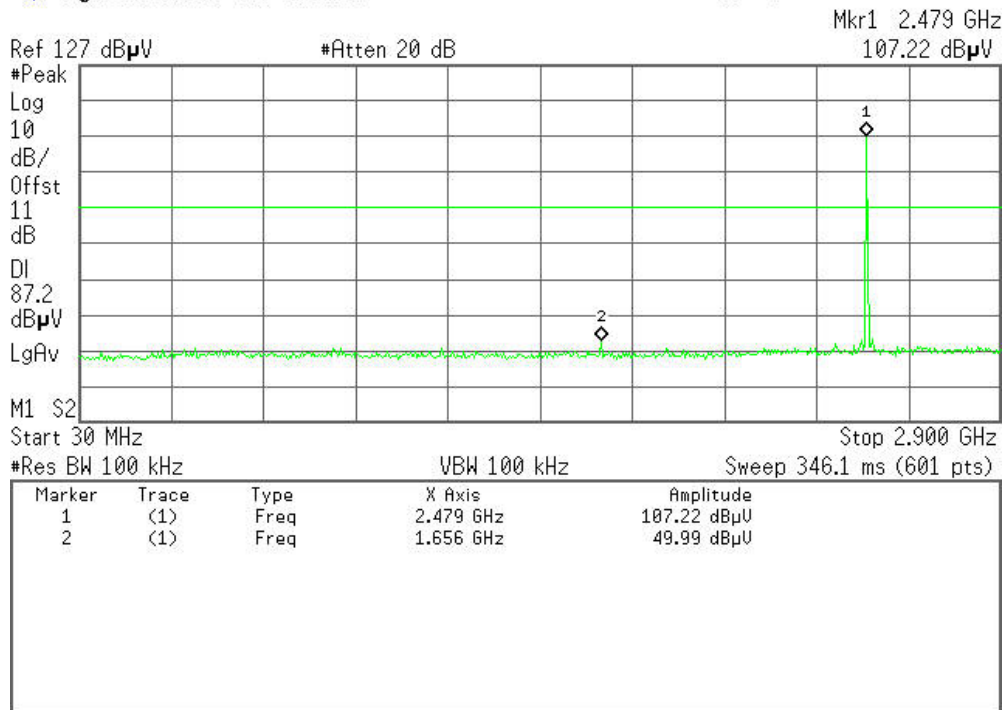

#### 2.9GHz ~ 26.5GHz

Agilent 05:41:51 Mar 2, 2011

R T

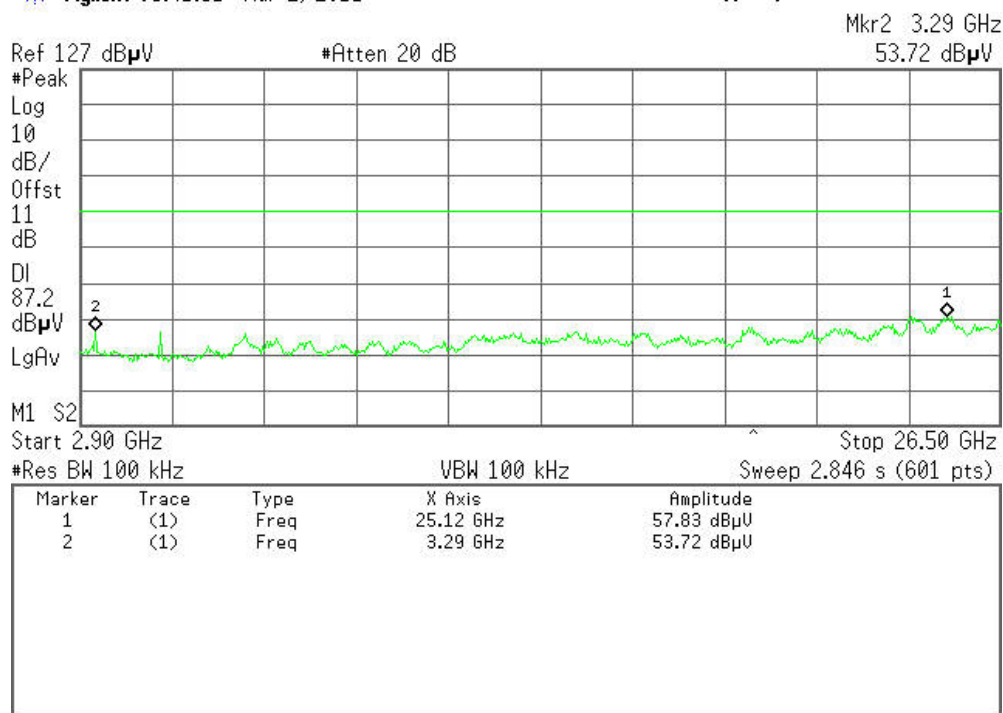

**6.8.2. Radiated Emissions****LIMIT**

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54



**MEASUREMENT EQUIPMENT USED**

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012
Amplifier	MITEQ	AM-1604-3000	1411843	03/21/2011	03/21/2012
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	06/18/2010	06/18/2011
Site NSA	C&C	N/A	N/A	N.C.R	N.C.R
Bilog Antenna	SCHAFFNER	CBL6143	5082	06/18/2010	06/18/2011
Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012
Signal Generator	Anritsu	MG3694A	#050125	03/21/2011	03/21/2012
Horn Antenna	TRC	HA0301	N/A	03/19/2011	03/19/2012
Loop Antenna	A.R.A	PLA-1030/B	1029	03/19/2011	03/19/2012
Power Sensor	Anritsu	MA2491A	030619	06/18/2010	06/18/2011
Power Meter	Anritsu	ML2487A	6K00001491	06/18/2010	06/18/2011
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/30/2011	03/30/2012


**Remark:** Each piece of equipment is scheduled for calibration once a year.






## Test Configuration

### Below 1 GHz

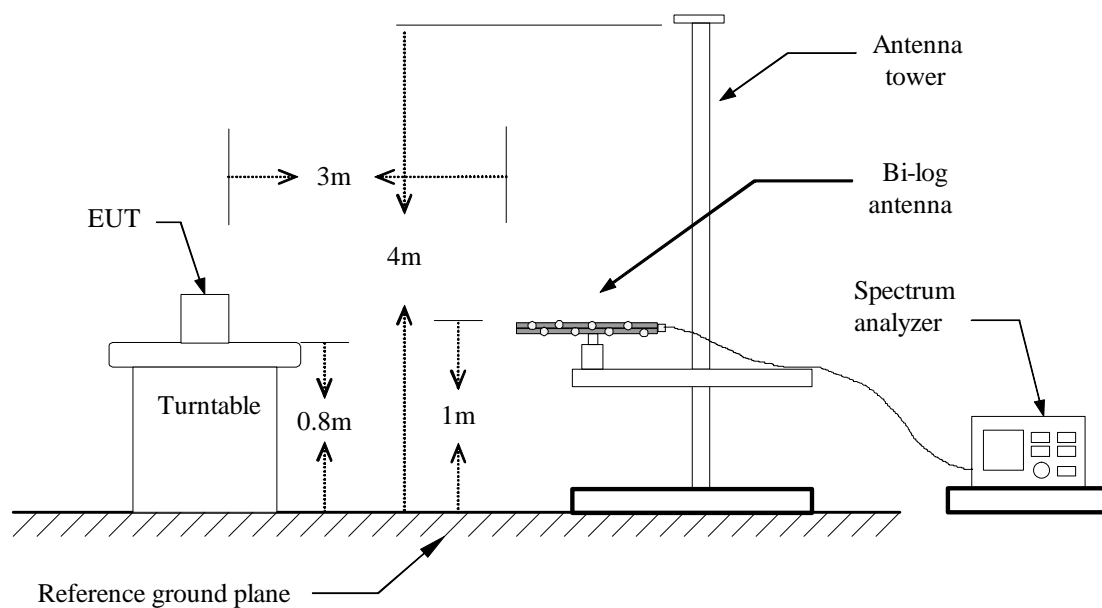

### Above 1 GHz

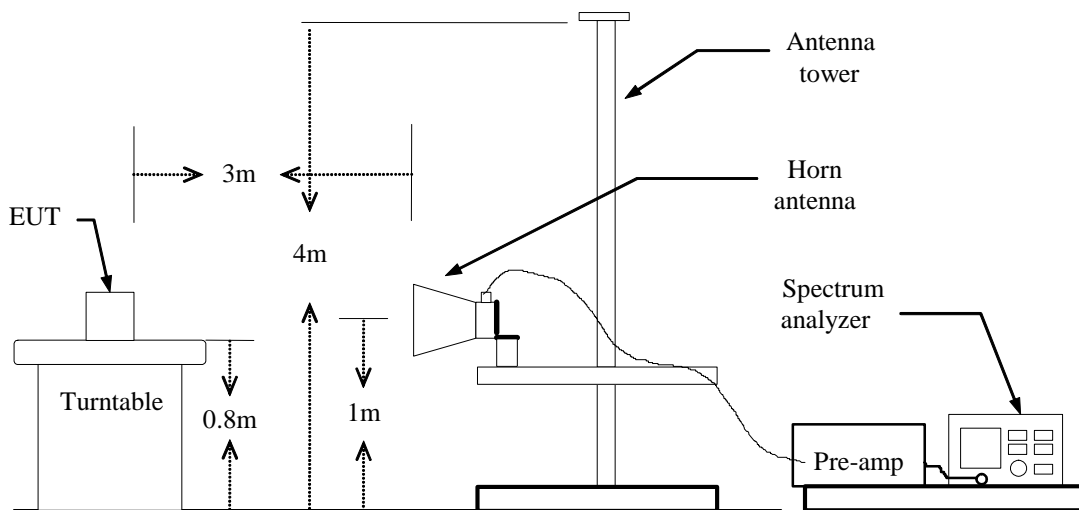



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz**

**Operation Mode:** Normal

**Test Date:** March 16, 2011

**Temperature:** 26°C

**Tested by:** Sunday Hu

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol. H/V	Detector Mode (PK/Q.P)	Reading (dBuV/m)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Safe Margin (dB)
56.675	V	Peak	48.43	-19.28	29.15	40.00	-10.85
134.275	V	Peak	51.52	-18.58	32.94	43.50	-10.56
219.150	V	Peak	46.93	-14.79	32.14	46.00	-13.86
354.950	V	Peak	47.35	-10.02	37.33	46.00	-8.67
408.300	V	Peak	41.82	-9.15	32.67	46.00	-13.33
723.550	V	Peak	38.23	-4.29	33.94	46.00	-12.06
107.600	H	Peak	43.83	-18.06	25.77	40.00	-14.23
160.950	H	Peak	46.51	-16.09	30.42	43.50	-13.08
216.725	H	Peak	46.56	-14.94	31.62	46.00	-14.38
270.075	H	Peak	45.81	-13.09	32.72	46.00	-13.28
418.000	H	Peak	40.48	-9.05	31.43	46.00	-14.57
944.225	H	Peak	30.12	-1.96	28.16	46.00	-17.84

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

**Notes:**

- Measuring frequencies from 9kHz to the 1GHz.
- Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
- |                    |  |
|--------------------|--|
| Freq(MHz).         | = Emission frequency in MHz                    |
| Reading (dBuV/m)   | = Receiver reading                             |
| Corr. Factor (dB)  | = Antenna factor + Cable loss – Amplifier gain |
| Actual FS (dBuV/m) | = Reading (dBuV) + Corr. Factor (dB/m)         |
| Limit (dBuV/m)     | = Limit stated in standard                     |
| Safe Margin(dB)    | = Measured (dBuV/m) – Limits (dBuV/m)          |
| Ant. H/V           | = Current carrying line of reading             |
| Detector           | = Mark Peak Reading or Quasi-peak Reading      |

**Above 1 GHz****GFSK****Operation****Mode:**

TX(CH Low)

**Test Date:** March 4, 2011**Temperature:**

24°C

**Tested by:** Sunday Hu**Humidity:**

52% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV/m)	AV Reading (dBuV/m)	Ant. / CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1595.000	V	59.49	---	-10.31	49.18	---	74.00	54.00	-4.82	Peak
1708.333	V	58.90	---	-10.22	48.68	---	74.00	54.00	-5.32	Peak
3210.000	V	50.04	---	-5.47	44.57	---	74.00	54.00	-9.43	Peak
4796.666	V	60.26	41.63	-0.67	59.59	40.96	74.00	54.00	-13.04	AVG
6071.666	V	46.51	---	3.25	49.76	---	74.00	54.00	-4.24	Peak
7205.000	V	49.94	36.84	4.98	54.92	41.82	74.00	54.00	-12.18	AVG
1595.000	H	51.88	---	-10.31	41.57	---	74.00	54.00	-12.43	Peak
3210.000	H	47.07	---	-5.47	41.60	---	74.00	54.00	-12.40	Peak
3606.666	H	45.71	---	-3.80	41.91	---	74.00	54.00	-12.09	Peak
4796.666	H	56.38	40.72	5.02	61.40	45.74	74.00	54.00	-8.26	AVG
6156.666	H	45.81	---	3.63	49.44	---	74.00	54.00	-4.56	Peak
7120.000	H	47.06	---	4.74	51.80	---	74.00	54.00	-2.20	Peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Freq.(MHz) = Emission frequency in MHz  
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
 Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier gain  
 Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Actual FS (dBuV/m) - Limit (dBuV/m)  
 Pk = Peak Reading  
 AV = Average Reading  
 Remark = Mark Peak Reading or Quasi-peak Reading



**Operation Mode:** TX(CH Mid)

**Test Date:** March 4, 2011

**Temperature:** 24°C

**Tested by:** Sunday Hu

**Humidity:** 52% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV/m)	AV Reading (dBuV/m)	Ant. / CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1453.333	V	52.70	---	-10.28	42.42	---	74.00	54.00	-11.58	Peak
1595.000	V	53.96	---	-10.31	43.65	---	74.00	54.00	-10.35	Peak
3266.666	V	51.76	---	-5.35	46.41	---	74.00	54.00	-7.59	Peak
4881.666	V	58.15	43.37	5.13	63.28	48.50	74.00	54.00	-5.50	AVG
6468.333	V	44.99	---	3.85	48.84	---	74.00	54.00	-5.16	Peak
7318.333	V	47.61	33.93	5.27	52.88	39.20	74.00	54.00	-14.80	AVG
1623.333	H	49.72	---	-10.29	39.43	---	74.00	54.00	-14.57	Peak
3918.333	H	46.35	---	-3.70	42.65	---	74.00	54.00	-11.35	Peak
4881.666	H	56.23	41.98	-0.39	55.84	41.59	74.00	54.00	-12.41	AVG
5958.333	H	45.34	---	2.86	48.20	---	74.00	54.00	-5.80	Peak
6241.666	H	45.09	---	3.79	48.88	---	74.00	54.00	-5.12	Peak
7120.000	H	45.73	---	4.74	50.47	---	74.00	54.00	-3.53	Peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Freq.(MHz) = Emission frequency in MHz  
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
 Corr. Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Actual FS (dBuV/m)- Limit (dBuV/m)  
 Pk = Peak Reading  
 AV. = Average Reading  
 Remark = Mark Peak Reading or Quasi-peak Reading



**Operation Mode:** TX(CH High)

**Test Date:** March 4, 2011

**Temperature:** 24 °C

**Tested by:** Sunday Hu

**Humidity:** 52% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV/m)	AV Reading (dBuV/m)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1651.666	V	52.88	---	-10.26	42.62	---	74.00	54.00	-11.38	Peak
3295.000	V	50.54	---	-5.29	45.25	---	74.00	54.00	-8.75	Peak
4258.333	V	45.90	---	-2.73	43.17	---	74.00	54.00	-10.83	Peak
4996.666	V	52.80	---	-0.12	52.68	---	74.00	54.00	-1.32	Peak
6411.666	V	45.71	---	3.71	49.42	---	74.00	54.00	-4.58	Peak
6950.000	V	47.16	---	4.38	51.54	---	74.00	54.00	-2.46	Peak
1651.666	H	50.46	---	-10.26	40.20	---	74.00	54.00	-13.80	Peak
3295.000	H	48.52	---	-5.29	43.23	---	74.00	54.00	-10.77	Peak
4258.333	H	45.84	---	-2.73	43.11	---	74.00	54.00	-10.89	Peak
4966.666	H	51.37	---	-0.12	51.25	---	74.00	54.00	-2.75	Peak
6496.67	H	45.84	---	3.93	49.77	---	74.00	54.00	-4.23	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Freq.(MHz) = Emission frequency in MHz  
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
 Corr. Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Actual FS (dBuV/m)- Limit (dBuV/m)  
 Pk = Peak Reading  
 AV. = Average Reading  
 Remark = Mark Peak Reading or Quasi-peak Reading

**8DPSK****Operation Mode:**

TX(CH Low)

**Test Date:** March 4, 2011**Temperature:** 24°C**Tested by:** Sunday Hu**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV/m)	AV Reading (dBuV/m)	Ant. / CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1595.000	V	54.18	---	-10.31	43.87	---	74.00	54.00	-10.13	Peak
3210.000	V	51.21	---	-5.47	45.74	---	74.00	54.00	-8.26	Peak
3606.666	V	46.85	---	-3.80	43.05	---	74.00	54.00	-10.95	Peak
4796.666	V	52.88	38.79	-0.67	52.21	38.12	74.00	54.00	-15.88	AVG
6270.000	V	45.27	---	3.77	49.04	---	74.00	54.00	-4.96	Peak
7403.333	V	45.15	---	5.48	50.63	---	74.00	54.00	-3.37	Peak
1595.000	H	50.27	---	-10.31	39.96	---	74.00	54.00	-14.04	Peak
3210.000	H	48.90	---	-5.47	43.43	---	74.00	54.00	-10.57	Peak
4173.333	H	45.42	---	-3.02	42.40	---	74.00	54.00	-11.60	Peak
4796.666	H	51.18	---	-0.67	50.51	---	74.00	54.00	-3.49	Peak
6156.666	H	45.61	---	3.63	49.24	---	74.00	54.00	-4.76	Peak
7035.000	H	46.96	---	4.50	51.46	---	74.00	54.00	-2.54	Peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Freq.(MHz) = Emission frequency in MHz  
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading  
 Corr. Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Actual FS (dBuV/m)- Limit (dBuV/m)  
 Pk = Peak Reading  
 AV. = Average Reading  
 Remark = Mark Peak Reading or Quasi-peak Reading





**Operation Mode:** TX(CH Mid)

**Test Date:** March 4, 2011

**Temperature:** 24°C

**Tested by:** Sunday Hu

**Humidity:** 52% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV/m)	AV Reading (dBuV/m)	Ant. / CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1623.333	V	52.91	---	-10.29	42.62	---	74.00	54.00	-11.38	Peak
3266.666	V	51.28	---	-5.35	45.93	---	74.00	54.00	-8.07	Peak
4400.000	V	46.35	---	-2.26	44.09	---	74.00	54.00	-9.91	Peak
4881.666	V	50.96	---	-0.39	50.57	---	74.00	54.00	-3.43	Peak
6440.000	V	45.10	---	3.78	48.88	---	74.00	54.00	-5.12	Peak
6921.666	V	46.10	---	4.36	50.46	---	74.00	54.00	-3.54	Peak
1623.333	H	50.49	---	-10.29	40.20	---	74.00	54.00	-13.80	Peak
3266.666	H	47.93	---	-5.35	42.58	---	74.00	54.00	-11.42	Peak
4116.666	H	45.97	---	-3.20	42.77	---	74.00	54.00	-11.23	Peak
4881.666	H	49.34	---	-0.39	48.95	---	74.00	54.00	-5.05	Peak
6128.333	H	46.16	---	3.50	49.66	---	74.00	54.00	-4.34	Peak
7148.333	H	45.60	---	4.82	50.42	---	74.00	54.00	-3.58	Peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Freq.(MHz) = Emission frequency in MHz  
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
 Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier gain  
 Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Actual FS (dBuV/m) - Limit (dBuV/m)  
 Pk = Peak Reading  
 AV = Average Reading  
 Remark = Mark Peak Reading or Quasi-peak Reading





Operation Mode: TX(CH High)

Test Date: March 4, 2011

Temperature: 24 °C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV/m)	AV Reading (dBuV/m)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1113.333	V	53.82	---	-11.65	42.17	---	74.00	54.00	-11.83	Peak
1651.666	V	55.21	---	-10.26	44.95	---	74.00	54.00	-9.05	Peak
3295.000	V	53.51	---	-5.29	48.22	---	74.00	54.00	-5.78	Peak
5335.000	V	45.63	---	0.87	46.50	---	74.00	54.00	-7.50	Peak
6156.666	V	45.33	---	3.63	48.96	---	74.00	54.00	-5.04	Peak
7006.666	V	46.07	---	4.42	50.49	---	74.00	54.00	-3.51	Peak
1198.333	H	52.43	---	-11.42	41.01	---	74.00	54.00	-12.99	Peak
1651.666	H	52.18	---	-10.26	41.92	---	74.00	54.00	-12.08	Peak
3295.000	H	49.56	---	-5.29	44.27	---	74.00	54.00	-9.73	Peak
4966.666	H	46.51	---	-0.12	46.39	---	74.00	54.00	-7.61	Peak
5816.67	H	44.78	---	2.62	47.40	---	74.00	54.00	-6.60	Peak
6978.33	H	46.14	---	4.39	50.53	---	74.00	54.00	-3.47	Peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Freq.(MHz) = Emission frequency in MHz  
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
 Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier gain  
 Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Actual FS (dBuV/m) - Limit (dBuV/m)  
 Pk = Peak Reading  
 AV. = Average Reading  
 Remark = Mark Peak Reading or Quasi-peak Reading



## POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


### MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	1166.5950 03	100145	03/21/2011	03/21/2012
LISN	FCC	FCC-LISN-50-50-2-M	01068	03/21/2011	03/21/2012
LISN	EMCO	3825/2	8901-1459	03/21/2011	03/21/2012
CDN	FCC	FCC-TILISN-T4	20182	03/21/2011	03/21/2012
CDN	FCC	FCC-TLISN-T8-02	20183	03/21/2011	03/21/2012
CDN	FCC	FCC-TLISN-T4-02	20382	03/21/2011	03/21/2012
CDN	FCC	FCC-TLISN-T4-02	20383	03/21/2011	03/21/2012
CDN	FCC	FCC-801-T8-RJ45	04030	03/21/2011	03/21/2012
Current Probe	STODDART AIRCRAFT	91550-1	345-73	03/21/2011	03/21/2012
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/30/2010	03/30/2011

**Remark:** Each piece of equipment is scheduled for calibration once a year.



## Test Configuration

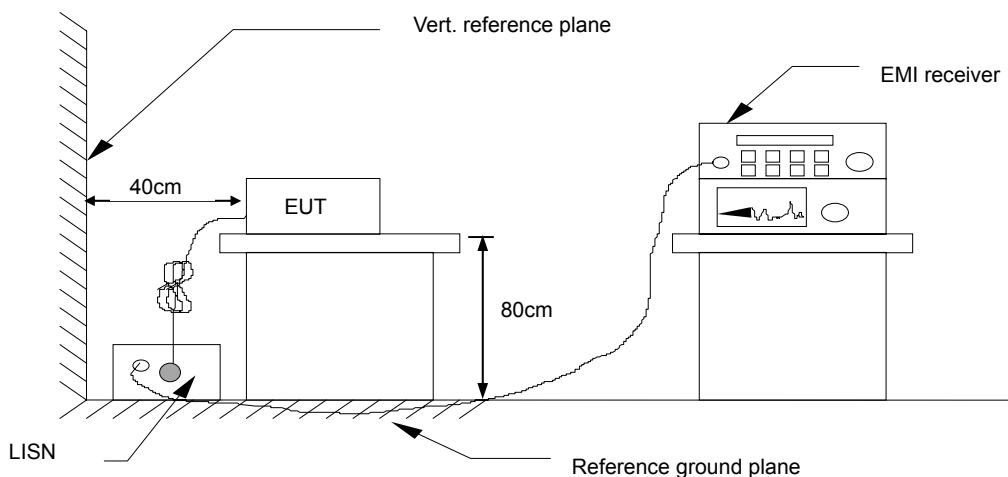

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

<b>Model No.</b>	RSE-II	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	26°C, 60% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Sunday Hu		

(The chart below shows the highest readings taken from the final data.)

Frequency Range Investigated (150 kHz to 30 MHz)										
Freq. (MHz)	Q.P. Level (dBuV)	AVG Level (dB uV)	Cor. Factor (dB)	Q.P. Result (dBuV)	AVG Result (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dB uV)	Q.P. Margin (dB)	AVG Margin (dB)	Line (L1/L2)
0.150	50.12	31.72	11.52	61.64	43.24	65.99	55.99	-4.35	-12.75	L 1
0.198	44.24	26.23	11.52	55.76	37.75	63.69	53.69	-7.93	-15.94	L 1
0.342	41.72	32.58	11.51	53.23	44.09	59.15	49.15	-5.92	-5.06	L 1
0.742	34.82	24.53	11.51	46.33	36.04	56.00	46.00	-9.67	-9.96	L 1
2.750	36.32	25.38	11.59	47.91	36.97	56.00	46.00	-8.09	-9.03	L 1
25.041	37.12	25.59	12.82	49.94	38.41	60.00	50.00	-10.06	-11.59	L 1
0.150	49.03	30.86	11.52	60.55	42.38	65.99	55.99	-5.44	-13.61	L 2
0.337	41.13	31.91	11.53	52.66	43.44	59.25	49.25	-6.59	-5.81	L 2
0.746	34.24	23.25	11.53	45.77	34.78	56.00	46.00	-10.23	-11.22	L 2
0.950	34.34	23.14	11.51	45.85	34.65	56.00	46.00	-10.15	-11.35	L 2
2.758	36.17	24.56	11.59	47.76	36.15	56.00	46.00	-8.24	-9.85	L 2
23.618	36.48	24.92	12.68	49.16	37.60	60.00	50.00	-10.84	-12.40	L 2

**NOTE:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

2. Those frequencies only show peak emission level because that was below the Average limit, so no need to check average anymore.



## **7. ANNEX DECLARATION FOR BLUETOOTH DEVICE ACC to Part 15.247**

### **1 Output power and channel separation of a Bluetooth device in the different operating modes:**

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters. Only a different hopping sequence will be used. For this reason the check of these

RF parameters in one op-mode is sufficient.

### **2 Frequency range of a Bluetooth device:**

Hereby we declare that the maximum frequency of this device is: 2402 – 2480 MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA. This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04E). Other frequency ranges ( e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

### **3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:**

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

### **4 Example of a hopping sequence in data mode:**

Example of a 79 hopping sequence in data mode: 40, 21, 44,  
23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60,  
39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76,  
31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13,  
47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03,  
55, 05, 04



## **5 Equally average use of frequencies in data mode and behaviour for short transmissions:**

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5  $\mu$ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour: The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5  $\mu$ s). The hopping sequence will always differ from the first one.

## **6 Receiver input bandwidth and behaviour for repeated single or multiple packets:**

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.



## 7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length \* hop rate / number of hopping channels \* 30s

Example for a DH1 packet (with a maximum length of one time slot) Dwell time =  $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 30\text{s} = 0.3797\text{s}$  (in a 30s period)

For multislot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots) Dwell time =  $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/\text{s} / 79 * 30\text{s} = 0.3797\text{s}$  (in a 30s period).

This is according to the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore all Bluetooth devices comply with the FCC dwell time requirement in data mode. This was checked during the Bluetooth Qualification tests. The Dwell time in hybrid mode is measured and stated in the test report.

## 8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1MHz independent of the operating mode. The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is  $f_{\text{center}} = 75 \text{ kHz}$ . This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07E) for three frequencies (2402, 2441, 2480 MHz). Additionally an example for the channel separation is given in the test report

## 9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see chapter 5), but this time with different input vectors:

- For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.
- For the page hop sequence, the device address of the paged unit is used as input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode the frequency use is equally averaged.

Example of a hopping sequence in inquiry mode: 48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23





Example of a hopping sequence in paging mode: 08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

#### **10 Receiver input bandwidth and synchronisation in hybrid mode:**

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code, the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD\_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced considerably.

#### **11 Spread rate / data rate of the direct sequence signal**

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate/ Data rate will be 68/1.

#### **12 Spurious emission in hybrid mode**

The dwell time in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.

#### **13 Peak power spectral density measurement**

Since the transmitter is only active for some milliseconds on one channel you would get a result with many interruptions if using a sweep time of e.g. 1s as stated in the FCC rules. Therefore a fast sweep in maxhold function is used instead and the EUT is activated several times until the measurement curve has stabilized.