



Report No.: FCC 1902047-04 File reference No.: 2019-03-05

Applicant: Shenzhen Geniatech Inc., Ltd.

Product: Enjoy TV

Model No.: APC390R, ATV390R

Trademark: N/A

Test Standards: FCC Part 15 Subpart E, Paragraph 15.407 and RSS-247 Issue 2

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10,FCC Part 15 Subpart C, Paragraph 15.247 and RSS-247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: March 05,2018

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2019-03-05



Page 2 of 72

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	6
1.5	Test Duration.	6
1.6	Test Uncertainty.	6
1.7	Test By	6
2.0	List of Measurement Equipment	7
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT.	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Undesirable Emission and Restrict band	13
7.0	Bandwidth Measurement	43
8.0	Peak Transmit Power Measurement.	126
9.0	Peak Power Spectral Density Measurement	132
10.0	Frequency Stability	167
11.0	Antenna Requirement.	170
12.0	FC Label	171
13.0	Photo of Test Setup and EUT View.	172

Date: 2019-03-05



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Geniatech Inc., Ltd.

Address: 18F, GDC Building, No 9th, Gaoxin Middle 3rd Road, Nanshan, Shenzhen, China

Telephone: -Fax: -
1.3 Description of EUT

Product: Enjoy TV

Manufacturer: Shenzhen Geniatech Inc., Ltd.

Address: 18F, GDC Building, No 9th, Gaoxin Middle 3rd Road, Nanshan, Shenzhen,

China

Brand Name: N/A
Additional Brand Name: N/A

Model Number: APC390R

Additional Model Number: ATV390R

Type of Modulation IEEE 802.11a/n (HT20/HT40) : OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency Band 1: 5180MHz-5240MHz;

Channel Separation 802.11a/802.11n20:20MHz, 802.11n40:40MHz Air Data Rate IEEE 802.11a : 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n/HT20: mcs0: 6.5Mbps,mcs1:13Mbps,mcs2:19.5Mbps,mcs3:26Mbps,

mcs4:39Mbps,mcs5:52Mbps,mcs6:58.5Mbps,mcs7:65Mbps

 $IEEE\ 802.11n/HT40:\ mcs0:15Mbps,mcs1:30Mbps,mcs2:45Mbps,mcs3:60Mbps,$

mcs4:90Mbps,mcs5:120Mbps,mcs6:135Mbps,mcs7:150Mbps

Antenna: Two Integral antennas used.

Antenna Gain: Maximum 3.2dBi for each antenna, Directional gain 6.21dBi

Test Mode: During testing, EUT was set to 100% duty cycle. 6Mbps air data rate was the worst case

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



for 802.11a mode; mcs0 air data rate was the worst case for 802.11n mode;

All modes are MIMO modes.

Input Voltage: DC5V

Power Adapter Model: TEKA012-0502000UK;

Input: 100-240V~50/60Hz 0.35A Max; Output: DC5V,2A

Each Channel Operation Frequency

Euch Chaimer Operation Proquency							
	Band 1						
802.11a	a / 11n HT20	80	802.11n HT40				
Channel	Frequency	Channel	Channel Frequency				
36	5180MHz	38	5190 MHz				
40	5200 MHz	46	5230 MHz				
44	5220 MHz						
48	5240 MHz						

The selected test channels as follows:

The believed veet endmines do follows.						
	Band 1					
802.11a	a / 11n HT20	802.11n HT40				
Channel Frequency Channel Frequency		Frequency				
36	5180MHz	38	5190 MHz			
40	5200 MHz	46	5230 MHz			
48	5240 MHz					

1.4 Submitted Sample: 2 Samples

1.5 Test Duration: 2019-02-18 to 2019-03-01

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Date: 2019-03-05



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:					
Standard	Test Type	Result	Notes		
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies		
FCC Part 15 Subpart E Paragraph 15.407 (b)(1), Part 15.205 and Part 15.209	Undesirable Emission and Restrict band	PASS	Complies		
FCC Part 15, Paragraph 15.407 (a)(1)(iv)	maximum conducted output power	PASS	Complies		
FCC Part 15, Paragraph 15.407 (5)	26 dB emission bandwidth 99% BW	PASS	Complies		
FCC Part 15, Paragraph 15.407 (a)(1)(iv)	maximum power spectral density	PASS	Complies		
FCC Part 15, Paragraph 15.407(g)	Frequency Stability	PASS	Complies		

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.407, ANSI C63.10:2013, ANSI C63.4:2014 789033 D02 General UNII Test Procedures New Rules v02r01

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 72


Report No.: FCC1902047-04

Date: 2019-03-05



5. Power Line Conducted Emission Test

5.1 Schematics of the test

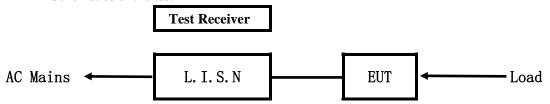


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

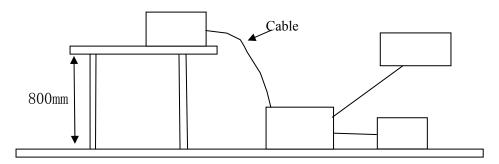

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A.	EUT

Device	Manufacturer	Model	FCC ID
Enjoy TV	Shenzhen Geniatech Inc., Ltd.	APC390R, ATV390R	ZJU-F19AF3

Report No.: FCC1902047-04 Page 9 of 72

Date: 2019-03-05



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level Average Level		Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2019-03-05



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keeping MIMO Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

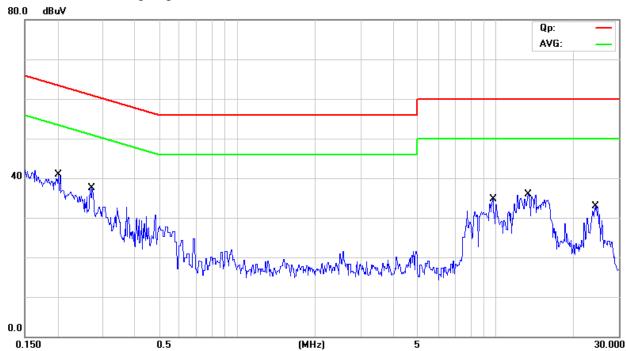

No.	Mk.	Freq.	Measure- ment	Limit	Over	
		MHz	dBuV	dBuV	dB	Detector
1	*	0.2031	34.90	63.48	-28.58	QP
2		0.2031	6.60	53.48	-46.88	AVG
3		0.2737	30.80	61.00	-30.20	QP
4		0.2737	1.30	51.00	-49.70	AVG
5		9.7642	29.20	60.00	-30.80	QP
6		9.7642	-1.80	50.00	-51.80	AVG
7		13.4422	30.00	60.00	-30.00	QP
8		13.4422	3.20	50.00	-46.80	AVG
9		24.4190	23.60	60.00	-36.40	QP
10		24.4190	-1.80	50.00	-51.80	AVG

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-03-05



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keeping MIMO Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

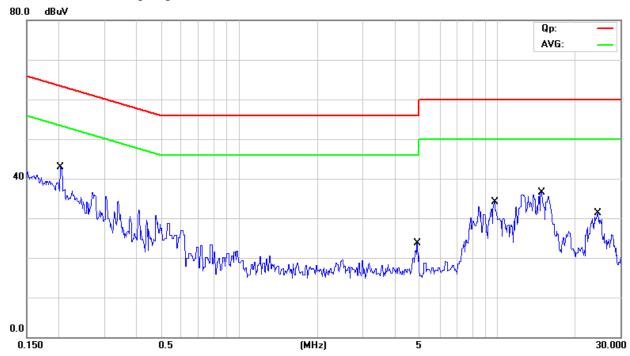

No.	Mk.	Freq.	Measure- ment	Limit	Over	
		MHz	dBuV	dBuV	dB	Detector
1	*	0.2031	37.80	63.48	-25.68	QP
2		0.2031	7.70	53.48	-45.78	AVG
3		4.9054	12.90	56.00	-43.10	QP
4		4.9054	-13.80	46.00	-59.80	AVG
5		9.7537	26.60	60.00	-33.40	QP
6		9.7537	-2.70	50.00	-52.70	AVG
7		14.7760	30.40	60.00	-29.60	QP
8		14.7760	2.20	50.00	-47.80	AVG
9		24.5630	25.30	60.00	-34.70	QP
10		24.5630	-0.80	50.00	-50.80	AVG

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2019-03-05



6 Undesirable Emission and Restrict band

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 40 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz, VBW=3MHz and PK detector, AV value with RBW=1MHz, VBW=3MHz and RMS detector.
 - Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

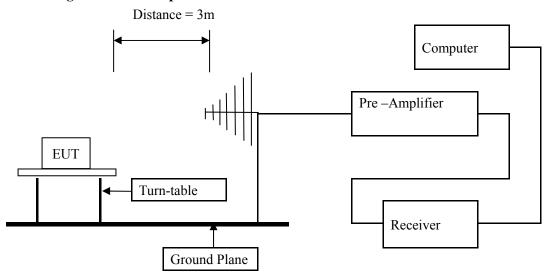

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1902047-04 Page 13 of 72

Date: 2019-03-05



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz
- (2) For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. 802.11a/802.11n20 and 802.11n40 MIMO mode all have been tested, only worse case is reported

Page 14 of 72

Report No.: FCC1902047-04

Date: 2019-03-05




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keeping MIMO Transmitting

Results: Pass

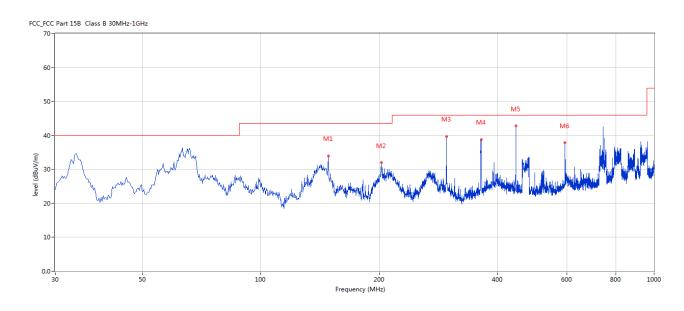


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	148.310	34.01	-17.16	43.5	-9.49	Peak	329.00	100	V	Pass
2	202.374	31.93	-13.39	43.5	-11.57	Peak	336.00	200	V	Pass
3	296.683	39.69	-11.04	46.0	-6.31	Peak	296.00	100	V	Pass
4	363.597	38.79	-9.56	46.0	-7.21	Peak	65.00	100	V	Pass
5	445.299	42.82	-8.00	46.0	-3.18	Peak	360.00	200	V	Pass
6	593.914	37.80	-5.25	46.0	-8.20	Peak	183.00	100	V	Pass

Page 15 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



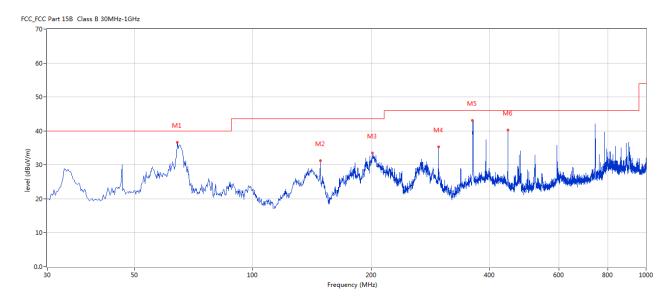

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	64.184	36.66	-13.37	40.0	-3.34	Peak	140.00	200	Н	Pass
2	148.310	31.20	-17.16	43.5	-12.30	Peak	14.00	200	Н	Pass
3	201.647	33.51	-13.41	43.5	-9.99	Peak	360.00	200	Н	Pass
4	296.683	35.25	-11.04	46.0	-10.75	Peak	178.00	100	Н	Pass
5	361.415	43.08	-9.51	46.0	-2.92	Peak	132.00	100	Н	Pass
6	445.299	40.26	-8.00	46.0	-5.74	Peak	146.00	100	Н	Pass

Date: 2019-03-05



Operation Mode: Keeping Transmitting under CH36 for 11a at 6Mbps

			_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
5180.00		Н	Eundomontal Eraguanay
5180.00		V	Fundamental Frequency
10360		Н	74(Peak)/ 54(AV)
15540		V	74(Peak)/ 54(AV)
20720		H/V	74(Peak)/ 54(AV)
25900		H/V	74(Peak)/ 54(AV)
31080		H/V	74(Peak)/ 54(AV)
36260		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Operation Mode: Keeping Transmitting under CH40 for 11a at 6Mbps

	2 0		_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
5200.00	-	Н	Eundamental Eraguenay
5200.00		V	Fundamental Frequency
10400		Н	74(Peak)/ 54(AV)
15600		V	74(Peak)/ 54(AV)
20800		H/V	74(Peak)/ 54(AV)
26000		H/V	74(Peak)/ 54(AV)
31200		H/V	74(Peak)/ 54(AV)
36400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Page 17 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



Operation Mode: Keeping Transmitting under CH48 for 11a at 6Mbps

	1 0		_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
5240.00	-	Н	Fundamental Frequency
5240.00		V	Fundamental Frequency
10480		Н	74(Peak)/ 54(AV)
15720		V	74(Peak)/ 54(AV)
20960		H/V	74(Peak)/ 54(AV)
26200		H/V	74(Peak)/ 54(AV)
31440		H/V	74(Peak)/ 54(AV)
36680		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

3. For 802.11a mode 6Mbps

Page 18 of 72


Report No.: FCC1902047-04

Date: 2019-03-05



Please refer to the following test plots for details:

CH36 for 11a MIMO at 6Mbps: Horizontal

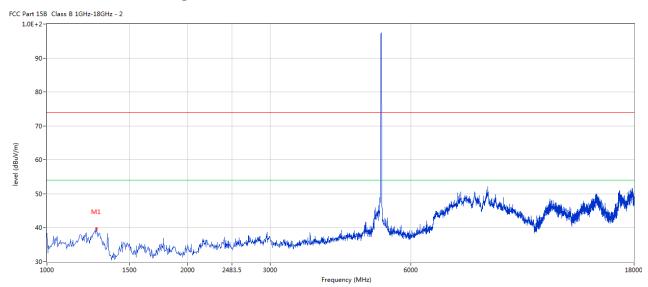


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	1276.181	39.74	-8.40	74.0	-34.26	Peak	277.00	100	Н	Pass


Page 19 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



CH36 for 11a MIMO at 6Mbps: Vertical



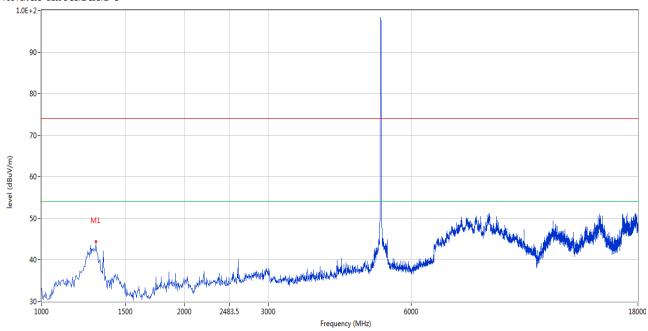


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	1301.675	44.48	-8.24	74.0	-29.52	Peak	3.00	100	V	Pass

Page 20 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



CH40 for 11a MIMO at 6Mbps: Horizontal

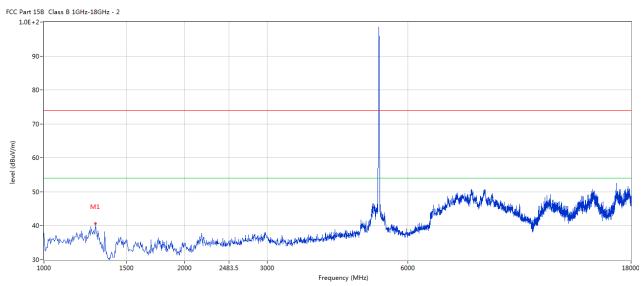


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	1288.928	40.64	-8.31	74.0	-33.36	Peak	272.00	100	Н	Pass

Page 21 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



CH40 for 11a MIMO at 6Mbps: Vertical

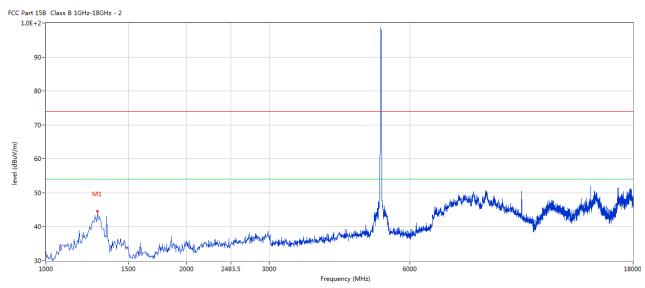


No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	1288.92	44.62	-8.31	74.0	-29.38	Peak	5.00	100	٧	Pass
	8									

Page 22 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



CH48 for 11a MIMO at 6Mbps: Vertical

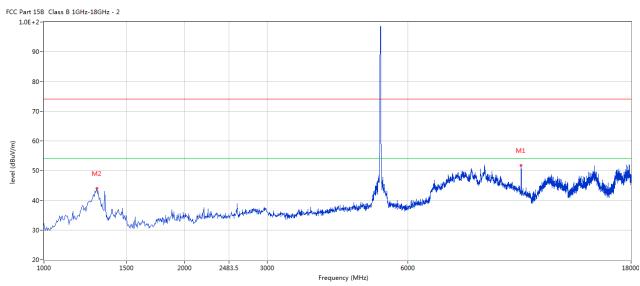

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	10475.1	51.76	6.01	74.0	-22.24	Peak	231.00	100	V	Pass
	31									
2	1297.42	44.09	-8.25	74.0	-29.91	Peak	337.00	100	V	Pass
	6									


Page 23 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



CH48 for 11a MIMO at 6Mbps: Horizontal

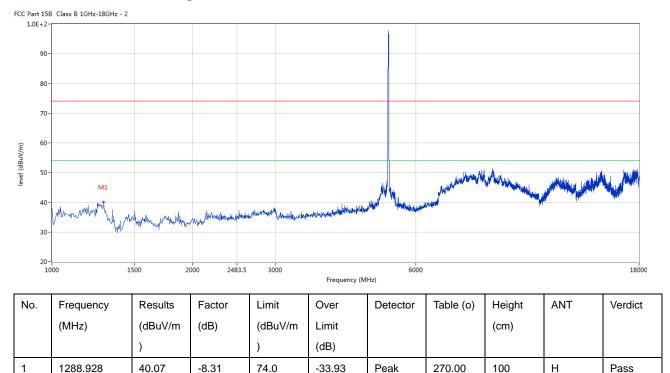

Note: 1.For radiated Emissions from 18-40GHz, it is only the floor noise.

2. 802.11a MIMO mode is the worst case.

Date: 2019-03-05



	tricted ban	d Me	easurement			T		T			
	EUT			Enjoy T	V	Tes	t Mode:	Channe	el 36 (518	0MHz)-1	1a MIMO
	Mode		Ke	eeping Trans	smitting	Inpu	t Voltage		12	0V~	
Τ	emperatur	e		24 deg. (C,	Нι	ımidity		569	% RH	
-	Γest Result	:		Pass		D	etector]	PK	
	5150		PK (dBµV	7/m) 4	48.15 (PK)		r tta		27.15	/N/III	
			EIRP (dB	Bm)	-47.05		Limit		-2/aE	8m/MHz	
	Polarity			Vertica	1						
Гest	Figure										
CC Pa	rt 15B Class B 1GH	z-18GHz	- 2								
1.0	E+2-									M	
	90-										
	80-										
	70-										
(m//u	60-										
level (dBuV/m)	00-										
es es	50-										
							ulean physical and the second second	l de	A STATE OF THE STA	Makelink	ورابأ الندر والمافاطية
	40-		1		والإحامل والكامأة والدروا الأالامان	n. 41.1	المطولات والمراج المراج المراج		A total March 1	וורוזייפיי	appell hall hare met
			iyandiyordiyadinida jayabilaniyada		trientari' va kouleenin i'hr hustilië		A STATE OF THE PARTY OF				
	30-										
	4500					Frequency (MHz)					5300
			Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
No	. Freque	ncy			i .	1	1		, ,	1	
No	. Frequer	ncy	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		

Remark: 1. According to KDB 789033 v01r03 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if E[dB μ V/m]=48.15 dB μ V/m,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=48.15-95.2=-47.05dBm$

2. RBW=1MHz, VBW=3MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 25 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



	Е	UT	Enjoy TV				Test Mod	e: Cha	Channel 36 (5180MHz)-11a MIM		
	M	lode	Keeping Transmitting]	nput Voltag		120V~		
,	Temperature			24 deg	. C,]	Humidity			56% RH	
	Test	Result:		Pass	8		Detecto	r		PK	
	5	150	PK (dBμV/m) 47.53 (PK)		25	/ ID / A (II)					
		=	EIRP (dBn	n)	-47.67		Limit		-27	dBm/MH	Z
	Pol	larity		Horizo	ntal						
Гes	t Fig	ure				1		<u>'</u>			
		Class B 1GHz-18GHz - :	2								
1.	0E+2-									iDr.	
										<i>/</i> ^\	
	90-										
	80-										
	70-									+	
(m//											
evel (dBuV/m)	60-										
eve	50-										
								is to be substituted		Malai	hr
	40-	or a first to the state of the state of	المعالية والمراجع والمعارفة	e ar na malas sunhe mite	وروا أوروا ألها فيجول اللأر	A STATE OF THE PARTY OF THE PAR	A STATE OF THE PARTY OF THE PAR	A SALAN MARKET CONTRACTOR OF A SALAN CONTRAC	only the say and	THE STATE OF THE S	The supplement of
	Lái	the production party and also fillers	the data in the side to come a long of anti-	n i de la companya d	all technology (Sec. 10	energen i enderempligitet in	Manual Con-				
		<u> </u>									5300
	30- 4500					Frequency (MHz)				
	30-¦ 4500				Limit	Over	Detector	Table (o)	Height	ANT	Verdict
No	4500	Frequency	Results	Factor	Limit						
No	4500	Frequency (MHz)	Results (dBuV/m	Factor (dB)	(dBuV/m	Limit			(cm)		
No	4500					Limit (dB)			(cm)		

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m]=47.53 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.53-95.2=-47.67dBm$

2. RBW=1MHz, VBW=3MHz

Page 26 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Restr	ricted band Me	asurement								
EUT		Enjoy TV				Test Mode: Channel			48 (5240MHz)-11a MIM	
	Mode	Ke	eping Tra	nsmitting		Input Volta	ge		120V~	
Те	emperature		24 deg	g. C,		Humidity			56% RH	-
Te	est Result:		Pas	S		Detecto	or		PK	
	5250	PK (dBμV	/m)	60.18 (P	K)	T 1			7.1D /N.6	TT
		EIRP (dB	m)	-35.02		Limit		-2	27dBm/M	HZ
	Polarity	Horizontal								
Test	Figure				l .					
CC Part	15B Class B 1GHz-18GHz -	2								
level (dBuV/m)	80	12			Frequency	(MHz)	man matter between the safety as		hard, all the blood story had held	ssoo
No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	5250.000	60.18	3.55	74.0	-13.82	Peak	108.00	100	Н	Pass
		+		 	 	 		 	+	

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

-7.48

ΑV

108.00

100

Н

Pass

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

5250.000

1

For Example, if $E[dB\mu V/m]=60.18 dB\mu V/m$,

46.52

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=60.18-95.2=-35.02dBm$

3.55

54.0

2. RBW=1MHz, VBW=3MHz

Date: 2019-03-05



Res	trict	ed band Mea	asurement								
	Е	UT	Enjoy TV				Test Mo	ode: C	Channel 48 (5240MHz)-11a M		
	M	lode	Kee	eping Tra	nsmitting		Input Volta	age		120V~	
Τ	Temperature			24 deg	g. C,		Humidity			56% RI	I
7	Test !	Result:		Pas	S		Detect	or		PK	
	5250		PK (dBµV/	/m)	61.20 (P	K)	Limi	,		27dBm/M	Ша
			EIRP (dBr	m)	-34.00)	LIIIII	١	-	-2 / UDIII/ IV.	IΠZ
Polarity		larity		Verti	cal						
Tesi	t Fig	ure				1					
1.0 (ω/(νω) level	90- 80- 70- 60- 50- 30- 5200	Frequency		Factor (dB)	Limit (dBuV/m	Frequency Over Limit		Table (o)	Height (cm)	ANT	5500
No		(MHz)	(42 41,111								
No		(MHz)))	(dB)					

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

-6.67

ΑV

232.00

100

Pass

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

5250.000

For Example, if $E[dB\mu V/m]=61.20 dB\mu V/m$,

47.33

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=61.20-95.2=-34.00dBm$

3.55

54.0

2. RBW=1MHz, VBW=3MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-03-05



Restricted band Measurement								
EUT	Eı	njoy TV	Test Mode:	Channel 36				
				(5180MHz)-11n/HT20 MIMO				
Mode	Keeping	Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBµV/m)	47.23 (PK)	T in it	27 10/4/11				
	EIRP (dBm) -47.97		Limit	-27dBm/MHz				
Polarity	Но	orizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.23 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.23-95.2=-47.97dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Eı	njoy TV	Test Mode:	Channel 36				
				(5180MHz)-11n/HT20 MIMO				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBµV/m)	47.68 (PK)	T :	25.15 (2.5)				
	EIRP (dBm) -47.52		Limit	-27dBm/MHz				
Polarity	Vertical							

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.68 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 47.68 - 95.2 = -47.52dBm$

2. RBW=1MHz, VBW=3MHz

Date: 2019-03-05



Restricted band Measurement								
EUT	Eı	njoy TV	Test Mode:	Channel 48 (5240MHz)-				
				11n/HT20 MIMO				
Mode	Keeping	g Transmitting	Input Voltage	120V∼				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	58.72 (PK)						
	AV $(dB\mu V/m)$	43.38 (AV)	T : :/	27.15 /2.01				
	EIRP (dBm) -36.48		Limit	-27dBm/MHz				
Polarity	Но	orizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 58.72 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=58.72-95.2=-36.48dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Eı	njoy TV	Test Mode:	Channel 48 (5240MHz)-				
				11n/HT20 MIMO				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	59.65 (PK)						
	AV ($dB\mu V/m$)	44.69 (AV)	Limit	-27dBm/MHz				
	EIRP (dBm) -35.55							
Polarity		Vertical						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 59.65dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=59.65-95.2=-35.55 dBm$

2. RBW=1MHz, VBW=3MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-03-05



Restricted band Measurement								
EUT	Eı	njoy TV	Test Mode:	Channel 38				
				(5190MHz)-11n/HT40 MIMO				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBµV/m)	45.28 (PK)	T :	27 10/MII				
	EIRP (dBm)	-49.92	Limit	-27dBm/MHz				
Polarity	Но	orizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 45.28 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=45.28-95.2=-49.92 dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Eı	njoy TV	Test Mode:	Channel 38				
				(5190MHz)-11n/HT40 MIMO				
Mode	Keeping	g Transmitting	Input Voltage	120V∼				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBµV/m)	47.33 (PK)	T in it	27.10 (2.5)				
	EIRP (dBm) -47.87		Limit	-27dBm/MHz				
Polarity	1	Vertical						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 47.33 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 47.33 - 95.2 = -47.87dBm$

2. RBW=1MHz, VBW=3MHz

Date: 2019-03-05



Restricted band Measurement								
EUT	E	njoy TV	Test Mode:	Channel 46 (5230MHz)- 11n/				
				HT40 MIMO				
Mode	Keeping	g Transmitting	Input Voltage	120V∼				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	56.92(PK)						
	AV (dBμV/m)	41.78(AV)	Limit	-27dBm/MHz				
	EIRP (dBm)	-38.28						
Polarity	Н	orizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 56.92 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=56.92-95.2=-38.28 dBm$

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Eı	njoy TV	Test Mode:	Channel 46 (5230MHz)- 11n/				
				HT40 MIMO				
Mode	Keeping	g Transmitting	Input Voltage	120V∼				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	57.66 (PK)						
	AV (dBμV/m)	43.28 (AV)	Limit	-27dBm/MHz				
	EIRP (dBm)	EIRP (dBm) -37.54						
Polarity	7	Vertical						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$

For Example, if $E[dB\mu V/m] = 57.66 dB\mu V/m$,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=57.66-95.2=-37.54dBm$

2. RBW=1MHz, VBW=3MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-03-05



7.0 Emission Bandwidth

7.1 Test Setup



7.3 Test Procedure for Emission Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set VBW> RBW
- 3 Detector = Peak
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

7.4 Test Procedure for Minimum Bandwidth for the Band 5725-5850MHz

- 1. Set RBW = 100 kHz.
- 2. Set $VBW \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.5 Test Procedure for 99% Bandwidth

- 1. Set center frequency to the nominal EUT channel center frequency
- 2. Set span = 1.5 times to 5.0 times OBW
- 3. Set RBW= 1% TO 5% of the OBW
- 4. Set $VBW \ge 3 \times RBW$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Other, peak detection and max mode (until trace stabilizes) shall be used.
- 6. Use the 99% power bandwidth function of the instrument

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 33 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



7.6 Test Result

EUT		Enjoy TV			Model		APC390R		
Mode		802.11a			Input Voltage		120V~		
Temperati	ure	24	4 deg. C,		Humidity	,		56% RH	
Channel		el Frequency (MHz)					num Limit MHz)	Pass/ Fail	
26dB Bandwidth									
36	36 5180		6	24.61				Pass	
40	40 5200		6	23.97				Pass	
48		5240	6	24.21				Pass	
99% Ban	dwidth								
36		5180	6	16	.83			Pass	
40		5200	6	16	16.83			Pass	
48		5240	6	16.91				Pass	

Note: Ant1 and Ant 2 were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.


Date: 2019-03-05



Test Figure:

26dB Bandwidth

Channel 36

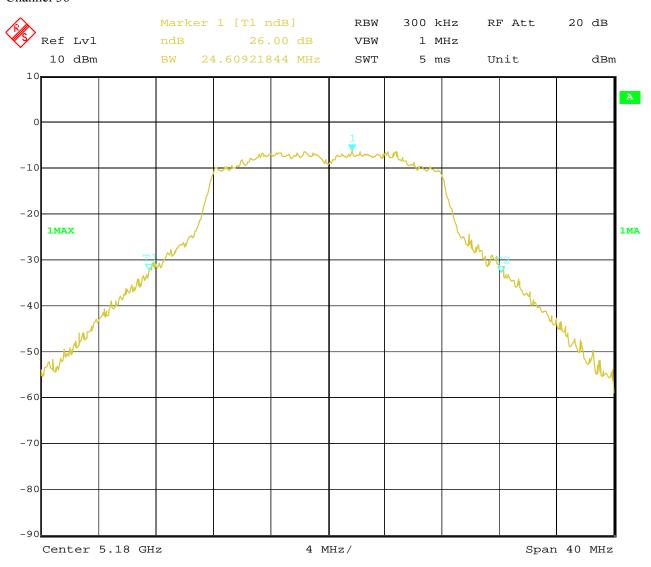

Date: 19.FEB.2019 09:09:58


Page 35 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 40

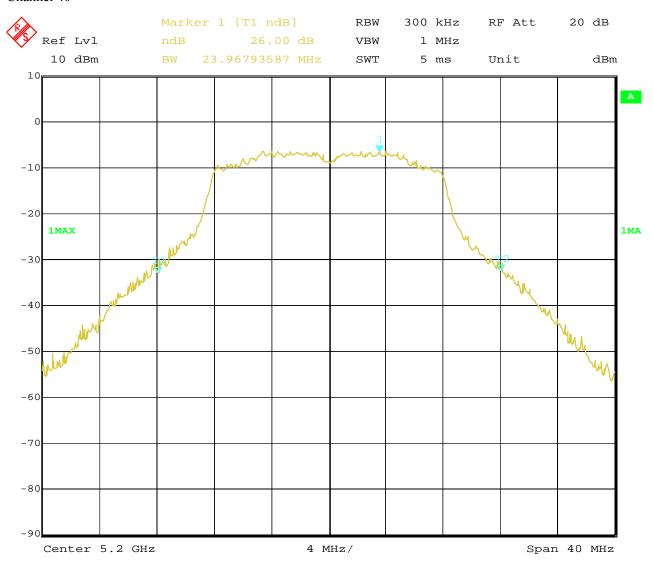

19.FEB.2019 09:12:09 Date:


Page 36 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 48

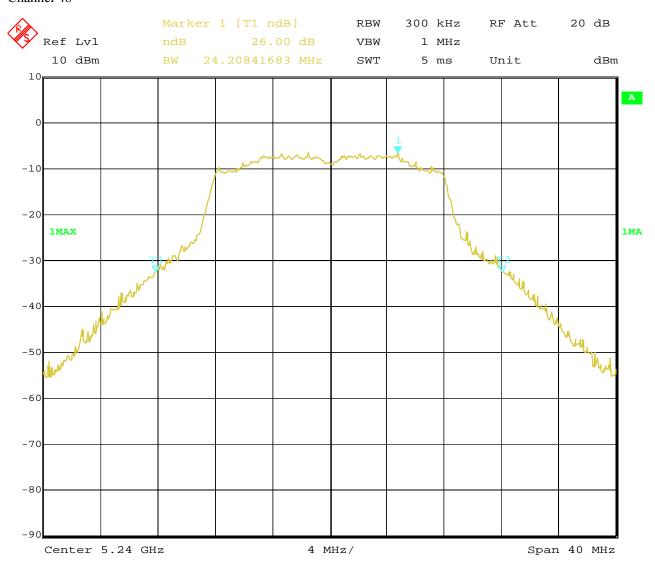

19.FEB.2019 09:13:28 Date:


Date: 2019-03-05



Test Figure:

99% Bandwidth

Channel 36

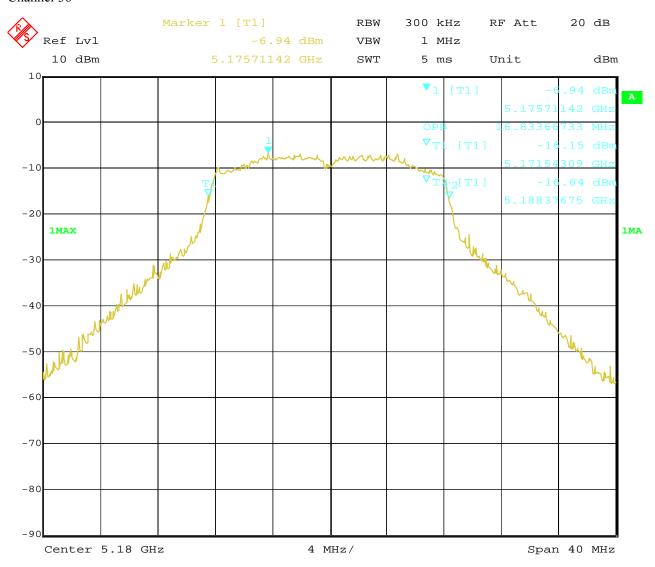

Date: 19.FEB.2019 16:52:54


Page 38 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 40

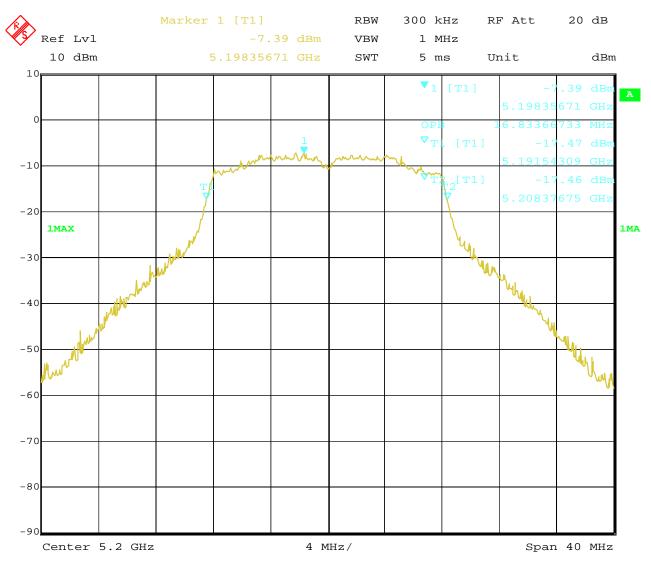

19.FEB.2019 16:53:55 Date:


Page 39 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 48

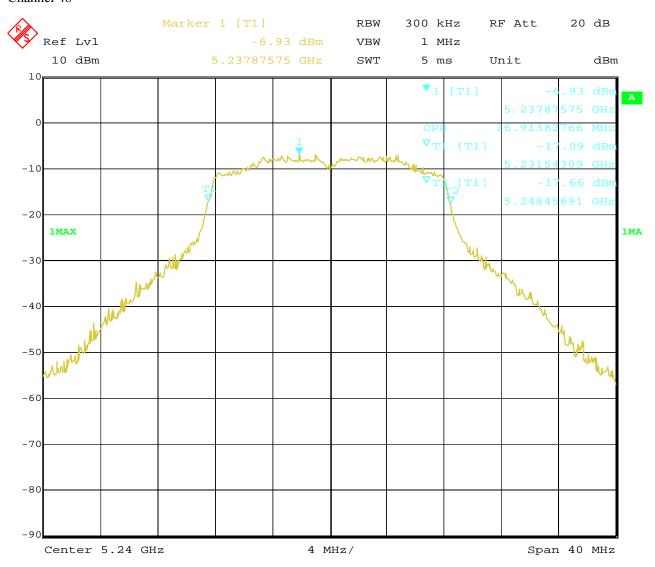

19.FEB.2019 16:55:14 Date:

Report No.: FCC1902047-04 Page 40 of 72

Date: 2019-03-05



EUT		Е	njoy TV		Model			APC390R		
Mode		802	.11n HT20		Input Voltage			120V~		
Temperati	Temperature 24 deg. C,				Humidity	7	56% RH			
Channel		Channel Frequency (MHz)		Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail		
26dB Bar	ndwidth									
36	5180		mcs0	23.53				Pass		
40	5200		mcs0	24.53				Pass		
48		5240	mcs0	24.36				Pass		
99% Ban	dwidth									
36	5180		mcs0	17	.96			Pass		
40		5200 mcs0		17.96				Pass		
48	5240 n		mcs0	17.96				Pass		

Note: Ant1 and Ant 2 were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.


Date: 2019-03-05



Test Configure

26dB Bandwidth

Channel 36

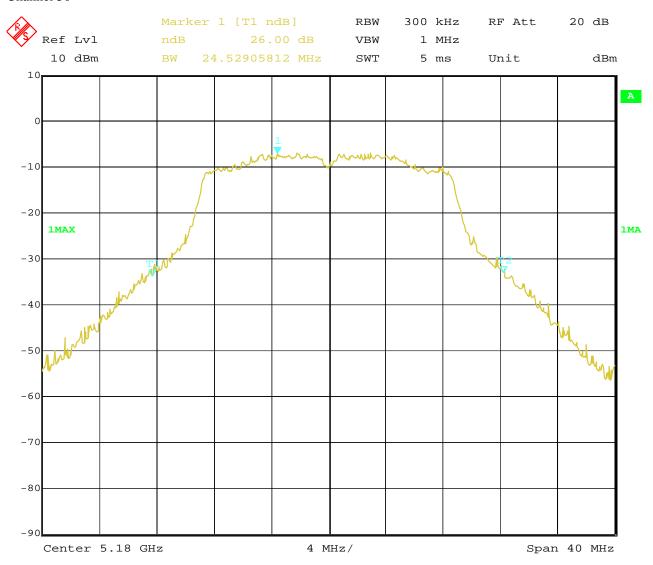

Date: 19.FEB.2019 09:14:37


Page 42 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 40

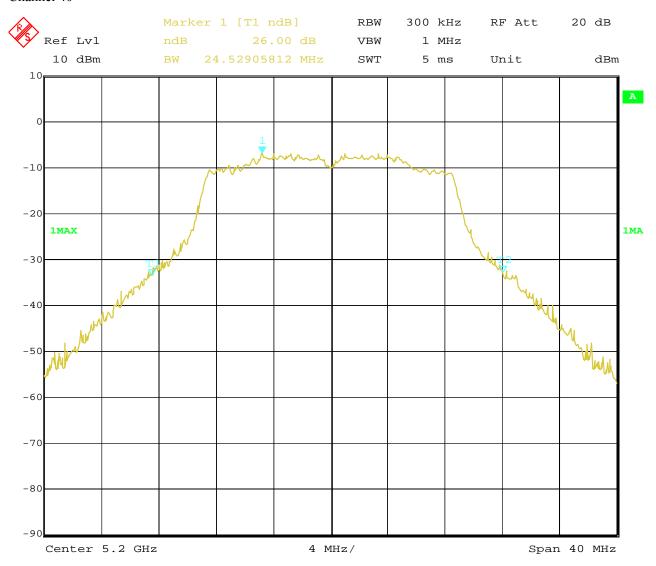

19.FEB.2019 09:15:47 Date:


Page 43 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 48

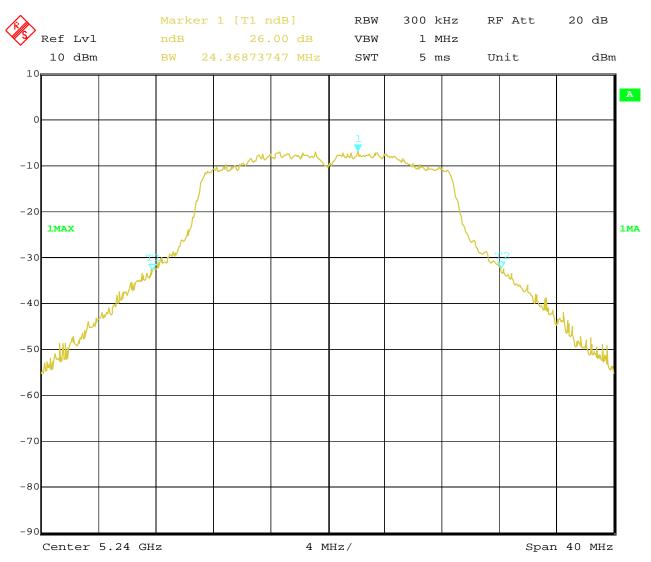

19.FEB.2019 09:17:07 Date:


Date: 2019-03-05



Test Configure

99% Bandwidth

Channel 36

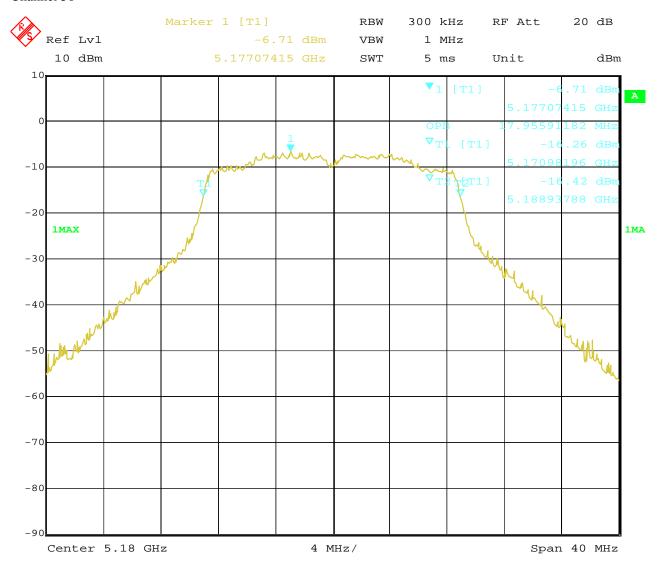

Date: 19.FEB.2019 16:58:21


Page 45 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 40

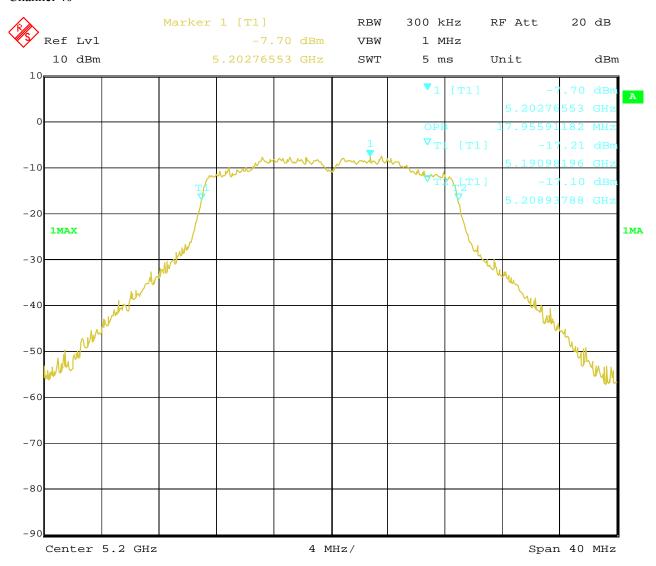

19.FEB.2019 16:57:07 Date:


Page 46 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 48

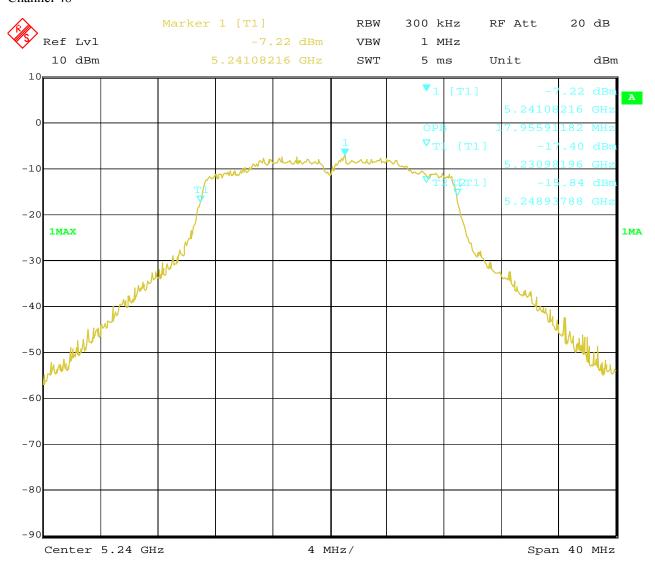

19.FEB.2019 16:56:04 Date:

Page 47 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



EUT		Е	njoy TV		Model			APC390R	
Mode		802	.11n HT40		Input Vol	tage	120V~		
Temperati	Temperature 24 deg. C,			Humidity			56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail	
26dB Bandwidth									
38		5190		42	.65			Pass	
46		5230	mcs0	42	.48			Pass	
99% Ban	dwidth								
38		5190	mcs0 36		.07			Pass	
46		5230	mcs0 36.		.23			Pass	

Note: Ant1 and Ant 2 were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.

Page 48 of 72

Report No.: FCC1902047-04


Date: 2019-03-05



Test Configure

26dB Bandwidth

Channel 38

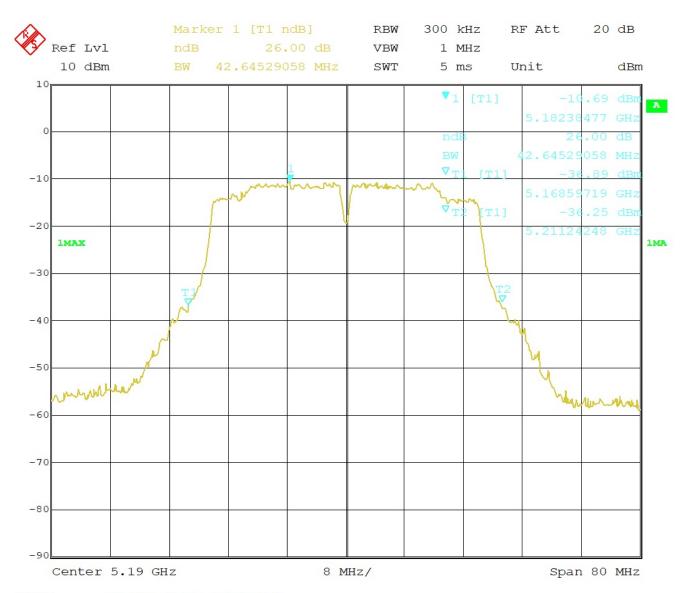

Date: 19.FEB.2019 09:18:23


Page 49 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 46

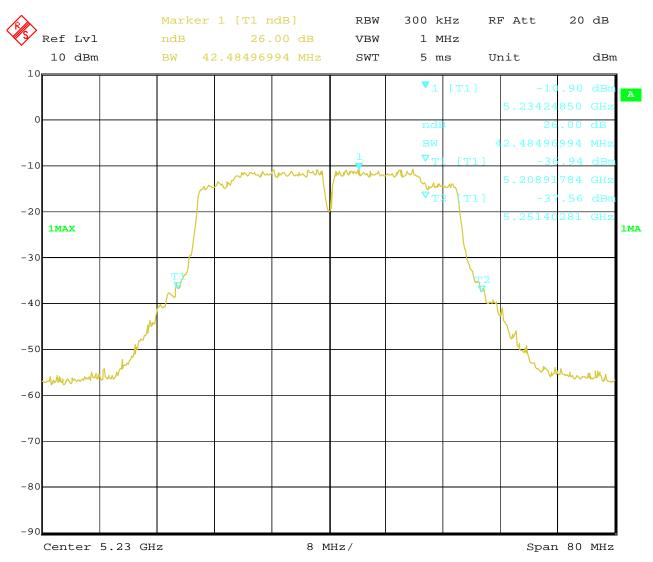

19.FEB.2019 09:20:02 Date:


Date: 2019-03-05



Test Configure

99% Bandwidth

Channel 38

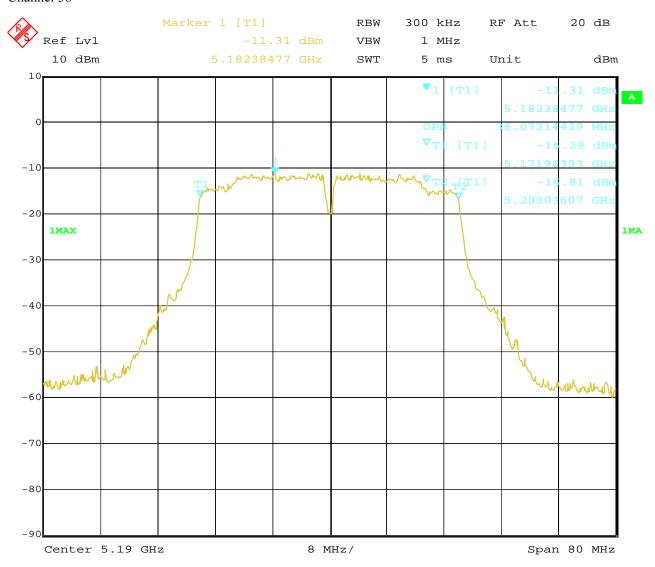

Date: 19.FEB.2019 16:59:22


Page 51 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



Channel 46

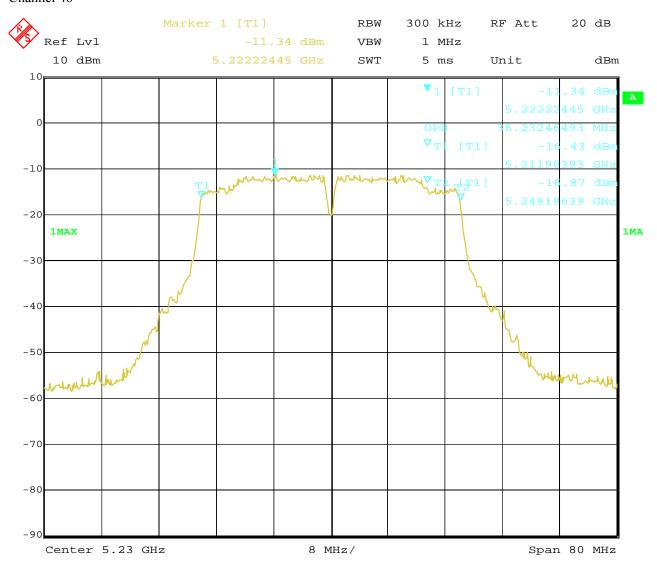


19.FEB.2019 17:00:27 Date:

Date: 2019-03-05



8.0 MAX Conducted Transmit Power Measurement

8.1 Test Setup



8.2 Limits of Peak Transmit Power Measurement

Operation Band	EUT Category	Limit
U-NII-2A		For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or
		1.76 + 10 log ₁₀ B*, dBm, whichever is less
	V	For other devices, the maximum e.i.r.p. shall
		not exceed 200 mW or $10 + 10 \log_{10} B^*$,
		dBm, whichever power is less

Note: 1. Where B is the 99% emission bandwidth in MHz.

2. EIRP was measured, EIRP=AV Power +Antenna Gain

U-NII-2A	-	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		1 Watt (30 dBm)

Note: 1. Where B is the 26dB emission bandwidth in MHz.

2. The average power was measured

8.3 Test Procedure

The average power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the average power was measured

Date: 2019-03-05



8.4Test Results

EU	T		Enjoy TV				Model		APC390R			
Mo	de		802.11a			Input Voltage			120V~			
Tempe	rature		24 deg. C,		Humidity			56% RH				
Channel	Frequen	cy	Ant 1 l	Power	ower A		Power	Total Power	Limit	Pass/ Fail		
	(MHz)		dBm	mW	dF	3m	mW	(dBm)	(dBm)			
36	5180		2.26	1.68	2.	07	1.61	5.17	22.38	Pass		
40	5200		2.02	1.59	1.	95	1.57	5.00	22.38	Pass		
48	5240		2.31	1.70	2.	15	1.64	5.24	22.38	Pass		

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

EU	T		Enjoy TV]	Model		APC390R			
Mod	de		802.11n HT20			Input Voltage			120V~			
Temper	rature		24 deg	24 deg. C,		Humidity		56% RH				
Channel	Frequen	су	Ant 1	Power	ower A		Power	Total Power	Limit	Pass/ Fail		
	(MHz)		dBm	mW	dF	3m	mW	(dBm)	(dBm)			
36	5180		1.98	1.58	1.	82	1.52	4.91	22.38	Pass		
40	5200		1.68	1.47	1.	59	1.44	4.64	22.38	Pass		
48	5240		1.89	1.55	1.	70	1.48	4.81	22.38	Pass		

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1902047-04 Page 54 of 72

Date: 2019-03-05



EU	T	Enjoy TV]	Model	APC390R				
Mo	de		802.11n HT40			Input Voltage			120V~		
Temper	rature		24 deg	g. C,		Н	umidity				
Channel	Frequen	Ant 1 Power		Ant 2 Power		Power	Total Power	Limit	Pass/ Fail		
	(MHz)		dBm	mW	dB	m	mW	(dBm)	(dBm)		
38	5190		0.67	1.17	17 0.5		1.14	3.64	23.02	Pass	
46	5230		0.61	1.15	0.5	53	1.13	3.58	23.01	Pass	

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

- 3. The worse case was recorded
- 4. Total power = Ant 1 + Ant 2

Page 55 of 72


Report No.: FCC1902047-04

Date: 2019-03-05



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

Operation Band	Limit
U-NII-1	10dBm/MHz
U-NII-2A	11dBm/MHz
U-NII-2C	11dBm/MHz
U-NII-3	30dBm/500kHz

9.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer
- 2. Set the RBW = 1MHz.
- 3. Set the VBW = 3MHz.
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = RMS
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Page 56 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



9.4Test Result

EUT		Enjoy TV			N	Model	APC390R			
Mode		802.11a 6Mbps			Inpu	t Voltage	120V~			
Temperat	ure		24 deg. C,		Humidity			56% RH		
Channel	-	uency [Hz)	Ant1 Spectral Density		actor	Total Spectral Density (dBm)		Limit (dBm)	Pass/ Fail	
36	51	180	-8.13		3.01	-5.12		10	Pass	
40	52	200 -8.51			3.01	-5.50		10	Pass	
48	52	-8.56			3.01	-	-5.55	10	Pass	

Note: 1. Total Spectral Density = Ant1 Spectral Density + Factor

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case


Report No.: FCC1902047-04 Page 57 of 72

Date: 2019-03-05



9.5 Plots of Power Spectral Density Measurement

1.802.11a at 6Mbps of CH36

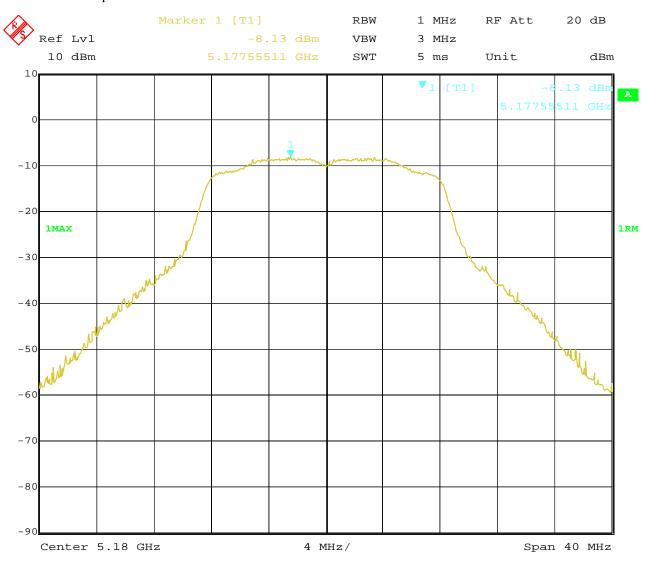

Date: 19.FEB.2019 16:44:54


Page 58 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



2.802.11a at 6Mbps of CH40

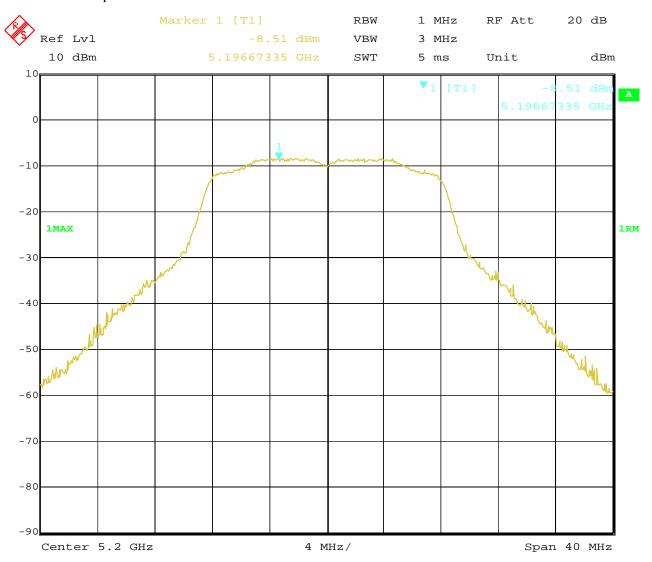

19.FEB.2019 16:45:55 Date:


Page 59 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



3.802.11a at 6Mbps of CH48

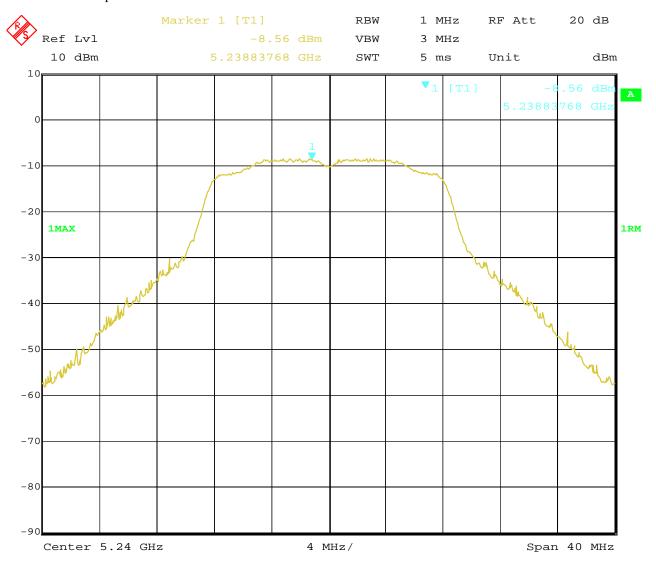

19.FEB.2019 16:46:50 Date:

Page 60 of 72 Report No.: FCC1902047-04

Date: 2019-03-05



EUT		Enjoy TV			N	Model	APC390R			
Mode		802.11n HT20 mcs0			Inpu	t Voltage	120V~			
Temperat	ture		24 deg. C,		Humidity			56% RH		
Channel	Freq	uency	Ant1 F		actor	Total Spectral Density		Limit	Pass/ Fail	
	(M	(Hz)	Spectral Density			(dBm)		(dBm)		
36	51	180	-8.21		3.01	-5.20		10	Pass	
40	52	200	-8.62		3.01	-5.61		10	Pass	
48	52	-8.78			3.01	-5.77		10	Pass	

Note: 1. Total Spectral Density = Ant1 Spectral Density + Factor

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 61 of 72


Report No.: FCC1902047-04

Date: 2019-03-05



Test Plots

1.802.11n at mcs0 of CH36

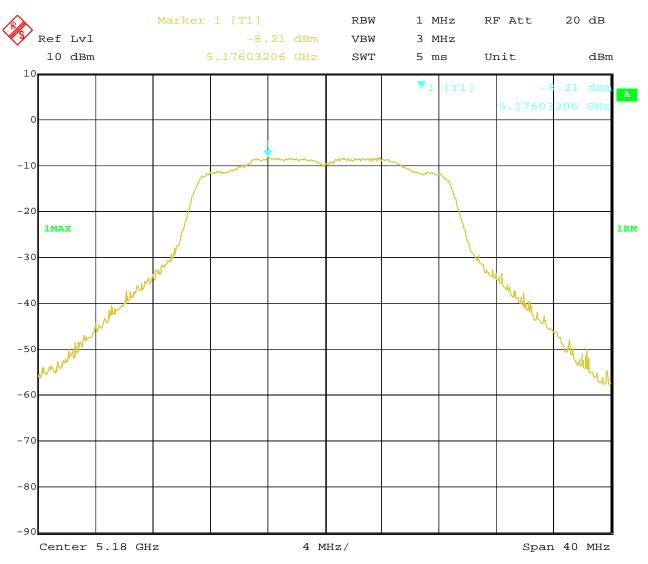

Date: 19.FEB.2019 16:49:29


Page 62 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



2.802.11n at mcs0 of CH40

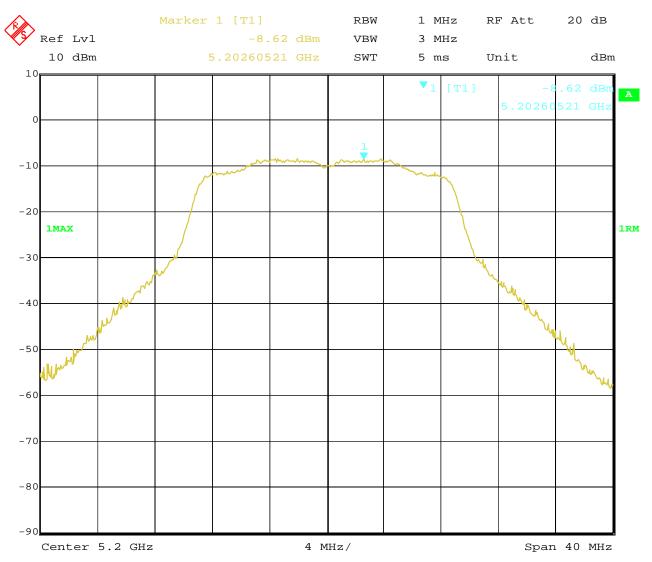

19.FEB.2019 16:48:41 Date:


Page 63 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



3.802.11n at mcs0 of CH48

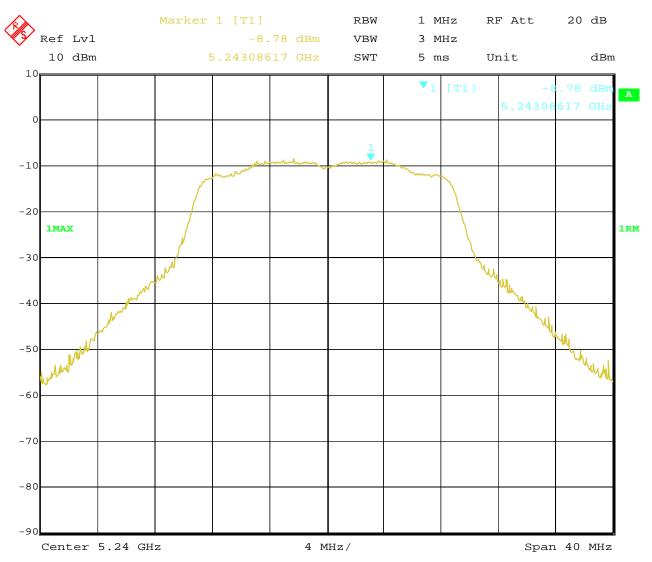

19.FEB.2019 16:47:40 Date:

Report No.: FCC1902047-04 Page 64 of 72

Date: 2019-03-05



EUT		Enjoy TV			N	Iodel	APC390R			
Mode	,	802.11n HT40 mcs0			Inpu	t Voltage	120V~			
Temperat	ture	24 deg. C,		Humidity		56% RH				
Channel	Freq	uency	Ant1	F	actor	Total Spectral Density		Limit	Pass/ Fail	
	(M	Hz)	Spectral Density			(dBm)		(dBm)		
38	51	5190 -11.66			3.01	-	-8.65	10	Pass	
46	52	5230 -12.15			3.01	-9.14		10	Pass	

Note: 1. Total Spectral Density = Ant1 Spectral Density + Factor

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case

Page 65 of 72


Report No.: FCC1902047-04

Date: 2019-03-05



Test Plots

1.802.11n HT40 at mcs0 of CH38

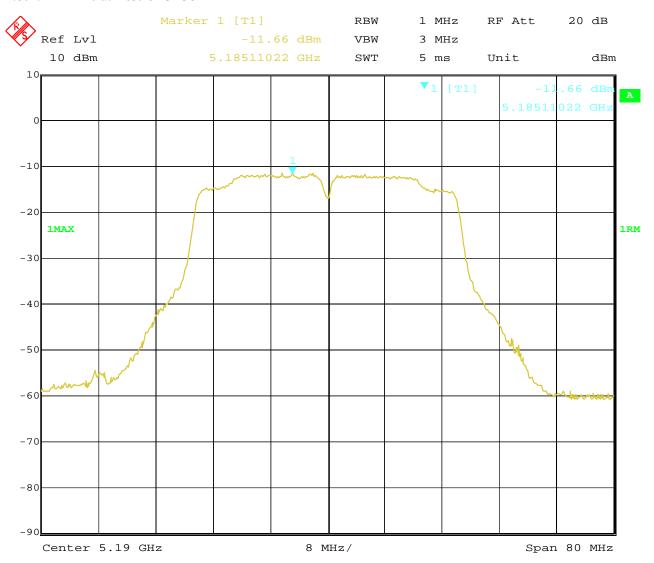

19.FEB.2019 16:50:18 Date:


Page 66 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



2.802.11n HT40 at mcs0 of CH46

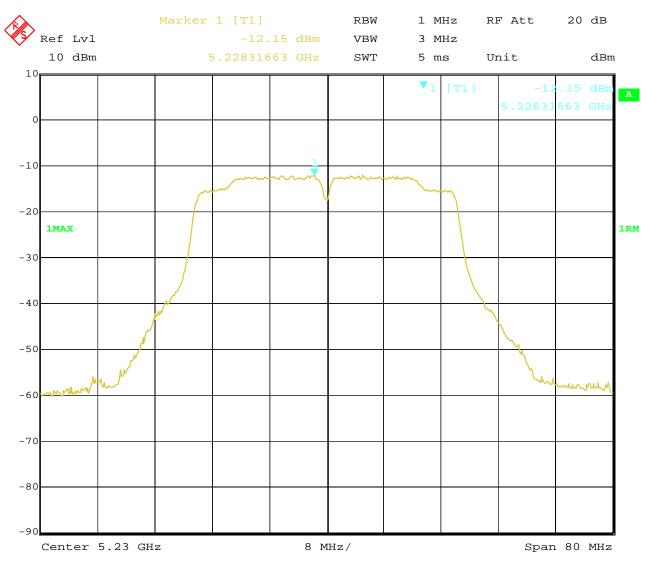

19.FEB.2019 16:51:00 Date:

Date: 2019-03-05



Page 67 of 72

10.0 Frequency Stability

10.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within \pm 0.02% of the operating frequency over a temperature variation of \pm 30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

10.2 Test Procedure

- 1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2. Turn the EUT on and couple its output to a spectrum analyzer.
- 3. Turn the EUT off and set the chamber to the highest temperature specified.
- 4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Date: 2019-03-05



11.3 Test Result

Channel 36 (5180MHz)

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5179.9856
120V	5179.9823
102V	5179.9836
Max. Deviation (MHz)	0.0177
Max. Deviation (ppm)	3.4

Rated working voltage: 120V~

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-30	5179.9830
-20	5179.9816
-10	5179.9823
0	5179.9809
10	5179.9839
20	5179.9813
30	5179.9816
40	5179.9827
50	5179.9802
Max. Deviation (MHz)	0.0198
Max. Deviation (ppm)	3.8

Date: 2019-03-05



Page 69 of 72

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Two Integral antenna used. The maximum Gain of each antenna is 3.2 dBi for 5G band.

Page 70 of 72 Report No.: FCC1902047-04

Date: 2019-03-05




12.0 FCC ID Label

FCC ID: ZJU-F19AF3

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

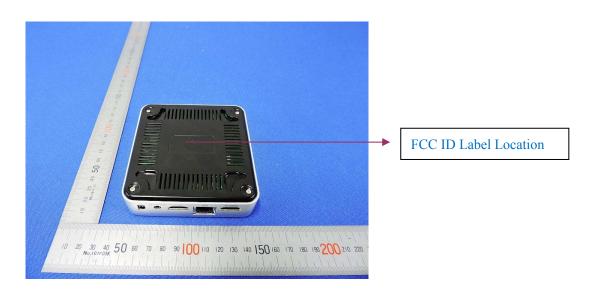

Page 71 of 72

Report No.: FCC1902047-04

Date: 2019-03-05



13.0 Photo of testing


Conducted Emission Test Setup:




Date: 2019-03-05



Radiated Emission Test Setup:

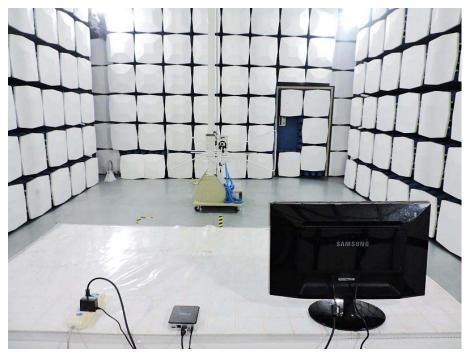

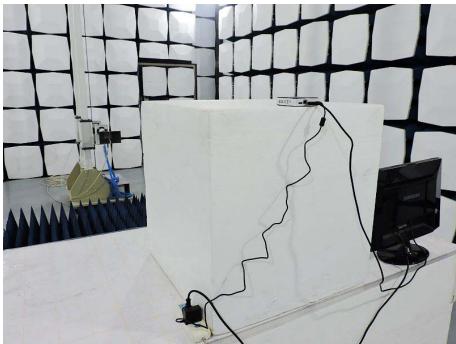

Photos of EUT

Please see test report FCC1902047-01

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.