FCC RF Test Report

APPLICANT : Bullitt Group

EQUIPMENT: Rugged Smart Phone

BRAND NAME : CAT
MODEL NAME : S31
FCC ID : ZL5S31

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 06, 2017 and testing was completed on Sep. 17, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-E-2016 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 1 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

1190

Report No.: FG770420-02A

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAF	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Product Feature of Equipment Under Test	5
	1.4	Modification of EUT	5
	1.5	Testing Location	6
	1.6	Applicable Standards	6
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	8
	2.3	Support Unit used in test configuration	
	2.4	Measurement Results Explanation Example	
	2.5	Frequency List of Low/Middle/High Channels	9
3	CON	DUCTED TEST RESULT	10
	3.1	Measuring Instruments	10
	3.2	Test Setup	10
	3.3	Test Result of Conducted Test	
	3.4	Conducted Output Power and ERP/EIRP	11
	3.5	Peak-to-Average Ratio	
	3.6	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.7	Conducted Band Edge	
	3.8	Conducted Spurious Emission	
	3.9	Frequency Stability	
4	RAD	IATED TEST ITEMS	17
	4.1	Measuring Instruments	17
	4.2	Test Setup	17
	4.3	Test Result of Radiated Test	
	4.4	Field Strength of Spurious Radiation Measurement	18
5	LIST	OF MEASURING EQUIPMENT	19
6	UNC	ERTAINTY OF EVALUATION	20
ΑP	PEND	OIX A. TEST RESULTS OF CONDUCTED TEST	
		OIX B. TEST RESULTS OF RADIATED TEST	

APPENDIX C. TEST SETUP PHOTOGRAPHS

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 2 of 20
Report Issued Date : Oct. 09, 2017

Report No.: FG770420-02A

Report Version : Rev. 02
Report Template No.: BU5-FG22/24/27 Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG770420-02A	Rev. 01	Initial issue of report	Oct. 02, 2017
FG770420-02A	Rev. 02	Revising ANSI / TIA / EIA-603-E-2016 information.	Oct. 09, 2017

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 3 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

SUMMARY OF TEST RESULT

Report Section FCC Rule		Description	Description Limit		Remark
	§2.1046	Conducted Output Power	Reporting Only	PASS	ı
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	•
3.4	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	ı
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
0.0	§2.1055 §22.355	Frequency Stability	< 2.5 ppm for Part 22		
3.9	§2.1055 §24.235 §27.54	for Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 22.52 dB at 2544.000 MHz

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 4 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report No.: FG770420-02A

1 General Description

1.1 Applicant

Bullitt Group

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

1.2 Manufacturer

Compal Electronics, INC.

No. 385, Yangguang St. Neihu District, Taipei City 11491, Taiwan, R.O.C

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, FM Receiver, and GPS.

Product Specification subjective to this standard					
	WWAN: Coupling type (LDS) Antenna				
	WLAN: PIFA Antenna				
Antonno Typo	Bluetooth: PIFA Antenna				
Antenna Type	GPS / Glonass / BDS : PIFA Antenna				
	FM: Integral Antenna				
	(Earphone acting as FM antenna deemed as an integral antenna)				

Report No.: FG770420-02A

<Sample Information>

S31 has 2 different Variant					
Sample 1 Dual SIM					
Sample 2	Single SIM				
For Dual-SIM or Single-SIM control by SW, The HW difference is SIM holder					

Remark: All test items were performed with Sample 1.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 5 of 20

 TEL: 886-3-327-3456
 Report Issued Date
 : Oct. 09, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

FCC ID : ZL5S31 Report Template No.: BU5-FG22/24/27 Version 2.0

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FG770420-02A

: 6 of 20

: Rev. 02

Test Site	SPORTON INTERNATIONAL INC.
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,
Took Cita Lagation	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.
Test Site Location	TEL: +886-3-327-3456
	FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
rest site No.	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,
Toot Site Leastion	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.
Test Site Location	TEL: +886-3-327-3456
	FAX: +886-3-328-4978
Took Site No	Sporton Site No.
Test Site No.	03CH11-HY

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-E-2016
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL INC.

Page Number TEL: 886-3-327-3456 Report Issued Date: Oct. 09, 2017 FAX: 886-3-328-4978 Report Version FCC ID: ZL5S31 Report Template No.: BU5-FG22/24/27 Version 2.0

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
- 2. 30 MHz to 18000 MHz for WCDMA Band IV.
- 3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


	Test Modes							
Band	Radiated TCs	Conducted TCs						
GSM 850	■ GSM Link	■ GSM Link						
GSW 650	■ EDGE class 8 Link	■ EDGE class 8 Link						
GSM 1900	■ GSM Link	■ GSM Link						
GSW 1900	■ EDGE class 8 Link	■ EDGE class 8 Link						
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link						
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link						
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link						

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 7 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

2.2 Connection Diagram of Test System

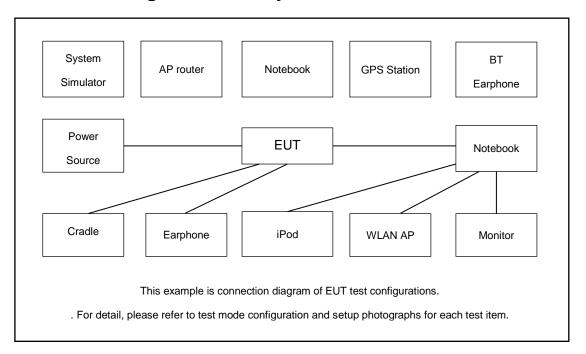

2.3 Support Unit used in test configuration

ltem	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).
=
$$4.2 + 10 = 14.2$$
 (dB)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 8 of 20 Report Issued Date : Oct. 09, 2017

Report No.: FG770420-02A

Report Version : Rev. 02

2.5 Frequency List of Low/Middle/High Channels

Frequency List							
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest			
GSM850	Channel	128	189	251			
GSIVIOSU	Frequency	824.2	836.4	848.8			
WCDMA	Channel	4132	4182	4233			
Band V	Frequency	826.4	836.4	846.6			
GSM1900	Channel	512	661	810			
G2M1900	Frequency	1850.2	1880.0	1909.8			
WCDMA	Channel	9262	9400	9538			
Band II	Frequency	1852.4	1880.0	1907.6			
WCDMA	Channel	1312	1413	1513			
Band IV	Frequency	1712.4	1732.6	1752.6			

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 9 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

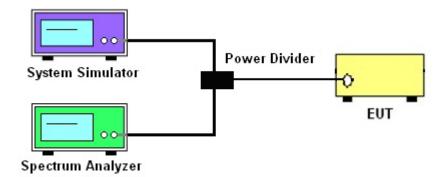

3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 10 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report No.: FG770420-02A

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

 $L_{\text{\scriptsize C}}$ = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 11 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 12 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
 (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 14 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 15 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report No.: FG770420-02A

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 16 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report No.: FG770420-02A


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

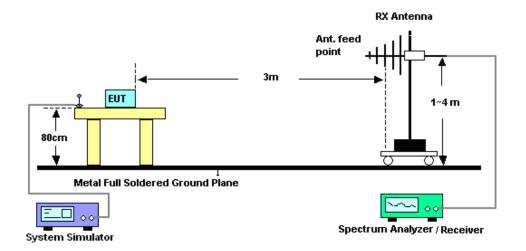

4.2.2 For radiated test above 1GHz

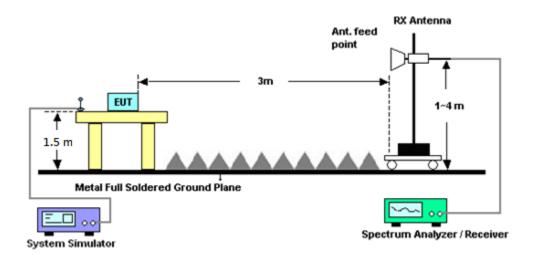

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 17 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report No.: FG770420-02A

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-E-2016 Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 18 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report No. : FG770420-02A

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 26, 2017	Sep. 12, 2017 ~ Sep. 13, 2017	Jun. 25, 2018	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 16, 2016	Sep. 12, 2017 ~ Sep. 13, 2017	Nov. 15, 2017	Conducted (TH03-HY)
Programmabl e Power	GW Instek	PSS-2005	EL883644	Voltage:0~20V;C urrent:0~5A	Nov. 22, 2016	Sep. 12, 2017 ~ Sep. 13, 2017	Nov. 21, 2017	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117997	GSM / GPRS / WCDMA / CDMA	Aug. 20, 2017	Sep. 12, 2017 ~ Sep. 13, 2017	Aug. 19, 2018	Conducted (TH03-HY)
Amplifier	MITEQ	TTA1840-3 5-HG	1871923	18GHz~40GHz, VSWR : 2.5:1	Jul. 21, 2017	Sep. 13, 2017 ~ Sep. 17, 2017	Jul. 20, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Sep. 13, 2017 ~ Sep. 17, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-	35414&AT-N 0602	30MHz~1GHz	Oct. 15, 2016	Sep. 13, 2017 ~ Sep. 17, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 07, 2016	Sep. 13, 2017 ~ Sep. 17, 2017	Oct. 06, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY5327008 0	1GHz~26.5GHz	Nov. 10, 2016	Sep. 13, 2017 ~ Sep. 17, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0 0101800-3	1902247	1GHz~18GHz	Jun. 23, 2017	Sep. 13, 2017 ~ Sep. 17, 2017	Jun. 22, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHz	Oct. 12, 2016	Sep. 13, 2017 ~ Sep. 17, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-45 00-B	N/A	1~4m	N/A	Sep. 13, 2017 ~ Sep. 17, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Sep. 13, 2017 ~ Sep. 17, 2017	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(M XE)	MY5329005 3	20Hz to 26.5GHz	Jan. 12, 2017	Sep. 13, 2017 ~ Sep. 17, 2017	Jan. 11, 2018	Radiation (03CH11-HY)
SHF-EHF Horn	SCHWARZBE CK	BBHA 9170	BBHA91705 84	18GHz- 40GHz	Nov. 08, 2016	Sep. 13, 2017 ~ Sep. 17, 2017	Nov. 07, 2017	Radiation (03CH11-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 19 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.37
Confidence of 95% (U = 2Uc(y))	3.37

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.67
Confidence of 95% (U = 2Uc(y))	3.07

<u>Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)</u>

Measuring Uncertainty for a Level of	4.00
Confidence of 95% (U = 2Uc(y))	4.03

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31 Page Number : 20 of 20
Report Issued Date : Oct. 09, 2017
Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 2.0

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850		GSM1900			
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.71	32.82	32.92	29.63	29.75	29.95
GPRS class 8	32.58	32.67	32.72	29.61	29.73	29.93
GPRS class 10	30.14	30.28	30.34	27.41	27.47	27.61
GPRS class 11	28.44	28.54	28.61	25.91	25.80	25.90
GPRS class 12	27.66	27.77	27.47	24.93	25.00	25.13
EGPRS class 8	26.94	26.95	26.99	25.85	25.91	25.99
EGPRS class 10	25.88	25.96	26.04	25.08	25.15	25.26
EGPRS class 11	24.13	24.27	24.34	23.56	23.61	23.72
EGPRS class 12	22.60	22.63	22.65	21.94	21.98	22.10

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V		WCDMA Band II			
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	23.75	23.64	23.80	22.80	22.84	22.81
HSDPA Subtest-1	22.81	22.71	22.86	21.89	21.91	21.88
HSDPA Subtest-2	22.80	22.66	22.91	21.93	21.88	21.83
HSDPA Subtest-3	22.30	22.14	22.29	21.48	21.35	21.44
HSDPA Subtest-4	22.26	22.13	22.38	21.42	21.43	21.50
HSUPA Subtest-1	22.27	21.96	22.29	21.62	21.51	21.38
HSUPA Subtest-2	21.87	21.47	21.81	20.95	20.87	20.77
HSUPA Subtest-3	21.61	21.26	21.66	20.84	20.81	20.80
HSUPA Subtest-4	22.23	21.84	22.21	21.37	21.27	21.37
HSUPA Subtest-5	22.78	22.77	22.80	21.78	21.82	21.80

Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.80	23.58	23.53
HSDPA Subtest-1	22.67	22.58	22.54
HSDPA Subtest-2	22.88	22.63	22.68
HSDPA Subtest-3	22.41	22.27	22.34
HSDPA Subtest-4	22.40	22.30	22.25
HSUPA Subtest-1	22.53	22.74	22.10
HSUPA Subtest-2	21.32	21.55	20.92
HSUPA Subtest-3	21.12	21.27	20.64
HSUPA Subtest-4	21.72	21.90	21.34
HSUPA Subtest-5	22.75	22.66	22.68

A1. GSM


Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.32	3.36	
Middle CH	0.28	3.44	PASS
Highest CH	0.28	3.32	


Report No. : FG770420-02A

Mode	GSM1900		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.24	3.28	
Middle CH	0.28	3.12	PASS
Highest CH	0.28	3.24	

Report No.: FG770420-02A

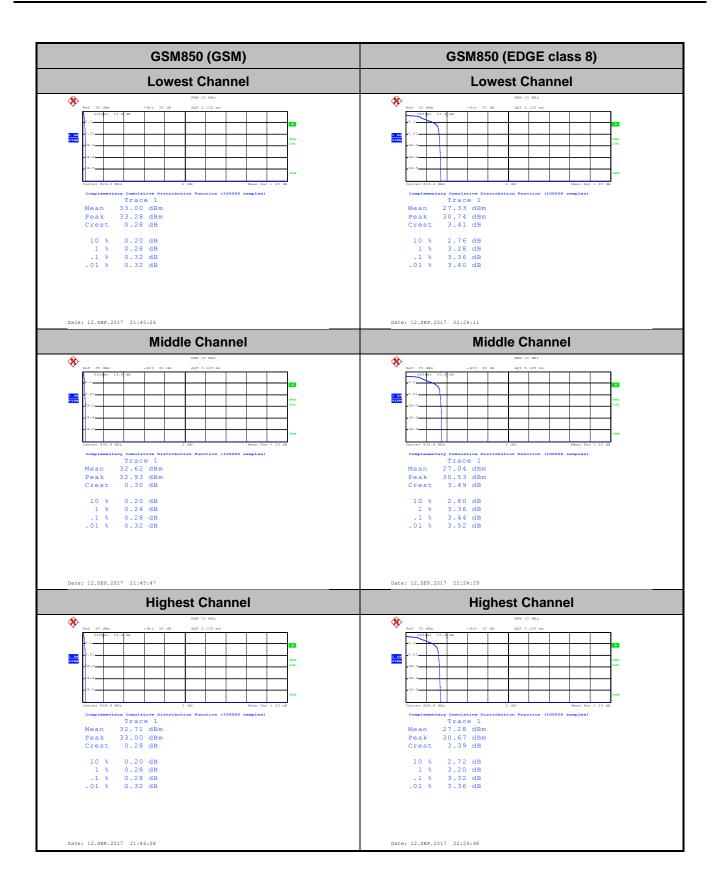

Report No.: FG770420-02A

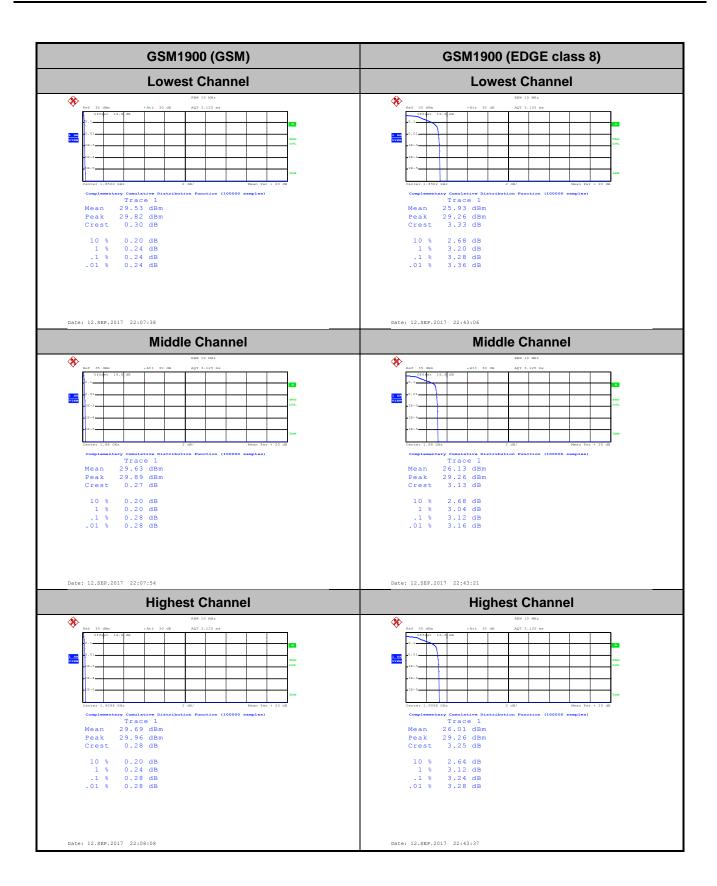


26dB Bandwidth

Mode	GSM850			
Mod.	GSM EDGE class 8			
Lowest CH	0.316	0.301		
Middle CH	0.308	0.307		
Highest CH	0.306	0.303		


Report No. : FG770420-02A

Mode	GSM1900			
Mod.	GSM EDGE class 8			
Lowest CH	0.317	0.299		
Middle CH	0.300	0.298		
Highest CH	0.303	0.300		



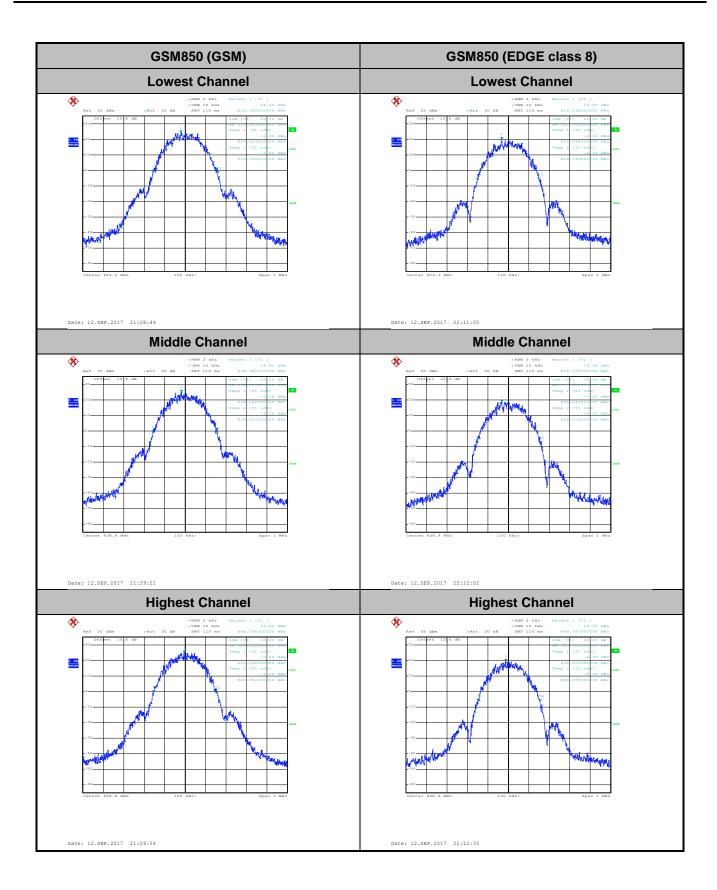



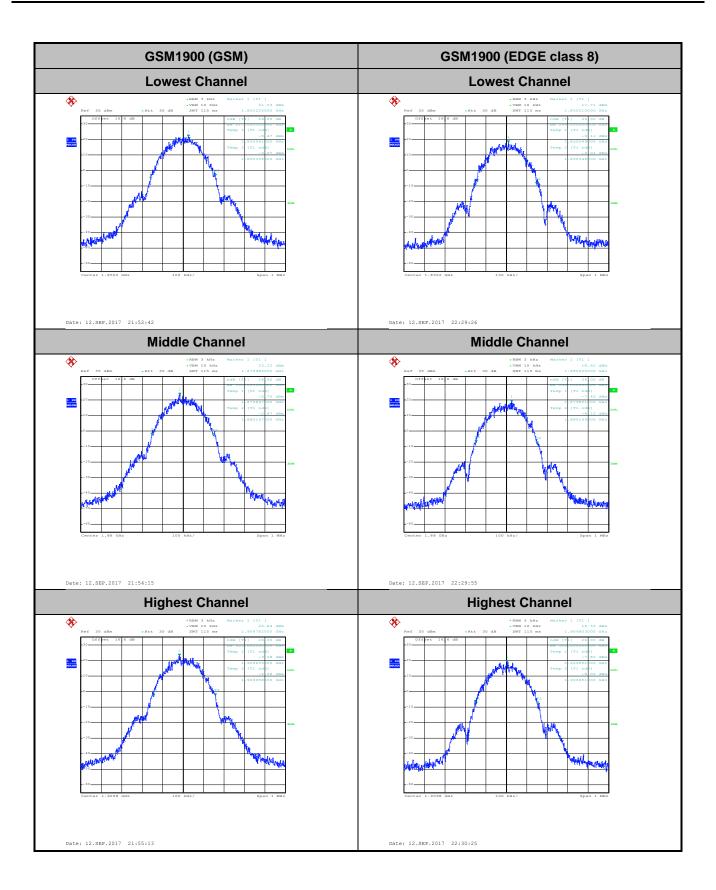


Occupied Bandwidth

Mode	GSM850			
Mod.	GSM EDGE class 8			
Lowest CH	0.244	0.238		
Middle CH	0.243	0.243		
Highest CH	0.244	0.245		


Report No. : FG770420-02A

Mode	GSM1900		
Mod.	GSM EDGE class 8		
Lowest CH	0.243	0.242	
Middle CH	0.244	0.252	
Highest CH	0.248	0.249	



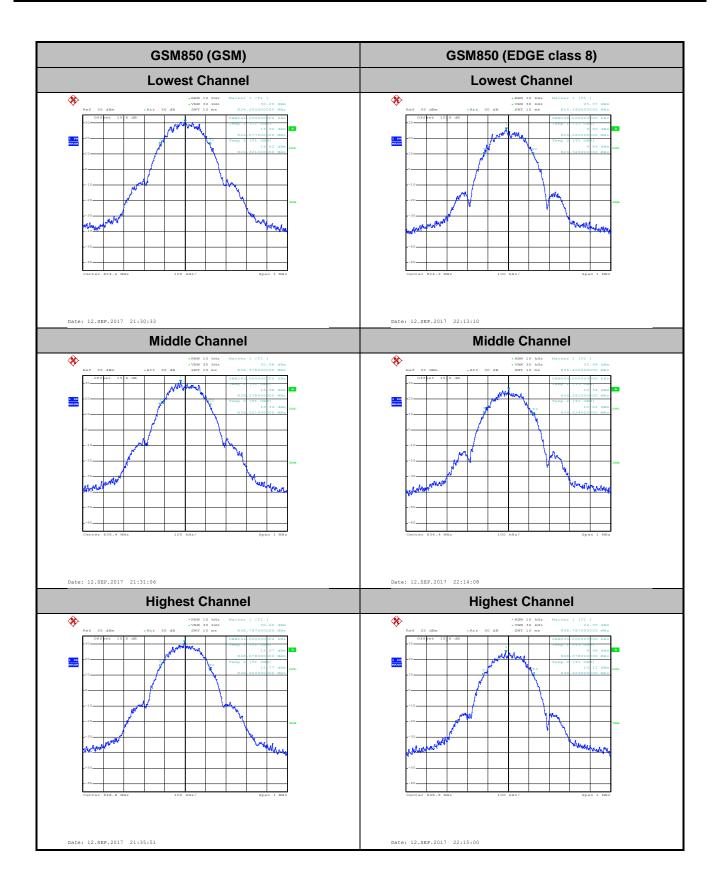




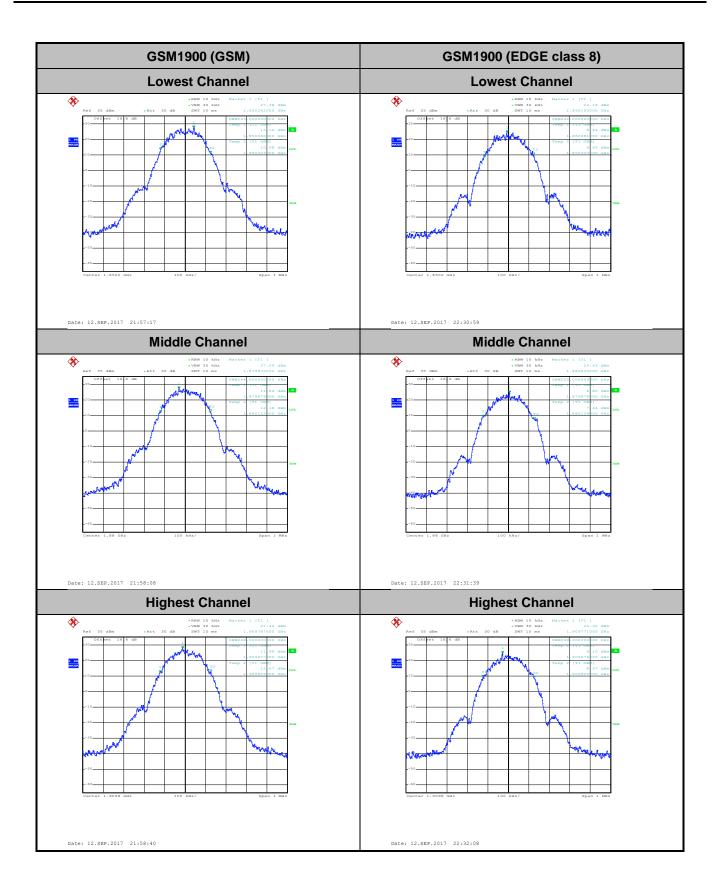


Conducted Band Edge

TEL: 886-3-327-3456 FAX: 886-3-328-4978

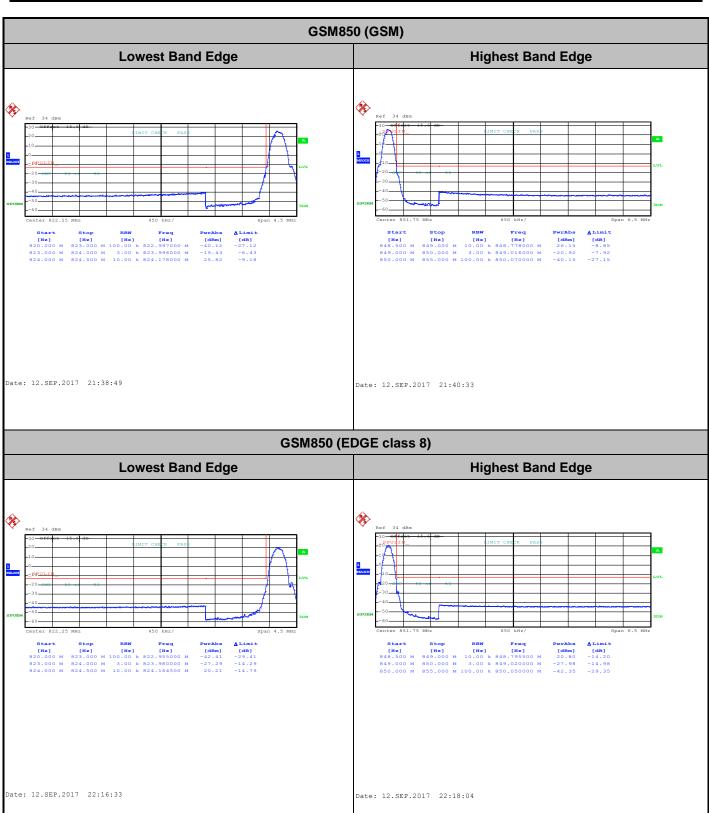

TEL: 886-3-327-3456 FAX: 886-3-328-4978

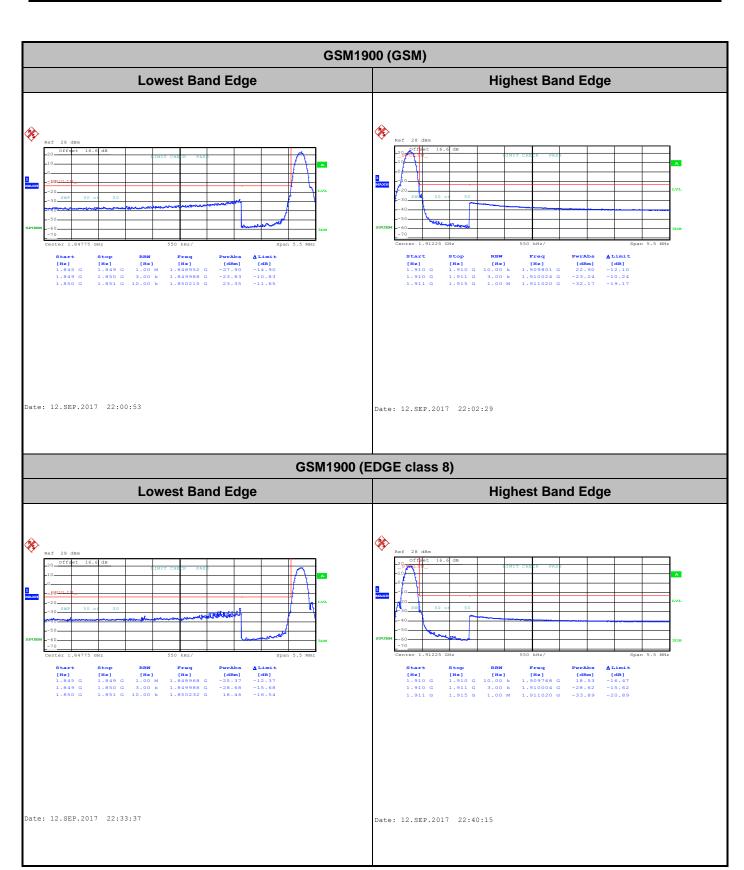


TEL: 886-3-327-3456 FAX: 886-3-328-4978


Conducted Spurious Emission

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number : A2-13 of 16

Report No. : FG770420-02A

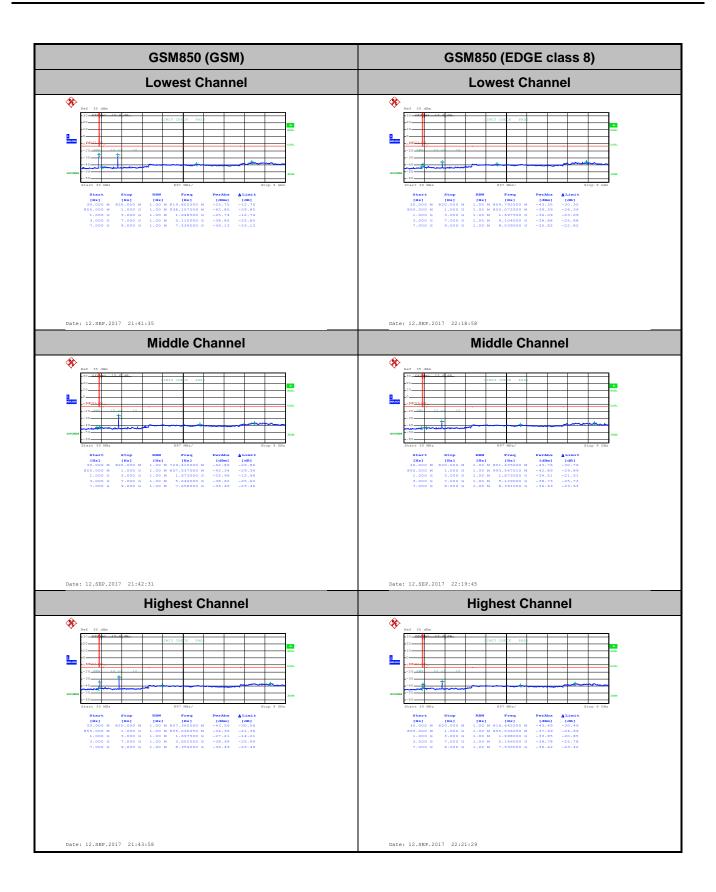

C RF Test Report No.: FG770420-02A

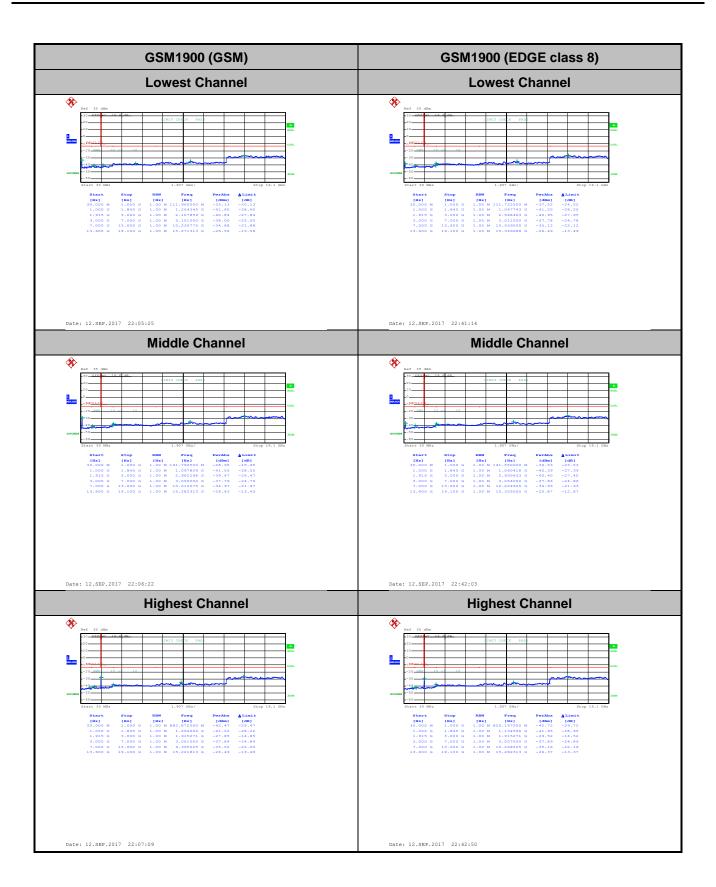

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviatio	n (ppm)	Result
50	Normal Voltage	0.0000	0.0000	
40	Normal Voltage	0.0072	0.0036	
30	Normal Voltage	0.0060	0.0048	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0048	0.0048	
0	Normal Voltage	0.0060	0.0060	
-10	Normal Voltage	0.0036	0.0024	PASS
-20	Normal Voltage	0.0000	0.0036	
-30	Normal Voltage	0.0000	0.0060	
20	Maximum Voltage	0.0048	0.0000	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0036	0.0060	

Report No.: FG770420-02A

Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviati	ion (ppm)	Result
50	Normal Voltage	0.0176	0.0021	
40	Normal Voltage	0.0064	0.0000	
30	Normal Voltage	0.0138	0.0005	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0213	0.0016	
0	Normal Voltage	0.0191	0.0021	
-10	Normal Voltage	0.0053	0.0043	PASS
-20	Normal Voltage	0.0085	0.0016	
-30	Normal Voltage	0.0090	0.0005	
20	Maximum Voltage	0.0059	0.0021	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0037	0.0011	

Note:

- 1. Normal Voltage = 4 V. ; Battery End Point (BEP) = 3.6 V.; Maximum Voltage =4.4 V
- 2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL INC. Page Number : A2-16 of 16


A2. WCDMA

Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.96	3.00	3.16	
Middle CH	3.12	3.08	3.12	PASS
Highest CH	3.12	3.00	3.12	

Report No. : FG770420-02A

Report No.: FG770420-02A

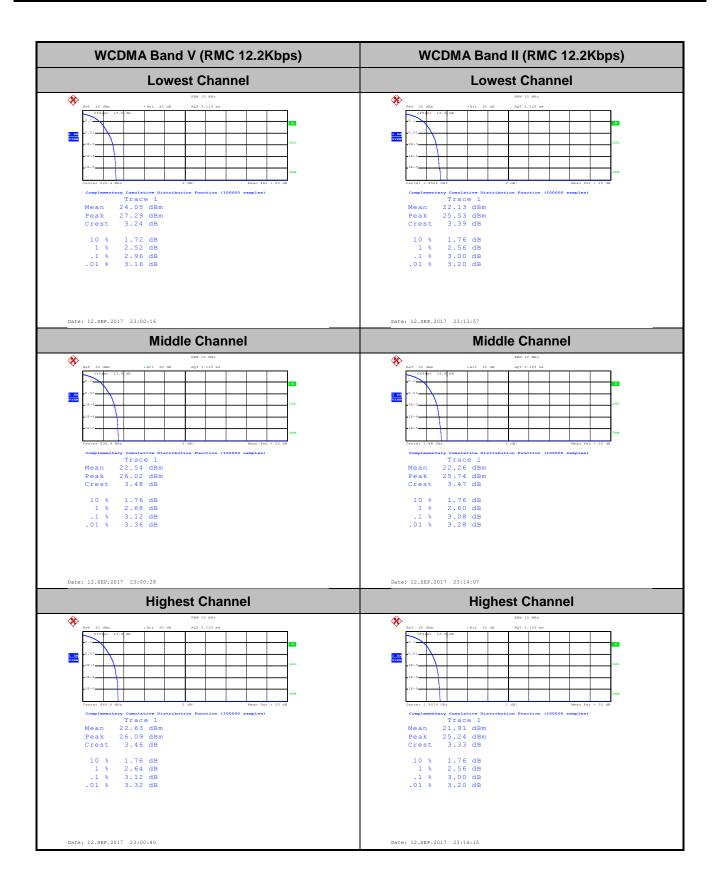

CC RF Test Report No.: FG770420-02A

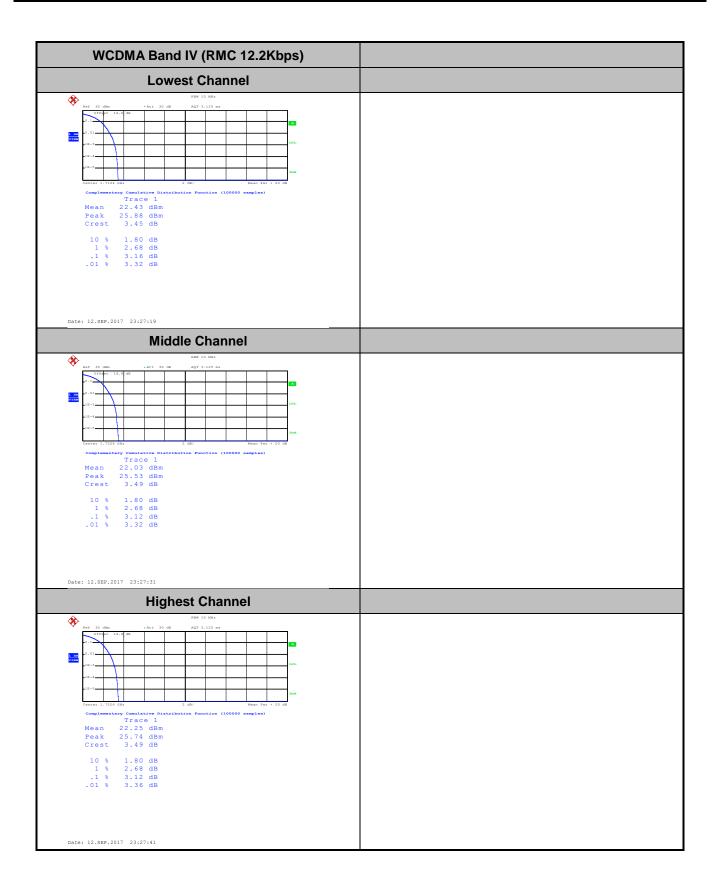


26dB Bandwidth


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.71	4.73	4.72
Middle CH	4.70	4.72	4.72
Highest CH	4.73	4.73	4.71

Report No. : FG770420-02A

CC RF Test Report No.: FG770420-02A

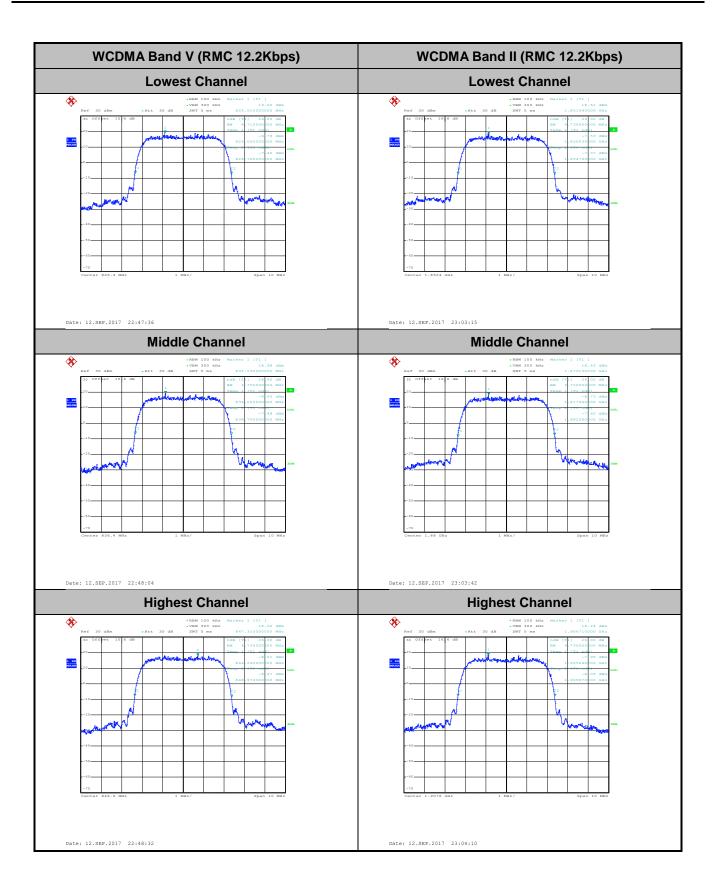



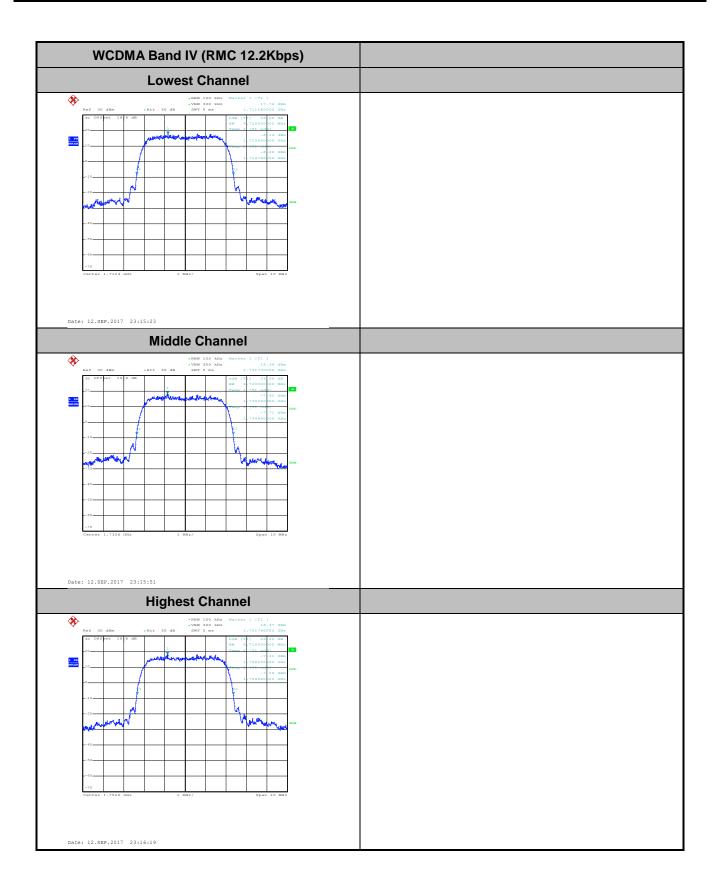


Occupied Bandwidth


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.17	4.17
Middle CH	4.14	4.17	4.16
Highest CH	4.15	4.15	4.16

Report No. : FG770420-02A



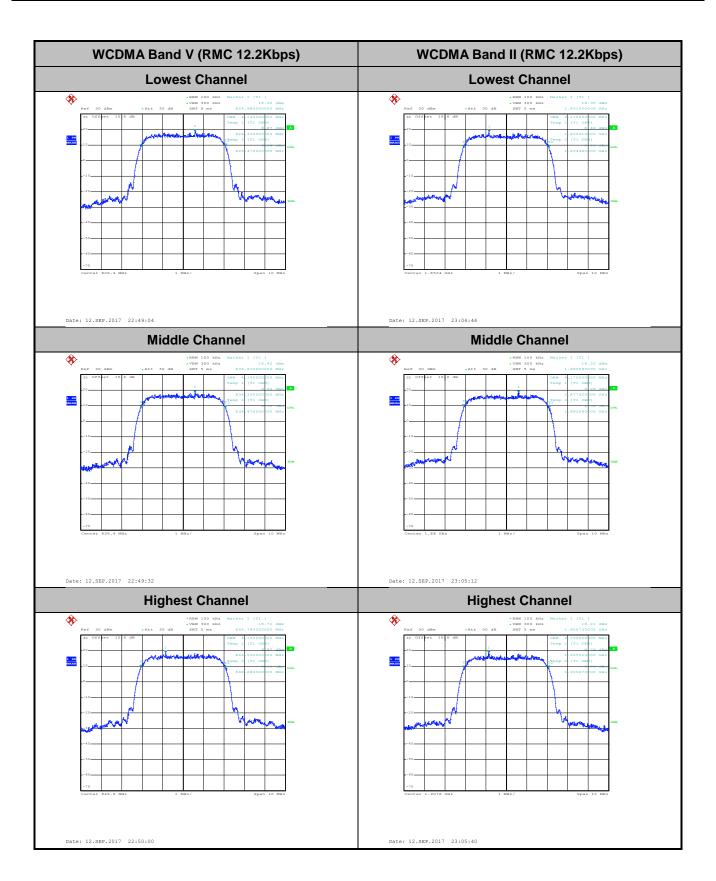





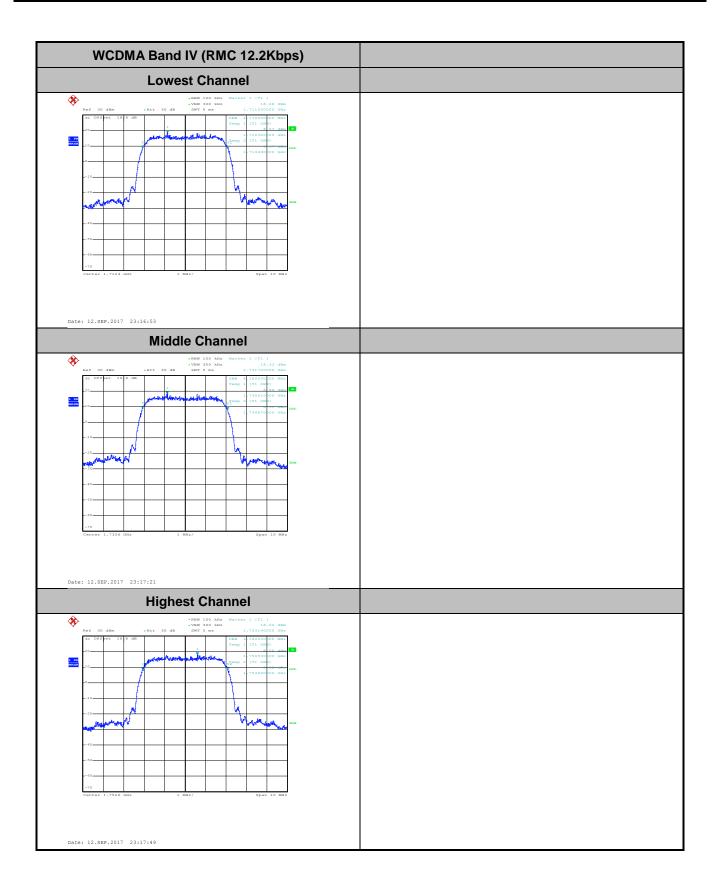


Conducted Band Edge

TEL: 886-3-327-3456 FAX: 886-3-328-4978

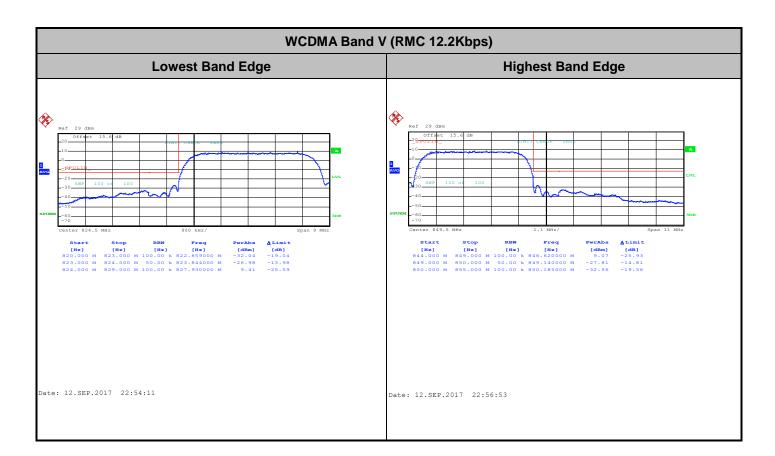

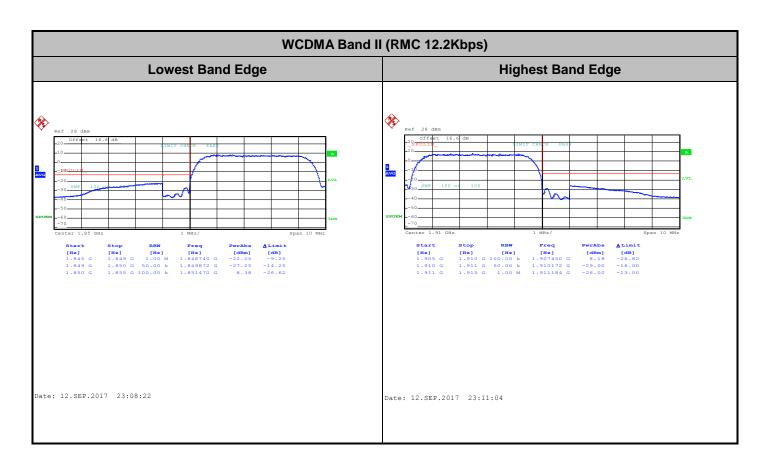


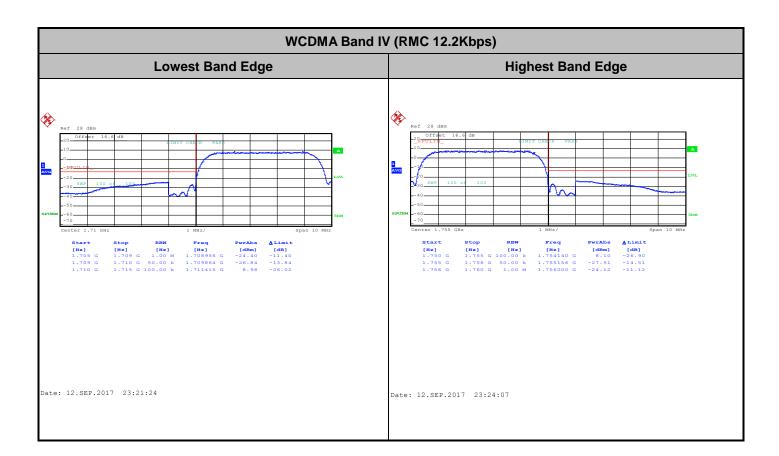


Conducted Spurious Emission

TEL: 886-3-327-3456 FAX: 886-3-328-4978



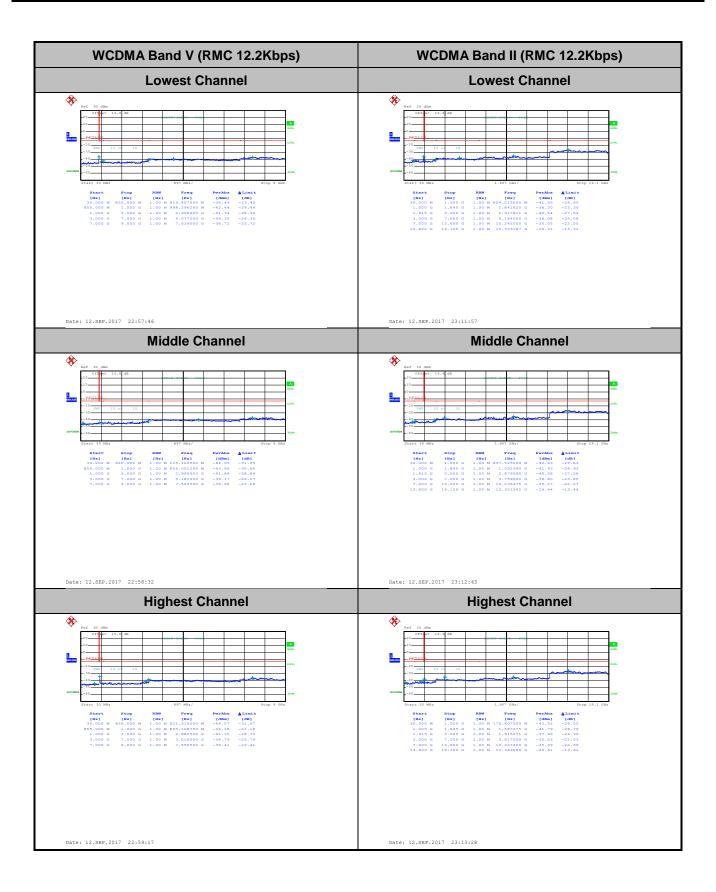

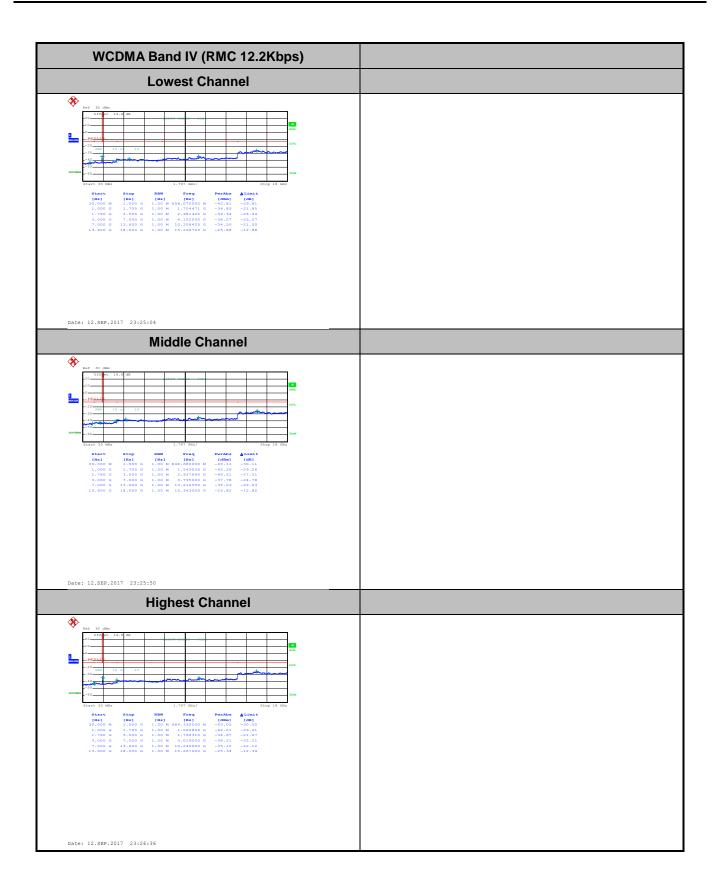

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0000	
40	Normal Voltage	0.0143	
30	Normal Voltage	0.0167	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0167	
0	Normal Voltage	0.0155	
-10	Normal Voltage	0.0167	PASS
-20	Normal Voltage	0.0167	
-30	Normal Voltage	0.0155	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0012	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0080	
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0021	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0005	PASS
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0016	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0017	
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0029	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0092	
0	Normal Voltage	0.0081	
-10	Normal Voltage	0.0040	PASS
-20	Normal Voltage	0.0035	
-30	Normal Voltage	0.0040	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	

Note:

- 1. Normal Voltage = 4 V. ; Battery End Point (BEP) = 3.6 V.; Maximum Voltage =4.4 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Appendix B. Test Results of ERP/EIRP and Radiated Test

Report No. : FG770420-02A

ERP/EIRP

Channel	Mode	Cond	ucted	ERP		
Chamilei	Wiode	Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)	
Lowest	GSM850	32.71	1.8664	29.72	0.9376	
Middle	GSM	32.82	1.9143	29.83	0.9616	
Highest	GT - LC = -0.84 dB	32.92	1.9588	29.93	0.9840	
Lowest	GSM850	26.94	0.4943	23.95	0.2483	
Middle	EDGE class 8	26.95	0.4955	23.96	0.2489	
Highest	GT - LC = -0.84 dB	26.99	0.5000	24.00	0.2512	
Lowest	WCDMA Band V	23.75	0.2371	20.76	0.1191	
Middle	RMC 12.2Kbps	23.64	0.2312	20.65	0.1161	
Highest	GT - LC = -0.84 dB	23.80	0.2399	20.81	0.1205	
Limit	ERP < 7W	Result		PA	SS	

Channel	Mode	Cond	ucted	EIRP		
Channel	Wiode	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)	
Lowest	GSM1900	29.63	0.9183	30.80	1.2023	
Middle	GSM	29.75	0.9441	30.92	1.2359	
Highest	(GT - LC = 1.17 dB)	29.95	0.9886	31.12	1.2942	
Lowest	GSM1900	25.85	0.3846	27.02	0.5035	
Middle	EDGE class 8	25.91	0.3899	27.08	0.5105	
Highest	(GT - LC = 1.17 dB)	25.99	0.3972	27.16	0.5200	
Lowest	WCDMA Band II	22.80	0.1905	23.97	0.2495	
Middle	RMC 12.2Kbps	22.84	0.1923	24.01	0.2518	
Highest	(GT - LC = 1.17 dB)	22.81	0.1910	23.98	0.2500	
Limit	EIRP < 2W	Result		PA	SS	

Channel	Mode	Cond	ucted	EIRP		
Chamilei	IVIOGE	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)	
Lowest	WCDMA Band IV	23.80	0.2399	24.07	0.2553	
Middle	RMC 12.2Kbps	23.58	0.2280	23.85	0.2427	
Highest	(GT - LC = 0.27 dB)	23.53	0.2254	23.80	0.2399	
Limit	EIRP < 1W	Re	sult	PA	SS	

Radiated Spurious Emission

GSM850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1648	-49.41	-13	-36.41	-59.32	-56.36	0.53	9.63	Н
	2472	-45.92	-13	-32.92	-59.36	-53.9	0.65	10.78	Н
Lowest	3296	-57.13	-13	-44.13	-73.27	-66.21	0.76	11.99	Н
Lowest	1648	-51.76	-13	-38.76	-61.38	-58.71	0.53	9.63	V
	2472	-37.06	-13	-24.06	-50.99	-45.04	0.65	10.78	V
	3296	-58.68	-13	-45.68	-74.79	-67.76	0.76	11.99	V
	1672	-46.64	-13	-33.64	-56.73	-53.64	0.53	9.68	Н
	2512	-40.08	-13	-27.08	-53.5	-48.08	0.66	10.81	Н
Middle	3344	-58.42	-13	-45.42	-74.62	-67.64	0.76	12.13	Н
Middle	1672	-49.36	-13	-36.36	-59.05	-56.36	0.53	9.68	V
	2512	-41.07	-13	-28.07	-54.9	-49.07	0.66	10.81	V
	3344	-58.68	-13	-45.68	-74.69	-67.9	0.76	12.13	V
	1696	-39.23	-13	-26.23	-49.61	-46.28	0.53	9.73	Н
	2544	-41.91	-13	-28.91	-55.39	-49.92	0.67	10.83	Н
I limb t	4248	-51.27	-13	-38.27	-68.88	-60.58	0.84	12.30	Н
Highest	1696	-41.97	-13	-28.97	-51.7	-49.02	0.53	9.73	V
	2544	-35.52	-13	-22.52	-49.37	-43.53	0.67	10.83	V
	4248	-49.02	-13	-36.02	-67.9	-58.33	0.84	12.30	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

 ${\it SPORTON\ INTERNATIONAL\ INC.}$

TEL: 886-3-327-3456 FAX: 886-3-328-4978

EDGE 850

EDGE 850											
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	1648	-57.02	-13	-44.02	-66.93	-63.97	0.53	9.63	Н		
	2472	-52.87	-13	-39.87	-66.31	-60.85	0.65	10.78	Н		
Lawast	3296	-58.39	-13	-45.39	-74.53	-67.47	0.76	11.99	Н		
Lowest	1648	-58.35	-13	-45.35	-67.97	-65.3	0.53	9.63	V		
	2472	-45.72	-13	-32.72	-59.65	-53.7	0.65	10.78	V		
	3296	-58.62	-13	-45.62	-74.73	-67.7	0.76	11.99	V		
	1672	-51.95	-13	-38.95	-62.04	-58.95	0.53	9.68	Н		
	2512	-52.78	-13	-39.78	-66.2	-60.78	0.66	10.81	Н		
N 4: el ell e	3344	-58.56	-13	-45.56	-74.76	-67.78	0.76	12.13	Н		
Middle	1672	-54.46	-13	-41.46	-64.15	-61.46	0.53	9.68	V		
	2512	-44.59	-13	-31.59	-58.42	-52.59	0.66	10.81	V		
	3344	-58.85	-13	-45.85	-74.86	-68.07	0.76	12.13	V		
	1696	-51.21	-13	-38.21	-61.59	-58.26	0.53	9.73	Н		
	2544	-50.09	-13	-37.09	-63.57	-58.1	0.67	10.83	Н		
l limb a c	3392	-58.57	-13	-45.57	-74.88	-67.93	0.77	12.28	Н		
Highest	1696	-48.84	-13	-35.84	-58.6	-55.89	0.53	9.73	V		
	2544	-42.58	-13	-29.58	-56.43	-50.59	0.67	10.83	V		
	3392	-58.84	-13	-45.84	-74.74	-68.2	0.77	12.28	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number

: B2-2 of 7

WCDMA 850

WCDMA 850											
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	1649	-63.18	-13	-50.18	-73.09	-70.13	0.53	9.63	Н		
	2474	-60.46	-13	-47.46	-73.9	-68.44	0.65	10.78	Н		
Lowest	3298	-58.57	-13	-45.57	-74.71	-67.66	0.76	11.99	Н		
Lowest	1649	-63.62	-13	-50.62	-73.24	-70.57	0.53	9.63	V		
	2474	-59.97	-13	-46.97	-73.9	-67.95	0.65	10.78	V		
	3298	-58.54	-13	-45.54	-74.65	-67.63	0.76	11.99	V		
	1672	-63.45	-13	-50.45	-73.54	-70.45	0.53	9.68	Н		
	2512	-60.48	-13	-47.48	73.9	-68.48	0.66	10.81	Н		
Middle	3344	-58.42	-13	-45.42	-74.62	-67.64	0.76	12.13	Н		
ivildale	1672	-63.54	-13	-50.54	-73.23	-70.54	0.53	9.68	V		
	2512	-59.78	-13	-46.78	-73.61	-67.78	0.66	10.81	V		
	3344	-59.00	-13	-46.00	-75.01	-68.22	0.76	12.13	V		
	1696	-62.56	-13	-49.56	-72.94	-69.61	0.53	9.73	Н		
	2544	-60.29	-13	-47.29	-73.77	-68.3	0.67	10.83	Н		
l limb a c	3392	-58.71	-13	-45.71	-75.02	-68.07	0.77	12.28	Н		
Highest	1696	-63.42	-13	-50.42	-73.18	-70.47	0.53	9.73	V		
	2544	-60.17	-13	-47.17	-74.02	-68.18	0.67	10.83	V		
	3392	-58.73	-13	-45.73	-74.63	-68.09	0.77	12.28	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

WCDMA 1700

WCDMA 1700											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	3426	-58.17	-13	-45.17	-75.33	-69.77	0.77	12.38	Н		
	5136	-55.92	-13	-42.92	-76.62	-67.42	0.97	12.47	Н		
Lowest	6852	-53.88	-13	-40.88	-77.61	-64.67	0.83	11.63	Н		
Lowest	3426	-57.89	-13	-44.89	-74.86	-69.49	0.77	12.38	V		
	5136	-55.68	-13	-42.68	-76.55	-67.18	0.97	12.47	V		
	6852	-53.15	-13	-40.15	-77.33	-63.94	0.83	11.63	V		
	3468	-58.15	-13	-45.15	-75.35	-69.88	0.78	12.50	Н		
	5196	-55.67	-13	-42.67	-76.46	-67.27	0.99	12.59	Н		
Middle	6930	-52.44	-13	-39.44	-76.31	-62.89	1.01	11.45	Н		
Middle	3468	-57.25	-13	-44.25	-74.84	-68.98	0.78	12.50	V		
	5196	-55.39	-13	-42.39	-76.34	-66.99	0.99	12.59	V		
	6930	-52.29	-13	-39.29	-76.54	-62.74	1.01	11.45	V		
	3504	-58.04	-13	-45.04	-75.29	-69.86	0.78	12.60	Н		
	5256	-56.09	-13	-43.09	-77.06	-67.79	1.01	12.71	Н		
I limb a at	7008	-51.68	-13	-38.68	-75.71	-61.8	1.17	11.29	Н		
Highest	3504	-56.40	-13	-43.40	-74.62	-68.22	0.78	12.60	V		
	5256	-56.31	-13	-43.31	-77.42	-68.01	1.01	12.71	V		
	7008	-51.63	-13	-38.63	-75.96	-61.75	1.17	11.29	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

GSM1900

GSM 1900											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	3702	-52.36	-13	-39.36	-69.35	-64.15	0.72	12.52	Н		
	5550	-48.98	-13	-35.98	-70.84	-61.15	1.00	13.17	Н		
Lowest	7404	-50.89	-13	-37.89	-76	-60.28	1.18	10.57	Н		
Lowest	3702	-56.36	-13	-43.36	-74.52	-68.15	0.72	12.52	V		
	5550	-47.09	-13	-34.09	-69.04	-59.26	1.00	13.17	V		
	7404	-51.18	-13	-38.18	-76.08	-60.57	1.18	10.57	V		
	3762	-49.31	-13	-36.31	-66.46	-61.12	0.69	12.50	Н		
	5640	-51.31	-13	-38.31	-73.03	-63.44	0.98	13.12	Н		
Middle	7524	-50.57	-13	-37.57	-75.49	-59.86	1.18	10.47	Н		
Middle	3762	-51.97	-13	-38.97	-70.33	-63.78	0.69	12.50	V		
	5640	-47.37	-13	-34.37	-69.26	-59.5	0.98	13.12	V		
	7524	-50.95	-13	-37.95	-75.92	-60.24	1.18	10.47	V		
	3820	-50.50	-13	-37.50	-67.77	-62.28	0.69	12.47	Н		
	5730	-51.78	-13	-38.78	-73.52	-63.85	0.99	13.06	Н		
I limb a ct	7640	-51.05	-13	-38.05	-76.23	-60.66	1.18	10.79	Н		
Highest	3820	-54.04	-13	-41.04	-72.53	-65.82	0.69	12.47	V		
	5730	-47.42	-13	-34.42	-69.37	-59.49	0.99	13.06	V		
	7640	-51.12	-13	-38.12	-76.05	-60.73	1.18	10.79	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

EDGE1900

EDGE 1900											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	3702	-53.74	-13	-40.74	-70.73	-65.53	0.72	12.52	Н		
	5550	-53.16	-13	-40.16	-75.02	-65.33	1.00	13.17	Н		
Lowest	7404	-50.92	-13	-37.92	-76.03	-60.31	1.18	10.57	Н		
Lowest	3702	-57.01	-13	-44.01	-75.17	-68.8	0.72	12.52	V		
	5550	-50.89	-13	-37.89	-72.84	-63.06	1.00	13.17	V		
	7404	-51.29	-13	-38.29	-76.19	-60.68	1.18	10.57	V		
	3762	-52.39	-13	-39.39	-69.54	-64.2	0.69	12.50	Н		
	5640	-54.68	-13	-41.68	-76.4	-66.81	0.98	13.12	Н		
Middle	7524	-51.30	-13	-38.30	-76.22	-60.59	1.18	10.47	Н		
Middle	3762	-54.52	-13	-41.52	-72.88	-66.33	0.69	12.50	V		
	5640	-51.25	-13	-38.25	-73.14	-63.38	0.98	13.12	V		
	7524	-51.35	-13	-38.35	-76.32	-60.64	1.18	10.47	V		
	3820	-54.43	-13	-41.43	-71.7	-66.21	0.69	12.47	Н		
	5730	-54.60	-13	-41.60	-76.34	-66.67	0.99	13.06	Н		
l limb oct	7640	-50.99	-13	-37.99	-76.17	-60.6	1.18	10.79	Н		
Highest	3820	-53.87	-13	-40.87	-72.36	-65.65	0.69	12.47	V		
	5730	-52.12	-13	-39.12	-74.07	-64.19	0.99	13.06	V		
	7640	-51.00	-13	-38.00	-75.93	-60.61	1.18	10.79	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978

WCDMA 1900

WCDMA 1900											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
	3704	-48.33	-13	-35.33	-65.32	-60.12	0.72	12.52	Н		
	5556	-51.26	-13	-38.26	-73.07	-63.43	1.00	13.17	Н		
Louiset	7408	-50.76	-13	-37.76	-75.84	-60.14	1.18	10.57	Н		
Lowest	3704	-48.54	-13	-35.54	-66.7	-60.33	0.72	12.52	V		
	5556	-48.80	-13	-35.80	-70.73	-60.97	1.00	13.17	V		
	7408	-51.24	-13	-38.24	-76.17	-60.62	1.18	10.57	V		
	3756	-41.75	-13	-28.75	-58.86	-53.55	0.69	12.50	Н		
	5640	-49.22	-13	-36.22	-70.94	-61.35	0.98	13.12	Н		
Middle	7518	-49.91	-13	-36.91	-74.82	-59.18	1.18	10.45	Н		
Middle	3756	-41.02	-13	-28.02	-59.32	-52.82	0.69	12.50	V		
	5640	-46.15	-13	-33.15	-68.04	-58.28	0.98	13.12	V		
	7518	-49.80	-13	-36.80	-74.76	-59.07	1.18	10.45	V		
	3816	-38.43	-13	-25.43	-55.7	-50.22	0.69	12.47	Н		
	5718	-48.46	-13	-35.46	-70.21	-60.54	0.99	13.07	Н		
I limb a ct	7626	-49.83	-13	-36.83	-75.01	-59.4	1.18	10.75	Н		
Highest	3816	-37.49	-13	-24.49	-55.98	-49.28	0.69	12.47	V		
	5718	-42.92	-13	-29.92	-64.88	-55	0.99	13.07	V		
	7626	-50.50	-13	-37.50	-75.43	-60.07	1.18	10.75	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978