



# No. I17N00063-LTE

for

Power Idea Technology (Shenzhen) Co., Ltd.

**TD-LTE** digital mobile phone

**Model Name: MD501** 

FCC ID: ZLE-MD501

with

Hardware Version: 1.04

Software Version: MD501\_US\_1.003.00\_20170103

Issued Date: 2017-03-06

#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

#### **Test Laboratory:**

FCC 2.948 Listed: No. 342690

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl\_terminals@catr.cn, website: www.chinattl.com



# REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17N00063-LTE	Rev.0	1st edition	2017-03-06



# **CONTENTS**

1.	TEST LABORATORY	4
1.1.	TESTING LOCATION	4
1.2.	TESTING ENVIRONMENT	4
1.3.	PROJECT DATA	4
1.4.	SIGNATURE	4
2.	CLIENT INFORMATION	5
2.1.	APPLICANT INFORMATION	5
2.2.	MANUFACTURER INFORMATION	5
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1.	ABOUT EUT	6
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4.	GENERAL DESCRIPTION	6
4.	REFERENCE DOCUMENTS	
4.1.		
5.	LABORATORY ENVIRONMENT	
	SUMMARY OF TEST RESULTS	
6.1.		
6.2.		
	TEST EQUIPMENTS UTILIZED	
ANN	NEX A: MEASUREMENT RESULTS	15
	.1 OUTPUT POWER	
	2 EMISSION LIMIT	_
A.	.3 FREQUENCY STABILITY	
A.	.4 OCCUPIED BANDWIDTH	82
A.	5 EMISSION BANDWIDTH	126
A.	6 BAND EDGE COMPLIANCE	170
A.	7 CONDUCTED SPURIOUS EMISSION	201
۸	8 DEAK-TO-AVEDAGE DOMED DATIO	207



### 1. Test Laboratory

### 1.1. Testing Location

Company Name:

CTTL ShenZhen, Telecommunication Technology Labs, Academy of

Telecommunication Research, MIIT

Address:

TCL International E city No. 1001 Zhongshanyuan Road, Nanshan

District, Shenzhen, Guangdong, China

Postal Code:

518048

Telephone:

+86(755)33322000

Fax:

+86(755)33322000

### 1.2. Testing Environment

Normal Temperature:

15-35℃

Relative Humidity:

20-75%

Air pressure

980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

### 1.3. Project data

Testing Start Date:

2017-01-18

Testing End Date:

2017-02-28

### 1.4. Signature

Lai Minghua

(Prepared this test report)

Yang Zi'an

(Reviewed this test report)

Zhang Bojun

**Deputy Director of the laboratory** 

(Approved this test report)



# 2. Client Information

### 2.1. Applicant Information

Company Name: Power Idea Technology (Shenzhen) Co., Ltd.

4th Floor, A Section, Languang Science&technology Building, No.7

Address / Post: Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen,

P.R.C.

Contact Person: alex.ma

Contact Email alex.ma@pwidea.com Telephone: 0086-0755-86220211

Fax: /

### 2.2. Manufacturer Information

Company Name: Power Idea Technology (Shenzhen) Co., Ltd.

4th Floor, A Section, Languang Science&technology Building, No.7

Address / Post: Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen,

P.R.C.

Contact Person: alex.ma

Contact Email alex.ma@pwidea.com Telephone: 0086-0755-86220211

Fax: /



### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 3.1. **About EUT**

Description TD-LTE digital mobile phone

Model Name MD501
FCC ID ZLE-MD501
Antenna Integrated

Output power 26.43dBm maximum EIRP measured for LTE Band 7

Extreme vol. Limits 3.6VDC to 4.35VDC (nominal: 3.8VDC)

Extreme temp. Tolerance -30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

### 3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	<b>HW Version</b>	SW Version	Sample Arrival Date
S01	867453021949642	1.04	MD501_US_1.003.00	2017-01-18
			20170103	

<sup>\*</sup>EUT ID: is used to identify the test sample in the lab internally.

### 3.3. Internal Identification of AE used during the test

# AE ID\* Description AE1 Battery AE2 Charger

AE1

Model Li-ion Rechargeable Battery

Manufacturer Springpower Technology (Shenzhen) Co., LTD

Capacitance 3950mAh

AE2

Model HKC0055010-2D

Manufacturer SHENZHEN HUNTKEY ELECTRIC CO., LTD

### 3.4. General Description

The Equipment Under Test (EUT) is a model TD-LTE mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

<sup>\*</sup>AE ID: is used to identify the test sample in the lab internally.



# 4. Reference Documents

# 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-15
		Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-15
		Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY	10-1-15
	MATTERS; GENERAL RULES AND REGULATIONS	Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS	10-1-15
	SERVICES	Edition
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-15
		Edition
ANSI/TIA-603-D	Land Mobile FM or PM Communications Equipment	2010
	Measurement and Performance Standards	
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from	2014
	Low-Voltage Electrical and Electronic Equipment in the	
	Range of 9 kHz to 40 GHz	
KDB 971168 D01	Power Meas License Digital Systems	v02r02



# 5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber 2** (8.6 meters × 6.1 meters × 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	<1 Ω
Site voltage standing-wave ratio (SVSWR)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

**Semi-anechoic chamber 2 / Fully-anechoic chamber 3** (10 meters × 6.7 meters × 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (Syswr)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz



# 6. SUMMARY OF TEST RESULTS

# 6.1. Summary of test results

Abbreviations used in this clause:		
Р		Pass
Verdict Column	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column A/D/C/D		The test is performed in test location A, B, C or D
Location Column A/B/C/D		which are described in section 1.1 of this report

### LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	Р
2	Emission Limit	24.238(a), 2.1051	A.2	Р
3	Frequency Stability	24.235, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	24.238(a)	A.5	Р
6	Band Edge Compliance	24.238(a)	A.6	Р
7	Conducted Spurious Emission	24.238, 2.1057	A.7	Р
8	Peak to Average Power Ratio	24.232 (d)	A.8	Р

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(d)(4)	A.1	Р
2	Emission Limit	27.53(h), 2.1051	A.2	Р
3	Frequency Stability	27.54, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	27.53(h)	A.5	Р
6	Band Edge Compliance	27.53(h)	A.6	Р
7	Conducted Spurious Emission	27.53(h), 2.1057	A.7	Р
8	Peak to Average Power Ratio	27.50(a)	A.8	Р



# LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046(a), 22.913(a)	A.1	Р
2	Emission Limit	22.917, 2.1051	A.2	Р
3	Frequency Stability	22.235, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	22.917(b)	A.5	Р
6	Band Edge Compliance	22.917(b)	A.6	Р
7	Conducted Spurious Emission	22.917, 2.1057	A.7	Р

### LTE Band 7

u 1				
Items	Test Name	Clause in	Section in	Verdict
		FCC rules	this report	
1	Output Power	27.50(h)(2)	A.1	Р
2	Emission Limit	27.53(m), 2.1051	A.2	Р
3	Frequency Stability	27.54, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	27.53(m)	A.5	Р
6	Band Edge Compliance	27.53(m)	A.6	Р
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	Р
8	Peak to Average Power Ratio	27.50(a)	A.8	Р

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(c)(10)	A.1	Р
2	Emission Limit	27.53(g), 2.1051	A.2	Р
3	Frequency Stability	27.54, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	27.53(g)	A.5	Р
6	Band Edge Compliance	27.53(g)	A.6	Р
7	Conducted Spurious Emission	27.53(g), 2.1057	A.7	Р
8	Peak to Average Power Ratio	27.50(a)	A.8	Р



### LTE Band 13

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(b)(10)	A.1	Р
2	Emission Limit	27.53(f), 2.1051	A.2	Р
3	Frequency Stability	27.54, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	27.53(f)	A.5	Р
6	Band Edge Compliance	27.53(f)	A.6	Р
7	Conducted Spurious Emission	27.53(f), 2.1057	A.7	Р
8	Peak to Average Power Ratio	27.50(a)	A.8	Р

### LTE Band 17

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(c)(10)	A.1	Р
2	Emission Limit	27.53(g), 2.1051	A.2	Р
3	Frequency Stability	27.54, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	27.53(g)	A.5	Р
6	Band Edge Compliance	27.53(g)	A.6	Р
7	Conducted Spurious Emission	27.53(g), 2.1057	A.7	Р
8	Peak to Average Power Ratio	27.50(a)	A.8	Р

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	Р
2	Emission Limit	24.238(a), 2.1051	A.2	Р
3	Frequency Stability	24.235, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	24.238(a)	A.5	Р
6	Band Edge Compliance	24.238(a)	A.6	Р
7	Conducted Spurious Emission	24.238, 2.1057	A.7	Р
8	Peak to Average Power Ratio	24.232 (d)	A.8	Р



### LTE Band 26

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046(a), 22.913(a)	A.1	Р
2	Emission Limit	22.917, 2.1051	A.2	Р
3	Frequency Stability	22.235, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	22.917(b)	A.5	Р
6	Band Edge Compliance	22.917(b)	A.6	Р
7	Conducted Spurious Emission	22.917, 2.1057	A.7	Р

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	Р
2	Emission Limit	27.53(m), 2.1051	A.2	Р
3	Frequency Stability	27.54, 2.1055	A.3	Р
4	Occupied Bandwidth	2.1049(h)(i)	A.4	Р
5	Emission Bandwidth	27.53(m)	A.5	Р
6	Band Edge Compliance	27.53(m)	A.6	Р
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	Р
8	Peak to Average Power Ratio	27.50(a)	A.8	Р



### 6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the LTE functions among the features described in section 3.



# 7. Test Equipments Utilized

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101675	2017-07-21
2	BiLog Antenna	VULB9163	Schwarzbeck	9163330	2017-04-22
3	Horn Antenna	3117	ETS-Lindgren	00066585	2019-03-05
4	Antenna	SBA 9113	814	Schwarzbeck	/
5	Antenna	SBA 9112	302	Schwarzbeck	/
6	Antenna	3160-09	LM4750/00118388	ETS-Lindgren	2018.07.14
7	preamplifier	83017A	MY39501110	Agilent	/
8	Signal Generator	SMR40	R&S	100541	2017-06-27
9	Fully Anechoic Chamber	FACT5-2.0	ETS-Lindgren	4166	2018-05-13
10	Spectrum Analyzer	FSP40	R&S	100378	2017-12-15
11	Universal Radio Communication Tester	CMU200	R&S	114544	2017-09-09
12	Universal Radio Communication Tester	CMW500	R&S	158344	2017-07-21
13	Universal Radio Communication Tester	CMU200	R&S	123210	2017-12-25
14	Spectrum Analyzer	FSU	R&S	200679	2017-12-25
15	Temperature Chamber	SH-241	ESPECs	92007516	2017-11-29
16	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2017-11-22

### **Test software**

ltem	Name	Vesion
Radiated	EMC32	Version 10.01.00



# **ANNEX A: MEASUREMENT RESULTS**

### A.1 OUTPUT POWER

### Reference

FCC: 22.913(a), 24.232(c), 27.50(h)(2).

### A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

#### A.1.2 Conducted

#### A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

### A.1.2.2 Measurement result

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
bandwidin	RD SIZE/OIISEL	Frequency (MHZ)	QPSK	16QAM
		1909.3	22.53	21.81
	1 RB high	1880.0	22.22	21.51
		1850.7	22.48	21.65
		1909.3	22.53	21.84
	1 RB low	1880.0	22.20	21.51
1.4MHz		1850.7	22.42	21.62
		1909.3	22.59	21.63
	50% RB mid	1880.0	22.25	21.26
		1850.7	22.40	21.48
	100% RB	1909.3	21.67	20.75
		1880.0	21.26	20.40
		1850.7	21.58	20.65
		1908.5	22.51	21.82
	1 RB high	1880.0	22.17	21.46
		1851.5	22.50	21.65
		1908.5	22.51	21.84
3MHz	1 RB low	1880.0	22.19	21.48
		1851.5	22.46	21.60
		1908.5	21.64	20.74
	50% RB mid	1880.0	21.25	20.38
		1851.5	21.59	20.61



	T	1000 E	04.65	20.60
	1000/ DD	1908.5	21.65	20.69
	100% RB	1880.0	21.25	20.33
		1851.5	21.62	20.61
		1907.5	22.55	21.87
	1 RB high	1880.0	22.23	21.54
		1852.5	22.53	21.72
		1907.5	22.54	21.82
	1 RB low	1880.0	22.27	21.58
5MHz		1852.5	22.56	21.70
		1907.5	21.29	20.39
	50% RB mid	1880.0	21.29	20.38
		1852.5	21.43	20.59
	_	1907.5	21.35	20.46
	100% RB	1880.0	21.24	20.30
	1	1852.5	21.48	20.58
		1905.0	22.32	21.56
	1 RB high	1880.0	22.21	21.52
		1855.0	22.27	21.60
	1 RB low	1905.0	21.82	21.13
		1880.0	22.29	21.61
10MHz		1855.0	22.06	21.37
1011112	<u> </u>	1905.0	21.00	20.30
	50% RB mid	1880.0	21.24	20.30
		1855.0	21.53	20.57
		1905.0	21.10	20.38
	100% RB	1880.0	21.27	20.34
		1855.0	21.53	20.60
		1902.5	22.24	21.41
	1 RB high	1880.0	22.29	21.62
		1857.5	22.58	21.81
		1902.5	22.41	21.71
	1 RB low	1880.0	22.34	21.66
		1857.5	22.41	21.69
15MHz		1902.5	22.39	21.34
	50% RB mid	1880.0	22.36	21.34
	50% KD IIIIQ			
		1857.5	22.57	21.58
	_	1902.5	21.34	20.39
	100% RB	1880.0	21.30	20.37
		1857.5	21.62	20.64
20MHz	1 RB high	1900.0	22.50	21.88



	1880.0	22.22	21.51
	1860.0	22.26	21.56
	1900.0	22.32	21.63
1 RB low	1880.0	22.35	21.64
	1860.0	22.64	21.76
	1900.0	21.44	20.44
50% RB mid	1880.0	21.21	20.30
	1860.0	21.49	20.55
	1900.0	21.43	20.50
100% RB	1880.0	21.23	20.30
	1860.0	21.48	20.52



Pandwidth	RB size/offset	Fraguency (MLI-7)	Powe	r(dBm)
Bandwidth	RB SIZE/Offset	Frequency (MHz)	QPSK	16QAM
		1754.3	21.96	21.24
	1 RB high	1732.5	22.52	21.69
		1710.7	22.74	21.87
		1754.3	21.99	21.33
	1 RB low	1732.5	22.54	21.70
1.4MHz		1710.7	22.74	21.85
1. <del>4</del> IVI⊓∠		1754.3	21.86	21.01
	50% RB mid	1732.5	22.60	21.56
		1710.7	22.81	16QAM 21.24 21.69 21.87 21.33 21.70 21.85 21.01
		1754.3	21.05	20.30
	100% RB	1732.5	21.61	20.64
		1710.7	21.81	20.82
		1753.5	21.93	21.22
	1 RB high	1732.5	22.48	21.65
		1711.5	22.68	21.80
	1 RB low	1753.5	22.18	21.54
		1732.5	22.51	21.68
ONALL		1711.5	22.71	21.83
3MHz	50% RB mid	1753.5	21.17	20.35
		1732.5	21.60	20.62
		1711.5	21.81	20.80
		1753.5	21.18	20.35
	100% RB	1732.5	21.60	20.58
		1711.5	21.81	20.77
		1752.5	21.87	21.18
	1 RB high	1732.5	22.53	21.73
		1712.5	22.75	21.87
		1752.5	22.55	21.72
	1 RB low	1732.5	22.52	21.76
<b>-14</b> 1		1712.5	22.79	21.91
5MHz		1752.5	21.00	20.19
	50% RB mid	1732.5	21.61	20.61
		1712.5	21.83	
		1752.5	21.08	20.36
	100% RB	1732.5	21.58	
		1712.5	21.79	
	,	1750.0	21.41	20.72
10MHz	1 RB high	1732.5	22.55	21.72



		1715.0	21.91	21.32
		1750.0	22.69	21.84
	1 RB low	1732.5	21.82	21.24
		1715.0	22.84	21.95
		1750.0	21.53	20.57
	50% RB mid	1732.5	21.61	20.58
		1715.0	21.80	20.75
		1750.0	21.61	20.61
	100% RB	1732.5	21.60	20.59
		1715.0	21.80	20.76
		1747.5	22.68	21.83
	1 RB high	1732.5	22.30	21.65
		1717.5	22.81	21.91
		1747.5	22.68	21.84
	1 RB low	1732.5	22.02	21.40
45841-		1717.5	22.86	21.95
15MHz	50% RB mid	1747.5	22.75	21.64
		1732.5	22.06	21.22
		1717.5	22.89	21.77
		1747.5	21.69	20.65
	100% RB	1732.5	21.20	20.42
		1717.5	21.84	20.78
		1745.0	21.88	20.99
	1 RB high	1732.5	22.60	21.74
		1720.0	21.97	21.32
		1745.0	22.63	21.82
	1 RB low	1732.5	22.30	21.61
201411-		1720.0	22.86	21.96
20MHz		1745.0	21.66	20.64
	50% RB mid	1732.5	21.62	20.61
		1720.0	21.55	20.73
		1745.0	21.62	20.59
	100% RB	1732.5	21.61	20.58
		1720.0	21.77	20.74



Pandwidth	RB size/offset	DR size/offset   Frequency (MHz)	Power(dBm)	
Bandwidth	RB SIZE/Offset	Frequency (MHz)	QPSK	16QAM
		848.3	22.17	21.52
	1 RB high	836.5	22.47	21.88
		824.7	22.50	21.81
		848.3	22.14	21.46
	1 RB low	836.5	22.48	21.90
1.4MHz		824.7	22.49	21.76
1.4111112		848.3	22.20	21.27
	50% RB mid	836.5	22.52	21.66
		824.7	22.54	21.58
		848.3	21.28	20.40
	100% RB	836.5	21.59	20.73
		824.7	21.59	20.67
		847.5	22.14	21.51
	1 RB high	836.5	22.43	21.85
		825.5	22.49	21.77
	1 RB low	847.5	22.11	21.39
		836.5	22.47	21.89
3MHz		825.5	22.47	21.76
3IVITZ	50% RB mid	847.5	21.27	20.38
		836.5	21.65	20.76
		825.5	21.62	20.69
		847.5	21.24	20.34
	100% RB	836.5	21.63	20.70
		825.5	21.61	20.64
		846.5	22.19	21.57
	1 RB high	836.5	22.47	21.87
		826.5	22.56	21.89
		846.5	22.30	21.61
	1 RB low	836.5	22.54	21.94
5N4!-		826.5	22.56	21.81
5MHz		846.5	21.33	20.36
	50% RB mid	836.5	21.65	20.73
		826.5	21.66	20.68
		846.5	21.27	20.30
	100% RB	836.5	21.58	20.65
		826.5	21.62	20.64
408411	4.00.111	844.0	22.23	21.62
10MHz	1 RB high	836.5	22.48	21.84



	829.0	22.59	21.99
	844.0	22.50	21.90
1 RB low	836.5	22.59	21.94
	829.0	22.56	21.87
	844.0	21.42	20.43
50% RB mid	836.5	21.59	20.66
	829.0	21.66	20.68
	844.0	21.43	20.46
100% RB	836.5	21.59	20.64
	829.0	21.68	20.69



Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
bandwidth	RD SIZE/OIISEL	Frequency (MHZ)	QPSK	16QAM
		2567.5	21.30	20.50
	1 RB high	2535.0	22.93	22.12
		2502.5	22.71	21.88
		2567.5	22.07	21.34
	1 RB low	2535.0	22.91	22.09
5MHz		2502.5	22.81	21.96
JIVII IZ		2567.5	20.42	20.46
	50% RB mid	2535.0	22.05	21.04
		2502.5	21.83	20.46
		2567.5	20.48	20.38
	100% RB	2535.0	22.02	20.99
		2502.5	21.87	20.83
		2565.0	21.10	20.36
	1 RB high	2535.0	22.89	22.11
		2505.0	22.74	21.99
	1 RB low	2565.0	22.53	21.72
		2535.0	22.95	22.14
10MHz		2505.0	22.70	21.98
TOWNIZ	50% RB mid	2565.0	21.12	20.33
		2535.0	22.08	21.04
		2505.0	21.92	20.86
		2565.0	21.12	20.36
	100% RB	2535.0	22.12	21.08
		2505.0	21.95	20.90
		2562.5	22.97	22.12
	1 RB high	2535.0	23.09	22.28
		2507.5	22.93	22.10
		2562.5	23.07	22.23
	1 RB low	2535.0	22.98	22.19
		2507.5	22.94	22.07
15MHz		2562.5	23.05	22.01
	50% RB mid	2535.0	23.08	22.03
	0070 RB IIIId	2507.5	22.98	21.90
		2562.5	22.99	21.90
	4000/ DD			
	100% RB	2535.0	22.11	21.05
		2507.5	22.04	20.95
20MHz	1 RB high	2560.0	22.86	21.47



	2535.0	23.32	22.54
	2510.0	23.05	22.29
	2560.0	23.22	22.45
1 RB low	2535.0	23.04	22.25
	2510.0	23.07	22.18
	2560.0	22.19	21.18
50% RB mid	2535.0	22.25	21.21
	2510.0	22.09	21.01
	2560.0	22.18	21.15
100% RB	2535.0	22.23	21.19
	2510.0	22.09	21.02



Bandwidth	RB size/offset	Frequency (MLL-)	Power(dBm)		
Bandwidin	RB SIZE/OIISEL	Frequency (MHz)	QPSK	16QAM	
		715.3	22.66	22.00	
	1 RB high	707.5	22.49	21.86	
		699.7	22.81	22.16	
		715.3	22.63	21.95	
	1 RB low	707.5	22.48	21.85	
1.4MHz		699.7	22.78	22.14	
1.4WITZ		715.3	22.72	21.79	
	50% RB mid	707.5	22.54	21.66	
		699.7	22.84	21.94	
		715.3	21.80	20.91	
	100% RB	707.5	21.61	20.71	
		699.7	21.93	21.03	
		714.5	22.64	21.99	
	1 RB high	707.5	22.47	21.87	
		700.5	23.20	22.52	
	1 RB low	714.5	22.78	22.10	
		707.5	22.46	21.86	
3MHz		700.5	22.75	22.12	
SIVITIZ	50% RB mid	714.5	21.77	20.87	
		707.5	21.63	20.74	
		700.5	22.06	21.16	
		714.5	21.80	20.84	
	100% RB	707.5	21.60	20.65	
		700.5	22.08	21.11	
		713.5	22.69	22.05	
	1 RB high	707.5	22.54	21.93	
		701.5	22.63	22.01	
		713.5	22.53	21.90	
	1 RB low	707.5	22.52	21.90	
5MHz		701.5	22.78	22.15	
SIVITZ		713.5	21.91	20.95	
	50% RB mid	707.5	21.66	20.70	
		701.5	21.99	21.20	
		713.5	21.77	20.80	
	100% RB	707.5	21.60	20.64	
		701.5	22.00	21.05	
10MHz	1 DR high	711.0	22.69	22.08	
IUIVIMZ	1 RB high	707.5	22.68	22.03	



	704.0	22.62	21.97
	711.0	22.52	21.90
1 RB low	707.5	22.62	21.96
	704.0	22.78	22.15
	711.0	21.74	20.73
50% RB mid	707.5	21.63	20.64
	704.0	21.78	20.85
	711.0	21.75	20.75
100% RB	707.5	21.69	20.69
	704.0	21.85	20.86



Bandwidth	RB size/offset	Frequency (MHz)	Power	r(dBm)
Danuwidin	RD SIZE/OIISEL	Frequency (MHz)	QPSK	16QAM
		784.5	22.50	21.81
	1 RB high	782.0	22.30	21.66
		779.5	22.24	21.49
		784.5	22.29	21.59
	1 RB low	782.0	22.26	21.62
5MHz		779.5	22.34	21.53
SIVIEZ		784.5	21.48	20.55
	50% RB mid	782.0	21.37	20.39
		779.5	21.41	20.40
	100% RB	784.5	21.48	20.56
		782.0	21.36	20.38
		779.5	21.35	20.33
	1 RB high	782.0	22.49	21.85
		782.0	22.51	21.83
		782.0	22.53	21.85
		782.0	22.29	21.57
	1 RB low	782.0	22.30	21.58
10MHz		782.0	22.31	21.58
ΙΟΙΝΙΠΖ		782.0	21.33	20.37
	50% RB mid	782.0	21.33	20.38
		782.0	21.34	20.38
		782.0	21.43	20.47
	100% RB	782.0	21.38	20.47
		782.0	21.38	20.47



D a sa alvo della	DD size/offset		Power	r(dBm)
Bandwidth	RB size/offset	Frequency (MHz)	QPSK	16QAM
		713.5	22.54	21.92
	1 RB high	710.0	22.45	21.81
		706.5	22.39	21.77
		713.5	22.42	21.82
	1 RB low	710.0	22.38	21.77
5MHz		706.5	22.47	21.86
SIVITZ		713.5	21.65	20.67
	50% RB mid	710.0	21.56	20.58
		706.5	21.94	20.98
	100% RB	713.5	21.60	20.61
		710.0	21.50	20.52
		706.5	21.67	20.70
	1 RB high	711.0	22.61	21.98
		710.0	22.59	21.94
		709.0	22.55	21.90
		711.0	22.94	22.32
	1 RB low	710.0	22.61	22.01
10MHz		709.0	22.44	21.85
IUIVIE		711.0	21.53	20.54
	50% RB mid	710.0	21.50	20.51
		709.0	21.55	20.57
		711.0	21.60	20.61
	100% RB	710.0	21.64	20.65
		709.0	21.63	20.64



Bandwidth	RB size/offset	offset Frequency (MHz)	Power(dBm)		
Bandwidth	RB SIZE/Offset	Frequency (MHZ)	QPSK	16QAM	
		1914.3	21.90	21.16	
	1 RB high	1882.5	22.11	21.35	
		1850.7	22.46	21.50	
		1914.3	22.23	21.34	
	1 RB low	1882.5	22.11	21.35	
1.4MHz		1850.7	22.46	21.49	
1.71/11 12		1914.3	22.00	21.15	
	50% RB mid	1882.5	22.17	21.13	
		1850.7	22.49	21.37	
		1914.3	21.25	20.34	
	100% RB	1882.5	21.17	20.39	
		1850.7	21.53	20.51	
		1913.5	21.85	21.16	
	1 RB high	1882.5	22.07	21.32	
		1851.5	22.39	21.48	
	1 RB low	1913.5	22.35	21.46	
		1882.5	22.09	21.32	
2001		1851.5	22.45	21.47	
3MHz	50% RB mid	1913.5	21.37	20.37	
		1882.5	21.15	20.34	
		1851.5	21.51	20.49	
		1913.5	21.38	20.38	
	100% RB	1882.5	21.16	20.31	
		1851.5	21.52	20.48	
		1912.5	21.83	21.14	
	1 RB high	1882.5	22.07	21.29	
		1852.5	22.39	21.51	
		1912.5	22.49	21.66	
	1 RB low	1882.5	22.17	21.40	
5N41-		1852.5	22.52	21.53	
5MHz		1912.5	21.44	20.45	
	50% RB mid	1882.5	21.19	20.34	
		1852.5	21.53	20.49	
		1912.5	21.43	20.41	
	100% RB	1882.5	21.17	20.37	
		1852.5	21.51	20.46	
400411-	1 DD h:h	1910.0	21.46	20.79	
10MHz	1 RB high	1882.5	22.14	21.36	



		1855.0	22.35	21.53
		1910.0	22.31	21.62
	1 RB low	1882.5	22.19	21.45
		1855.0	22.14	21.48
		1910.0	21.52	20.54
	50% RB mid	1882.5	21.16	20.30
		1855.0	21.50	20.47
		1910.0	21.52	20.55
	100% RB	1882.5	21.20	20.34
		1855.0	21.51	20.49
		1907.5	22.48	21.70
	1 RB high	1882.5	22.21	21.46
		1857.5	22.54	21.70
		1907.5	22.40	21.65
	1 RB low	1882.5	22.24	21.49
45141-		1857.5	22.38	21.61
15MHz	50% RB mid	1907.5	22.37	21.35
		1882.5	22.24	21.23
		1857.5	22.58	21.47
	100% RB	1907.5	21.33	20.43
		1882.5	21.20	20.35
		1857.5	21.58	20.55
		1905.0	21.93	21.18
	1 RB high	1882.5	22.15	21.37
		1860.0	22.18	21.42
		1905.0	22.33	21.57
	1 RB low	1882.5	22.26	21.52
201411-		1860.0	22.52	21.62
20MHz		1905.0	21.48	20.54
	50% RB mid	1882.5	21.16	20.31
		1860.0	21.45	20.47
		1905.0	21.44	20.49
	100% RB	1882.5	21.19	20.32
		1860.0	21.42	20.43



Bandwidth	RB size/offset	Frequency (MHz)	Power	(dBm)
Danuwiuti	ND SIZE/UIISET	inequency (MITZ)	QPSK	16QAM
		848.3	22.15	21.47
	1 RB high	831.5	22.50	21.83
		814.7	22.41	21.70
		848.3	22.13	21.45
	1 RB low	831.5	22.50	21.83
1.4MHz		814.7	22.40	21.70
1.7111112		848.3	22.21	21.29
	50% RB mid	831.5	22.57	21.63
		814.7	22.47	21.51
		848.3	21.30	20.41
	100% RB	831.5	21.65	20.76
		814.7	21.53	20.62
		847.5	22.11	21.47
	1 RB high	831.5	22.46	21.80
		815.5	22.95	22.07
	1 RB low	847.5	22.11	21.41
		831.5	22.47	21.76
OMI I-		815.5	22.99	22.06
3MHz	50% RB mid	847.5	21.26	20.37
		831.5	21.64	20.76
		815.5	22.07	21.08
		847.5	21.26	20.31
	100% RB	831.5	21.62	20.68
		815.5	22.09	21.06
		846.5	22.13	21.47
	1 RB high	831.5	22.45	21.83
		816.5	22.41	21.77
		846.5	22.26	21.56
	1 RB low	831.5	22.53	21.83
5M⊔~		816.5	22.43	21.73
5MHz		846.5	21.31	20.34
	50% RB mid	831.5	21.68	20.73
		816.5	21.57	20.60
		846.5	21.28	20.30
	100% RB	831.5	21.63	20.67
		816.5	21.52	20.55
10141-	1 DD biab	844.0	22.19	21.52
10MHz	1 RB high	831.5	22.54	21.93



		820.0	22.53	21.83
		844.0	22.54	21.90
	1 RB low	831.5	22.56	21.83
		820.0	22.45	21.77
		844.0	21.37	20.38
	50% RB mid	831.5	21.64	20.69
		820.0	21.55	20.56
		844.0	21.41	20.44
	100% RB	831.5	21.66	20.70
		820.0	21.59	20.59
	1 RB high	841.5	22.60	21.98
		831.5	22.62	21.92
		822.5	22.55	21.84
		841.5	22.59	21.96
	1 RB low	831.5	22.57	21.88
15MHz		822.5	22.48	21.78
IOIVIEZ		841.5	22.67	21.76
	50% RB mid	831.5	22.67	21.68
		822.5	22.58	21.62
		841.5	21.66	20.73
	100% RB	831.5	21.69	20.68
		822.5	21.57	20.57



Bandwidth	RB size/offset	Fraguency (MUz)	Power	ver(dBm)	
Bandwidth	RB SIZE/Offset	Frequency (MHz)	QPSK	16QAM	
		2617.5	22.22	21.47	
	1 RB high	2595.0	22.26	21.48	
		2572.5	22.31	21.47	
		2617.5	22.17	21.51	
	1 RB low	2595.0	22.25	21.44	
5MHz		2572.5	22.32	21.46	
JIVII IZ		2617.5	21.38	20.53	
	50% RB mid	2595.0	21.31	20.48	
		2572.5	21.39	20.42	
		2617.5	21.32	20.46	
	100% RB	2595.0	21.29	20.43	
		2572.5	21.35	20.41	
		2615.0	22.27	21.53	
	1 RB high	2595.0	22.24	21.51	
		2575.0	22.33	21.48	
		2615.0	22.19	21.45	
	1 RB low	2595.0	22.25	21.44	
10MHz		2575.0	22.35	21.50	
TOWN IZ		2615.0	21.26	20.50	
	50% RB mid	2595.0	21.32	20.42	
		2575.0	21.39	20.42	
		2615.0	21.34	20.53	
	100% RB	2595.0	21.31	20.45	
		2575.0	21.37	20.40	
		2612.5	22.19	21.51	
	1 RB high	2595.0	22.26	21.46	
		2577.5	22.35	21.50	
		2612.5	22.19	21.50	
	1 RB low	2595.0	22.27	21.47	
		2577.5	22.35	21.50	
15MHz		2612.5	22.24	21.39	
	50% RB mid	2595.0	22.31	21.34	
	5576 RB IIIIG	2577.5	22.36	21.37	
	4000/ DD	2612.5	21.31	20.44	
	100% RB	2595.0	21.33	20.50	
		2577.5	21.40	20.42	
20MHz	1 RB high	2610.0	22.28	21.56	



		2595.0	22.29	21.57
		2580.0	22.30	21.51
		2610.0	22.21	21.48
	1 RB low	2595.0	22.31	21.48
		2580.0	22.36	21.51
	50% RB mid	2610.0	21.30	20.46
		2595.0	21.36	20.46
		2580.0	21.37	20.41
		2610.0	21.27	20.39
		2595.0	21.38	20.50
		2580.0	21.40	20.41



#### A.1.3 Radiated

### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 22.913(a) specifies "Mobile stations are limited to 2.0 watts EIRP.".

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP.".


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603-D-2010 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

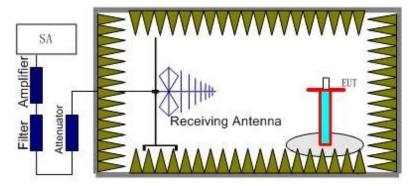

- 2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
- 3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

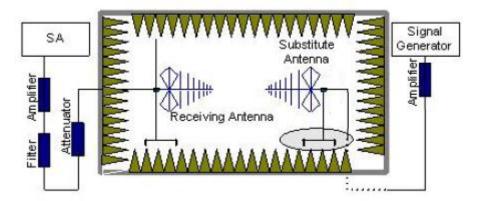

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the



substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss  $(P_{cl})$ , the substitution antenna Gain  $(G_a)$  and the amplifier Gain  $(P_{Ag})$  should be recorded after test.

The measurement results are obtained as described below:

Power (EIRP) =  $P_{Mea} - P_{Ag} - P_{cl} + G_a$ 

- 5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
- 6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15.



### A.1.3.3 Measurement result

LTE Band 2- EIRP 24. 232(c)

**Limits:** ≤33dBm (2W)

### LTE Band 2\_1.4MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-7.3	-29.4	0.15	22.25	33.00	I
1880.00	-7.73	-29.3	0.25	21.82	33.00	I
1909.30	-7.36	-29.3	0.35	22.29	33.00	I

### LTE Band 2\_3MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-6.53	-29.4	0.15	23.02	33.00	Η
1880.00	-7.84	-29.3	0.25	21.71	33.00	Н
1908.50	-7.48	-29.3	0.35	22.17	33.00	Н

### LTE Band 2\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-7.25	-29.4	0.15	22.30	33.00	Н
1880.00	-6.91	-29.3	0.25	22.64	33.00	Н
1907.50	-4.87	-29.3	0.35	24.78	33.00	Н

### LTE Band 2\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-7.28	-29.4	0.15	22.27	33.00	Н
1880.00	-6.33	-29.3	0.25	23.22	33.00	Н
1905.00	-5.52	-29.3	0.35	24.13	33.00	Н

### LTE Band 2\_15MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-7.4	-29.4	0.15	22.15	33.00	Н
1880.00	-7.31	-29.3	0.25	22.24	33.00	Η
1902.50	-5.85	-29.3	0.35	23.80	33.00	Н

### LTE Band 2\_20 MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-7.3	-29.4	0.15	22.25	33.00	Н
1880.00	-6.88	-29.3	0.25	22.67	33.00	Н
1900.00	-6.78	-29.3	0.35	22.87	33.00	Н



## LTE Band 2\_1.4MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-7.14	-29.4	0.15	22.41	33.00	Н
1880.00	-7.28	-29.3	0.25	22.27	33.00	Н
1909.30	-7.55	-29.3	0.35	22.10	33.00	Н

## LTE Band 2\_3MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-7.14	-29.4	0.15	22.41	33.00	Н
1880.00	-7.16	-29.3	0.25	22.39	33.00	Н
1908.50	-7.4	-29.3	0.35	22.25	33.00	Н

## LTE Band 2\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-7.35	-29.4	0.15	22.20	33.00	Н
1880.00	-7.2	-29.3	0.25	22.35	33.00	Н
1907.50	-7.38	-29.3	0.35	22.27	33.00	Н

## LTE Band 2\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-7.39	-29.4	0.15	22.16	33.00	Н
1880.00	-7.28	-29.3	0.25	22.27	33.00	Н
1905.00	-7.28	-29.3	0.35	22.37	33.00	Н

#### LTE Band 2\_15MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-7.24	-29.4	0.15	22.31	33.00	Н
1880.00	-7.65	-29.3	0.25	21.90	33.00	Η
1902.50	-7.61	-29.3	0.35	22.04	33.00	Η

## LTE Band 2\_20 MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-7.08	-29.4	0.15	22.47	33.00	Н
1880.00	-8.15	-29.3	0.25	21.40	33.00	Н
1900.00	-6.75	-29.3	0.35	22.90	33.00	Н

Peak EIRP (dBm)= $P_{Mea}(-4.87dBm)-(P_{cl}+P_{Ag})$  (-29.30dB)+ $G_a(0.35dB)$  =24.78dBm



# LTE Band 4- EIRP 27.50(d)

**Limits:** ≤30dBm (1W)

## LTE Band 4\_1.4MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-7.74	-29.60	0.39	22.25	30.00	Н
1732.50	-7.10	-29.60	0.27	22.78	30.00	Н
1754.30	-5.65	-29.50	0.17	24.03	30.00	Н

## LTE Band 4\_3MHz\_QPSK

Ī	Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
	1711.50	-7.86	-29.60	0.39	22.13	30.00	Н
ſ	1732.50	-5.85	-29.60	0.27	24.03	30.00	Н
Ī	1753.50	-6.57	-29.50	0.17	23.11	30.00	Н

## LTE Band 4\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-7.59	-29.60	0.39	22.40	30.00	Н
1732.50	-6.12	-29.60	0.27	23.75	30.00	Н
1752.50	-6.17	-29.50	0.17	23.50	30.00	Н

## LTE Band 4\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-7.93	-29.60	0.39	22.06	30.00	Н
1732.50	-6.93	-29.60	0.27	22.94	30.00	Η
1750.50	-6.45	-29.50	0.17	23.22	30.00	Η

# LTE Band 4\_15MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-7.87	-29.60	0.39	22.13	30.00	Н
1732.50	-7.63	-29.60	0.27	22.24	30.00	Н
1747.50	-6.85	-29.50	0.17	22.82	30.00	Н

# LTE Band 4\_20MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-7.50	-29.60	0.39	22.49	30.00	Н
1732.50	-7.60	-29.60	0.27	22.27	30.00	Н
1745.00	-7.13	-29.50	0.17	22.54	30.00	Н



#### LTE Band 4\_1.4MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-7.77	-29.60	0.39	22.22	30.00	Н
1732.50	-5.89	-29.60	0.27	23.98	30.00	Н
1754.30	-6.24	-29.50	0.17	23.43	30.00	Н

## LTE Band 4\_3MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-7.71	-29.60	0.39	22.28	30.00	Н
1732.50	-5.59	-29.60	0.27	24.28	30.00	Н
1753.50	-6.37	-29.50	0.17	23.30	30.00	Н

## LTE Band 4\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-7.70	-29.60	0.39	22.29	30.00	Н
1732.50	-6.35	-29.60	0.27	23.52	30.00	Н
1752.50	-6.50	-29.50	0.17	23.17	30.00	Н

## LTE Band 4\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-8.05	-29.60	0.39	21.94	30.00	Н
1732.50	-6.69	-29.60	0.27	23.18	30.00	Н
1750.50	-6.37	-29.50	0.17	23.30	30.00	Η

#### LTE Band 4 15MHz 16QAM

_	_					
Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-8.09	-29.60	0.39	21.90	30.00	Н
1732.50	-7.36	-29.60	0.27	22.51	30.00	Н
1747.50	-7.04	-29.50	0.17	22.63	30.00	Н

## LTE Band 4\_20MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-8.47	-29.60	0.39	21.52	30.00	Н
1732.50	-7.23	-29.60	0.27	22.64	30.00	Н
1745.00	-7.40	-29.50	0.17	22.27	30.00	Н

 $Peak \; EIRP \; (dBm) = P_{Mea}(-5.59dBm) - \; (\; P_{cl} + P_{Ag}) \; \; (-29.60dB) + G_a(0.27dB) \; = 24.28dBm \; \; (\; P_{cl} + P_{Ag}) \; \; (\; P_{cl} + P_$ 



# LTE Band 5- ERP 22.913(a) Limits: ≤38.45dBm (7W) LTE Band 5\_1.4MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-10.56	-33.60	0.28	2.15	21.17	38.45	Н
836.50	-9.05	-33.50	0.25	2.15	22.55	38.45	Н
848.30	-8.62	-33.50	0.21	2.15	22.95	38.45	Н

## LTE Band 5\_3MHz\_QPSK

_	_						
Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-9.80	-33.60	0.28	2.15	21.93	38.45	Н
836.50	-9.38	-33.50	0.25	2.15	22.22	38.45	Н
847.50	-8.55	-33.50	0.21	2.15	23.01	38.45	Н

## LTE Band 5\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-10.16	-33.60	0.28	2.15	21.57	38.45	Н
836.50	-9.83	-33.50	0.25	2.15	21.77	38.45	Н
846.50	-9.27	-33.50	0.21	2.15	22.29	38.45	Н

# LTE Band 5\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-9.84	-33.60	0.28	2.15	21.89	38.45	Н
836.50	-9.79	-33.50	0.25	2.15	21.81	38.45	Н
844.00	-9.79	-33.50	0.21	2.15	21.35	38.45	Н



## LTE Band 5\_1.4MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-10.59	-33.60	0.28	2.15	21.15	38.45	Н
836.50	-9.67	-33.50	0.25	2.15	21.93	38.45	Н
848.30	-8.89	-33.50	0.21	2.15	22.67	38.45	Н

## LTE Band 5\_3MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-10.24	-33.60	0.28	2.15	21.49	38.45	Н
836.50	-9.61	-33.50	0.25	2.15	21.99	38.45	Н
847.50	-8.54	-33.50	0.21	2.15	23.02	38.45	Н

## LTE Band 5\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-9.90	-33.60	0.28	2.15	21.83	38.45	Н
836.50	-9.27	-33.50	0.25	2.15	22.33	38.45	Н
846.50	-8.54	-33.50	0.21	2.15	23.02	38.45	Н

## LTE Band 5\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-10.70	-33.60	0.28	2.15	21.03	38.45	Н
836.50	-8.85	-33.50	0.25	2.15	22.75	38.45	Н
844.00	-9.72	-33.50	0.21	2.15	21.84	38.45	Н

Peak ERP (dBm)= $P_{Mea}$ (-8.54dBm)- ( $P_{cl}+P_{Ag}$ ) (-33.50dB)+ $G_a$ (0.21dB) -2.15dB =23.02dBm



## LTE Band 7- EIRP 27.50(h)(2)

**Limits**: ≤33 dBm (2W) **LTE Band 7\_5MHz\_QPSK** 

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-4.86	-28.70	0.59	24.43	33.00	Н
2535.00	-3.38	-28.60	0.45	25.67	33.00	Н
2567.50	-2.16	-28.60	-0.01	26.43	33.00	н

## LTE Band 7\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-5.12	-28.70	0.59	24.17	33.00	Н
2535.00	-3.72	-28.60	0.45	25.33	33.00	Н
2565.00	-2.81	-28.60	-0.01	25.78	33.00	Н

# LTE Band 7\_15MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-5.52	-28.70	0.59	23.77	33.00	Н
2535.00	-4.29	-28.60	0.45	24.76	33.00	Н
2562.50	-4.26	-28.60	-0.01	24.33	33.00	Н

## LTE Band 7\_20MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-6.28	-28.70	0.59	23.01	33.00	Н
2535.00	-5.97	-28.60	0.45	23.08	33.00	Н
2560.00	-4.64	-28.60	-0.01	23.96	33.00	Н



## LTE Band 7\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Pcl(dB)+ PAg(dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-4.73	-28.70	0.59	24.56	33.00	Н
2535.00	-3.05	-28.60	0.45	26.00	33.00	Н
2567.50	-2.42	-28.60	-0.01	26.17	33.00	Н

## LTE Band 7\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-4.98	-28.70	0.59	24.31	33.00	Н
2535.00	-3.29	-28.60	0.45	25.76	33.00	Н
2565.00	-2.95	-28.60	-0.01	25.64	33.00	Н

## LTE Band 7\_15MHz\_16QAM

<del></del>	_					
Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-6.38	-28.70	0.59	22.91	33.00	Н
2535.00	-4.84	-28.60	0.45	24.22	33.00	Н
2562.50	-3.73	-28.60	-0.01	24.86	33.00	Н

## LTE Band 7\_20MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-6.31	-28.70	0.59	22.99	33.00	Н
2535.00	-5.32	-28.60	0.45	23.73	33.00	Н
2560.00	-4.52	-28.60	-0.01	24.07	33.00	Н

Peak EIRP (dBm)= $P_{Mea}$ (-2.16dBm)- ( $P_{cl}+P_{Ag}$ ) (-28.60dB)+ $G_a$ (-0.01dB) -2.15dB =26.43dBm



## LTE Band 12 - ERP 27.50(c)(10)

Limits: ≤34.77dBm (3W) LTE Band 12\_1.4MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-23.40	1.90	-44.66	-0.77	2.15	17.98	34.77	Н
707.50	-23.95	1.91	-44.94	-0.62	2.15	17.55	34.77	Н
715.30	-24.16	1.92	-45.26	-0.50	2.15	17.53	34.77	Н

## LTE Band 12\_3MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-23.58	1.90	-44.68	-0.76	2.15	17.81	34.77	Н
707.50	-23.72	1.91	-44.94	-0.62	2.15	17.78	34.77	Н
714.50	-24.08	1.92	-45.26	-0.50	2.15	17.61	34.77	Н

## LTE Band 12\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-23.98	1.90	-44.81	-0.74	2.15	17.52	34.77	Н
707.50	-24.20	1.91	-44.94	-0.62	2.15	17.30	34.77	Н
713.50	-23.64	1.92	-45.22	-0.50	2.15	18.01	34.77	Н

## LTE Band 12\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-24.92	1.91	-44.93	-0.70	2.15	16.65	34.77	Н
707.50	-24.43	1.91	-44.94	-0.62	2.15	17.07	34.77	Н
711.00	-22.88	1.92	-45.19	-0.53	2.15	18.77	34.77	Н



## LTE Band 12\_1.4MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-24.25	1.90	-44.66	-0.77	2.15	17.13	34.77	Н
707.50	-24.90	1.91	-44.94	-0.62	2.15	16.60	34.77	Н
715.30	-25.05	1.92	-45.26	-0.50	2.15	16.64	34.77	Н

## LTE Band 12\_3MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-24.50	1.90	-44.68	-0.76	2.15	16.89	34.77	Н
707.50	-24.52	1.91	-44.94	-0.62	2.15	16.98	34.77	Н
714.50	-24.93	1.92	-45.26	-0.50	2.15	16.76	34.77	Н

## LTE Band 12\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-24.76	1.90	-44.81	-0.74	2.15	16.74	34.77	Н
707.50	-25.09	1.91	-44.94	-0.62	2.15	16.41	34.77	Н
713.50	-24.31	1.92	-45.22	-0.50	2.15	17.34	34.77	Н

## LTE Band 12\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-25.74	1.91	-44.93	-0.70	2.15	15.83	34.77	Н
707.50	-25.21	1.91	-44.94	-0.62	2.15	16.29	34.77	Н
711.00	-23.81	1.92	-45.19	-0.53	2.15	17.84	34.77	Н

 $\label{eq:peak_error} Peak\; ERP\; (dBm) = P_{Mea}(-22.88dBm) - Cable\; Loss(1.92) - (\,P_{cl} + P_{Ag}\,)\; (-45.19dB) - G_a(-0.53dB)\; -2.15dB\; = 18.77dBm$ 



# LTE Band 13- ERP 27.50(b)(10)

Limits: ≤34.77dBm (3W) LTE Band 13\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-9.76	-34.00	0.28	2.15	22.38	34.77	Н
782.00	-9.57	-34.00	0.25	2.15	22.53	34.77	Н
784.50	-8.52	-34.10	0.26	2.15	23.70	34.77	Н

## LTE Band 13\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-9.51	-34.00	0.25	2.15	22.62	34.77	Н
782.00	-9.48	-34.00	0.25	2.15	22.62	34.77	Н
782.00	-9.49	-34.00	0.25	2.15	22.62	34.77	Н

## LTE Band 13\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-9.54	-34.00	0.28	2.15	22.59	34.77	Н
782.00	-9.81	-34.00	0.25	2.15	22.29	34.77	Н
784.50	-9.80	-34.10	0.26	2.15	22.41	34.77	Н

## LTE Band 13\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-9.88	-34.00	0.25	2.15	22.25	34.77	Н
782.00	-9.85	-34.00	0.25	2.15	22.25	34.77	Н
782.00	-9.86	-34.00	0.25	2.15	22.25	34.77	Н

 $Peak \; ERP \; (dBm) = P_{Mea}(-8.52dBm) - \; (P_{cl} + P_{Ag}) \; \; (-34.10dB) + G_a(0.26dB) \; -2.15dB \; = 23.70dBm$ 



## LTE Band 17- ERP 27.50(c)(10)

Limits: ≤34.77dBm (3W) LTE Band 17\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
706.50	-25.66	1.91	-45.53	-0.66	2.15	16.48	34.77	Н
710.00	-23.52	1.92	-45.68	-0.54	2.15	18.63	34.77	Н
713.50	-23.64	1.92	-45.22	-0.50	2.15	18.01	34.77	Н

## LTE Band 17\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
709.00	-23.64	1.92	-45.64	-0.57	2.15	18.50	34.77	Н
710.00	-23.50	1.92	-45.68	-0.54	2.15	18.65	34.77	Н
711.00	-22.88	1.92	-45.19	-0.53	2.15	18.77	34.77	Н

## LTE Band 17\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
706.50	-26.42	1.91	-45.53	-0.66	2.15	15.72	34.77	Н
710.00	-24.36	1.92	-45.68	-0.54	2.15	17.79	34.77	Н
713.50	-24.32	1.92	-45.22	-0.50	2.15	17.33	34.77	Н

## LTE Band 17\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Cable Loss(dB)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
709.00	-24.46	1.92	-45.64	-0.57	2.15	17.68	34.77	Н
710.00	-24.23	1.92	-45.68	-0.54	2.15	17.92	34.77	Н
711.00	-23.83	1.92	-45.19	-0.53	2.15	17.82	34.77	Н

Peak ERP (dBm)= $P_{Mea}$ (-22.88dBm)- Cable Loss(1.92) - ( $P_{cl}$ + $P_{Ag}$ ) (-45.19dB)- $G_a$ (-0.53dB) -2.15dB =18.77dBm



LTE Band 25- EIRP 24. 232(c)

**Limits:** ≤33dBm (2W)

## LTE Band 25\_1.4MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-6.70	-29.40	0.15	22.85	33.00	Н
1882.50	-6.55	-29.30	0.25	23.01	33.00	Н
1914.30	-7.31	-29.30	0.35	22.34	33.00	Н

## LTE Band 25\_3MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-7.08	-29.40	0.15	22.47	33.00	Н
1882.50	-6.91	-29.30	0.25	22.64	33.00	Н
1913.50	-7.48	-29.30	0.35	22.17	33.00	Н

## LTE Band 25\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-7.28	-29.40	0.15	22.27	33.00	Н
1882.50	-6.45	-29.30	0.25	23.11	33.00	Н
1912.50	-6.85	-29.30	0.35	22.80	33.00	Н

## LTE Band 25\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-7.44	-29.40	0.15	22.11	33.00	Н
1882.00	-6.28	-29.30	0.25	23.27	33.00	Н
1910.00	-7.16	-29.30	0.35	22.49	33.00	Н

## LTE Band 25\_15MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-7.21	-29.40	0.15	22.34	33.00	Н
1882.50	-7.38	-29.30	0.25	22.17	33.00	Н
1907.50	-7.38	-29.30	0.35	22.27	33.00	Н

## LTE Band 25\_20 MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-7.95	-29.40	0.15	21.60	33.00	Н
1882.50	-7.49	-29.30	0.25	22.06	33.00	Н
1905.00	-7.49	-29.30	0.35	22.16	33.00	Н



## LTE Band 25\_1.4MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-7.26	-29.40	0.15	22.29	33.00	Н
1882.50	-5.47	-29.30	0.25	24.08	33.00	Н
1914.30	-6.71	-29.30	0.35	22.94	33.00	Н

## LTE Band 25\_3MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-7.00	-29.40	0.15	22.56	33.00	Н
1882.50	-4.88	-29.30	0.25	24.67	33.00	Н
1913.50	-6.44	-29.30	0.35	23.21	33.00	Н

## LTE Band 25\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-6.86	-29.40	0.15	22.69	33.00	Н
1882.50	-5.35	-29.30	0.25	24.20	33.00	Н
1912.50	-6.15	-29.30	0.35	23.50	33.00	Н

# LTE Band 25\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-6.80	-29.40	0.15	22.75	33.00	Н
1882.00	-7.10	-29.30	0.25	22.45	33.00	Н
1910.00	-6.52	-29.30	0.35	23.14	33.00	Н

## LTE Band 25\_15MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-7.17	-29.40	0.15	22.38	33.00	Н
1882.50	-7.24	-29.30	0.25	22.31	33.00	Н
1907.50	-7.01	-29.30	0.35	22.64	33.00	Н

## LTE Band 25\_20 MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-8.14	-29.40	0.15	21.41	33.00	Н
1882.50	-7.85	-29.30	0.25	21.70	33.00	Н
1905.00	-6.83	-29.30	0.35	22.82	33.00	Н

Peak EIRP (dBm)= $P_{Mea}(-4.88dBm)$ - ( $P_{cl}+P_{Ag}$ ) (-29.30dB)+ $G_a(0.25dB)$  =24.67dBm



# LTE Band 26- ERP 22.913(a)

Limits: ≤38.45dBm (7W)
LTE Band 26\_1.4MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
814.70	-8.62	-33.60	0.28	2.15	23.11	38.45	Н
831.50	-9.16	-33.50	0.25	2.15	22.44	38.45	Н
848.30	-9.89	-33.50	0.21	2.15	21.67	38.45	Н

# LTE Band 26\_3MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
815.50	-8.50	-33.60	0.28	2.15	23.23	38.45	Н
831.50	-8.92	-33.50	0.25	2.15	22.68	38.45	Н
847.50	-9.55	-33.50	0.21	2.15	22.01	38.45	Н

# LTE Band 26\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
816.50	-8.81	-33.60	0.28	2.15	22.92	38.45	Н
831.50	-9.00	-33.50	0.25	2.15	22.61	38.45	Н
846.50	-9.22	-33.50	0.21	2.15	22.34	38.45	Н

# LTE Band 26\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
820.00	-8.68	-33.60	0.28	2.15	23.05	38.45	Н
831.50	-10.39	-33.50	0.25	2.15	21.21	38.45	Н
844.00	-10.07	-33.50	0.21	2.15	21.49	38.45	Н

# LTE Band 26\_15MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>d</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
822.50	-11.04	-33.60	0.28	2.15	20.69	38.45	Н
831.50	-11.85	-33.50	0.25	2.15	19.75	38.45	Н
841.50	-12.04	-33.50	0.21	2.15	19.52	38.45	Н



## LTE Band 26\_1.4MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
814.70	-8.72	-33.60	0.28	2.15	23.01	38.45	Н
831.50	-9.17	-33.50	0.25	2.15	22.43	38.45	Н
848.30	-9.85	-33.50	0.21	2.15	21.71	38.45	Н

# LTE Band 26\_3MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
815.50	-8.63	-33.60	0.28	2.15	23.10	38.45	Н
831.50	-8.89	-33.50	0.25	2.15	22.71	38.45	Н
847.50	-9.64	-33.50	0.21	2.15	21.92	38.45	Н

# LTE Band 26\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
816.50	-8.55	-33.60	0.28	2.15	23.18	38.45	Н
831.50	-9.12	-33.50	0.25	2.15	22.48	38.45	Н
846.50	-9.30	-33.50	0.21	2.15	22.26	38.45	Н

# LTE Band 26\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
820.00	-9.05	-33.60	0.28	2.15	22.68	38.45	Н
831.50	-10.24	-33.50	0.25	2.15	21.36	38.45	Н
844.00	-10.15	-33.50	0.21	2.15	21.42	38.45	Н

#### LTE Band 26\_15MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
822.50	-10.63	-33.60	0.28	2.15	21.10	38.45	Н
831.50	-11.64	-33.50	0.25	2.15	19.96	38.45	Н
841.50	-11.96	-33.50	0.21	2.15	19.60	38.45	Н

 $Peak \; EIRP \; (dBm) = P_{Mea}(-8.50 dBm) - \; (\; P_{cl} + P_{Ag} ) \; \; (-33.60 dB) + G_a(0.28 dB) \; = 23.23 dBm \; (\; P_{cl} + P_{Ag} ) \; \; (\; P_{$ 



## LTE Band 38- EIRP 27.50(h)(2)

**Limits:** ≤33dBm (2W)

## LTE Band 38\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2572.50	-0.92	-28.60	0.38	28.06	33.00	Н
2595.00	-0.46	-28.60	0.31	28.45	33.00	Н
2617.50	-0.86	-28.60	0.30	28.04	33.00	Н

# LTE Band 38\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2575.00	-1.13	-28.60	0.38	27.86	33.00	Н
2595.00	-1.18	-28.60	0.31	27.73	33.00	Н
2615.00	-0.37	-28.60	0.30	28.53	33.00	Н

# LTE Band 38\_15MHz\_QPSK

Frequency(MHz)	Frequency(MHz) P <sub>Mea</sub> (dBm) P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)		G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2577.50	-2.48	-28.60	0.38	26.50	33.00	Н
2595.00	-2.01	-28.60	0.31	26.90	33.00	Н
2612.50	-1.48	-28.60	0.30	27.42	33.00	Н

## LTE Band 38\_20 MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2580.00	-2.68	-28.60	0.38	26.30	33.00	Н
2595.00	-2.11	-28.60	0.31	26.80	33.00	Н
2610.00	-1.97	-28.60	0.30	26.93	33.00	Н



#### LTE Band 38\_5MHz\_16QAM

Frequency(MHz)	Hz) P <sub>Mea</sub> (dBm) P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)		Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2572.50	-0.97	-28.60	0.38	28.01	33.00	Н
2595.00	-0.71	-28.60	0.31	28.20	33.00	Н
2617.50	-0.75	-28.60	0.30	28.15	33.00	Н

#### LTE Band 38\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2575.00	-0.99	-28.60	0.38	27.99	33.00	Н
2595.00	-1.29	-28.60	0.31	27.62	33.00	Н
2615.00	-0.26	-28.60	0.30	28.65	33.00	Н

#### LTE Band 38\_15MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2577.50	-2.85	-28.60	0.38	26.13	33.00	Н
2595.00	-2.01	-28.60	0.31	26.90	33.00	Н
2612.50	-1.94	-28.60	0.30	26.96	33.00	Н

#### LTE Band 38\_20 MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2580.00	-3.07	-28.60	0.38	25.91	33.00	Н
2595.00	-2.60	-28.60	0.31	26.31	33.00	Н
2610.00	-1.48	-28.60	0.30	27.42	33.00	Н

 $Peak \; EIRP \; (dBm) = P_{Mea}(-0.26dBm) - \; (\; P_{cl} + P_{Ag}) \; \; (-28.60dB) + G_a(0.30dB) \; = 28.65dBm \; \; (\; P_{cl} + P_{Ag}) \; \; (\; P_{cl} + P_$ 

#### **ANALYZER SETTINGS:**

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is U = 0.96 dB, k = 2.



#### A.2 EMISSION LIMIT

#### Reference

FCC: CFR 2.1051, 22.917, 24.238(a), 27.53(m).


#### A.2.1 Measurement Method

The measurements procedures in TIA-603-D-2010 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917, 24.238(a), Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2, 4, 5, 7,12,13,17,25,26,38.

#### The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

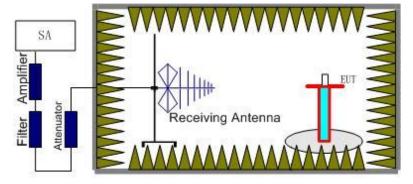

- 2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
- 3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

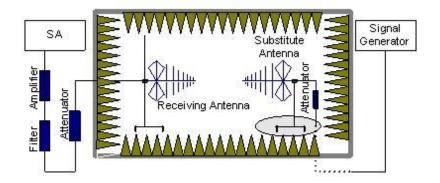

In the chamber, an substitution antenna for the frequency band of interest is placed at the



reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{\text{Mea}}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_{\text{r}}$ ). The power of signal source ( $P_{\text{Mea}}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 4. The Path loss (P<sub>pl</sub>) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G<sub>a</sub>) should be recorded after test.
  - An amplifier should be connected in for the test.
  - The Path loss (Ppl) is the summation of the cable loss and the gain of the amplifier.
  - The measurement results are obtained as described below:
  - Power (EIRP)=P<sub>Mea</sub> P<sub>pl</sub> + G<sub>a</sub>
- 5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
- 6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dB.

#### A.2.2 Measurement Limit

Part 22.917, 24.238(a), 27.53(m) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2, 4, 5, 7,12,13,17,25,26,38. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2, 4, 5, 7,12,13,17,25,26,38 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.



## LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5552.25	-30.54	1.30	-2.64	-34.48	-13.00	V
16695.38	-34.40	2.90	-0.13	-37.43	-13.00	Н
17148.84	-34.00	2.90	-0.79	-37.69	-13.00	Н
17440.88	-32.73	3.20	-1.08	-37.01	-13.00	Н
17780.81	-33.20	3.20	-0.75	-37.15	-13.00	Н
17849.72	-32.34	3.20	-0.84	-36.38	-13.00	Н

## LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5640.38	-27.16	1.30	-2.54	-31.00	-13.00	V
17185.59	-32.63	2.90	-0.79	-36.32	-13.00	Н
17423.81	-32.03	3.20	-1.08	-36.31	-13.00	Н
17629.22	-32.10	3.20	-1.01	-36.31	-13.00	Н
17798.53	-31.74	3.20	-0.75	-35.69	-13.00	V
17916.66	-31.82	3.20	-0.64	-35.66	-13.00	Н

# LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5728.13	-26.30	1.50	-2.73	-30.53	-13.00	V
17203.97	-33.77	2.90	-1.01	-37.68	-13.00	Н
17283.38	-34.28	2.90	-1.01	-38.19	-13.00	Н
17400.19	-33.21	3.20	-1.08	-37.49	-13.00	Н
17764.41	-33.97	3.20	-0.75	-37.92	-13.00	Н
17923.88	-33.05	3.20	-0.64	-36.89	-13.00	Н



## LTE Band 2, 1.4MHz, 16QAM, Channel 18607

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5552.63	-31.28	1.30	-2.64	-35.22	-13.00	V
17207.91	-33.42	2.90	-1.01	-37.33	-13.00	Н
17400.84	-31.79	3.20	-1.08	-36.07	-13.00	Н
17612.81	-32.18	3.20	-1.01	-36.39	-13.00	Н
17784.75	-32.60	3.20	-0.75	-36.55	-13.00	Н
17923.22	-32.50	3.20	-0.64	-36.34	-13.00	Н

## LTE Band 2, 1.4MHz, 16QAM, Channel 18900

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5640.38	-27.07	1.30	-2.54	-30.91	-13.00	V
16824.00	-33.23	2.90	-0.26	-36.39	-13.00	Н
17454.66	-32.31	3.20	-1.08	-36.59	-13.00	Н
17605.59	-32.90	3.20	-1.01	-37.11	-13.00	Н
17779.50	-32.84	3.20	-0.75	-36.79	-13.00	Н
17932.41	-32.37	3.20	-0.64	-36.21	-13.00	Н

## LTE Band 2, 1.4MHz, 16QAM, Channel 19193

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5728.13	-25.45	1.50	-2.73	-29.68	-13.00	V
17295.84	-32.64	2.90	-1.01	-36.55	-13.00	Н
17444.16	-32.14	3.20	-1.08	-36.42	-13.00	Н
17616.09	-32.20	3.20	-1.01	-36.41	-13.00	Н
17769.66	-33.12	3.20	-0.75	-37.07	-13.00	Н
17912.72	-31.96	3.20	-0.64	-35.80	-13.00	Н

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 4, 1.4MHz QPSK, Channel 19957

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
1 requeries (IVII 12)	i Mea(GDIII)	Loss	Gain	EIRP(dBm)	(dBm)	1 olarization
17197.41	-33.99	2.90	-0.79	-37.68	-13.00	Н
17274.84	-33.76	2.90	-1.01	-37.67	-13.00	Н
17447.44	-33.04	3.20	-1.08	-37.32	-13.00	Н
17595.09	-33.00	3.20	-0.81	-37.01	-13.00	Н
17776.88	-33.28	3.20	-0.75	-37.23	-13.00	Н
17925.84	-32.29	3.20	-0.64	-36.13	-13.00	Н

## LTE Band 4, 1.4MHz, QPSK, Channel 20175

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Delegization
		Loss	Gain	EIRP(dBm)	(dBm)	Polarization
5197.88	-33.31	1.20	-1.95	-36.46	-13.00	V
16798.41	-33.91	2.90	-0.26	-37.07	-13.00	V
17203.97	-33.43	2.90	-1.01	-37.34	-13.00	Н
17398.88	-33.26	2.90	-0.98	-37.14	-13.00	Н
17813.63	-33.05	3.20	-0.84	-37.09	-13.00	Н
17916.66	-32.44	3.20	-0.64	-36.28	-13.00	Н

# LTE Band 4, 1.4MHz, QPSK, Channel 20393

	<u>·                                      </u>					
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
		Loss	Gain	EIRP(dBm)	(dBm)	Polarization
5263.13	-27.45	1.20	-2.07	-30.72	-13.00	V
17357.53	-33.10	2.90	-0.98	-36.98	-13.00	Н
17459.91	-32.38	3.20	-1.08	-36.66	-13.00	Н
17602.97	-32.69	3.20	-1.01	-36.90	-13.00	Н
17783.44	-32.85	3.20	-0.75	-36.80	-13.00	Н
17924.53	-31.80	3.20	-0.64	-35.64	-13.00	Н



## LTE Band 4, 1.4MHz, 16QAM, Channel 19957

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
, , , , , , , , , , , , , , , , , , ,	· wica()	Loss	Gain	EIRP(dBm)	(dBm)	
17202.66	-33.66	2.90	-1.01	-37.57	-13.00	Н
17352.28	-32.23	2.90	-0.98	-36.11	-13.00	Н
17413.97	-32.47	3.20	-1.08	-36.75	-13.00	Н
17615.44	-33.00	3.20	-1.01	-37.21	-13.00	Н
17741.44	-32.52	3.20	-0.75	-36.47	-13.00	Н
17914.69	-32.88	3.20	-0.64	-36.72	-13.00	Н

## LTE Band 4, 1.4MHz, 16QAM, Channel 20175

Frequency(MHz)	D (dD:==)	Path	Antenna	Peak	Limit	Delegization
	P <sub>Mea</sub> (dBm)	Loss	Gain	EIRP(dBm)	(dBm)	Polarization
5197.50	-33.47	1.20	-1.95	-36.62	-13.00	Н
17198.06	-33.89	2.90	-0.79	-37.58	-13.00	Н
17431.69	-32.75	3.20	-1.08	-37.03	-13.00	Н
17601.00	-33.06	3.20	-1.01	-37.27	-13.00	Н
17752.59	-31.59	3.20	-0.75	-35.54	-13.00	Н
17928.47	-32.36	3.20	-0.64	-36.20	-13.00	Н

## LTE Band 4, 1.4MHz, 16QAM, Channel 20393

Frequency(MHz)	D (dD:==)	Path	Antenna	Peak	Limit	Dolorization
	P <sub>Mea</sub> (dBm)	Loss	Gain	EIRP(dBm)	(dBm)	Polarization
5263.13	-29.97	1.20	-2.07	-33.24	-13.00	Н
17363.44	-33.22	2.90	-0.98	-37.10	-13.00	Н
17417.25	-32.61	3.20	-1.08	-36.89	-13.00	V
17526.19	-33.28	3.20	-0.81	-37.29	-13.00	Н
17770.31	-31.66	3.20	-0.75	-35.61	-13.00	Н
17920.59	-32.64	3.20	-0.64	-36.48	-13.00	Н

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency(MHz)	D. (dDm)	Path	Antenna	Peak	Limit	Polarization
	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
7553.50	-41.03	1.80	-2.57	-47.55	-13.00	V
7641.50	-40.73	1.80	-2.58	-47.26	-13.00	V
8032.00	-41.27	1.80	-2.18	-47.40	-13.00	V
8541.00	-41.70	2.00	-1.77	-47.62	-13.00	V
9296.00	-41.89	2.10	-1.16	-47.30	-13.00	V
9331.00	-42.05	2.10	-1.12	-47.42	-13.00	V

## LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
		Loss	Gain	ERP(dBm)	(dBm)	Polarization
8314.50	-41.61	1.80	-2.04	-47.60	-13.00	Н
8542.50	-41.63	2.00	-1.77	-47.55	-13.00	Н
8738.00	-42.04	2.00	-1.63	-47.82	-13.00	Н
9168.00	-42.08	2.10	-1.36	-47.69	-13.00	V
9201.00	-42.19	2.10	-1.16	-47.60	-13.00	V
9352.50	-42.39	2.10	-1.12	-47.76	-13.00	Н

# LTE Band 5, 1.4MHz, QPSK, Channel 20643

Fraguenov/MHz)	D. (dPm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
7632.00	-41.03	1.80	-2.58	-47.56	-13.00	V
8115.50	-41.70	1.80	-2.15	-47.80	-13.00	Н
8307.00	-41.80	1.80	-2.04	-47.79	-13.00	V
8732.50	-41.96	2.00	-1.63	-47.74	-13.00	V
9114.50	-41.36	2.10	-1.36	-46.97	-13.00	V
9260.50	-42.06	2.10	-1.16	-47.47	-13.00	V



## LTE Band 5, 1.4MHz, 16QAM, Channel 20407

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
		Loss	Gain	ERP(dBm)	(dBm)	Polarization
7595.50	-41.30	1.80	-2.57	-47.82	-13.00	Н
8067.50	-41.81	1.80	-2.18	-47.94	-13.00	V
8544.50	-42.04	2.00	-1.77	-47.96	-13.00	V
8669.00	-42.23	2.00	-1.64	-48.02	-13.00	V
9120.00	-41.95	2.10	-1.36	-47.56	-13.00	V
9214.50	-42.70	2.10	-1.16	-48.11	-13.00	Н

## LTE Band 5, 1.4MHz, 16QAM, Channel 20525

Fragues av (MIII-)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)		Loss	Gain	ERP(dBm)	(dBm)	Polarization
8497.00	-42.48	1.80	-1.79	-48.22	-13.00	V
8564.00	-41.68	2.00	-1.77	-47.60	-13.00	V
8733.00	-42.28	2.00	-1.63	-48.06	-13.00	V
9171.00	-42.41	2.10	-1.36	-48.02	-13.00	V
9203.00	-42.58	2.10	-1.16	-47.99	-13.00	V
9388.50	-42.19	2.10	-1.12	-47.56	-13.00	V

## LTE Band 5, 1.4MHz, 16QAM, Channel 20643

Fragues (MIII)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Delegization
Frequency(MHz)		Loss	Gain	ERP(dBm)	(dBm)	Polarization
8527.50	-42.13	2.00	-1.77	-48.05	-13.00	V
8560.00	-41.87	2.00	-1.77	-47.79	-13.00	Н
8739.50	-42.08	2.00	-1.63	-47.86	-13.00	V
9009.50	-42.31	2.10	-1.42	-47.98	-13.00	Н
9169.50	-42.52	2.10	-1.36	-48.13	-13.00	V
9411.50	-42.87	2.10	-0.86	-47.98	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Polarizatio n
16732.78	-34.98	2.90	-0.26	-38.14	-13.00	Н
16799.06	-34.65	2.90	-0.26	-37.81	-13.00	V
17270.25	-34.35	2.90	-1.01	-38.26	-13.00	Н
17436.94	-33.23	3.20	-1.08	-37.51	-13.00	Н
17769.66	-33.58	3.20	-0.75	-37.53	-13.00	Н
17849.72	-32.36	3.20	-0.84	-36.40	-13.00	Н

# LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Polarizatio n
7601.44	-33.14	1.80	-2.58	-37.52	-13.00	V
16791.19	-34.46	2.90	-0.26	-37.62	-13.00	V
17386.41	-33.39	2.90	-0.98	-37.27	-13.00	Н
17597.06	-32.71	3.20	-0.81	-36.72	-13.00	Н
17826.75	-32.58	3.20	-0.84	-36.62	-13.00	Н
17927.81	-32.92	3.20	-0.64	-36.76	-13.00	Н

## LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Polarizatio n
7699.31	-33.31	1.80	-2.58	-37.69	-13.00	V
16780.69	-34.77	2.90	-0.26	-37.93	-13.00	Н
17444.81	-33.65	3.20	-1.08	-37.93	-13.00	Н
17606.25	-33.87	3.20	-1.01	-38.08	-13.00	Н
17766.38	-32.96	3.20	-0.75	-36.91	-13.00	Н
17926.50	-32.33	3.20	-0.64	-36.17	-13.00	Н



## LTE Band 7, 5 MHz, 16QAM, Channel 20775

Frequency(MH z)	P <sub>Mea</sub> (dB m)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Polarizatio n
16850.25	-34.06	2.90	-0.26	-37.22	-13.00	V
17143.59	-33.62	2.90	-0.79	-37.31	-13.00	Н
17391.00	-33.18	2.90	-0.98	-37.06	-13.00	Н
17627.91	-32.25	3.20	-1.01	-36.46	-13.00	Н
17772.28	-32.85	3.20	-0.75	-36.80	-13.00	Н
17929.13	-32.59	3.20	-0.64	-36.43	-13.00	Н

## LTE Band 7, 5 MHz, 16QAM, Channel 21100

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Polarizatio n
17205.94	-33.46	2.90	-1.01	-37.37	-13.00	Н
17280.09	-33.04	2.90	-1.01	-36.95	-13.00	Н
17456.63	-32.80	3.20	-1.08	-37.08	-13.00	Н
17599.69	-31.81	3.20	-0.81	-35.82	-13.00	Н
17818.88	-32.80	3.20	-0.84	-36.84	-13.00	Н
17923.22	-31.39	3.20	-0.64	-35.23	-13.00	Н

## LTE Band 7, 5 MHz, 16QAM, Channel 21425

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Polarizatio n
17205.94	-32.83	2.90	-1.01	-36.74	-13.00	Н
17314.88	-33.60	2.90	-0.98	-37.48	-13.00	Н
17451.38	-32.41	3.20	-1.08	-36.69	-13.00	Н
17618.06	-33.07	3.20	-1.01	-37.28	-13.00	Н
17768.34	-33.07	3.20	-0.75	-37.02	-13.00	Н
17922.56	-32.15	3.20	-0.64	-35.99	-13.00	Н

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 12, 1.4MHz, QPSK, Channel 23017

Fragues av (MIII-)	D. (dPm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
1399.46	-48.43	3.56	-4.98	-49.16	-13.00	V
2099.57	-52.53	4.40	-4.90	-54.18	-13.00	V
2799.19	-48.50	5.04	-6.64	-49.05	-13.00	V
3498.91	-46.41	5.69	-8.20	-46.05	-13.00	Н
4198.80	-54.70	6.23	-9.10	-53.98	-13.00	V
4954.21	-61.17	6.73	-9.85	-60.20	-13.00	V

## LTE Band 12, 1.4MHz, QPSK, Channel 23095

Fraguenov/MHz)	D. (dPm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
2122.77	-45.28	4.41	-4.97	-46.87	-13.00	V
2830.33	-42.31	5.07	-6.69	-42.84	-13.00	V
3537.93	-43.94	5.75	-8.25	-43.59	-13.00	Н
4245.46	-50.85	6.25	-9.15	-50.10	-13.00	V
4953.35	-54.63	6.73	-9.85	-53.66	-13.00	V
5660.71	-51.77	7.19	-10.57	-50.54	-13.00	Н

# LTE Band 12, 1.4MHz, QPSK, Channel 23173

Fragues av (MIIII)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Delegization
Frequency(MHz)		Loss	Gain	ERP(dBm)	(dBm)	Polarization
1430.81	-55.19	3.61	-5.14	-55.81	-13.00	V
2145.91	-52.88	4.41	-5.04	-54.40	-13.00	V
2861.60	-41.79	5.10	-6.75	-42.29	-13.00	V
3576.91	-44.93	5.70	-8.31	-44.47	-13.00	Н
4292.13	-49.10	6.29	-9.19	-48.35	-13.00	V
5008.06	-53.60	6.78	-9.91	-52.62	-13.00	V



## LTE Band 12, 1.4MHz, 16QAM, Channel 23017

Fragues ov/MII=	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)		Loss	Gain	ERP(dBm)	(dBm)	Polarization
1399.42	-47.64	3.56	-4.98	-48.37	-13.00	V
2099.55	-43.16	4.40	-4.90	-44.81	-13.00	V
2798.84	-49.59	5.04	-6.64	-50.14	-13.00	V
4198.56	-56.95	6.23	-9.10	-56.23	-13.00	Н
4898.18	-55.35	6.73	-9.80	-54.43	-13.00	V
5598.14	-54.30	7.17	-10.58	-53.04	-13.00	Н

## LTE Band 12, 1.4MHz 16QAM, Channel 23095

Fragues (MIII)	DMag(dDm)	Path	Antenna	Peak	Limit	Delerization
Frequency(MHz)	PMea(dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
2122.82	-51.63	4.41	-4.97	-53.22	-13.00	V
2830.60	-43.94	5.07	-6.70	-44.46	-13.00	V
3537.91	-43.78	5.75	-8.25	-43.43	-13.00	Н
4245.86	-50.65	6.25	-9.15	-49.90	-13.00	V
4952.62	-53.73	6.73	-9.85	-52.76	-13.00	V
5660.76	-51.51	7.19	-10.57	-50.28	-13.00	Н

## LTE Band 12, 1.4MHz, 16QAM, Channel 23173

Frequency(MHz)	PMea(dBm)	Path	Antenna	Peak	Limit	Delegization
		Loss	Gain	ERP(dBm)	(dBm)	Polarization
1430.60	-54.82	3.60	-5.14	-55.43	-13.00	V
2146.19	-51.92	4.41	-5.04	-53.44	-13.00	V
2861.85	-44.48	5.10	-6.75	-44.98	-13.00	V
3576.70	-46.01	5.70	-8.31	-45.55	-13.00	Н
4292.61	-51.37	6.28	-9.19	-50.61	-13.00	V
5007.75	-53.93	6.78	-9.91	-52.95	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 13, 5 MHz, QPSK, Channel 23205

Fraguenov/MHz)	v(MHz) P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)		Loss	Gain	ERP(dBm)	(dBm)	Polarization
8590.50	-41.41	2.00	-1.77	-47.33	-13.00	Н
8940.50	-41.99	2.10	-1.58	-47.82	-13.00	V
9072.50	-42.09	2.10	-1.42	-47.76	-13.00	V
9169.00	-41.80	2.10	-1.36	-47.41	-13.00	V
9265.00	-42.12	2.10	-1.16	-47.53	-13.00	Н
9370.00	-41.84	2.10	-1.12	-47.21	-13.00	V

## LTE Band 13, 5 MHz, QPSK, Channel 23230

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
Frequency(Minz)	Mea(ubiii)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
8646.00	-42.02	2.00	-1.64	-47.81	-13.00	V
8688.50	-42.21	2.00	-1.64	-48.00	-13.00	V
8792.00	-42.11	2.00	-1.63	-47.89	-13.00	Н
9165.00	-42.29	2.10	-1.36	-47.90	-13.00	Н
9273.50	-42.07	2.10	-1.16	-47.48	-13.00	Н
9626.50	-43.03	2.10	-0.66	-47.94	-13.00	V

# LTE Band 13, 5 MHz, QPSK, Channel 23255

Frequency(MHz) P <sub>Mea</sub> (dBm)	D. (dDm)	Path	Antenna	Peak	Limit	Polarization
	Loss	Gain	ERP(dBm)	(dBm)	Polarization	
8718.50	-41.88	2.00	-1.63	-47.66	-13.00	Н
9180.00	-42.57	2.10	-1.36	-48.18	-13.00	V
9219.00	-41.64	2.10	-1.16	-47.05	-13.00	Н
9351.00	-41.96	2.10	-1.12	-47.33	-13.00	Н
9836.50	-43.41	2.20	-0.38	-48.14	-13.00	V
9978.50	-43.39	2.20	-0.40	-48.14	-13.00	V



## LTE Band 13, 5 MHz, 16QAM, Channel 23205

Frequency(MHz) P <sub>Mea</sub> (	D. (dPm)	Path	Antenna	Peak	Limit	Polarization
	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
4663.88	-41.30	1.30	-1.44	-46.19	-13.00	V
5441.25	-38.66	1.30	-2.28	-44.39	-13.00	V
8597.00	-41.83	2.00	-1.77	-47.75	-13.00	V
9164.00	-42.00	2.10	-1.36	-47.61	-13.00	V
9255.50	-41.81	2.10	-1.16	-47.22	-13.00	Н
9918.00	-43.07	2.20	-0.40	-47.82	-13.00	Н

## LTE Band 13, 5 MHz, 16QAM, Channel 23230

Fragues av/MUT	D (dDm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
8736.00	-41.64	2.00	-1.63	-47.42	-13.00	V
9186.00	-41.96	2.10	-1.36	-47.57	-13.00	V
9200.50	-40.96	2.10	-1.16	-46.37	-13.00	V
9353.00	-42.20	2.10	-0.92	-47.37	-13.00	Н
9788.50	-42.88	2.20	-0.71	-47.94	-13.00	Н
9910.00	-43.16	2.20	-0.40	-47.91	-13.00	V

# LTE Band 13, 5 MHz, 16QAM, Channel 23255

(NALL_)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Delevinetiev
Frequency(MHz)		Loss	Gain	ERP(dBm)	(dBm)	Polarization
8261.00	-41.80	1.80	-1.90	-47.65	-13.00	V
8736.50	-41.96	2.00	-1.63	-47.74	-13.00	V
8782.00	-40.99	2.00	-1.63	-46.77	-13.00	V
9222.50	-41.52	2.10	-1.16	-46.93	-13.00	Н
9409.50	-42.31	2.10	-0.86	-47.42	-13.00	V
9984.00	-43.09	2.20	-0.40	-47.84	-13.00	Н

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 17, 5 MHz, QPSK, Channel 23755

Frequency(MHz) P <sub>Mea</sub> (dB	D. (dDm)	Path	Antenna	Peak	Limit	Polarization
	PMea(UDIII)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
1413.13	-56.69	3.57	-5.05	-57.36	-13.00	V
2119.85	-53.09	4.39	-4.96	-54.67	-13.00	V
2826.73	-43.91	5.07	-6.69	-44.44	-13.00	V
3533.42	-49.93	5.74	-8.25	-49.57	-13.00	V
4279.89	-61.12	6.29	-9.18	-60.38	-13.00	Н
4946.85	-54.69	6.74	-9.85	-53.73	-13.00	V

## LTE Band 17, 5 MHz, QPSK, Channel 23790

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
Frequency(Minz)	Mea(ubiii)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
2130.54	-48.15	4.40	-4.99	-49.71	-13.00	V
2840.65	-46.08	5.09	-6.71	-46.61	-13.00	V
3550.50	-52.19	5.71	-8.27	-51.78	-13.00	V
4261.32	-53.37	6.26	-9.16	-52.62	-13.00	V
4971.41	-55.31	6.74	-9.87	-54.33	-13.00	V
5681.07	-54.91	7.19	-10.56	-53.69	-13.00	Н

# LTE Band 17, 5 MHz, QPSK, Channel 23825

Fraguenov/MHz)	D. (dPm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
1427.29	-51.42	3.59	-5.12	-52.04	-13.00	V
2140.98	-53.44	4.41	-5.02	-54.98	-13.00	V
2854.89	-44.36	5.11	-6.74	-44.88	-13.00	V
3568.84	-46.72	5.69	-8.30	-46.26	-13.00	V
4282.29	-51.99	6.29	-9.18	-51.25	-13.00	V
5001.01	-61.16	6.79	-9.90	-60.20	-13.00	V



## LTE Band 17, 5 MHz, 16QAM, Channel 23755

Fraguanov/MHz)	D. (dPm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
1413.48	-59.26	3.56	-5.05	-59.92	-13.00	V
2120.03	-52.08	4.39	-4.96	-53.66	-13.00	V
2827.02	-49.62	5.07	-6.69	-50.15	-13.00	V
3533.40	-51.38	5.74	-8.25	-51.02	-13.00	Н
3550.50	-52.19	5.71	-8.27	-51.78	-13.00	V
4261.32	-53.91	6.26	-9.16	-53.16	-13.00	V

## LTE Band 17, 5 MHz, 16QAM, Channel 23790

Fraguency/MHz)	P <sub>Mea</sub> (dBm)	Path	Antenna	Peak	Limit	Polarization
Frequency(MHz)	Mea(ubiii)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
2130.66	-48.23	4.40	-4.99	-49.79	-13.00	V
2840.81	-49.12	5.09	-6.71	-49.65	-13.00	V
3550.84	-51.90	5.71	-8.27	-51.49	-13.00	V
4260.85	-53.38	6.26	-9.16	-52.63	-13.00	V
4970.91	-55.44	6.74	-9.87	-54.46	-13.00	V
5665.32	-59.93	7.19	-10.57	-58.70	-13.00	Н

## LTE Band 17, 5 MHz, 16QAM, Channel 23825

(\All_{1=})	D. (dRm)	Path	Antenna	Peak	Limit	Delegization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	ERP(dBm)	(dBm)	Polarization
1427.30	-51.52	3.59	-5.12	-52.14	-13.00	V
2140.92	-57.82	4.41	-5.02	-59.36	-13.00	V
2854.46	-43.62	5.11	-6.74	-44.14	-13.00	V
3568.30	-49.87	5.69	-8.30	-49.41	-13.00	V
4351.25	-60.09	6.36	-9.25	-59.35	-13.00	Н
5062.10	-60.24	6.75	-9.99	-59.15	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 25, 1.4MHz, QPSK, Channel 26047

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5552.63	-28.92	1.30	-2.64	-32.86	-13.00	V
17213.16	-32.86	2.90	-1.01	-36.77	-13.00	Н
17415.94	-32.70	3.20	-1.08	-36.98	-13.00	Н
17618.72	-32.68	3.20	-1.01	-36.89	-13.00	Н
17777.53	-32.46	3.20	-0.75	-36.41	-13.00	Н
17849.72	-32.43	3.20	-0.84	-36.47	-13.00	Н

# LTE Band 25, 1.4MHz, QPSK, Channel 26365

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5647.50	-25.24	1.30	-2.54	-29.08	-13.00	V
16956.56	-34.01	2.90	-0.50	-37.41	-13.00	Н
17464.50	-32.81	3.20	-1.08	-37.09	-13.00	Н
17601.00	-32.85	3.20	-1.01	-37.06	-13.00	Н
17795.91	-32.88	3.20	-0.75	-36.83	-13.00	Н
17927.81	-31.96	3.20	-0.64	-35.80	-13.00	Н

# LTE Band 25, 1.4MHz, QPSK, Channel 26683

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5742.75	-23.21	1.50	-2.73	-27.44	-13.00	V
16705.88	-33.83	2.90	-0.26	-36.99	-13.00	V
16812.84	-32.83	2.90	-0.26	-35.99	-13.00	Н
17438.91	-32.01	3.20	-1.08	-36.29	-13.00	V
17805.75	-32.55	3.20	-0.84	-36.59	-13.00	V
17916.00	-32.66	3.20	-0.64	-36.50	-13.00	Н



## LTE Band 25, 1.4MHz, 16QAM, Channel 26047

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5551.88	-27.72	1.30	-2.64	-31.66	-13.00	V
17353.59	-33.60	2.90	-0.98	-37.48	-13.00	Н
17443.50	-32.56	3.20	-1.08	-36.84	-13.00	Н
17635.78	-33.24	3.20	-1.01	-37.45	-13.00	Н
17773.59	-33.00	3.20	-0.75	-36.95	-13.00	Н
17923.88	-32.18	3.20	-0.64	-36.02	-13.00	Н

## LTE Band 25, 1.4MHz, 16QAM, Channel 26365

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5647.88	-25.77	1.30	-2.54	-29.61	-13.00	V
16800.38	-34.03	2.90	-0.26	-37.19	-13.00	Н
17200.69	-32.76	2.90	-1.01	-36.67	-13.00	Н
17436.28	-32.85	3.20	-1.08	-37.13	-13.00	Н
17774.91	-32.48	3.20	-0.75	-36.43	-13.00	Н
17922.56	-31.48	3.20	-0.64	-35.32	-13.00	Н

## LTE Band 25, 1.4MHz, 16QAM, Channel 26683

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5742.75	-23.20	1.50	-2.73	-27.43	-13.00	V
17151.47	-33.11	2.90	-0.79	-36.80	-13.00	Н
17365.41	-33.14	2.90	-0.98	-37.02	-13.00	Н
17379.84	-33.45	2.90	-0.98	-37.33	-13.00	Н
17769.66	-32.70	3.20	-0.75	-36.65	-13.00	Н
17925.19	-31.67	3.20	-0.64	-35.51	-13.00	Н

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



## LTE Band 26, 1.4MHz, QPSK, Channel 26697

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8635.00	-42.19	2.00	-1.64	-45.83	-13.00	V
8724.00	-42.03	2.00	-1.63	-45.66	-13.00	Н
8975.00	-42.22	2.10	-1.58	-45.90	-13.00	V
9201.00	-42.16	2.10	-1.16	-45.42	-13.00	V
9394.00	-42.10	2.10	-1.12	-45.32	-13.00	V
9898.50	-42.95	2.20	-0.38	-45.53	-13.00	V

## LTE Band 26, 1.4MHz, QPSK, Channel 26865

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8643.50	-41.27	2.00	-1.64	-44.91	-13.00	V
8728.50	-41.73	2.00	-1.63	-45.36	-13.00	Н
9163.50	-42.15	2.10	-1.36	-45.61	-13.00	V
9282.00	-41.98	2.10	-1.16	-45.24	-13.00	V
9316.50	-42.11	2.10	-1.12	-45.33	-13.00	V
9930.00	-43.30	2.20	-0.40	-45.90	-13.00	V

# LTE Band 26, 1.4MHz, QPSK, Channel 27033

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8496.00	-42.08	1.80	-1.79	-45.67	-13.00	V
8680.00	-41.48	2.00	-1.64	-45.12	-13.00	Н
9157.00	-41.69	2.10	-1.36	-45.15	-13.00	Н
9263.50	-41.93	2.10	-1.16	-45.19	-13.00	V
9328.50	-42.38	2.10	-1.12	-45.60	-13.00	V
9930.50	-42.70	2.20	-0.40	-45.30	-13.00	Н



# LTE Band 26, 1.4MHz, 16QAM, Channel 26697

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8064.50	-42.02	1.80	-2.18	-46.00	-13.00	V
8253.00	-42.19	1.80	-1.90	-45.89	-13.00	V
8499.00	-42.58	1.80	-1.79	-46.17	-13.00	Н
8555.00	-41.81	2.00	-1.77	-45.58	-13.00	V
9249.50	-42.73	2.10	-1.16	-45.99	-13.00	Н
9419.50	-42.85	2.10	-0.86	-45.81	-13.00	Н

# LTE Band 26, 1.4MHz, 16QAM, Channel 26865

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7579.50	-41.39	1.80	-2.57	-45.76	-13.00	V
7619.00	-41.51	1.80	-2.58	-45.89	-13.00	Н
8591.50	-41.97	2.00	-1.77	-45.74	-13.00	V
9167.00	-42.09	2.10	-1.36	-45.55	-13.00	V
9255.50	-41.93	2.10	-1.16	-45.19	-13.00	Н
9356.00	-42.24	2.10	-1.12	-45.46	-13.00	V

# LTE Band 26, 1.4MHz, 16QAM, Channel 27033

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7087.00	-40.91	1.80	-2.85	-45.56	-13.00	V
8262.00	-41.40	1.80	-1.90	-45.10	-13.00	V
9121.00	-41.68	2.10	-1.36	-45.14	-13.00	V
9247.00	-42.22	2.10	-1.16	-45.48	-13.00	Н
9743.00	-42.84	2.10	-0.71	-45.65	-13.00	V
9892.00	-42.90	2.20	-0.38	-45.48	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



# LTE Band 38, 5 MHz, QPSK, Channel 37775

Frequency(MHz) P <sub>Mea</sub> (dBm		Path	Antenna	Peak	Limit	Polarization
Frequency(MHZ)	P <sub>Mea</sub> (dBm)	Loss	Gain	EIRP(dBm)	(dBm)	Polarization
12851.06	-32.30	2.50	1.51	-33.29	-13.00	V
17207.25	-33.52	2.90	-1.01	-37.43	-13.00	Н
17429.06	-32.59	3.20	-1.08	-36.87	-13.00	Н
17620.69	-32.53	3.20	-1.01	-36.74	-13.00	Н
17797.22	-33.05	3.20	-0.75	-37.00	-13.00	V
17928.47	-32.33	3.20	-0.64	-36.17	-13.00	Н

# LTE Band 38, 5 MHz, QPSK, Channel 38000

Erogueney/MHz)	Frequency(MHz) P <sub>Mea</sub> (dBm)		Antenna	Peak	Limit	Polarization
Frequency(Minz)	Mea(ubiii)	Loss	Gain	EIRP(dBm)	(dBm)	Polarization
5185.88	-32.92	1.20	-1.95	-36.07	-13.00	V
7778.63	-30.84	1.80	-2.53	-35.17	-13.00	V
12963.94	-33.70	2.50	1.51	-34.69	-13.00	V
16804.97	-34.46	2.90	-0.26	-37.62	-13.00	Н
17600.34	-33.47	3.20	-1.01	-37.68	-13.00	Н
17912.72	-33.28	3.20	-0.64	-37.12	-13.00	Н

# LTE Band 38, 5 MHz, QPSK, Channel 38225

Eroguenov(MHz)	quency(MHz) P <sub>Mea</sub> (dBm)		Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBIII)	Loss	Gain	EIRP(dBm)	(dBm)	Polanzation
5230.88	-32.60	1.20	-2.07	-35.87	-13.00	Н
7845.28	-32.42	1.80	-2.45	-36.67	-13.00	Н
13076.81	-34.91	2.50	1.61	-35.80	-13.00	V
16802.34	-34.71	2.90	-0.26	-37.87	-13.00	Н
17757.84	-33.22	3.20	-0.75	-37.17	-13.00	Н
17923.88	-32.71	3.20	-0.64	-36.55	-13.00	Н



# LTE Band 38, 5 MHz, 16QAM, Channel 37775

Frequency(MHz) P <sub>Mea</sub> (dBn		Path	Antenna	Peak	Limit	Polarization
Frequency(Minz)	P <sub>Mea</sub> (dBm)	Loss	Gain	EIRP(dBm)	(dBm)	Polarization
7711.13	-31.62	1.80	-2.53	-35.95	-13.00	V
12851.06	-34.82	2.50	1.51	-35.81	-13.00	Н
17195.44	-33.14	2.90	-0.79	-36.83	-13.00	Н
17448.75	-31.72	3.20	-1.08	-36.00	-13.00	Н
17615.44	-32.63	3.20	-1.01	-36.84	-13.00	Н
17933.06	-32.35	3.20	-0.64	-36.19	-13.00	Н

# LTE Band 38, 5 MHz, 16QAM, Channel 38000

Fraguenov/MHz)	roquonov(MHz) D. (dPm)		Antenna	Peak	Limit	Polarization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	EIRP(dBm)	(dBm)	Polarization
5185.88	-32.87	1.20	-1.95	-36.02	-13.00	Н
7778.63	-31.63	1.80	-2.53	-35.96	-13.00	Н
12963.94	-34.50	2.50	1.51	-35.49	-13.00	V
17620.69	-32.51	3.20	-1.01	-36.72	-13.00	Н
17774.91	-32.50	3.20	-0.75	-36.45	-13.00	Н
17929.78	-32.26	3.20	-0.64	-36.10	-13.00	Н

# LTE Band 38, 5 MHz, 16QAM, Channel 38225

Fragues (MIII)	roquonov(MHz) D. (dPm)		Antenna	Peak	Limit	Dolorization
Frequency(MHz)	P <sub>Mea</sub> (dBm)	Loss	Gain	EIRP(dBm)	(dBm)	Polarization
5230.88	-32.65	1.20	-2.07	-35.92	-13.00	Н
7845.28	-31.86	1.80	-2.45	-36.11	-13.00	Н
13076.81	-34.39	2.50	1.61	-35.28	-13.00	V
17436.28	-32.89	3.20	-1.08	-37.17	-13.00	Н
17775.56	-33.21	3.20	-0.75	-37.16	-13.00	Н
17925.19	-32.75	3.20	-0.64	-36.59	-13.00	Н

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.



#### A.3 FREQUENCY STABILITY

#### Reference

FCC: CFR Part 2.1055, 22.235, 24.235, 27.54.

#### A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -30℃.
- With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call
  on middle channel, measure the carrier frequency. These measurements should be made
  within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6. Subject the EUT to overnight soak at +50℃.
- 7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8. Repeat the above measurements at 10 °C increments from +50 °C to -30 °C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
- 9. At all temperature levels hold the temperature to +/-  $0.5^{\circ}$ C during the measurement procedure.

#### A.4.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.



### A.4.3 Measurement results

# LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

# **Frequency Error vs Voltage**

Voltage	Frequency	y error (Hz)	Frequency error (ppm)		
(V)	QPSK 16QAM		QPSK	16QAM	
3.6	18	15	0.010	0.008	
3.8	6	25	0.003	0.013	
4.35	10	18	0.005	0.010	

### **Frequency Error vs Temperature**

Temperature	Frequenc	Frequency error (Hz)		error (ppm)
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	22	22	0.012	0.012
-20°	15	33	0.008	0.018
-10°	14	24	0.007	0.013
0°	9	11	0.005	0.006
10°	3	8	0.002	0.004
20°	-1	5	0.001	0.003
30°	-10	16	0.005	0.009
40°	25	28	0.013	0.015
50°	38	-8	0.020	0.004

# LTE Band 4, 1.4MHz bandwidth (worst case of all bandwidths)

# **Frequency Error vs Voltage**

Voltage	Frequency	y error (Hz)	Frequency error (ppm)		
(V)	QPSK 16QAM		QPSK	16QAM	
3.6	-10	-8	0.006	0.005	
3.8	2	-6	0.001	0.003	
4.35	18	11	0.010	0.006	

Temperature	Frequency error (Hz)		Frequency error (ppm)	
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	-8	8	0.005	0.005
-20°	11	24	0.006	0.014
-10°	25	-6	0.014	0.003
0°	26	12	0.015	0.007
10°	33	-7	0.019	0.004
20°	7	11	0.004	0.006
30°	11	-10	0.006	0.006
40°	6	-8	0.003	0.005
50°	-24	-1	0.014	0.001



# LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

# **Frequency Error vs Voltage**

Voltage	Frequency error (Hz)		Frequency error (ppm)	
(V)	QPSK	16QAM	QPSK	16QAM
3.6	-11	22	0.013	0.026
3.8	8	14	0.010	0.017
4.35	22	8	0.026	0.010

# Frequency Error vs Temperature

Temperature	Frequency	y error (Hz)	Frequency error (ppm)	
(°C)	QPSK	16QAM	QPSK	16QAM
-30°	14	5	0.017	0.006
-20°	25	7	0.030	0.008
-10°	8	1	0.010	0.001
0°	17	-2	0.020	0.002
10°	22	3	0.026	0.004
20°	26	11	0.031	0.013
30°	31	12	0.037	0.014
40°	9	15	0.011	0.018
50°	18	20	0.022	0.024

# LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)

# Frequency Error vs Voltage

Voltage	Frequency error (Hz)		Frequency	error (ppm)
(V)	QPSK	16QAM	QPSK	16QAM
3.6	36	-8	0.014	0.003
3.8	11	-5	0.004	0.002
4.35	-15	21	0.006	0.008

Temperature	Frequency	y error (Hz)	Frequency error (ppm)	
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	9	-3	0.004	0.001
-20°	-6	-9	0.002	0.004
-10°	11	11	0.004	0.004
0°	-24	15	0.009	0.006
10°	18	24	0.007	0.009
20°	25	-7	0.010	0.003
30°	39	-1	0.015	0.000
40°	49	2	0.019	0.001
50°	8	-15	0.003	0.006



# LTE Band 12, 1.4MHz bandwidth (worst case of all bandwidths)

# **Frequency Error vs Voltage**

Voltage	Frequency error (Hz)		Frequency	error (ppm)
(V)	QPSK	16QAM	QPSK	16QAM
3.6	-2	7	0.003	0.010
3.8	12	15	0.017	0.021
4.35	-7	24	0.010	0.034

# Frequency Error vs Temperature

Temperature	Frequency	y error (Hz)	Frequency e	error (ppm)
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	6	-9	0.008	0.013
-20°	18	3	0.025	0.004
-10°	25	6	0.035	0.008
0°	11	14	0.016	0.020
10°	6	11	0.008	0.016
20°	8	-1	0.011	0.001
30°	11	2	0.016	0.003
40°	-3	15	0.004	0.021
50°	-9	19	0.013	0.027

# LTE Band 13, 10MHz bandwidth (worst case of all bandwidths)

# Frequency Error vs Voltage

roducticy Error to voltage					
Voltage	Frequenc	Frequency error (Hz)		error (ppm)	
(V)	QPSK	16QAM	QPSK	16QAM	
3.6	14	8	0.018	0.010	
3.8	6	15	0.008	0.019	
4.35	3	29	0.004	0.037	

Temperature	Frequency	y error (Hz)	Frequency	error (ppm)
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	11	33	0.014	0.042
-20°	8	26	0.010	0.033
-10°	4	15	0.005	0.019
0°	4	9	0.005	0.012
10°	3	4	0.004	0.005
20°	12	15	0.015	0.019
30°	9	11	0.012	0.014
40°	7	24	0.009	0.031
50°	13	38	0.017	0.049



# LTE Band 17, 10MHz bandwidth (worst case of all bandwidths)

# **Frequency Error vs Voltage**

Voltage	Frequency error (Hz)		Frequency	error (ppm)
(V)	QPSK	16QAM	QPSK	16QAM
3.6	22	8	0.031	0.011
3.8	35	14	0.049	0.020
4.35	-6	9	0.008	0.013

# **Frequency Error vs Temperature**

Temperature	Frequency	y error (Hz)	Frequency error (ppm)	
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	24	22	0.034	0.031
-20°	33	31	0.046	0.044
-10°	21	16	0.030	0.023
0°	18	9	0.025	0.013
10°	9	27	0.013	0.038
20°	15	24	0.021	0.034
30°	28	11	0.039	0.015
40°	49	7	0.069	0.010
50°	44	25	0.062	0.035

# LTE Band 25, 10MHz bandwidth (worst case of all bandwidths)

# Frequency Error vs Voltage

Voltage	Frequency error (Hz)		Frequency error (ppm)	
(V)	QPSK	16QAM	QPSK	16QAM
3.6	15	9	0.008	0.005
3.8	18	17	0.010	0.009
4.35	22	5	0.012	0.003

Temperature	Frequency error (Hz)		Frequency error (ppm)	
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	6	17	0.003	0.009
-20°	-3	23	0.002	0.012
-10°	17	24	0.009	0.013
0°	-8	-2	0.004	0.001
10°	12	5	0.006	0.003
20°	15	21	0.008	0.011
30°	29	13	0.015	0.007
40°	37	3	0.020	0.002
50°	51	22	0.027	0.012



# LTE Band 26, 10MHz bandwidth (worst case of all bandwidths)

# Frequency Error vs Voltage

Voltage	Frequency error (Hz)		Frequency	error (ppm)
(V)	QPSK	16QAM	QPSK	16QAM
3.6	14	14	0.017	0.017
3.8	24	9	0.029	0.011
4.35	25	28	0.030	0.034

# **Frequency Error vs Temperature**

Temperature	Frequency error (Hz)		Frequency	error (ppm)
(℃)	QPSK	16QAM	QPSK	16QAM
-30°	44	19	0.053	0.023
-20°	15	5	0.018	0.006
-10°	-3	-1	0.004	0.001
0°	-9	2	0.011	0.002
10°	-15	-16	0.018	0.019
20°	-11	21	0.013	0.025
30°	5	17	0.006	0.020
40°	7	18	0.008	0.022
50°	14	22	0.017	0.026

# LTE Band 38, 10MHz bandwidth (worst case of all bandwidths)

#### Frequency Error vs Voltage

. roquono, = ro romago					
Voltage	Frequency error (Hz)		Voltage Frequency error (Hz) Frequency		error (ppm)
(V)	QPSK	16QAM	QPSK	16QAM	
3.6	11	18	0.004	0.007	
3.8	-4	3	0.002	0.001	
4.35	-10	11	0.004	0.004	

### **Frequency Error vs Temperature**

Temperature	Frequenc	Frequency error (Hz)		Frequency error (ppm)	
(℃)	QPSK	16QAM	QPSK	16QAM	
-30°	25	11	0.010	0.004	
-20°	33	21	0.013	0.008	
-10°	26	19	0.010	0.007	
0°	18	28	0.007	0.011	
10°	19	36	0.007	0.014	
20°	25	34	0.010	0.013	
30°	28	49	0.011	0.019	
40°	36	8	0.014	0.003	
50°	45	27	0.017	0.010	

Expanded measurement uncertainty for this test item is 10 Hz, k = 2.



### A.4 OCCUPIED BANDWIDTH

#### Reference

FCC: CFR Part 2.1049(h)(i)

#### A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 4.2:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### LTE band 2, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1880.0	QPSK	16QAM
	1089.74	1097.76

LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)

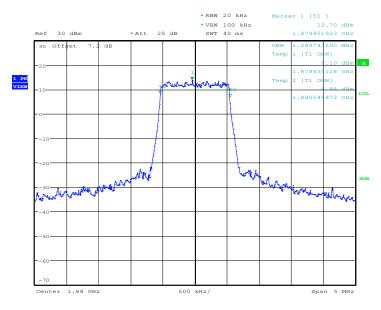

Date: 15.FEB.2017 01:31:46

# LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)

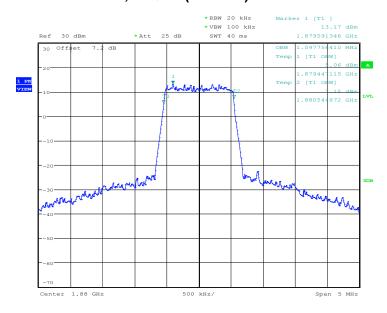


Date: 15.FEB.2017 01:34:12



# LTE band 2, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1880.0	QPSK	16QAM
	2692.31	2692.31

LTE band 2, 3MHz Bandwidth, QPSK (99% BW)

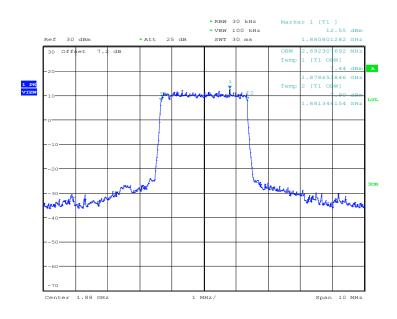

Date: 15.FEB.2017 02:18:09

# LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)

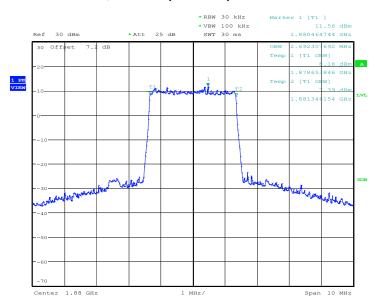


Date: 15.FEB.2017 02:17:39



### LTE band 2, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
4000.0	QPSK	16QAM
1880.0	4519.23	4519.23

LTE band 2, 5MHz Bandwidth, QPSK (99% BW)

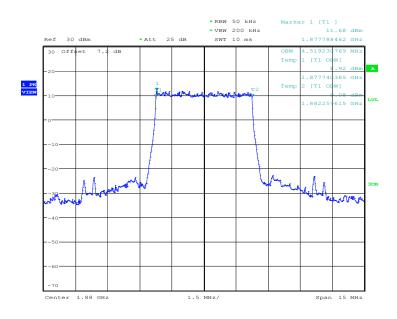

Date: 15.FEB.2017 02:27:25

# LTE band 2, 5MHz Bandwidth,16QAM (99% BW)

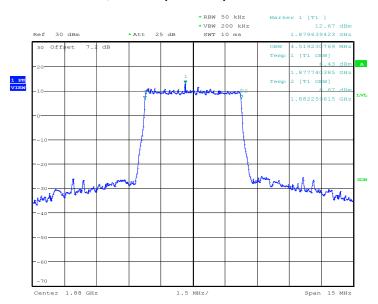


Date: 15.FEB.2017 02:28:06



### LTE band 2, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1880.0	QPSK	16QAM
	8942.31	8942.31

## LTE band 2, 10MHz Bandwidth, QPSK (99% BW)

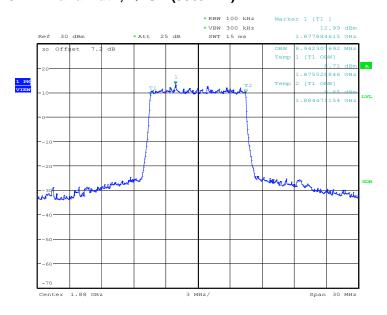

Date: 15.FEB.2017 03:36:18

# LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)

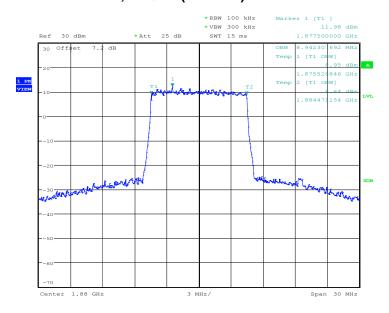


Date: 15.FEB.2017 03:35:29



### LTE band 2, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1880.0	QPSK	16QAM
	13557.69	13485.58

## LTE band 2, 15MHz Bandwidth, QPSK (99% BW)

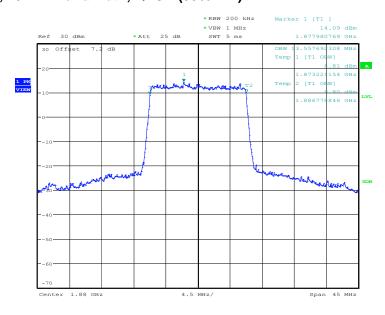

Date: 15.FEB.2017 03:39:35

# LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)

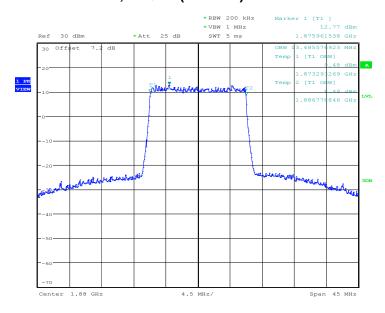


Date: 15.FEB.2017 03:40:12



# LTE band 2, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1880.0	QPSK	16QAM
	17980.77	17980.77

## LTE band 2, 20MHz Bandwidth, QPSK (99% BW)

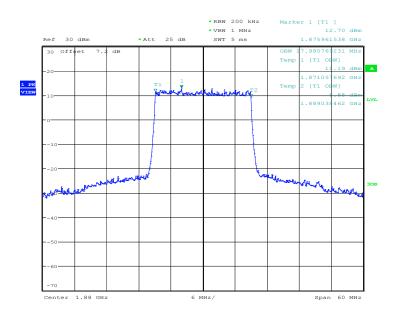

Date: 15.FEB.2017 04:05:04

# LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)

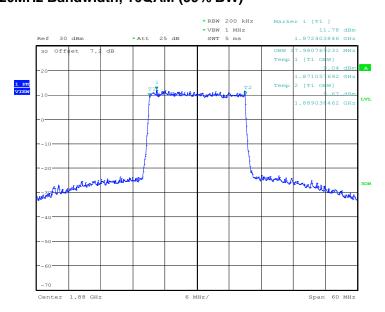


Date: 15.FEB.2017 04:05:51



### LTE band 4, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1732.5	QPSK	16QAM
	1105.77	1089.74

## LTE band 4, 1.4MHz Bandwidth, QPSK (99% BW)

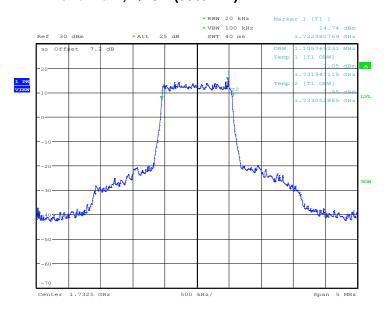

Date: 15.FEB.2017 01:40:25

# LTE band 4, 1.4MHz Bandwidth, 16QAM (99% BW)

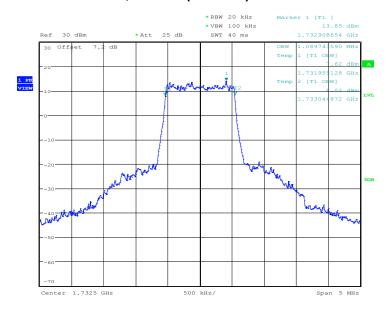


Date: 15.FEB.2017 01:39:56



### LTE band 4, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
4722.5	QPSK	16QAM
1732.5	2692.31	2692.31

## LTE band 4, 3MHz Bandwidth, QPSK (99% BW)

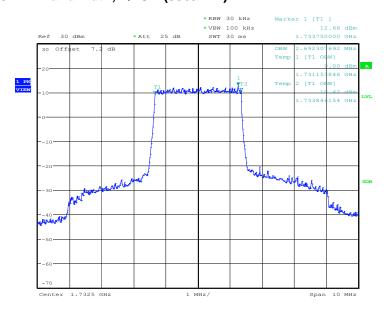

Date: 15.FEB.2017 02:12:14

# LTE band 4, 3MHz Bandwidth, 16QAM (99% BW)

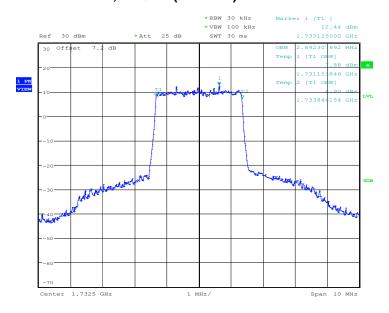


Date: 15.FEB.2017 02:12:46



### LTE band 4, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1732.5	QPSK	16QAM
1732.3	4495.19	4495.19

# LTE band 4, 5MHz Bandwidth, QPSK (99% BW)

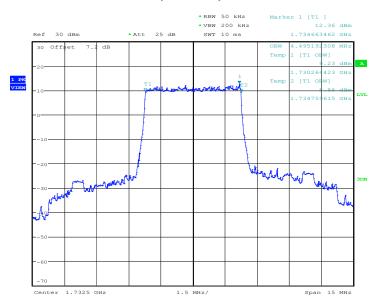

Date: 15.FEB.2017 02:33:27

### LTE band 4, 5MHz Bandwidth,16QAM (99% BW)

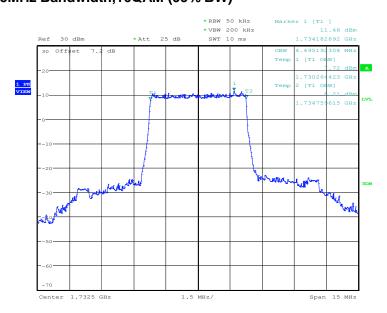


Date: 15.FEB.2017 02:32:52



### LTE band 4, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1732.5	QPSK	16QAM
1732.3	8990.38	8990.38

## LTE band 4, 10MHz Bandwidth, QPSK (99% BW)

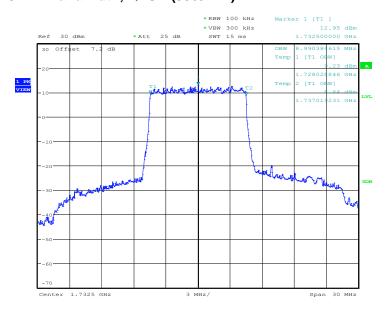

Date: 15.FEB.2017 03:31:07

# LTE band 4, 10MHz Bandwidth, 16QAM (99% BW)

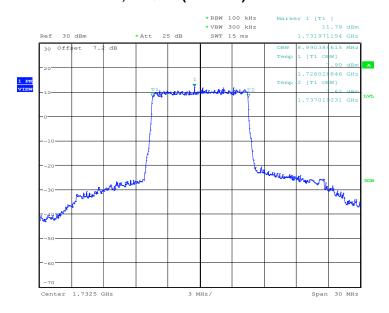


Date: 15.FEB.2017 03:31:42



### LTE band 4, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
4722.5	QPSK	16QAM
1732.5	13485.58	13485.58

### LTE band 4, 15MHz Bandwidth, QPSK (99% BW)

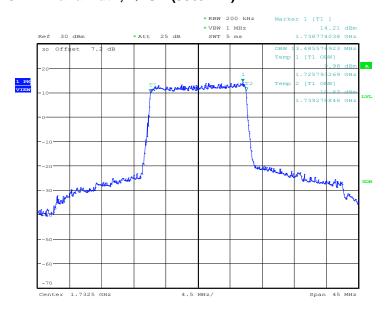

Date: 15.FEB.2017 03:45:04

# LTE band 4, 15MHz Bandwidth, 16QAM (99% BW)

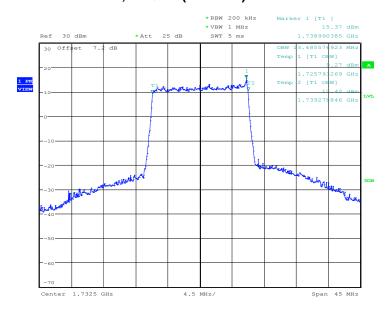


Date: 15.FEB.2017 03:44:37



### LTE band 4, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
1732.5	QPSK	16QAM
	17980.77	17980.77

## LTE band 4, 20MHz Bandwidth, QPSK (99% BW)

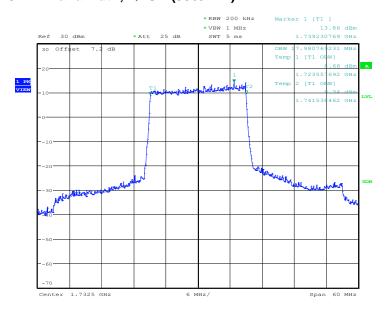

Date: 15.FEB.2017 04:03:48

# LTE band 4, 20MHz Bandwidth, 16QAM (99% BW)

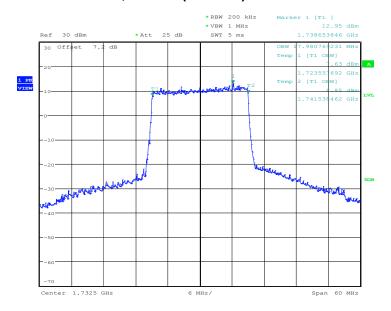


Date: 15.FEB.2017 04:03:22



### LTE band 5, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
836.5	QPSK	16QAM
	1097.76	1089.74

### LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)

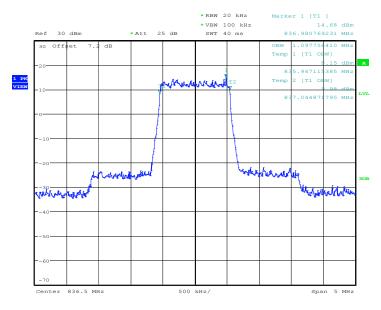

Date: 15.FEB.2017 01:41:34

# LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)

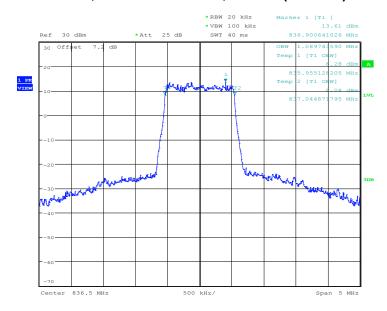


Date: 15.FEB.2017 01:42:20



### LTE band 5, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
926 5	QPSK	16QAM
836.5	2708.33	2692.31

### LTE band 5, 3MHz Bandwidth, QPSK (99% BW)

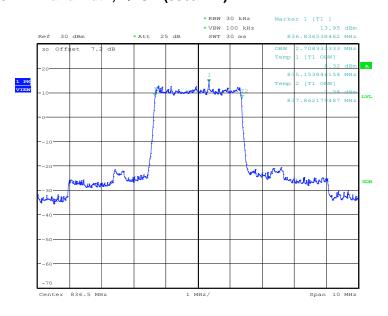

Date: 15.FEB.2017 02:11:25

# LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)

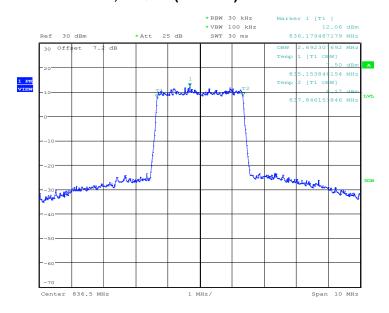


Date: 15.FEB.2017 02:10:29



### LTE band 5, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
836.5	QPSK	16QAM
	4495.19	4495.19

## LTE band 5, 5MHz Bandwidth, QPSK (99% BW)

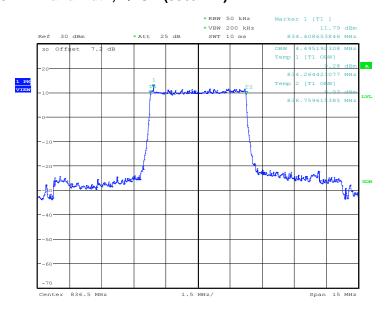

Date: 15.FEB.2017 02:34:19

# LTE band 5, 5MHz Bandwidth,16QAM (99% BW)

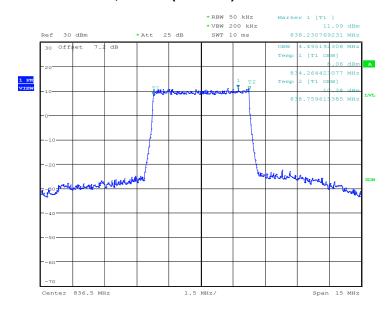


Date: 15.FEB.2017 02:35:00



### LTE band 5, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
926 5	QPSK	16QAM
836.5	8990.38	8990.38

## LTE band 5, 10MHz Bandwidth, QPSK (99% BW)

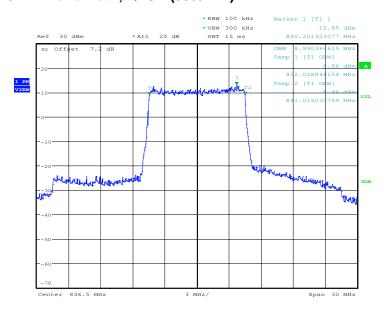

Date: 15.FEB.2017 03:30:05

# LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)

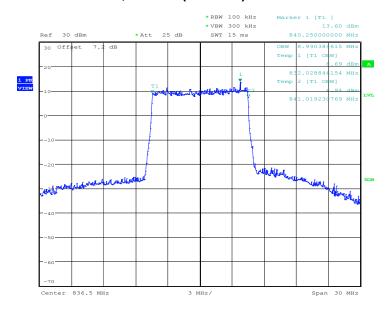


Date: 15.FEB.2017 03:29:13



### LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
2525.0	QPSK	16QAM
2535.0	4519.23	4495.19

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

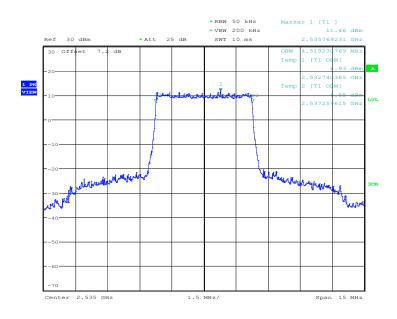

Date: 15.FEB.2017 02:39:44

# LTE band 7, 5MHz Bandwidth,16QAM (99% BW)

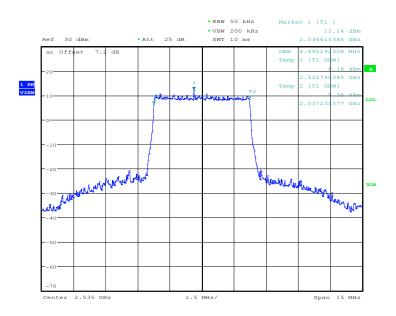


Date: 15.FEB.2017 02:39:07



### LTE band 7, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
2525.0	QPSK	16QAM
2535.0	8942.31	8942.31

### LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

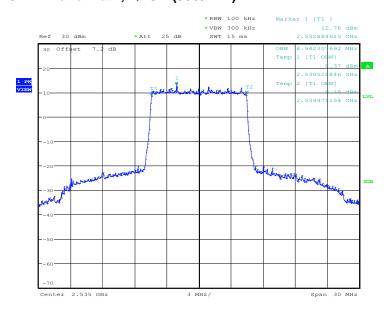

Date: 15.FEB.2017 03:24:17

# LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

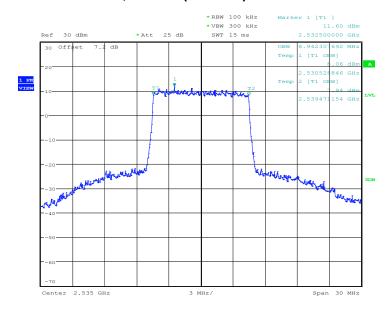

Date: 15.FEB.2017 03:25:20