

D

D

C

C


B

B

A

A

Near to PA

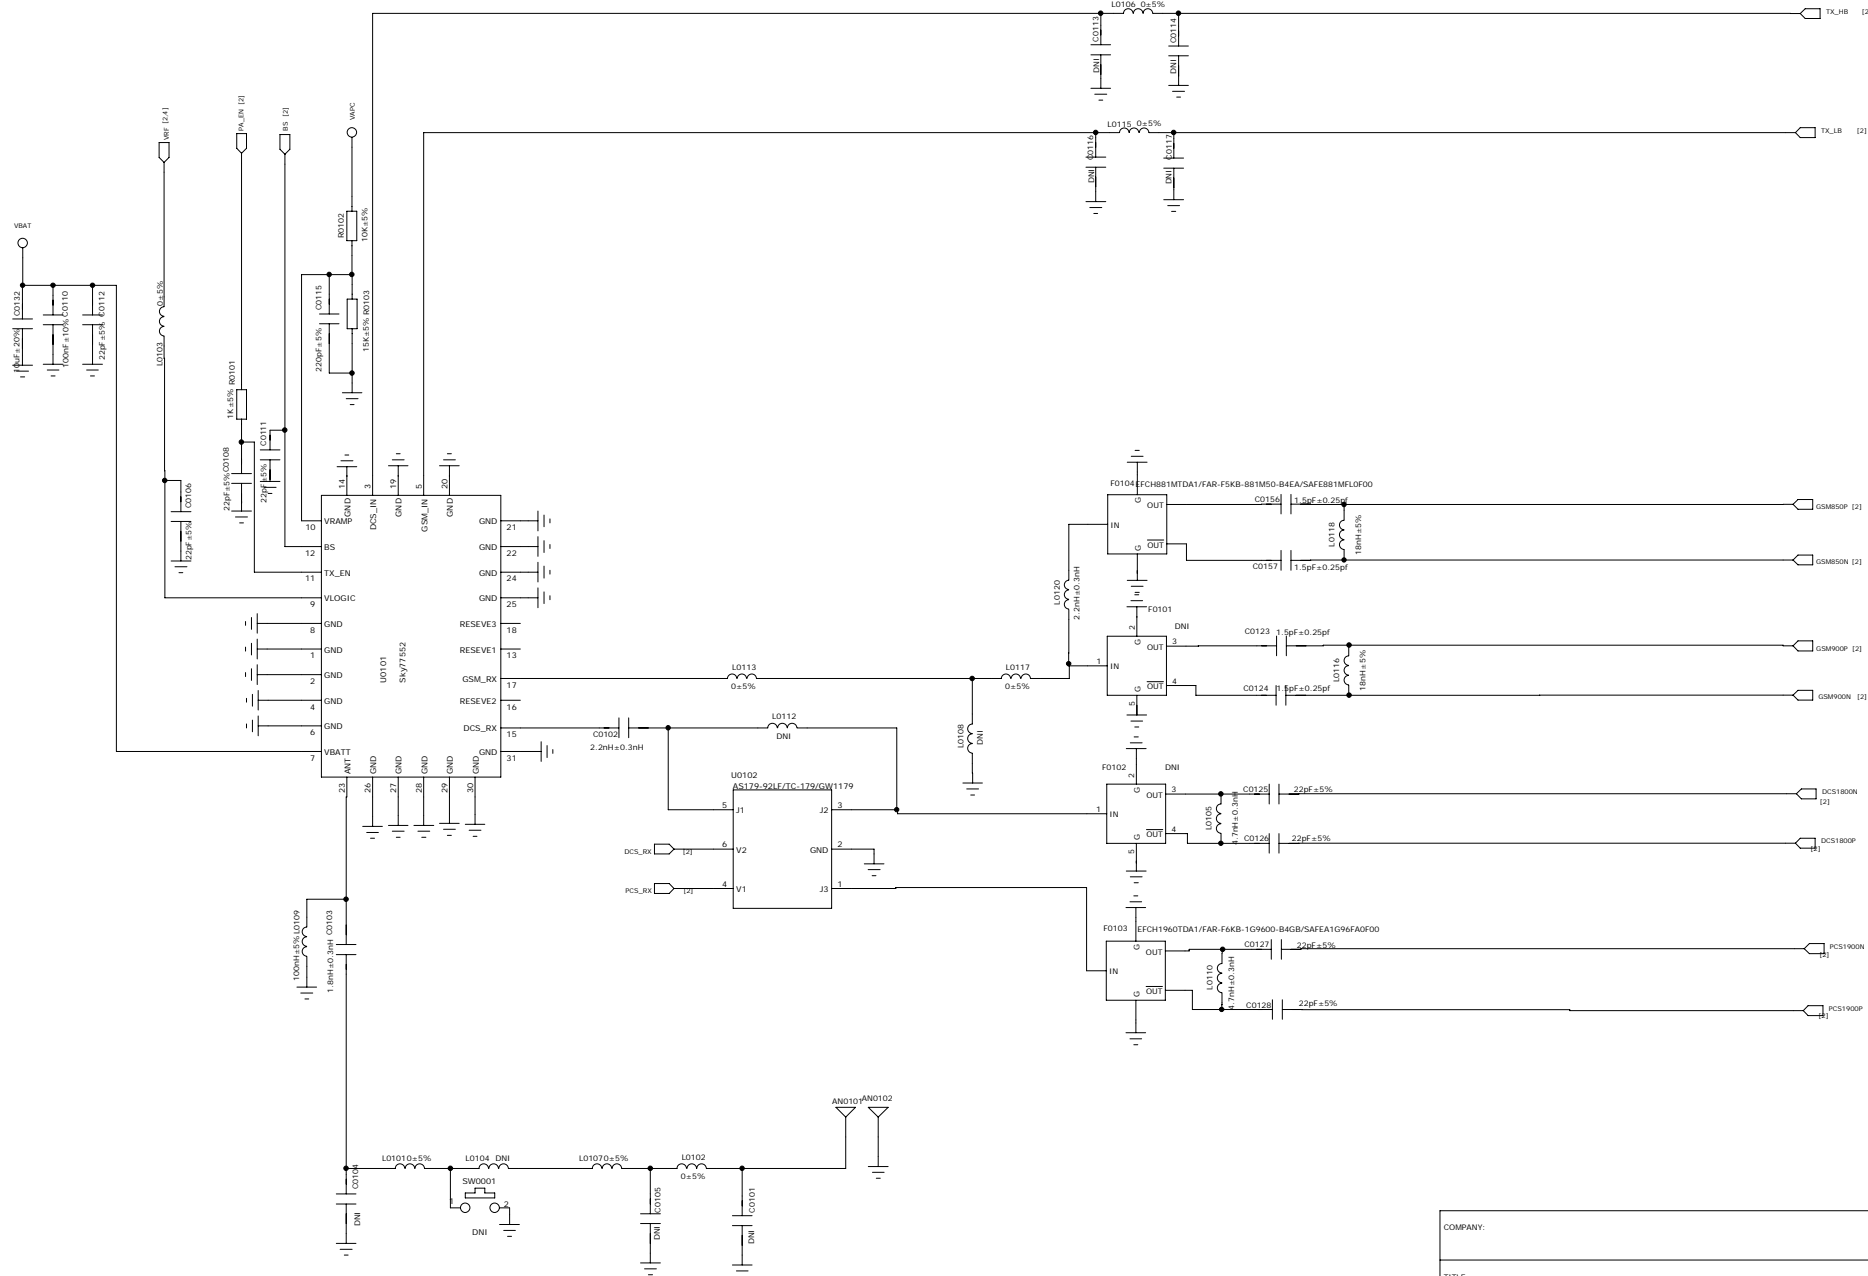

COMPANY:

TITLE:

LM802B RF







SIZE:

Document Number: SHEET: 1 of 8

Ver : 2.0

Date:

MEMORY

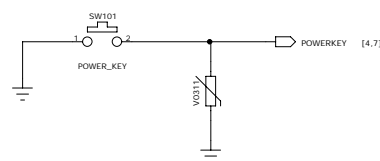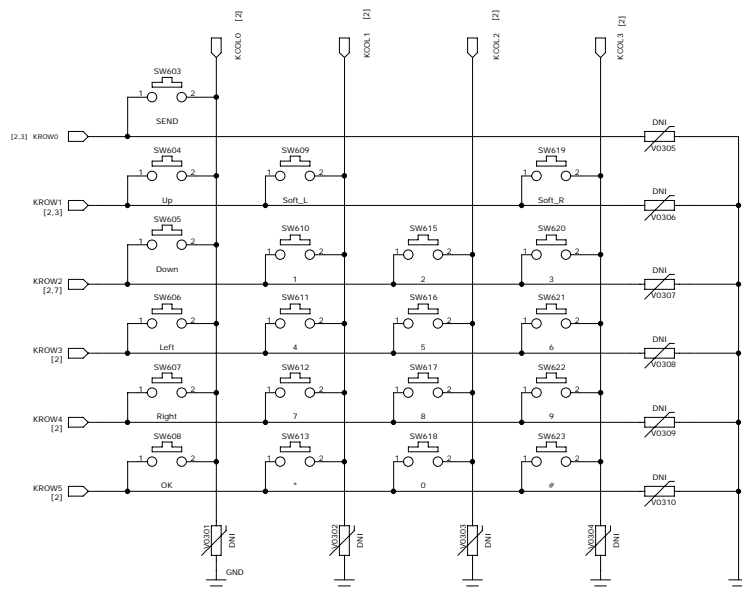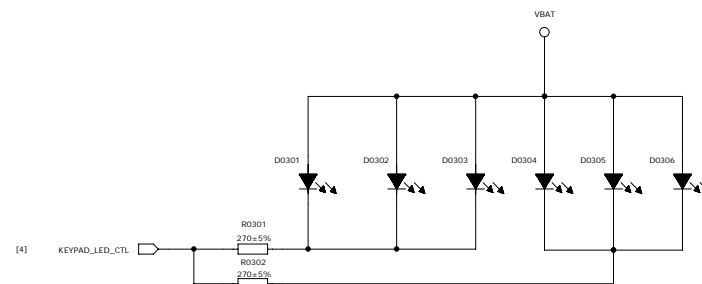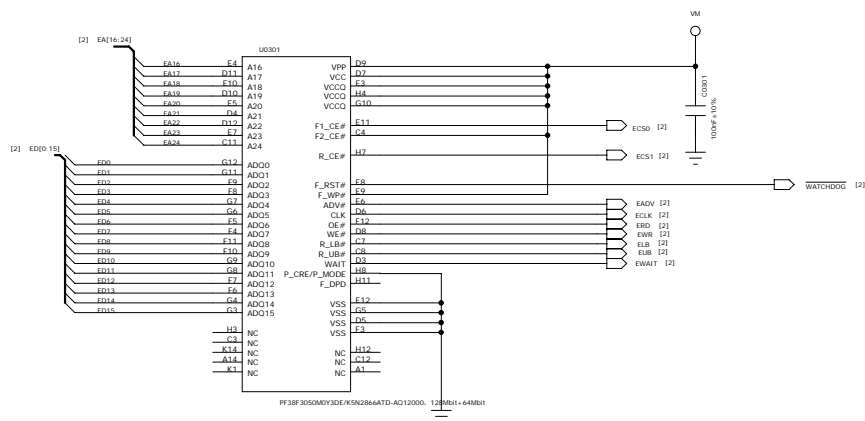

COMPANY:		
TITLE: LM802B MCP		
SIZE:	Document Number: SHEET: 3 of 12	Ver : 1.0
Date:	SHEET: 3 of 10	


[

C


B




in the shield

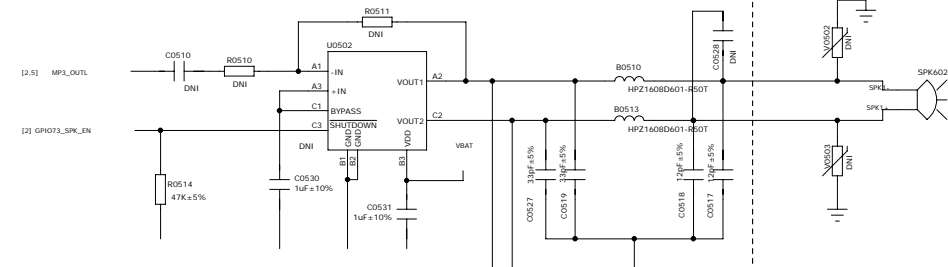


close to speaker





in the shield

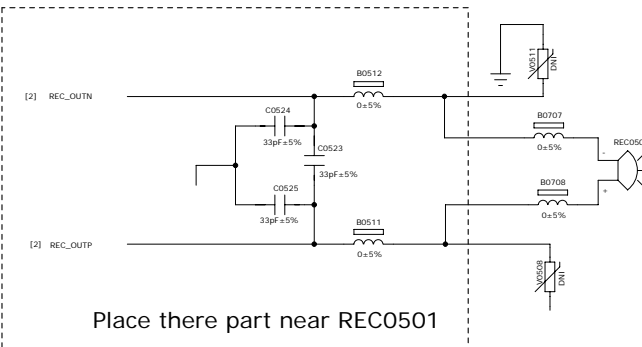


REC_P REC_N

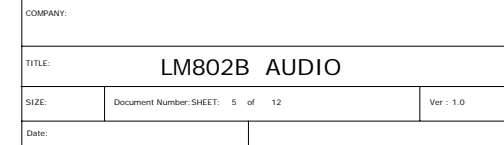

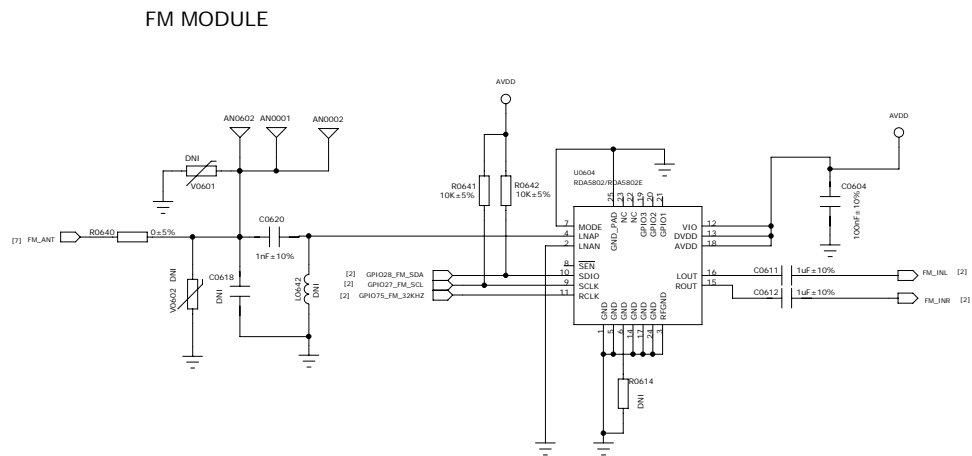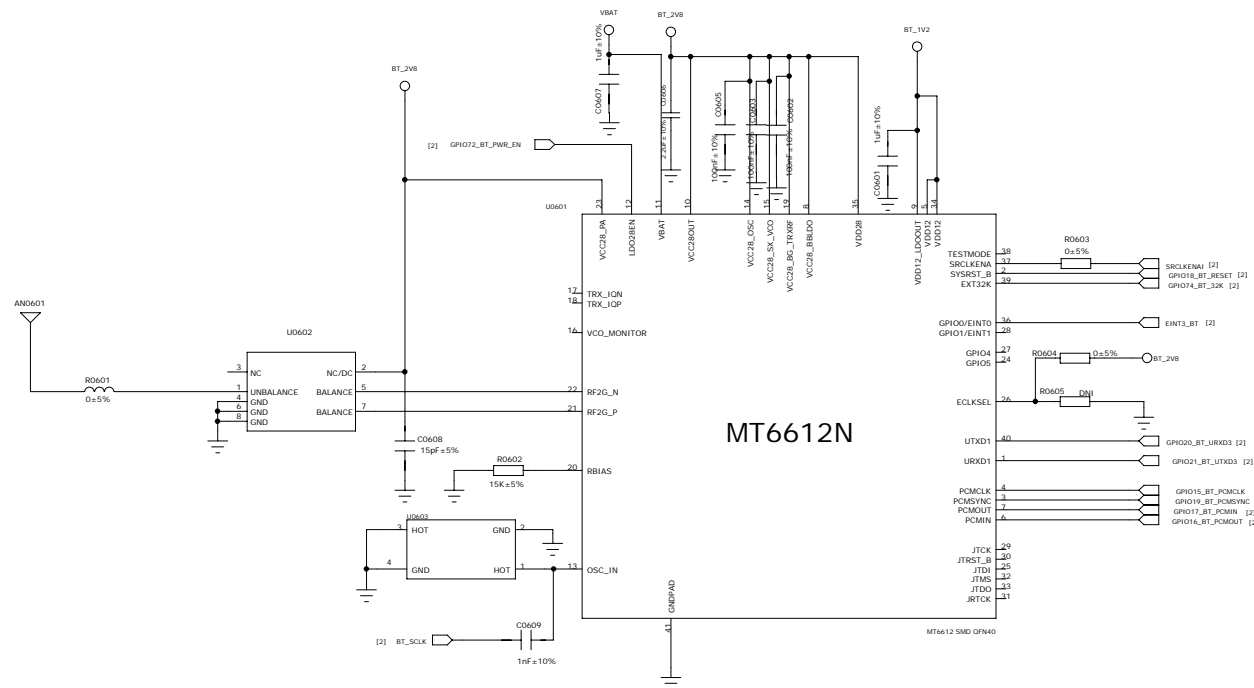

COMPANY:		
TITLE: LM802B BT_FM		
SIZE:	Document Number: SHEET: 6 of 12	Ver : 1.0
Date:		




T-FLASH CARD MODULE

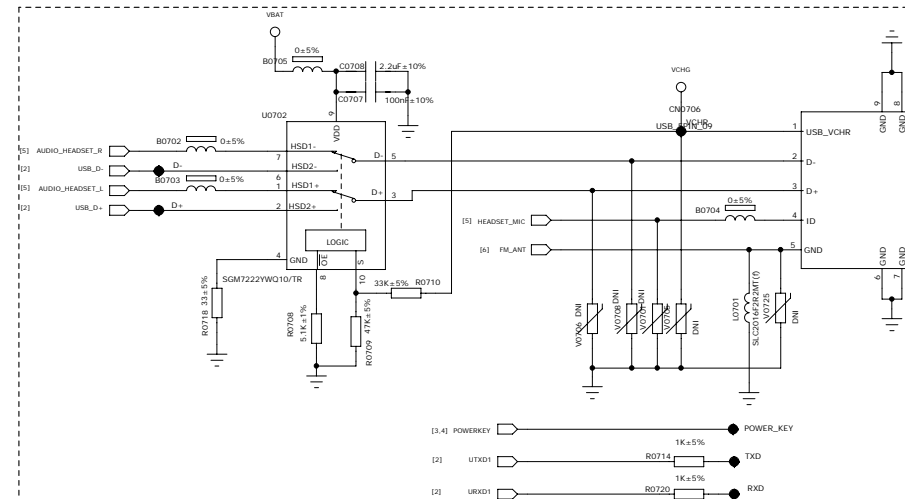





Timing diagram showing three signal transitions:

- [3,4] POWERKEY: High-to-low transition, delay $1K \pm 5\%$.
- [2] UTXD1: High-to-low transition, delay $1K \pm 5\%$.
- [2] URXD1: High-to-low transition, delay $1K \pm 5\%$.

SIM CARD

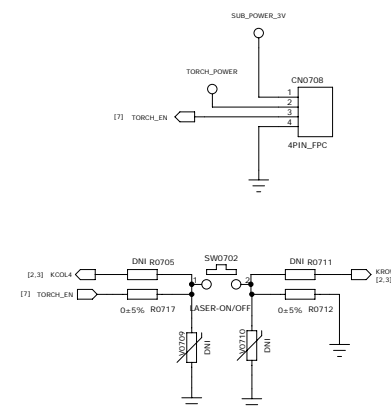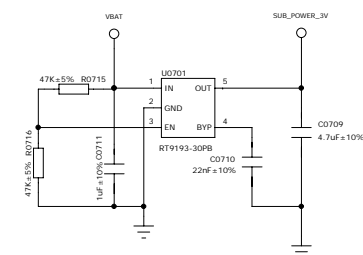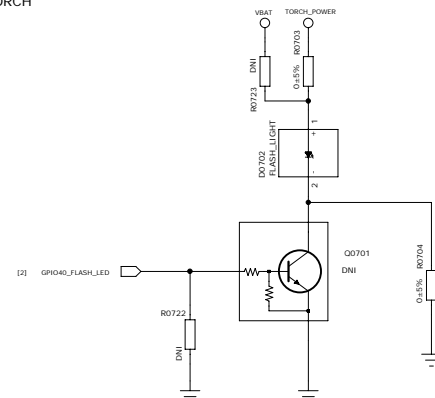

SIM CARD

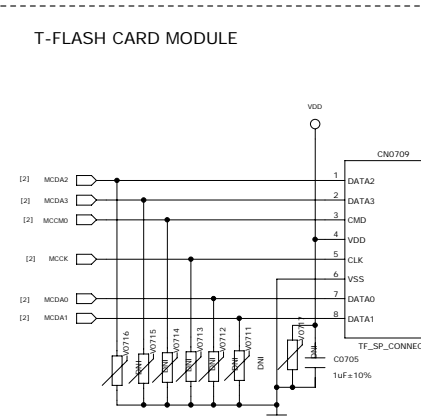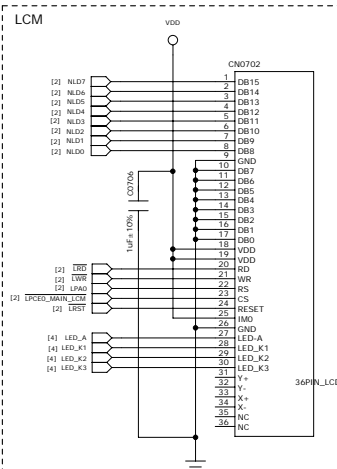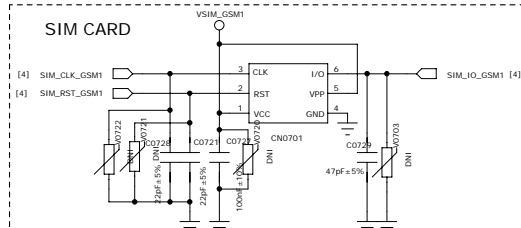

COMPANY:

TITLE:

LM802B INTERFACE

SIZE:

Document Number: SHEET: 7 of 12

Ver : 1.0

Date: