

North 710, Yihua Building, Shennan Road, Futian District, Shenzhen, P. R. China

Telephone: +86-755-29451282, Fax: +86-755-22639141

Report No.: FCC11-RTE070602

Page 1 of 53

FCC REPORT (Mobile phone)

Applicant: XPX Technology Limited

Address of Applicant: Flat B8 F8, Kin Tak Fung Ind Bldg,174 Wai Yip St,

Kwun Tong Kowloon, HongKong.

Equipment Under Test (EUT)

Product Name: mobile phone

Model No.: X11

Trade mark: XPX mobile phone

FCC ID: ZO6FCCX11002

Applicable standards: FCC CFR Title 47 Part 2: 2010

FCC CFR Title 47 Part22 Subpart H: 2010 FCC CFR Title 47 Part24 Subpart E: 2010

Date of sample receipt: 24 Jun., 2011

Date of Test: 27 Jun. -04 Jul., 2011

Date of report issued: 06 Jul., 2011

Test Result: PASS *

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC11-RTE070602 Page 2 of 53

2 Version

| Version No. | Date | Description |
|-------------|------------|-------------|
| 00 | 2011-07-06 | Original |
| | | |
| | | |
| | | |
| | | |

| Prepared By: | Collin. He | Date: | 2011-07-06 | |
|--------------|------------------|-------|------------|--|
| | Project Engineer | _ | | |
| Check By: | Homs. Hu | Date: | 2011-07-06 | |
| | Reviewer | _ | | |



Report No.: FCC11-RTE070602 Page 3 of 53

3 Contents

| | | | Page |
|---|------|--|------|
| 1 | C | OVER PAGE | 1 |
| 2 | VI | ERSION | 2 |
| 3 | | ONTENTS | |
| 4 | | EST SUMMARY | |
| 5 | | ENERAL INFORMATION | |
| Ī | 5.1 | CLIENT INFORMATION | |
| | 5.1 | GENERAL DESCRIPTION OF E.U.T | |
| | 5.3 | RELATED SUBMITTAL(S) / GRANT (S) | |
| | 5.4 | TEST METHODOLOGY | |
| | 5.5 | TEST FACILITY | 7 |
| | 5.6 | TEST LOCATION | |
| | 5.7 | TEST INSTRUMENTS LIST | 8 |
| 6 | S | YSTEM TEST CONFIGURATION | 10 |
| | 6.1 | EUT CONFIGURATION | 10 |
| | 6.2 | EUT Exercise | |
| | 6.3 | TEST PROCEDURE | 10 |
| | | 3.1 Conducted Emissions | |
| | | 3.2 Radiated Emissions | |
| | 6.4 | CONFIGURATION OF TESTED SYSTEM | |
| | 6.5 | DESCRIPTION OF TEST MODES | 11 |
| 7 | RI | F POWER OUTPUT MEASUREMENT | 12 |
| | 7.1 | STANDARD APPLICABLE | 12 |
| | 7.2 | TEST SETUP | |
| | 7.3 | MEASUREMENT PROCEDURE | |
| | 7.4 | TEST RESULT | 12 |
| 8 | El | RP, EIRP MEASUREMENT | 14 |
| | 8.1 | STANDARD APPLICABLE | 14 |
| | 8.2 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | |
| | 8.3 | Measurement Procedure | |
| | 8.4 | MEASUREMENT RESULT | 16 |
| 9 | M | IODULATION CHARACTERISTIC | 18 |
| 1 | 0 0 | CCUPIED BANDWIDTH | 19 |
| | 10.1 | STANDARD APPLICABLE | 19 |
| | 10.2 | TEST SETUP | |
| | 10.3 | TEST PROCEDURE | |
| | 10.4 | Тест Респит | 10 |



Report No.: FCC11-RTE070602 Page 4 of 53

| 11 0 | UT OF BAND EMISSION AT ANTENNA TERMINALS | 26 |
|-------|---|----|
| 11.1 | STANDARD APPLICABLE | 26 |
| 11.2 | TEST SETUP | |
| 11.3 | MEASUREMENT PROCEDURE | 26 |
| 11.4 | MEASUREMENT RESULT | 26 |
| 11 | 1.4.1 Spurious emission | 27 |
| 11 | 1.4.2 Band edge emission | 35 |
| 12 FI | IELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT | 35 |
| 12.1 | STANDARD APPLICABLE | 35 |
| 12.2 | EUT SETUP (BLOCK DIAGRAM OF CONFIGURATION) | 35 |
| 12.3 | MEASUREMENT PROCEDURE | 36 |
| 12.4 | Test Result | 37 |
| 13 FI | REQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT | 43 |
| 13.1 | STANDARD APPLICABLE | 43 |
| 13.2 | TEST SETUP | |
| 13.3 | TEST PROCEDURE | |
| 13.4 | TEST RESULT | 44 |
| 14 FI | REQUENCY STABILITY V.S. VOLTAGE MEASUREMENT | 45 |
| 14.1 | STANDARD APPLICABLE | 45 |
| 14.2 | TEST SETUP | 45 |
| 14.3 | TEST PROCEDURE | 45 |
| 14.4 | TEST RESULT | 46 |
| 15 A | C POWER LINE CONDUCTED EMISSION TEST | 47 |
| 15.1 | STANDARD APPLICABLE | 47 |
| 15.2 | TEST SETUP | 47 |
| 15.3 | TEST PROCEDURE | 47 |
| 15.4 | MEASUREMENT RESULT | 47 |
| 16 TI | EST SETUP PHOTO | 52 |
| 17 E | UT CONSTRUCTIONAL DETAILS | 53 |



Report No.: FCC11-RTE070602 Page 5 of 53

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--|--|--|
| RF Exposure (SAR) | Part 1.1307 Part 2.1093 | Passed* (Please refer to SAR Report) |
| RF Output Power | Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c) | Pass |
| Modulation Characteristics | Part 2.1047 | Pass |
| 99% & -26 dB Occupied Bandwidth | Part 2.1049 Part 22.917 Part 24.238 | Pass |
| Spurious Emissions at Antenna Terminal | Part 2.1051 Part 22.917 (a) Part 24.238 (a) | Pass |
| Field Strength of Spurious Radiation | Part 2.1053 Part 22.917 (a) Part 24.238 (a) | Pass |
| Out of band emission, Band Edge | Part 22.917 (a) Part 24.238 (a) | Pass |
| Frequency stability vs. temperature | Part 2.1055(a)(1)(b) | Pass |
| Frequency stability vs. voltage | Part 2.1055(d)(1)(2) | Pass |



Report No.: FCC11-RTE070602 Page 6 of 53

5 General Information

5.1 Client Information

| Applicant: | XPX Technology Limited |
|----------------------------------|---|
| Address of Applicant: | Flat B8 F8, Kin Tak Fung Ind Bldg,174 Wai Yip St, Kwun Tong Kowloon, HongKong. |
| Manufacturer/Factory: | Yuanfenn Industrial Dalang Lonhua |
| Address of Manufacturer/Factory: | 4&5 FL Area B,Yuanfenn Industrial Zone,Dalang Lonhua |

5.2 General Description of E.U.T.

| Product Name: | mobile phone |
|----------------------------|---|
| Model No.: | X11 |
| Data cable(USB): | Length 1m |
| Earphone line: | Length 1.5m |
| Power supply: | DC 3.7V Li-ion rechargeable Battery |
| AC adapter: | Input: AC 90-240V 50/60Hz 0.2A |
| | Output: DC 5.0V 500mA |
| Operation Frequency range: | GSM/GPRS 850: 824MHz-849MHz |
| | PCS1900: 1850MHz-1910MHz |
| Type of Emission: | 247KGXW |
| IMEI: | 352273017386340 |
| Software Version: | L1202_X11_6610_6620_MULTI_6432_V1.04_110621 |
| Hardware Version: | L1202_V2 |
| | · |



Report No.: FCC11-RTE070602 Page 7 of 53

5.3 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

5.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (2003) and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960



Report No.: FCC11-RTE070602 Page 8 of 53

5.7 Test Instruments list

| 5.7 Test flisti unicitis fist | | | | | | | |
|-------------------------------|--------------------------------------|--------------------------------|-----------------------------|------------------|------------------------|----------------------------|--|
| Radia | Radiated Emission: | | | | | | |
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) | |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | Mar. 30 2011 | Mar. 29 2012 | |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A | |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | Sept. 10 2010 | Sept. 09 2011 | |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | Feb. 26 2011 | Feb. 25 2012 | |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | 9120D-829 | GTS208 | Aug. 03 2010 | Aug. 02 2011 | |
| 6 | Horn Antenna | ETS-LINDGREN | 3160 | GTS217 | Aug. 03 2010 | Aug. 02 2011 | |
| 7 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A | |
| 8 | Coaxial Cable | GTS | N/A | GTS213 | Apr. 01 2011 | Mar. 31 2012 | |
| 9 | Coaxial Cable | GTS | N/A | GTS211 | Apr. 01 2011 | Mar. 31 2012 | |
| 9 | Coaxial cable | GTS | N/A | GTS210 | Apr. 01 2011 | Mar. 31 2012 | |
| 11 | Coaxial Cable | GTS | N/A | GTS212 | Apr. 01 2011 | Mar. 31 2012 | |
| 12 | Amplifier(100kHz-3GHz) | HP | 8347A | GTS204 | Aug. 03 2010 | Aug. 02 2011 | |
| 13 | Amplifier(2GHz-20GHz) | HP | 8349B | GTS206 | Aug. 03 2010 | Aug. 02 2011 | |
| 14 | Pre-amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | GTS218 | Aug. 03 2010 | Aug. 02 2011 | |
| 15 | Band filter | Amindeon | 82346 | GTS219 | Aug. 03 2010 | Aug. 02 2011 | |
| 16 | Universal radio communication tester | Rohde & Schwarz | CMU200 | GTS235 | May 11 2011 | May 11 2012 | |
| 17 | Signal Generator | Rohde & Schwarz | SML03 | GTS236 | May 11 2011 | May 11 2012 | |
| 18 | Temp. Humidity/ Barometer | Oregon Scientific | BA-888 | GTS248 | May 11 2011 | May 11 2012 | |
| 19 | D.C. Power Supply | Instek | PS-3030 | GTS232 | NA | NA | |
| 20 | Splitter | Agilent | 11636B | GTS237 | May 11 2011 | May 11 2012 | |



Report No.: FCC11-RTE070602 Page 9 of 53

| Cond | Conducted Emission: | | | | | |
|------|---------------------|--------------------------------|----------------------|------------------|------------------------|----------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Shielding Room | ZhongYu Electron | 7.0(L)x3.0(W)x3.0(H) | GTS206 | Apr. 10 2011 | Apr. 10 2012 |
| 2 | EMI Test Receiver | Rohde & Schwarz | ESCS30 | GTS208 | Sept. 14 2010 | Sept. 14 2011 |
| 3 | 10dB Pulse Limita | Rohde & Schwarz | N/A | GTS209 | Sept. 14 2010 | Sept. 14 2011 |
| 4 | LISN | SCHWARZBECK MESS-ELEKTRONIK | NSLK 8127 | GTS207 | Apr. 14 2011 | Apr. 14 2012 |
| 5 | Coaxial Cable | GTS | N/A | GTS406 | Apr. 01 2011 | Apr. 01 2012 |
| 6 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |



Report No.: FCC11-RTE070602

Page 10 of 53

6 SYSTEM TEST CONFIGURATION

6.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

6.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

6.3 Test Procedure

6.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

6.3.2 Radiated Emissions


The EUT is placed on a turn table which is 1.0m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.



Report No.: FCC11-RTE070602

Page 11 of 53

6.4 Configuration of Tested System



6.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for both GSM/PCS with power adaptors, earphone and Data cable. The worst-case H mode for GSM 850 band, PCS1900 band.



Report No.: FCC11-RTE070602

Page 12 of 53

7 RF POWER OUTPUT MEASUREMENT


7.1 Standard Applicable

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W

FCC 24.232(b) Mobile station are limited to 2W.

7.2 Test setup

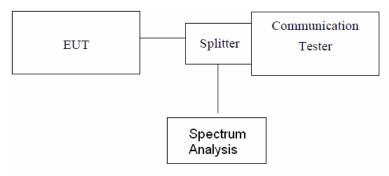

Note: Measurement setup for testing on Antenna connector

7.3 Measurement Procedure

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a spectrum analysis. Transmitter output was read off the spectrum analysis in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to spectrum analysis reading.

7.4 Test Result

| EUT Mode Frequency (MHz) | | Channel | PK power (dBm) |
|--------------------------|--------|---------|----------------|
| | 824.20 | 128 | 29.71 |
| GSM 850 | 848.80 | 190 | 30.59 |
| | 836.60 | 251 | 31.72 |

| EUT Mode | Frequency (MHz) | Channel | PK power (dBm) |
|----------|-----------------|---------|----------------|
| | 1850.20 | 512 | 28.99 |
| PCS 1900 | 1880.00 | 661 | 28.19 |
| | 1909.80 | 810 | 27.15 |




Report No.: FCC11-RTE070602 Page 13 of 53


Please refer to the following plots.

Please refer to the following plots.

| Test mode: | GSM850 | Test channel: | 128/190/251 |
|------------|--------|---------------|-------------|

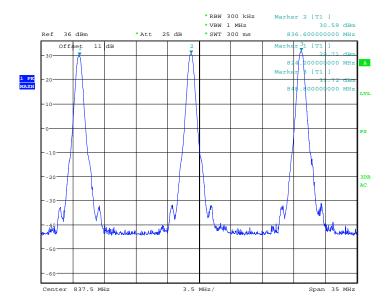

Test mode: PCS1900 Test channel: 512/661/810

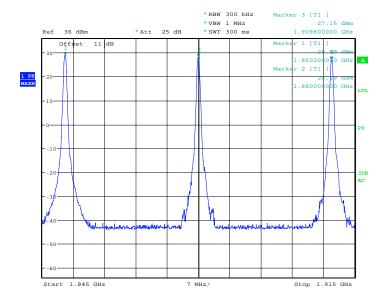



Report No.: FCC11-RTE070602

Page 14 of 53


8 ERP, EIRP MEASUREMENT

8.1 Standard Applicable


According to FCC §2.1046 FCC 22.913(a) Mobile station are limited to 7W ERP. FCC 24.232(b) Mobile station are limited to 2W EIRP.

8.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

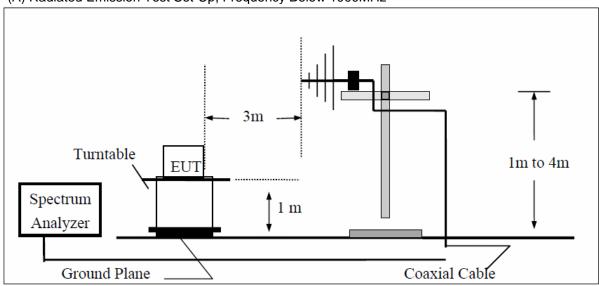


(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

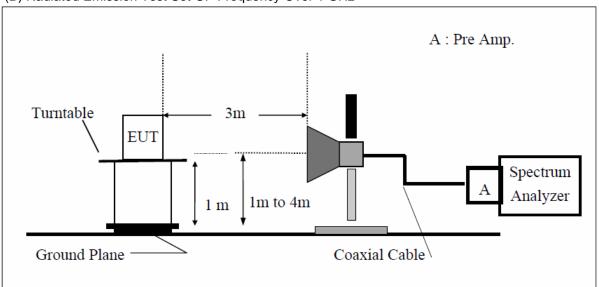



Report No.: FCC11-RTE070602 Page 15 of 53

(C) Substituted Method Test Set-UP

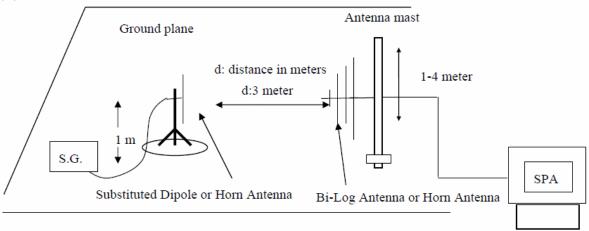

8.3 Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)



Report No.: FCC11-RTE070602 Page 16 of 53

8.4 Measurement Result

| EUT | Frequency | СН | EUT | Antenna | SPA Reading | S.G. Output | Antenna Gain | Cable Loss | ERP | Limit |
|---------|-----------|-----|------|---------|----------------|----------------|-----------------|--|-------|-------|
| mode | (MHz) | CII | Pol. | Pol. | (dBuV) | (dBm) | (dBd) | (dB) | (dBm) | (dBm) |
| | | | 11 | V | 120.78 | 36.39 | -7.87 | Loss (dBm) 3.62 24.90 3.62 30.80 3.62 27.63 3.62 22.22 3.62 24.17 3.62 29.21 3.65 26.97 3.65 31.62 3.65 27.59 3.65 22.27 3.65 24.16 3.65 29.23 | 24.90 | 38.45 |
| | | | Н | Н | 125.56 | 42.29 | -7.87 | 3.62 | 30.80 | 38.45 |
| | 924.20 | 128 | 17.1 | V | 123.51 | 39.12 | -7.87 | 3.62 | 27.63 | 38.45 |
| | 824.20 | 128 | E1 | Н | 118.98 | 33.71 | -7.87 | 3.62 | 22.22 | 38.45 |
| | | | E2 | V | 120.05 | 35.66 | -7.87 | 3.62 | 24.17 | 38.45 |
| | | | E2 | Н | 126.97 | 40.70 | -7.87 | 3.62 29.21 | 38.45 | |
| | | | 11 | V | 123.75 | 38.50 | -7.88 | 3.65 | 26.97 | 38.45 |
| | | | Н | Н | 128.26 | 43.15 | -7.88 | 3.65 | 31.62 | 38.45 |
| CCM 050 | 026.60 | 100 | E1 | V | 124.37 | 39.12 | -7.88 | 3.65 | 27.59 | 38.45 |
| GSM 850 | 836.60 | 190 | E1 | Н | 117.03 | 33.80 | -7.88 | | 22.27 | 38.45 |
| | | | F2 | V | 120.94 | 35.69 | -7.88 | 3.65 | 24.16 | 38.45 |
| | | | E2 | Н | 124.99 | 40.76 | -7.88 | 3.65 | 29.23 | 38.45 |
| | | | *** | V | 125.53 | 41.41 | -7.88 | 3.68 | 29.85 | 38.45 |
| | | | Н | Н | 126.09 | 43.86 | -7.88 | 3.68 | 32.30 | 38.45 |
| | 0.40.00 | 251 | F1 | V | 122.56 | 39.44 | -7.88 | 3.68 | 27.88 | 38.45 |
| | 848.80 | 251 | E1 | Н | 118.77 | 35.58 | -7.88 | 3.68 | 24.02 | 38.45 |
| | | | | V | 118.93 | 34.81 | -7.88 | 3.68 | 23.25 | 38.45 |
| | | | E2 | Н | 128.77 | 42.53 | -7.88 | 3.68 | 30.97 | 38.45 |

Remark:

(1) The RBW,VBW of SPA for frequency Below 1GHz was RBW=100 KHz, VBW=300KHz, Above 1GHz was RBW= 1MHz, VBW= 3MHz



Report No.: FCC11-RTE070602 Page 17 of 53

| EUT | Frequency | СН | EUT | Antenna | SPA Reading | S.G. Output | Antenna Gain | Cable Loss | EIRP | Limit | | | | |
|----------|-----------|----------|------|---------|----------------|----------------|-----------------|---------------|-------|--------|-------|-------|------|-------|
| mode | (MHz) | Сп | Pol. | Pol. | (dBuV) | (dBm) | (dBi) | (dB) | (dBm) | (dBm) | | | | |
| | | | ** | V | 123.39 | 19.00 | 9.90 | 5.56 | 23.34 | 33.00 | | | | |
| | | | Н | Н | 129.28 | 24.86 | 9.90 | 5.56 | 29.20 | 33.00 | | | | |
| | 1050.20 | 510 | F1 | V | 124.87 | 20.48 | 9.90 | 5.56 | 24.82 | 33.00 | | | | |
| | 1850.20 | 512 | E1 | Н | 125.88 | 21.70 | 9.90 | 5.56 | 26.04 | 33.00 | | | | |
| | | | EO | V | 126.53 | 22.14 | 9.90 | 5.56 | 26.48 | 33.00 | | | | |
| | | | E2 | Н | 127.40 | 23.22 | 9.90 | 5.84 | 27.28 | 33.00 | | | | |
| | | | Н | V | 121.60 | 17.24 | 9.99 | 5.61 | 21.62 | 33.00 | | | | |
| | | | | Н | 127.92 | 23.78 | 9.99 | 5.61 | 28.16 | 33.00 | | | | |
| DCG 1000 | 1000.00 | CC1 | F1 | V | 126.38 | 22.02 | 9.99 | 5.61 | 26.40 | 33.00 | | | | |
| PCS 1900 | 1880.00 | 661 | E1 | Н | 127.03 | 23.19 | 9.99 | 5.61 | 27.57 | 33.00 | | | | |
| | | | F2 | V | 122.67 | 19.31 | 9.99 | 5.61 | 23.69 | 33.00 | | | | |
| | | | E2 | Н | 127.50 | 22.36 | 9.99 | 5.61 | 26.74 | 33.00 | | | | |
| | | | *** | V | 121.82 | 17.49 | 10.08 | 5.66 | 21.91 | 33.00 | | | | |
| | | | Н | Н | 126.35 | 23.24 | 10.08 | 5.66 | 27.66 | 33.00 | | | | |
| | 1000.00 | 010 | F1 | V | 124.32 | 18.99 | 10.08 | 5.66 | 23.41 | 33.00 | | | | |
| | 1909.80 | 0.80 810 | E1 | Н | 126.51 | 22.40 | 10.08 | 5.66 | 26.82 | 33.00 | | | | |
| | | | | V | 123.99 | 19.66 | 10.08 | 5.66 | 24.08 | 33.00 | | | | |
| | | | | | | | | E2 | Н | 126.33 | 22.22 | 10.08 | 5.66 | 26.64 |

Remark:

(1) The RBW,VBW of SPA for frequency Below 1GHz was RBW=100 KHz, VBW=300KHz, Above 1GHz was RBW= 1MHz, VBW= 3MHz



Report No.: FCC11-RTE070602 Page 18 of 53

9 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.



Report No.: FCC11-RTE070602


Page 19 of 53

10 OCCUPIED BANDWIDTH

10.1 Standard Applicable

CFR 47 §2.1049

10.2 Test setup

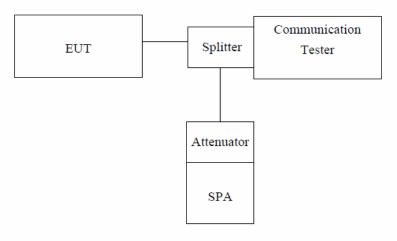

Note: Measurement setup for testing on Antenna connector

10.3 Test Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/47KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/150KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

10.4 Test Result

| EUT Mode | Frequency(MHz) | СН | 26dB bandwidth | 99% Bandwidth(MHz) |
|----------|----------------|-----|----------------|--------------------|
| | 824.20 | 128 | 316.00 | 245.00 |
| GSM 850 | 836.60 | 190 | 312.00 | 244.00 |
| | 848.80 | 251 | 314.00 | 247.00 |


| EUT Mode Frequency(MHz | | СН | 26dB bandwidth | 99% Bandwidth(MHz) |
|------------------------|---------|-----|----------------|--------------------|
| | 1850.20 | 512 | 315.00 | 245.00 |
| PCS 1900 | 1880.00 | 661 | 324.00 | 245.00 |
| | 1909.80 | 810 | 315.00 | 244.00 |

Please refer to the following plots.




Report No.: FCC11-RTE070602 Page 20 of 53

99% bandwidth:

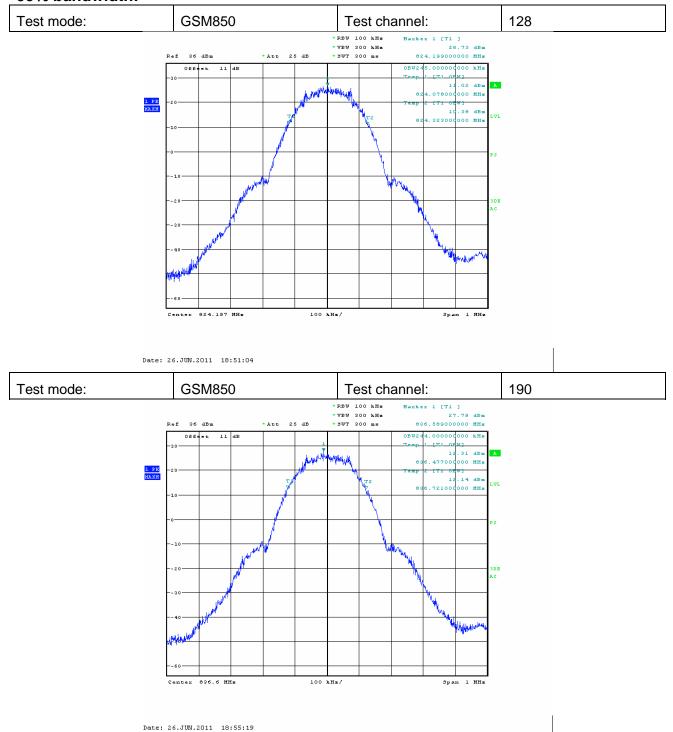




Report No.: FCC11-RTE070602 Page 21 of 53

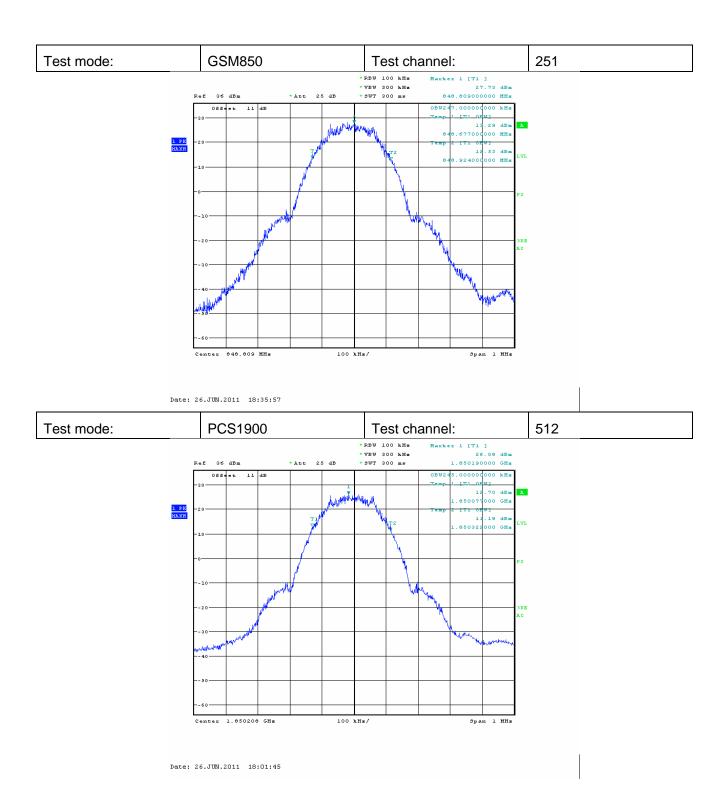




Report No.: FCC11-RTE070602 Page 22 of 53

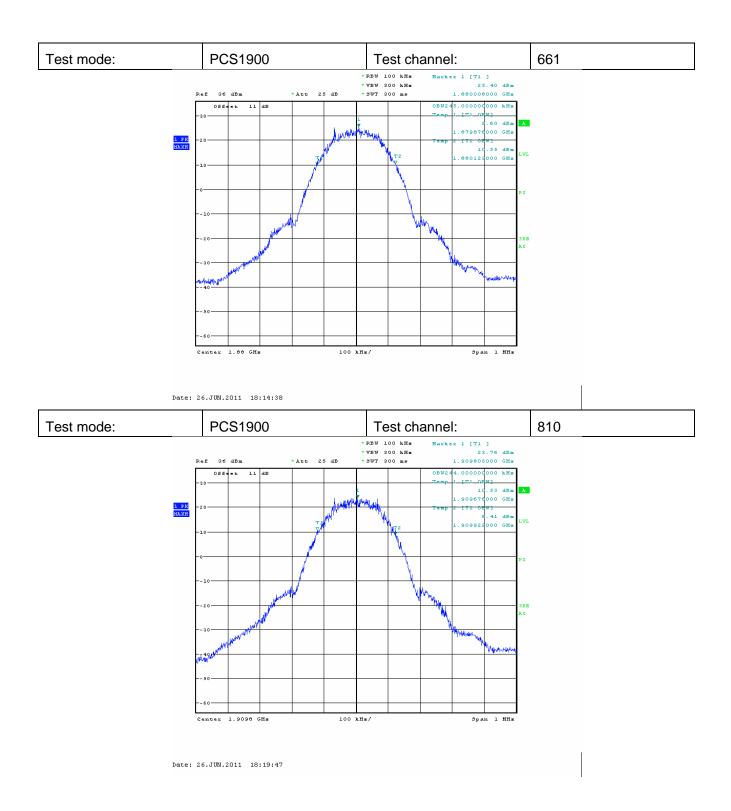




Report No.: FCC11-RTE070602 Page 23 of 53

26dB bandwidth:

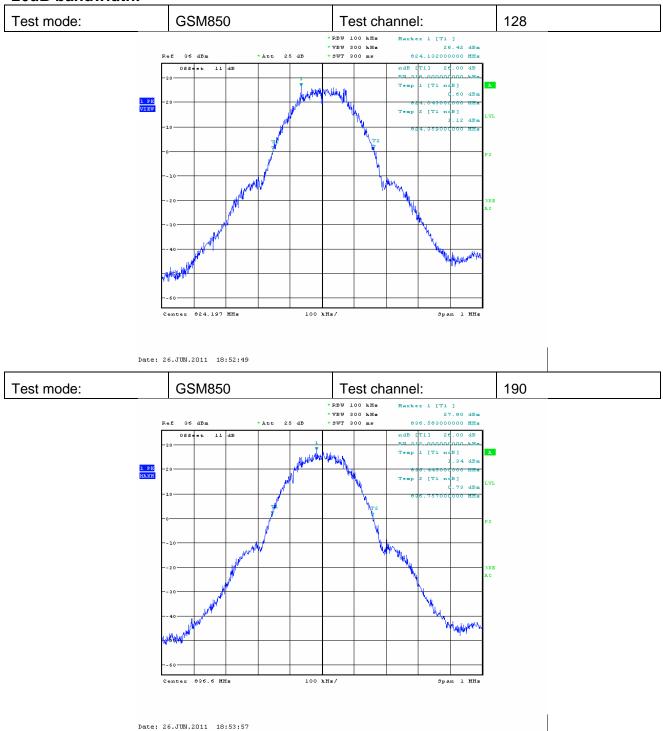




Report No.: FCC11-RTE070602 Page 24 of 53

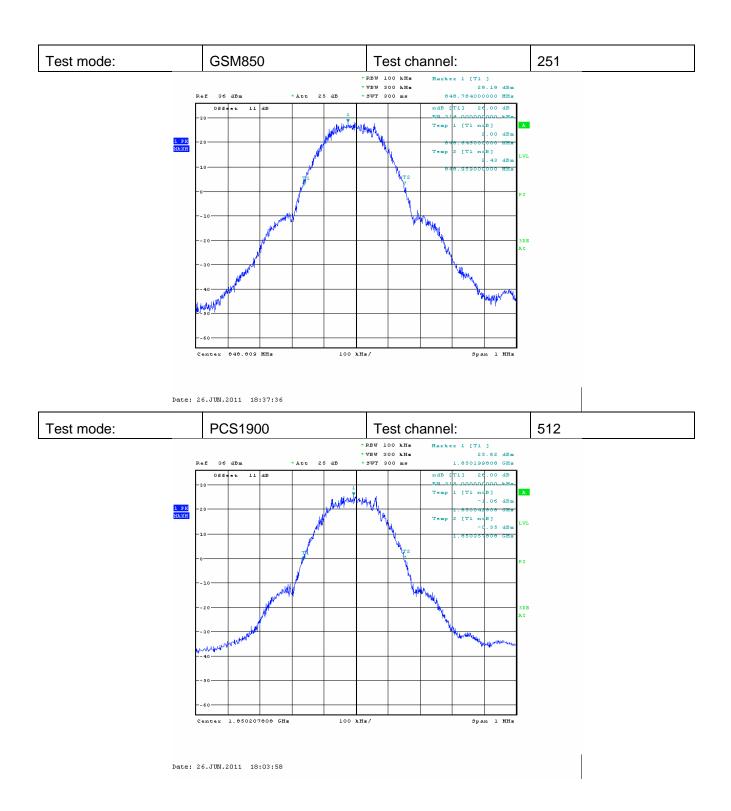



Report No.: FCC11-RTE070602 Page 25 of 53

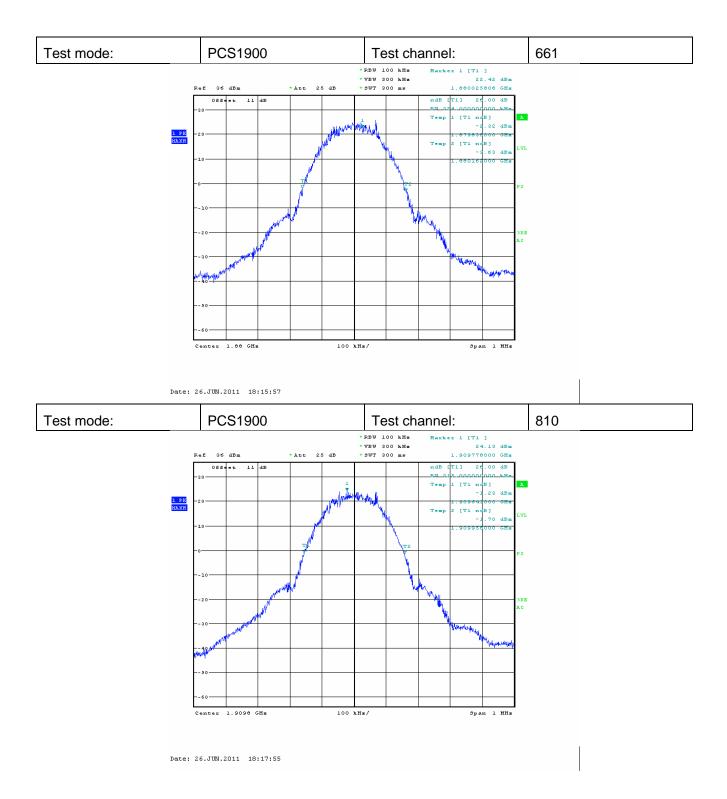



Report No.: FCC11-RTE070602 Page 26 of 53


11 OUT OF BAND EMISSION AT ANTENNA TERMINALS

11.1 Standard Applicable

According to FCC §2.1051.

FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power inwatts) dBc below the mean power output outside a license's frequency block (-13dBm)

11.2 Test setup

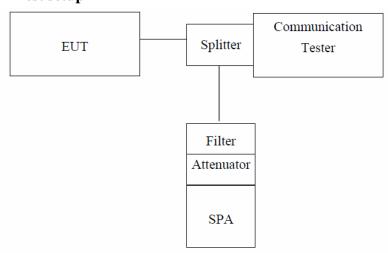

Note: Measurement setup for testing on Antenna connector

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

11.3 Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit =-13dBm.


11.4 Measurement Result




Report No.: FCC11-RTE070602 Page 27 of 53

11.4.1 Spurious emission

| Test mode: | GSM850 | Test channel: | 128 |
|-------------|--------|---------------|-----|
| 1 oot modo. | Comeco | 1 oot onarmon | 120 |

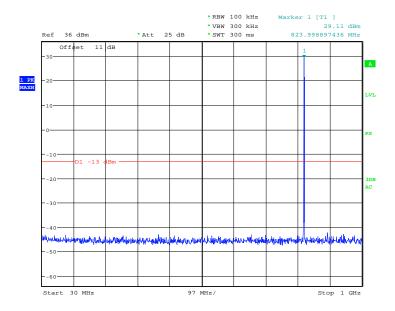


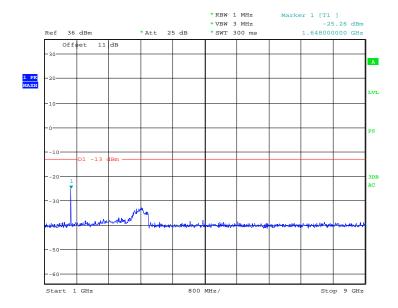




Report No.: FCC11-RTE070602 Page 28 of 53

| Test mode: | GSM850 | Test channel: | 190 |
|------------|--------|---------------|-----|

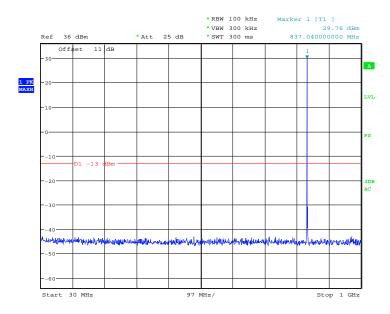


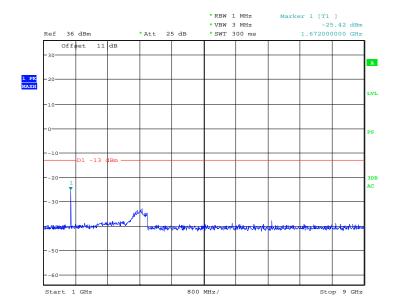




Report No.: FCC11-RTE070602 Page 29 of 53

Test mode: GSM850 Test channel: 251

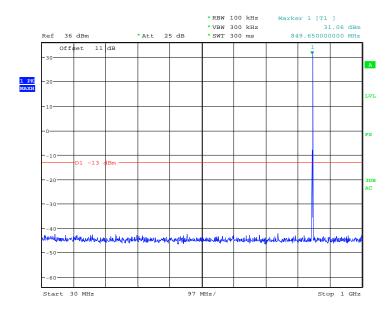


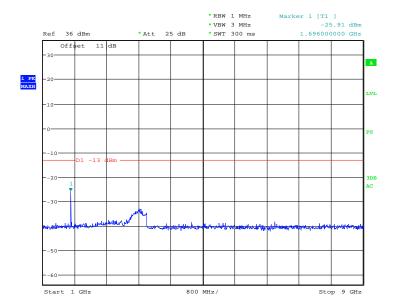




Report No.: FCC11-RTE070602 Page 30 of 53

Test mode: PCS1900 Test channel: 512

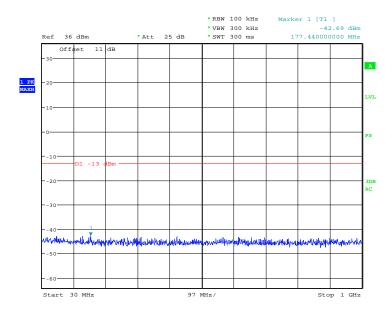


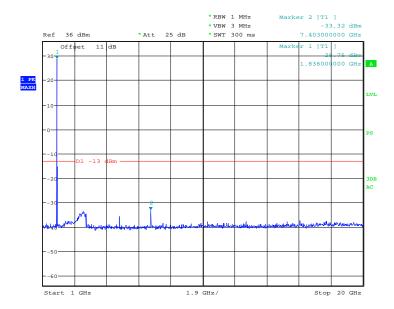




Report No.: FCC11-RTE070602 Page 31 of 53

| Test mode: | PCS1900 | Test channel: | 661 |
|------------|---------|---------------|-----|

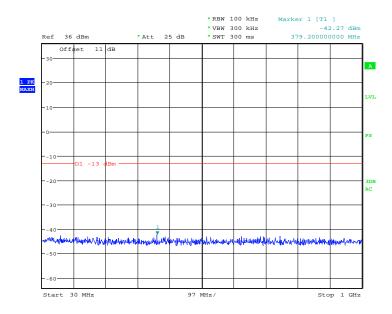


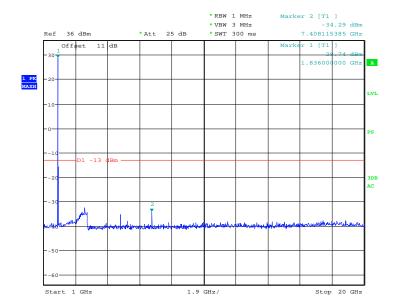




Report No.: FCC11-RTE070602 Page 32 of 53

Test mode: PCS1900 Test channel: 810

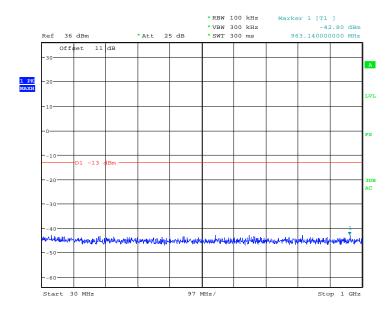

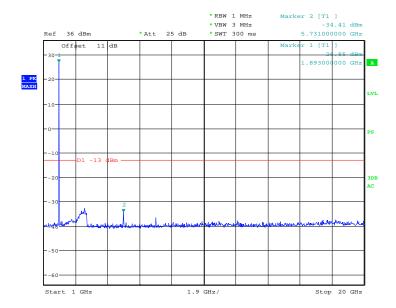





Report No.: FCC11-RTE070602 Page 33 of 53

11.4.2 Band edge emission

| Test mode: | GSM850 | Test channel: | 128 |
|------------|--------|---------------|-----|

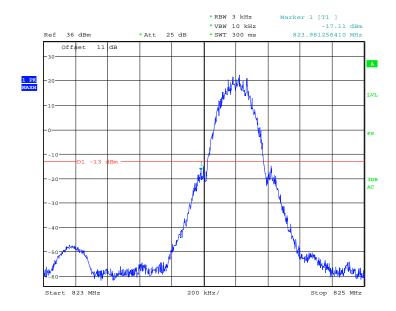


Test mode: GSM850 Test channel: 251

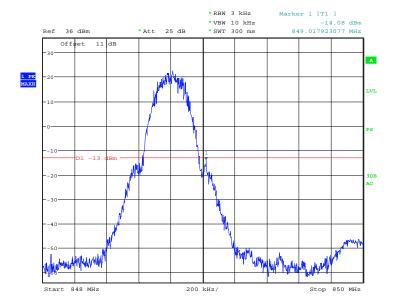




Report No.: FCC11-RTE070602 Page 34 of 53

Test mode: PCS1900 Test channel: 512

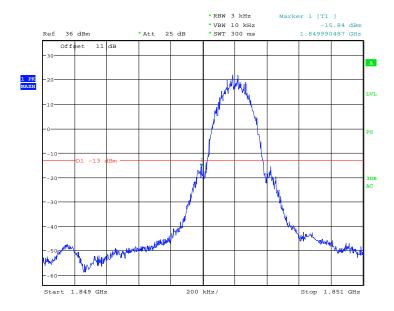

Test mode: PCS1900 Test channel: 810

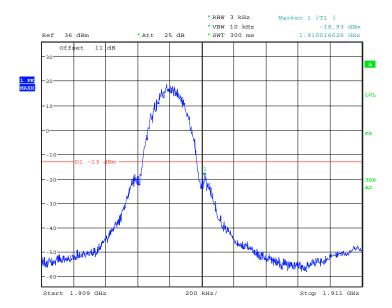



Report No.: FCC11-RTE070602

Page 35 of 53

12 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT


12.1 Standard Applicable

According to FCC §2.1053,


FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

12.2 EUT Setup (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency below 1000MHz

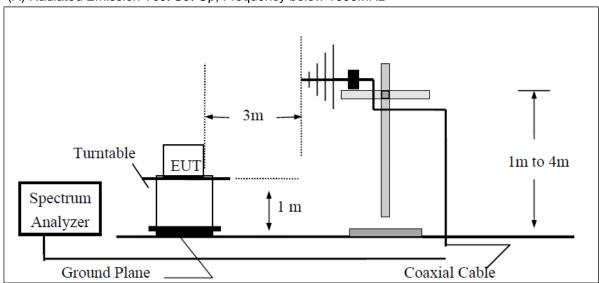


(B) Radiated Emission Test Set-UP Frequency over 1 GHz

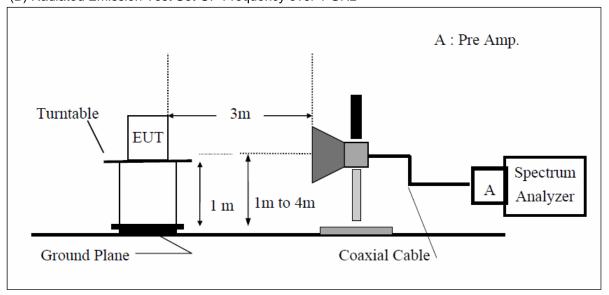



Report No.: FCC11-RTE070602 Page 36 of 53

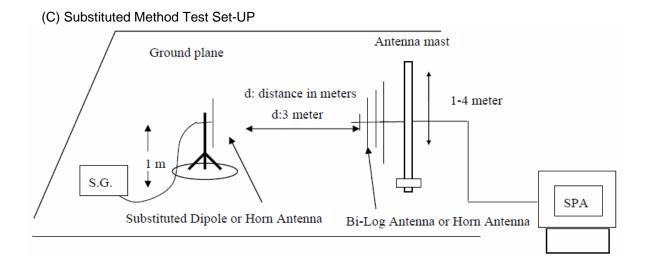

12.3 Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)



Report No.: FCC11-RTE070602 Page 37 of 53

12.4 Test Result

| Test mode: | GSM850 | Test channel: | 128 | EUT position | Н |
|------------|--------|---------------|-----|--------------|---|
| | | | | • | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 125.58 | 54.67 | V | -50.03 | -7.34 | 0.95 | -58.32 | -13.00 | -45.32 |
| 561.84 | 50.71 | V | -51.05 | -7.76 | 1.37 | -60.18 | -13.00 | -47.18 |
| 824.00 | 98.69 | V | -7.31 | -7.87 | 3.62 | -18.80 | -13.00 | -5.80 |
| 1648.40 | 77.31 | V | -27.27 | 9.29 | 5.23 | -23.21 | -13.00 | -10.21 |
| 2472.60 | 63.76 | V | -35.25 | 10.08 | 6.53 | -31.70 | -13.00 | -18.70 |
| 3296.80 | | V | | | | | -13.00 | |
| 4121.00 | | V | | | | | -13.00 | |
| 4945.20 | | V | | | | | -13.00 | |
| 5769.40 | | V | | | | | -13.00 | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 125.58 | 53.29 | Ι | -53.50 | -7.34 | 0.95 | -61.79 | -13.00 | -48.79 |
| 561.84 | 52.91 | Н | -49.51 | -7.76 | 1.37 | -58.64 | -13.00 | -45.64 |
| 824.00 | 94.66 | Н | -9.73 | -7.87 | 3.62 | -21.22 | -13.00 | -8.22 |
| 1648.40 | 76.03 | Н | -28.79 | 9.29 | 5.23 | -24.73 | -13.00 | -11.73 |
| 2472.60 | 67.08 | Н | -37.99 | 10.08 | 6.53 | -34.44 | -13.00 | -21.44 |
| 3296.80 | | Н | | | | | -13.00 | |
| 4121.00 | | Н | | | | | -13.00 | |
| 4945.20 | | Н | | | | | -13.00 | |
| 5769.40 | | Н | | | | | -13.00 | |

Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

ERP(dBm) = SG Setting(dBm) + Antenna Gain (dBd) - Cable loss (dB)



Report No.: FCC11-RTE070602 Page 38 of 53

| Test mode: | GSM850 | Test channel: | 190 | EUT position | Н |
|------------|--------|---------------|-----|--------------|---|
|------------|--------|---------------|-----|--------------|---|

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 295.68 | 50.86 | V | -45.98 | -7.67 | 1.10 | -54.75 | -13.00 | -41.75 |
| 651.27 | 47.78 | V | -44.48 | -7.83 | 1.58 | -53.89 | -13.00 | -40.89 |
| 1673.20 | 74.44 | V | -28.99 | 9.36 | 5.27 | -24.90 | -13.00 | -11.90 |
| 2509.80 | 66.78 | V | -35.76 | 10.09 | 6.58 | -32.25 | -13.00 | -19.25 |
| 3346.40 | 69.23 | V | -36.44 | 12.28 | 7.79 | -31.95 | -13.00 | -18.95 |
| 4183.00 | | V | | | | | -13.00 | |
| 5019.60 | | V | | | | | -13.00 | |
| 5856.20 | | V | | | | | -13.00 | |
| 6692.80 | | V | | | | | -13.00 | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 295.68 | 52.10 | Н | -46.17 | -7.67 | 1.10 | -54.94 | -13.00 | -41.94 |
| 651.27 | 52.01 | Η | -43.40 | -7.83 | 1.58 | -52.81 | -13.00 | -39.81 |
| 1673.20 | 76.29 | Н | -29.51 | 9.36 | 5.27 | -25.42 | -13.00 | -12.42 |
| 2509.80 | 67.24 | Н | -36.51 | 10.09 | 6.58 | -33.00 | -13.00 | -20.00 |
| 3346.40 | 66.82 | Н | -37.25 | 12.28 | 7.79 | -32.76 | -13.00 | -19.76 |
| 4183.00 | | Н | | | | | -13.00 | |
| 5019.60 | | Н | | | | | -13.00 | |
| 5856.20 | | Н | | | | | -13.00 | |
| 6692.80 | | Н | | | | | -13.00 | |

Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

ERP(dBm) = SG Setting(dBm) + Antenna Gain (dBd) - Cable loss (dB)



Report No.: FCC11-RTE070602 Page 39 of 53

| Test mode: | GSM850 | Test channel: | 251 | EUT position | Н |
|------------|--------|---------------|-----|--------------|---|
| | | | | | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 325.48 | 51.58 | V | -49.09 | -7.77 | 1.38 | -58.24 | -13.00 | -45.24 |
| 748.51 | 49.75 | V | -47.33 | -7.88 | 2.88 | -58.09 | -13.00 | -45.09 |
| 849.00 | 94.34 | V | -8.20 | -7.88 | 3.68 | -19.76 | -13.00 | -6.76 |
| 1697.60 | 77.38 | V | -29.47 | 9.44 | 5.31 | -25.34 | -13.00 | -12.34 |
| 2546.40 | 68.52 | V | -30.56 | 10.20 | 6.63 | -26.99 | -13.00 | -13.99 |
| 3395.20 | | V | | | | | -13.00 | |
| 4244.00 | | V | | | | | -13.00 | |
| 5092.80 | | V | | | | | -13.00 | |
| 5941.60 | | V | | | | | -13.00 | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 212.57 | 52.43 | Н | -44.94 | -7.77 | 1.38 | -54.09 | -13.00 | -41.09 |
| 598.68 | 52.46 | Н | -41.94 | -7.88 | 2.88 | -52.70 | -13.00 | -39.70 |
| 824.00 | 92.67 | Н | -9.80 | -7.88 | 3.68 | -21.36 | -13.00 | -8.36 |
| 1648.40 | 78.94 | Н | -27.78 | 9.44 | 5.31 | -23.65 | -13.00 | -10.65 |
| 2472.60 | 69.63 | Н | -31.73 | 10.20 | 6.63 | -28.16 | -13.00 | -15.16 |
| 3296.80 | | Н | | | | | -13.00 | |
| 4121.00 | | Н | | | | | -13.00 | |
| 4945.20 | | Н | | | | | -13.00 | |
| 5769.40 | | Н | | | | | -13.00 | |

Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

ERP(dBm) = SG Setting(dBm) + Antenna Gain (dBd) - Cable loss (dB)



Report No.: FCC11-RTE070602 Page 40 of 53

| Test mode: | PCS1900 | Test channel: | 512 | EUT position | Н |
|------------|---------|---------------|-----|--------------|---|
| | | | | - | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 527.54 | 54.67 | V | -46.85 | -7.83 | 1.41 | -56.09 | -13.00 | -43.09 |
| 1387.27 | 50.71 | V | -46.77 | 8.44 | 4.31 | -42.64 | -13.00 | -29.64 |
| 1850.00 | 75.00 | V | -23.79 | 9.90 | 5.56 | -19.45 | -13.00 | -6.45 |
| 3700.40 | 70.07 | V | -26.96 | 12.61 | 8.31 | -22.66 | -13.00 | -9.66 |
| 5550.60 | 68.41 | V | -30.34 | 13.23 | 10.33 | -27.44 | -13.00 | -14.44 |
| 7400.80 | | V | | | | | -13.00 | |
| 9251.00 | | V | | | | | -13.00 | |
| 11101.20 | | V | | | | | -13.00 | |
| 12951.40 | | V | | | | | -13.00 | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 527.54 | 53.96 | Н | -47.95 | -7.83 | 1.41 | -57.19 | -13.00 | -44.19 |
| 1578.41 | 49.37 | Н | -44.62 | 8.17 | 4.76 | -41.21 | -13.00 | -28.21 |
| 1850.00 | 73.84 | Н | -25.18 | 9.90 | 5.56 | -20.84 | -13.00 | -7.84 |
| 3700.40 | 68.06 | Н | -29.11 | 12.61 | 8.31 | -24.81 | -13.00 | -11.81 |
| 5550.60 | 67.81 | Н | -31.10 | 13.23 | 10.33 | -28.20 | -13.00 | -15.20 |
| 7400.80 | | Н | | | | | -13.00 | |
| 9251.00 | | Н | | | | | -13.00 | |
| 11101.20 | | Н | | | | | -13.00 | |
| 12951.40 | | Н | | | | | -13.00 | |

Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

ERP(dBm) = SG Setting(dBm) + Antenna Gain (dBd) - Cable loss (dB)



Report No.: FCC11-RTE070602 Page 41 of 53

| Test mode: | PCS1900 | Test channel: | 661 | EUT position | Н |
|------------|---------|---------------|-----|--------------|---|
| | | | | | |

| Freq(MHz) | SPA reading | Ant. Pol. | S.G output (dBm) | Antenna Gain (dBd) | Cable Loss (dB) | ERP (dBm) | Limit (dBm) | Margin (dBm) |
|-----------|-------------|--------------|---------------------|-----------------------|--------------------|--------------|----------------|-----------------|
| 527.54 | 55.55 | V | -45.90 | -7.83 | 1.41 | -55.14 | -13.00 | -42.14 |
| 1607.43 | 49.98 | V | -43.91 | 8.19 | 4.82 | -40.54 | -13.00 | -27.54 |
| 3760.00 | 71.87 | V | -26.64 | 12.60 | 8.39 | -22.43 | -13.00 | -9.43 |
| 5640.00 | 65.99 | V | -33.33 | 13.36 | 10.41 | -30.38 | -13.00 | -17.38 |
| 7520.00 | 66.54 | V | -32.38 | 11.45 | 12.19 | -33.12 | -13.00 | -20.12 |
| 9400.00 | | V | | | | | -13.00 | |
| 11280.00 | | V | | | | | -13.00 | |
| 13160.00 | | V | | | | | -13.00 | |
| 15040.00 | | V | | | | | -13.00 | |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 527.54 | 56.83 | Н | -45.05 | -7.83 | 1.41 | -54.29 | -13.00 | -41.29 |
| 1201.45 | 50.23 | Н | -45.43 | 7.89 | 4.58 | -42.12 | -13.00 | -29.12 |
| 3760.00 | 72.73 | Н | -26.36 | 12.60 | 8.39 | -22.15 | -13.00 | -9.15 |
| 5640.00 | 66.53 | Н | -32.03 | 13.36 | 10.41 | -29.08 | -13.00 | -16.08 |
| 7520.00 | 68.43 | Н | -30.80 | 11.45 | 12.19 | -31.54 | -13.00 | -18.54 |
| 9400.00 | | Н | | | | | -13.00 | |
| 11280.00 | | Н | | | | | -13.00 | |
| 13160.00 | | Н | | | | | -13.00 | |
| 15040.00 | | Н | | | | | -13.00 | |

Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

ERP(dBm) = SG Setting(dBm) + Antenna Gain (dBd) - Cable loss (dB)



Report No.: FCC11-RTE070602 Page 42 of 53

| Test mode: PCS1900 Test channel | I: 810 | EUT position | Н |
|---------------------------------|--------|--------------|---|
|---------------------------------|--------|--------------|---|

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 527.54 | 55.55 | V | -45.97 | -7.83 | 1.41 | -55.21 | -13.00 | -42.21 |
| 1388.22 | 50.98 | V | -44.11 | 7.56 | 4.56 | -41.11 | -13.00 | -28.11 |
| 1910.00 | 74.35 | V | -22.88 | 10.08 | 5.66 | -18.46 | -13.00 | -5.46 |
| 3819.60 | 63.89 | V | -32.56 | 12.60 | 8.69 | -28.65 | -13.00 | -15.65 |
| 5729.40 | 65.32 | V | -32.12 | 13.86 | 10.73 | -28.99 | -13.00 | -15.99 |
| 7639.20 | | V | | | | | -13.00 | 13.00 |
| 9549.00 | | V | | | | | -13.00 | 13.00 |
| 11458.80 | | V | | | | | -13.00 | 13.00 |
| 13368.60 | | V | | | | | -13.00 | 13.00 |

| Freq(MHz) | SPA | Ant. | S.G output | Antenna Gain | Cable Loss | ERP | Limit | Margin |
|-----------|---------|------|------------|--------------|------------|--------|--------|--------|
| | reading | Pol. | (dBm) | (dBd) | (dB) | (dBm) | (dBm) | (dBm) |
| 527.54 | 54.84 | Н | -46.81 | -7.83 | 1.41 | -56.05 | -13.00 | -43.05 |
| 895.39 | 52.18 | Н | -43.85 | -7.84 | 3.68 | -55.37 | -13.00 | -42.37 |
| 1910.00 | 72.59 | Н | -24.56 | 10.08 | 5.66 | -20.14 | -13.00 | -7.14 |
| 3819.60 | 62.09 | Н | -34.93 | 12.60 | 8.69 | -31.02 | -13.00 | -18.02 |
| 5729.40 | 64.45 | Н | -35.31 | 13.86 | 10.73 | -32.18 | -13.00 | -19.18 |
| 7639.20 | | Н | | | | | -13.00 | |
| 9549.00 | | Н | | | | | -13.00 | |
| 11458.80 | | Н | | | | | -13.00 | |
| 13368.60 | | Н | | | | | -13.00 | |

Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

ERP(dBm) = SG Setting(dBm) + Antenna Gain (dBd) - Cable loss (dB)



Report No.: FCC11-RTE070602

Page 43 of 53


13 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

13.1 Standard Applicable

According to FCC §2.1055(a)(1)(b).

Frequency Tolerance: 2.5 ppm

13.2 Test setup

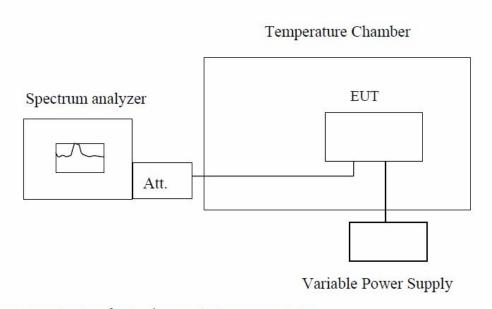

Note: Measurement setup for testing on Antenna connector

13.3 Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25° C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30° C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10° C increased per stage until the highest temperature of $+50^{\circ}$ C reached.



Report No.: FCC11-RTE070602

Page 44 of 53

13.4 Test Result

| Referen | Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz | | | | | | | | |
|---------------------|---|----|----------------|-----|--|--|--|--|--|
| Temperature (°C) | Power Frequency Frequency Supplied Error Error (Vdc) (Hz) (ppm) | | Limit (ppm) | | | | | | |
| -20 | 3.7 | 32 | 0.0383 | 2.5 | | | | | |
| -10 | 3.7 | 33 | 0.0394 | 2.5 | | | | | |
| 0 | 3.7 | 31 | 0.0371 | 2.5 | | | | | |
| 10 | 3.7 | 34 | 0.0406 | 2.5 | | | | | |
| 20 | 3.7 | 36 | 0.0430 | 2.5 | | | | | |
| 30 | 3.7 | 34 | 0.0406 | 2.5 | | | | | |
| 40 | 3.7 | 36 | 0.0430 | 2.5 | | | | | |
| 50 | 3.7 | 32 | 0.0383 | 2.5 | | | | | |

| Referen | Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz | | | | | | | | |
|---------------------|---|----|-----------------------------|----------------|--|--|--|--|--|
| Temperature (°C) | Power Frequency Supplied Error (Vdc) (Hz) | | Frequency Error (ppm) | Limit (ppm) | | | | | |
| -20 | 3.7 | 37 | 0.0197 | 2.5 | | | | | |
| -10 | 3.7 | 41 | 0.0218 | 2.5 | | | | | |
| 0 | 3.7 | 33 | 0.0176 | 2.5 | | | | | |
| 10 | 3.7 | 35 | 0.0186 | 2.5 | | | | | |
| 20 | 3.7 | 31 | 0.0165 | 2.5 | | | | | |
| 30 | 3.7 | 34 | 0.0181 | 2.5 | | | | | |
| 40 | 3.7 | 39 | 0.0207 | 2.5 | | | | | |
| 50 | 3.7 | 43 | 0.0229 | 2.5 | | | | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC11-RTE070602

Page 45 of 53


14 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

14.1 Standard Applicable

According to FCC §2.1055(d)(1)(2).

Frequency Tolerance: 2.5 ppm

14.2 Test setup

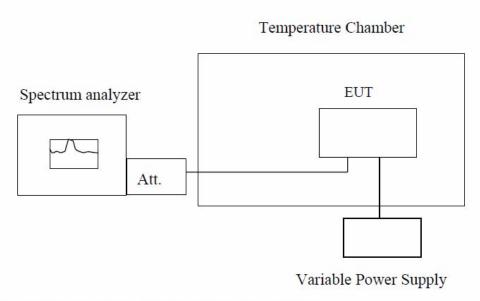

Note: Measurement setup for testing on Antenna connector

14.3 Test Procedure

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC11-RTE070602

Page 46 of 53

14.4 Test Result

| Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz | | | | | | | | |
|---|------|----|--------|-----|--|--|--|--|
| Temperature (°C) | | | | | | | | |
| 25 | 4.25 | 32 | 0.0383 | 2.5 | | | | |
| 25 | 3.7 | 34 | 0.0406 | 2.5 | | | | |
| 25 | 3.4 | 31 | 0.0371 | 2.5 | | | | |

| Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz | | | | | | | | |
|---|----------------------------|----------------------------|-----------------------------|----------------|--|--|--|--|
| Temperature (°C) | Power Supplied (Vdc) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) | | | | |
| 25 | 4.25 | 39 | 0.0207 | 2.5 | | | | |
| 25 | 3.7 | 31 | 0.0165 | 2.5 | | | | |
| 25 | 3.4 | 44 | 0.0234 | 2.5 | | | | |



Report No.: FCC11-RTE070602

Page 47 of 53

15 AC POWER LINE CONDUCTED EMISSION TEST

15.1 Standard Applicable

According to FCC §15.207. The emission value for frequency within 150KHz to 30MHz shall not Exceed criteria of below chart.

| Frequency range (MHz) | Lim | its dB(uV) |
|---------------------------|------------|------------|
| Frequency range (IVII 12) | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

15.2 Test setup

- The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2001.
- 2. The EUT was plug-in DC power adaptort and was placed on the center of the back edge on the test table. The peripherals like earphone was placed on the side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The Power adaptor was connected with 110Vac/60Hz power source.

15.3 Test Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.


15.4 Measurement Result



Report No.: FCC11-RTE070602 Page 48 of 53

Test mode: GSM850

Line:

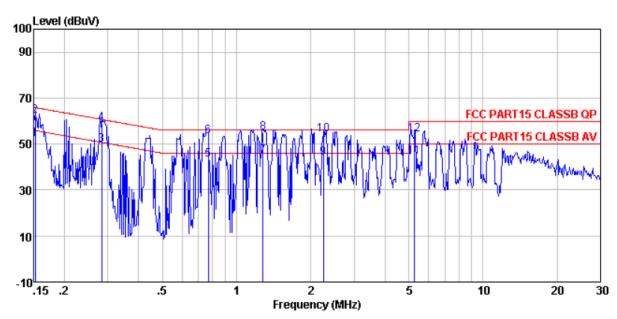

Condition : FCC PART15 CLASSB QP LISN(2011) LINE

Job No. : 490RF

Test Mode : communicate mode


Test Engineer: Collin Remark : GSM850

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|-------------|----------------------------|----------------------------|----------------------|----------------------|-------------------------|-------------------------|----------------|--------------------------|
| | MHz | dBuV | dB | d₿ | dBuV | dBuV | dB | |
| 1 2 | 0.152 0.152 | 51.23 61.41 | 0.69 0.69 | 0.10 0.10 | 52.02 62.20 | 55.87 65.87 | -3.85 -3.67 | Average QP |
| 3 4 | 0. 283 0. 283 | 48. 96 58. 35 | 0.62 0.62 | 0.10 0.10 | 49.68 59.07 | 50.72 60.72 | -1.65 | |
| 5 6 | 0. 767 0. 767 | 42. 64 52. 83 | 0.51 0.51 | 0.10 | 43. 25 53. 44 | 46.00 56.00 | -2.56 | • |
| 7 8 9 | 1. 282 1. 282 2. 249 | 44. 21 54. 21 43. 59 | 0.45 0.45 0.39 | 0.10 0.10 0.10 | 44.76 54.76 44.08 | 46.00 56.00 46.00 | -1.24 | Average QP Average |
| 10 11 | 2. 249 2. 249 5. 277 | 53. 75 43. 88 | 0.39 | 0.10 0.10 0.10 | 54. 24 44. 27 | 56.00 50.00 | -1.76 | |
| 12 | 5. 277 | 53.86 | 0.29 | 0.10 | 54. 25 | 60.00 | -5.75 | |



Report No.: FCC11-RTE070602 Page 49 of 53

Neutral:

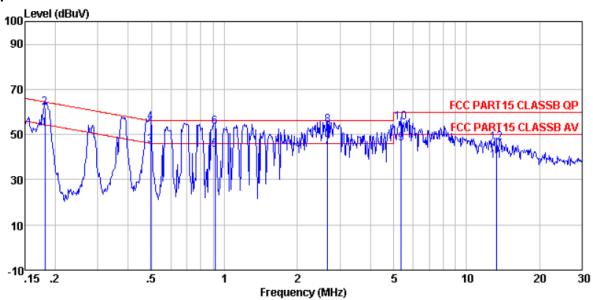

Condition : FCC PART15 CLASSB QP LISN(2011) NEUTRAL

Job No. : 490RF

Test Mode : communicate mode

Test Engineer: Collin Remark : GSM850

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------|---------------|----------------|---------------|-------|---------------|---------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.182 | 51.56 | 0.67 | 0.10 | 52.33 | 54.42 | -2.09 | Average |
| 2 | 0.182 | 61.06 | 0.67 | 0.10 | 61.83 | 64.42 | -2.59 | QP |
| 3 | 0.497 | 44.66 | 0.56 | 0.10 | 45.32 | 46.05 | -0.73 | Average |
| 4 | 0.497 | 54.56 | 0.56 | 0.10 | 55.22 | 56.05 | -0.83 | QP |
| 5 | 0.914 | 42.74 | 0.49 | 0.10 | 43.33 | 46.00 | -2.67 | Average |
| 6 | 0.914 | 52.60 | 0.49 | 0.10 | 53.19 | 56.00 | -2.81 | QP |
| 7 | 2.664 | 43.78 | 0.37 | 0.10 | 44.25 | 46.00 | -1.75 | Average |
| 8 | 2.664 | 53.70 | 0.37 | 0.10 | 54.17 | 56.00 | -1.83 | QP _ |
| 9 | 5.362 | 45.67 | 0.29 | 0.11 | 46.07 | 50.00 | -3.93 | Average |
| 10 | 5.362 | 54.93 | 0.29 | 0.11 | 55.33 | 60.00 | -4.67 | QP |
| 11 | 13.337 | 37.89 | 0.19 | 0.20 | 38.28 | 50.00 | -11.72 | Average |
| 12 | 13.337 | 46.01 | 0.19 | 0.20 | 46.40 | | -13.60 | |


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC11-RTE070602 Page 50 of 53

Test mode: PCS1900

Line:

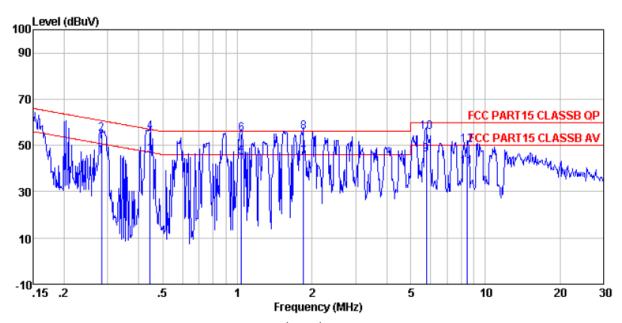

: FCC PART15 CLASSB QP LISN(2011) LINE Condition

: 490RF

Job No. Test Mode : communicate mode

Test Engineer: Collin : PCS1900 Remark


| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|-------------------------|--|--|---|--|--|---|----------------------------------|---|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 2 3 4 5 | 0. 283 0. 283 0. 444 0. 444 1. 037 | 44. 32 54. 35 45. 09 55. 08 44. 10 | 0.62 0.62 0.57 0.57 0.47 | 0.10 0.10 0.10 0.10 0.10 | 45. 04 55. 07 45. 76 55. 75 44. 67 | 50.72 60.72 46.98 56.98 46.00 | -5.65 -1.22 -1.23 -1.33 | Average QP Average |
| 7 8 9 10 11 | 1. 037 1. 848 1. 848 5. 774 5. 774 8. 456 8. 456 | 54. 53 44. 29 55. 21 45. 62 55. 39 40. 23 49. 54 | 0. 47 0. 41 0. 41 0. 28 0. 28 0. 24 0. 24 | 0.10 0.10 0.10 0.11 0.11 0.18 0.18 | 55. 10 44. 80 55. 72 46. 01 55. 78 40. 65 49. 96 | 56.00 46.00 56.00 50.00 60.00 | -0. 28 -3. 99 -4. 22 | Average QP Average QP Average |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC11-RTE070602 Page 51 of 53

Neutral:

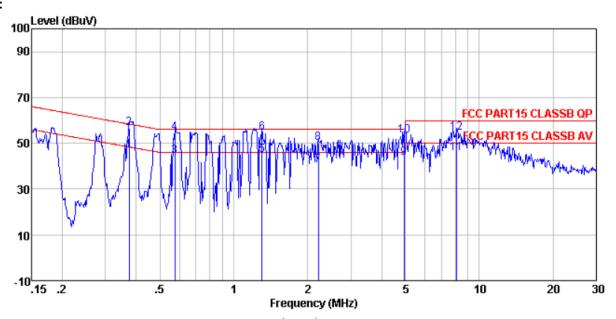

Condition : FCC PART15 CLASSB QP LISN(2011) NEUTRAL

Job No. : 490RF

Test Mode : communicate mode

Test Engineer: Collin Remark : PCS1900

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|--------------------|--------------------------------------|--------------------------------------|------------------------------|------------------------------|--------------------------------------|----------------------------------|-------------------------|--------------------------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 2 3 4 | 0.375 0.375 0.576 0.576 | 45. 94 55. 91 43. 65 53. 78 | 0.59 0.59 0.54 0.54 | 0.10 0.10 0.10 0.10 | 46.63 56.60 44.29 54.42 | 48.39 58.39 46.00 56.00 | -1.79 -1.71 -1.58 | Average QP |
| 5 6 7 | 1.303 1.303 2.213 | 44. 33 54. 09 39. 99 | 0. 45 0. 45 0. 39 | 0.10 0.10 0.10 | 44.88 54.64 40.48 | 46.00 56.00 46.00 | -1.36 -5.52 | Average |
| 8 9 10 11 | 2. 213 4. 952 4. 952 8. 105 | 49. 42 43. 08 52. 99 45. 21 | 0.39 0.30 0.30 0.24 | 0.10 0.10 0.10 0.18 | 49. 91 43. 48 53. 39 45. 63 | 56.00 46.00 56.00 50.00 | -2.61 -4.37 | Average QP Average |
| 12 | 8.105 | 54.26 | 0.24 | 0.18 | 54.68 | 60.00 | -5.32 | бЪ |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: FCC11-RTE070602


Page 52 of 53

16 Test Setup Photo

Radiated Emission (below 1GHz)

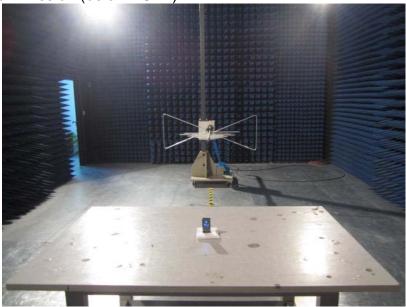

Radiated Emission (above 1GHz)

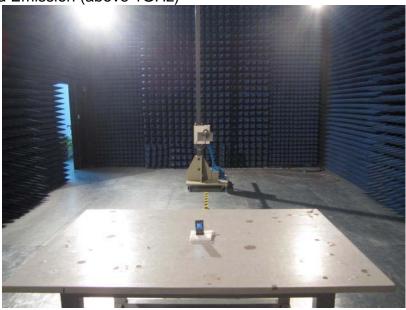



Report No.: FCC11-RTE070602 Page 53 of 53

Conducted Emission



17 EUT Constructional Details

Reference to the test report No. FCC11-RTE070601

-----end-----