



STK501 - EXPAND1



To make use of BOD, assemble resistors with 1MΩ to avoid radio wake up in case of a BOD reset condition.

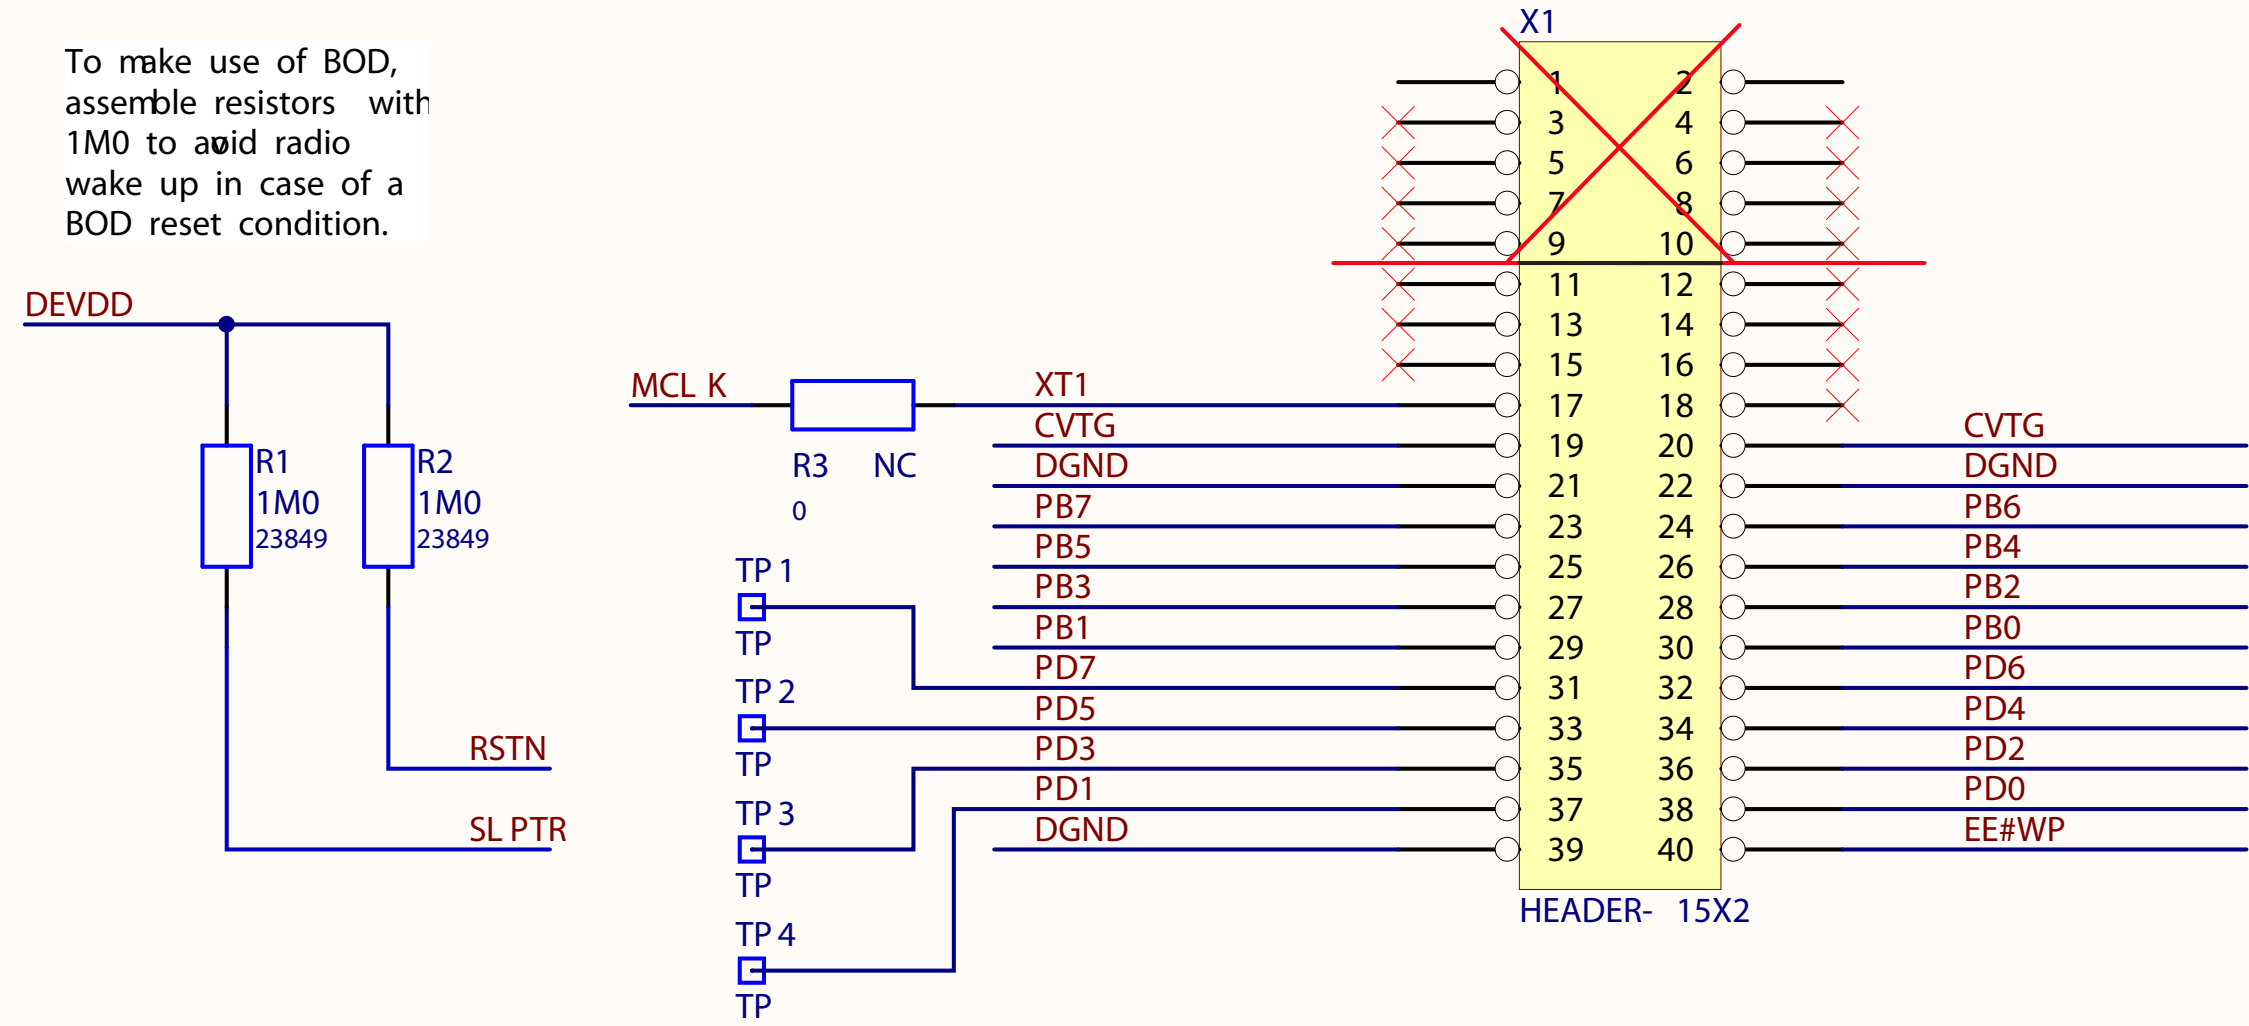


ATmega644 config

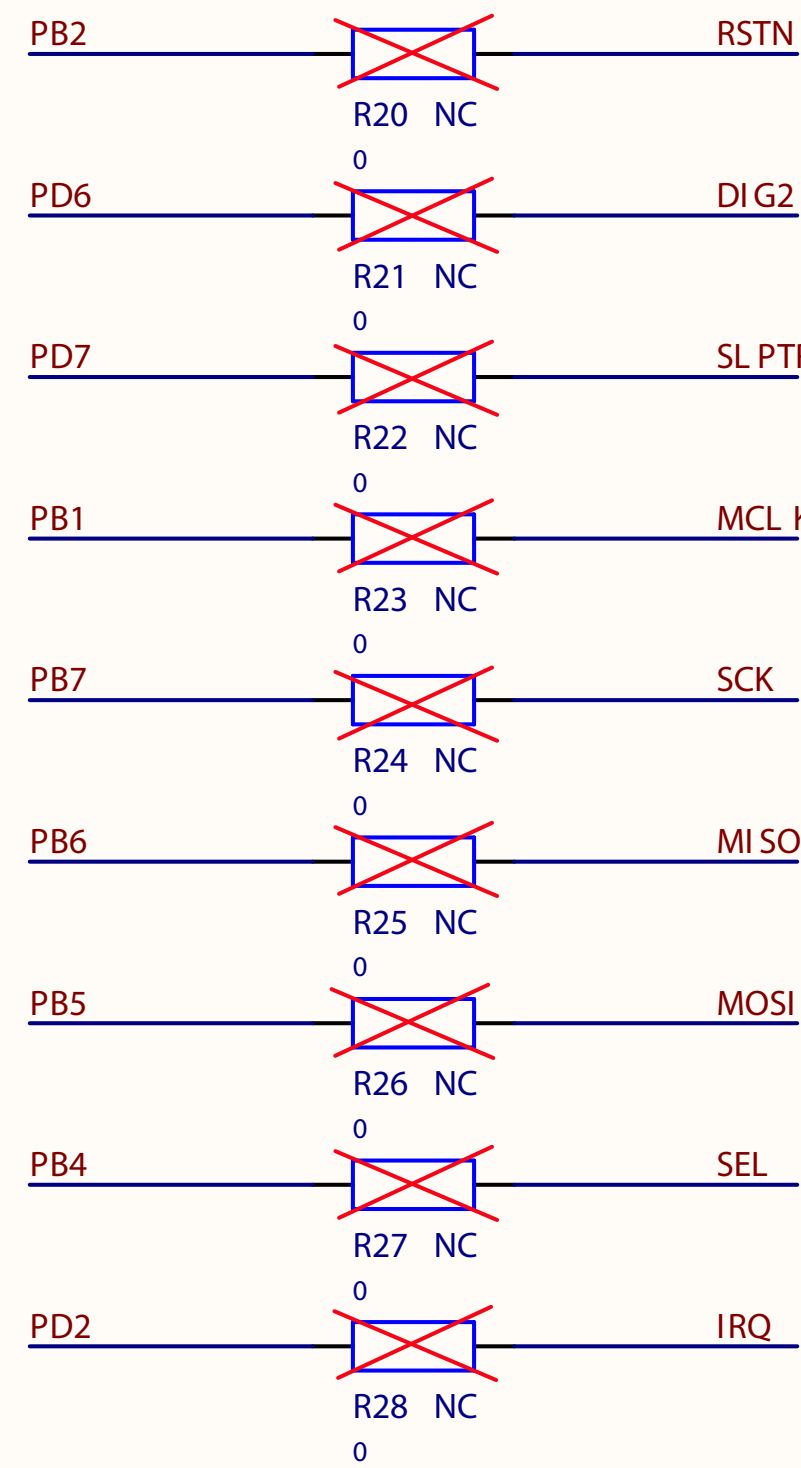

ATmega1281 config

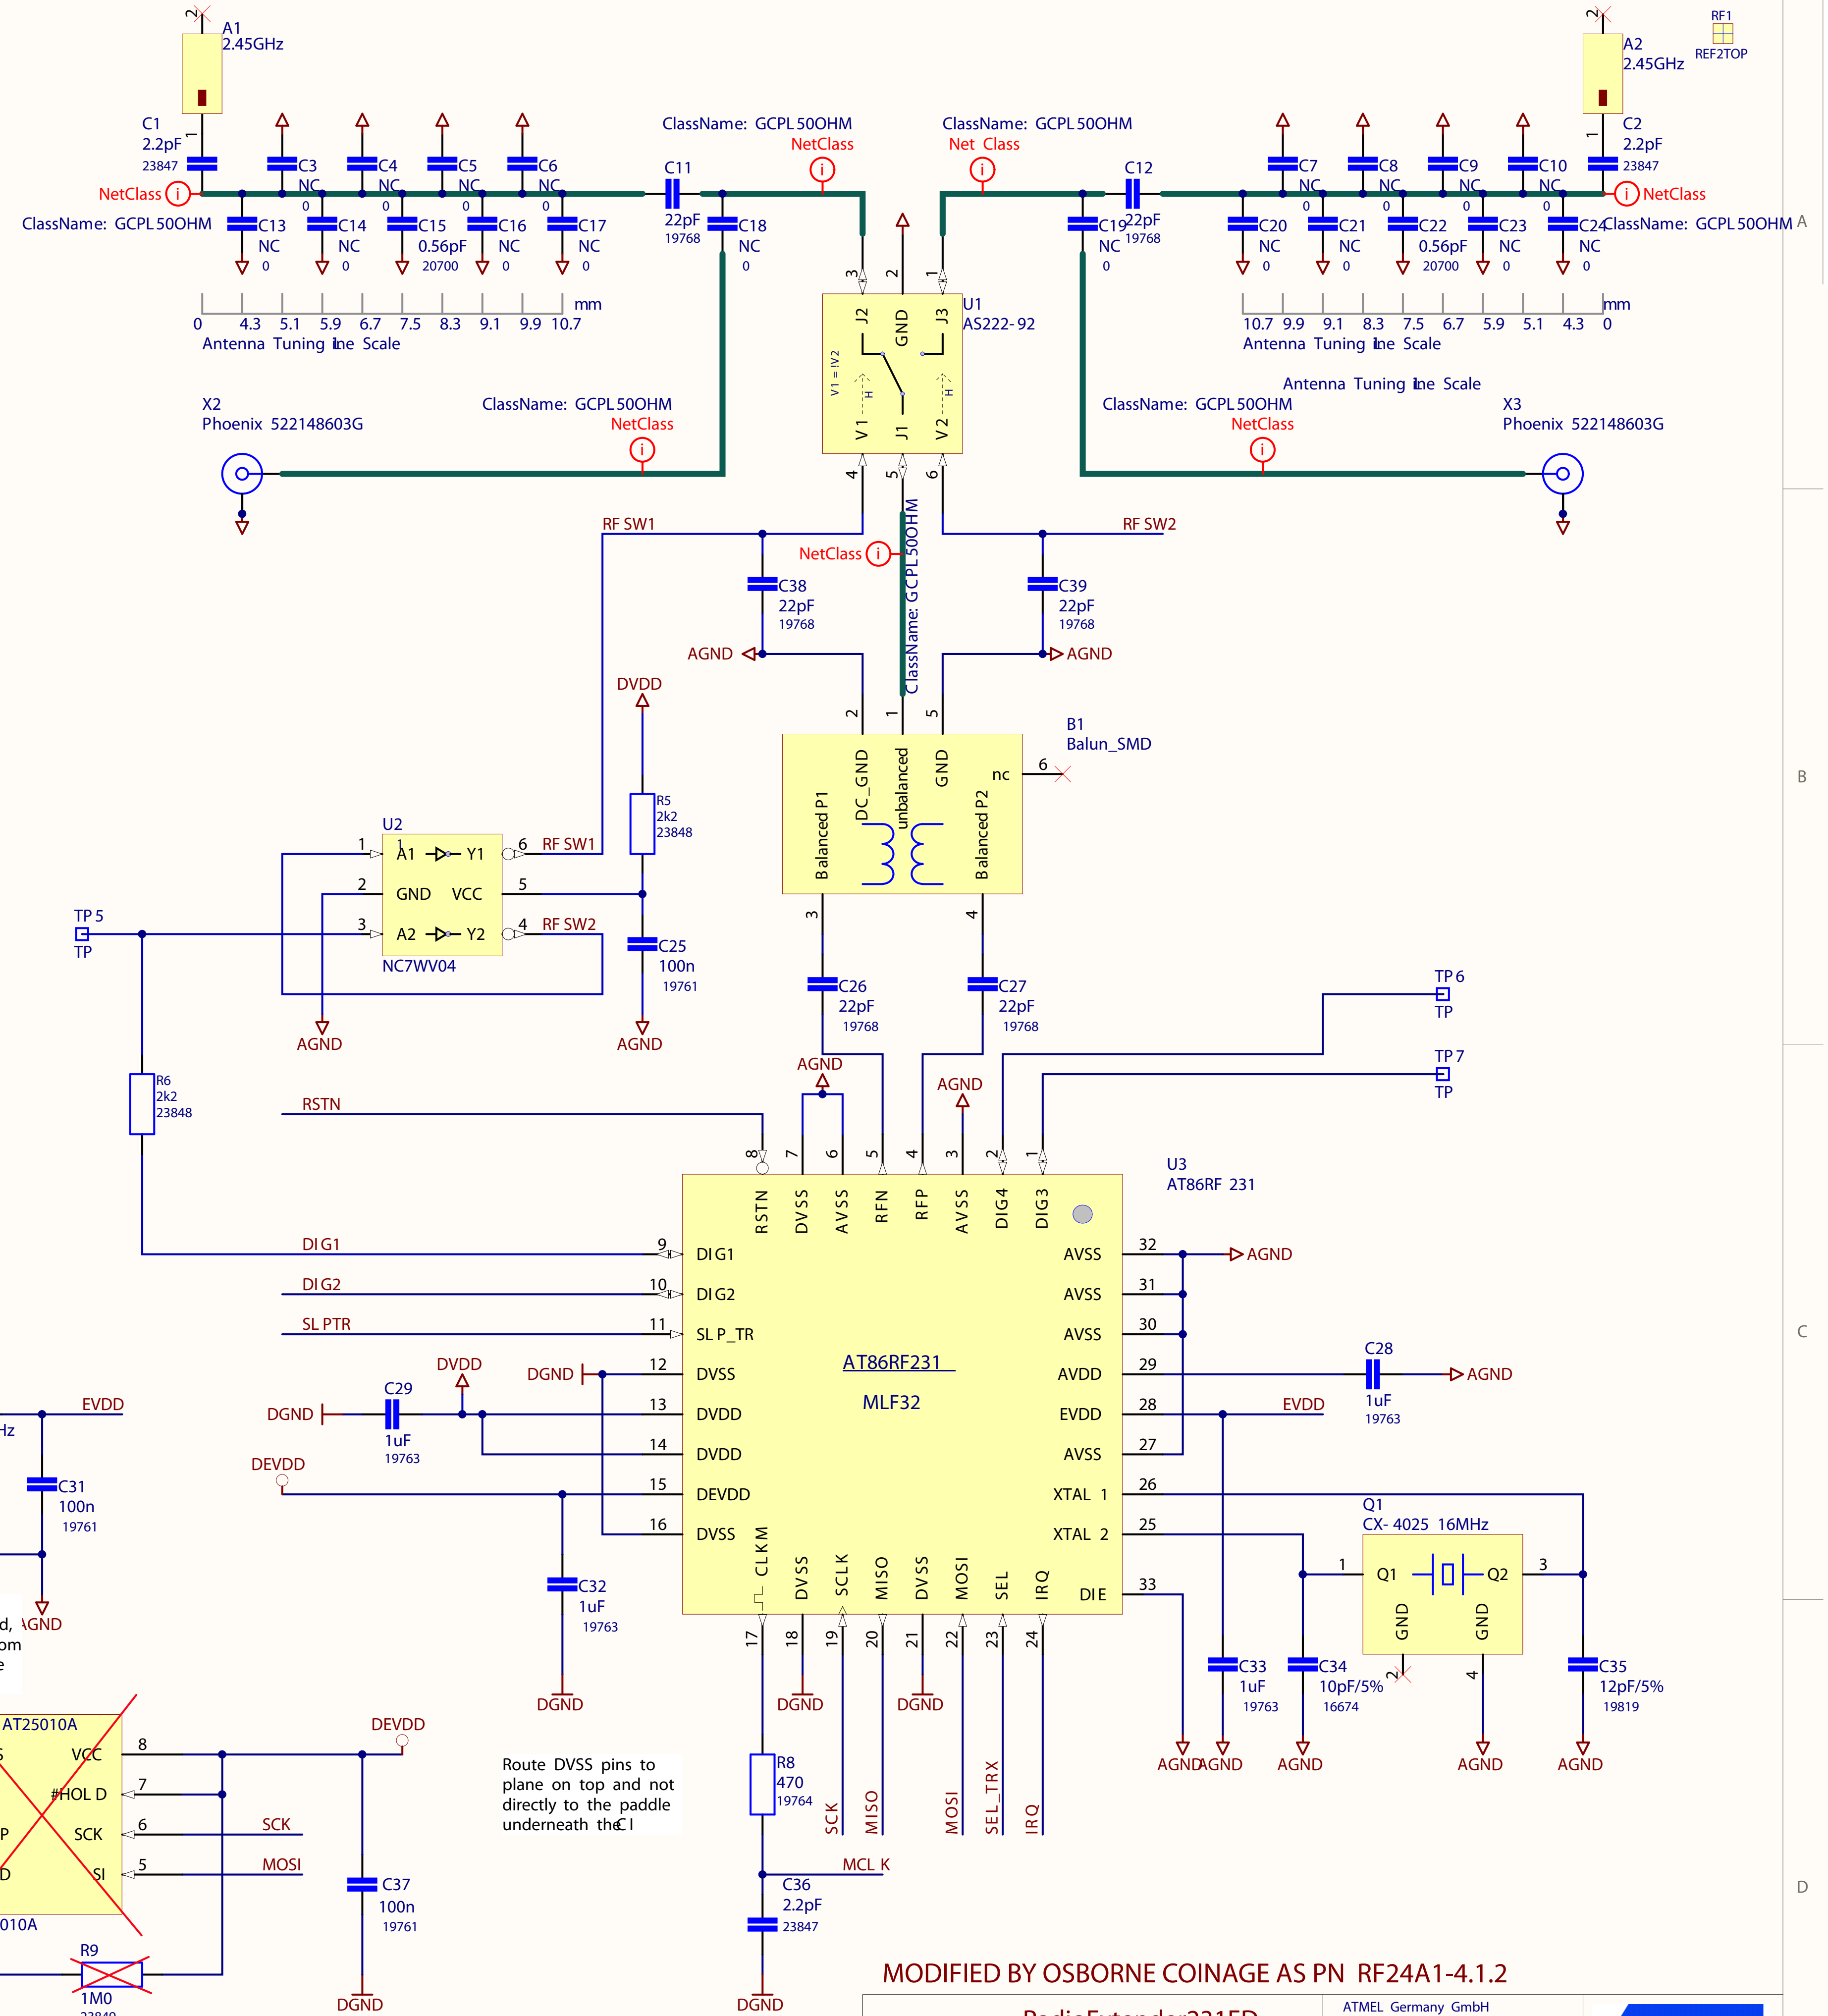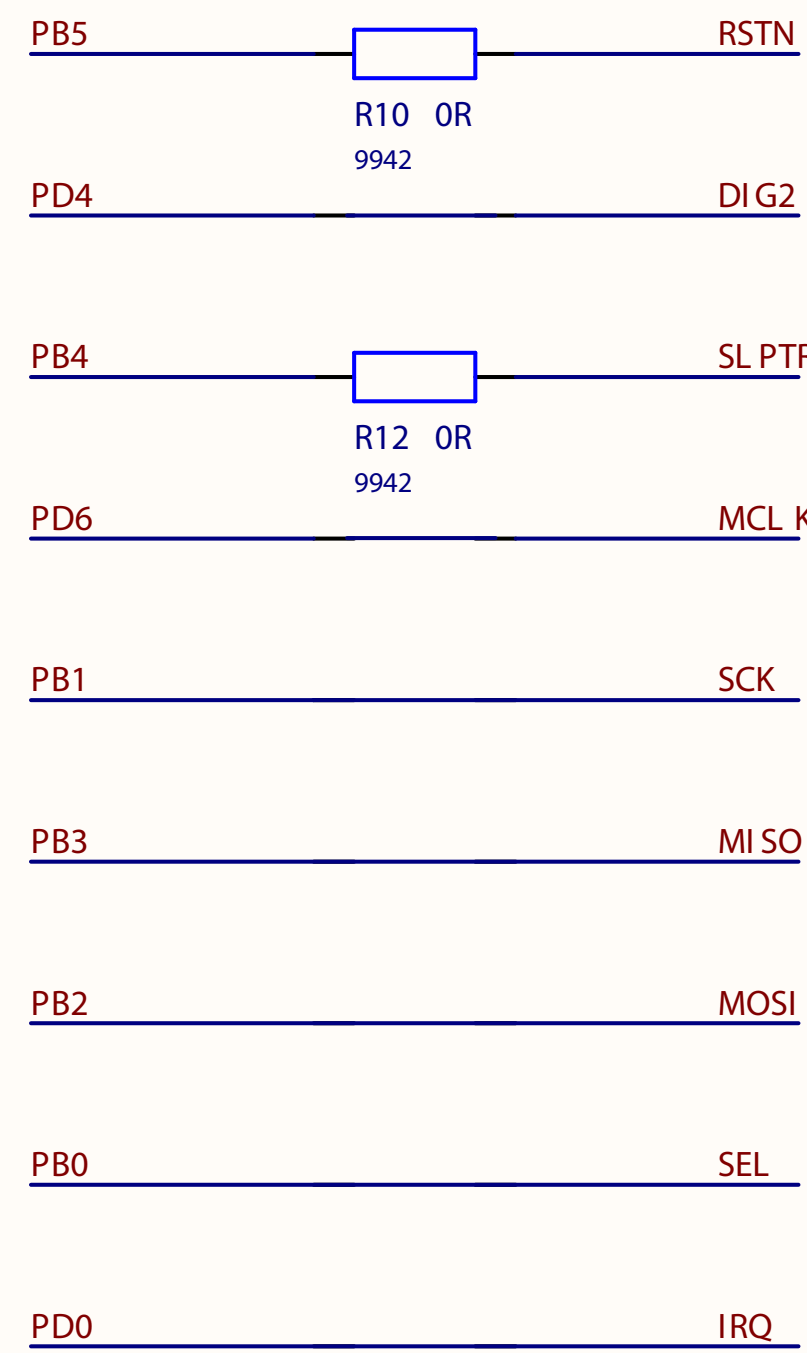

MODIFIED BY OSBORNE COINAGE AS PN RF24A1-4.1.2

Title		RadioExtender231ED		ATMEL Germany GmbH CMOS-RF		
Size: A3		Project: Z-Link AT86RF231 DE5 449 11 00.100.00		01099 Dresden Koenigsbruecker Landstrasse 61 Germany		
Date: 07.08.2007	Revision: 4.1.1	Sheet 1 of 1				
File: C:\Dokum ente und Einstellungen\tklosa\Eigene Dateien\mirror\RD(K)\Ph3_RF231_RadioExtender\RadioExtender231_4.1.1\RadioExtender231ED_V4.1.1.SchDoc						