







ISO/IEC17025Accredited Lab.

Report No: FCC 1501207 File reference No: 2015-07-29

Applicant: Fujian Nan'an Baofeng Electronic Co., Ltd.

Product: walkie talkie

Model No: UV-82L, GT-5

Trademark: N/A

Test Standards: FCC Part 90

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 and FCC Part 90,

regulations for the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: July 29, 2015

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: FCC1501207 Page 2 of 78

Date: 2015-07-29



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 78

Report No: FCC1501207

Date: 2015-07-29



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
6.0	Frequency Tolerance.	12
7.0	Emission Bandwidth and Mask	21
8.0	Unwanted Radiation.	35
9.0	Modulation Characteristics.	42
10.0	Maximum transmitter Power (Conducted Output Power)	52
11.0	Transmitter Frequency Behaviour.	54
12.0	Radiated Emission on Receiving Mode.	64
13.0	RF Exposure.	67
14.0	FCC ID Label	68
15.0	Photo of Test	69

Report No: FCC1501207 Page 4 of 78

Date: 2015-07-29



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Fujian Nan'an Baofeng Electronic Co., Ltd.

Address: Changfu Industrial Area, Xiamei, Nan'an, Quanzhou, Fujian, Chian

Telephone: 15959959929 Fax: 0595-86753889

1.3 Description of EUT

Product: walkie talkie

Manufacturer: Fujian Nan'an Baofeng Electronic Co., Ltd.

Brand Name: N/A

Model Number: UV-82L, GT-5

Power Source Adapter Model: 480-10050-E.S Input: 100-240V~0.25A max 60/50Hz

Output: DC 10V, 0.5A

Type of Modulation FM

Frequency range VHF Band:136-174MHz; UHF:400MHz-480MHz

Channel Spacing 12.5 kHz and 6.25kHz

Frequency Selection By operation

Antenna: Whip antenna with gain 1.0dBi

Emission Designer 5K41F3E for 12.5kHz channel spacing;

2K30F3E for 6.25 kHz channels spacing

1.4 Submitted Sample: 3Sample

Report No: FCC1501207 Page 5 of 78

Date: 2015-07-29



Test Duration 1.5 2015-01-24-2015-07-29

1.6 Test Uncertainty Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

Terry Tang Test Engineer 1.7

The sample tested by

Print Name: Terry Tang

Page 6 of 78

Report No: FCC1501207

Date: 2015-07-29



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2014-08-21	2015-08-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2014-08-22	2015-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2014-08-22	2015-08-21
Ultra Broadband ANT	R&S	HL562	100157	2014-08-23	2015-08-22
ESDV Test Receiver	R&S	ESDV	100008	2014-08-22	2015-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2014-08-21	2015-08-20
Oscillator	KENWOOD	AG-203D	3070002	2015-03-17	2016-03-16
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21
ESPI Test Receiver	R&S	ESI26	838786/013	2014-08-22	2015-08-21
3m OATS			N/A	2014-08-21	2015-08-20
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2014-08-23	2015-08-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2014-08-23	2015-08-22
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-23	2015-08-22
LISN	AFJ	LS16C	10010947251	2014-08-21	2015-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21
9*6*6 Anechoic			N/A	2014-08-21	2015-08-20
EMI Test Receiver	RS	ESCS30	100139	2014-08-22	2015-08-21
Modulation Analyzer	HP	8901B	3104A03367	2015-05-06	2016-05-05

Report No: FCC1501207 Page 7 of 78

Date: 2015-07-29



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested acc	ording to the following specifi	ications:
Standard	Test Type	Result
FCC Part 15.207	Conducted Emission	Compliant
FCC Part 90.205	Maximum Transmitter Power	Compliant
FCC Part 90.207	Modulation Characteristic	Compliant
FCC Part 90.209	Occupied Bandwidth	Compliant
FCC Part 90.210	Emission Mask	Compliant
FCC Part 90.213	Frequency Tolerance	Compliant
FCC Part 90.214	Transient Frequency Behaviour	Compliant

3.2 The tests were performed according to following standards:

FCC Part 90 TIA-603-D-2010 ANSI C63.10-2013

4.0 **EUT Modification**


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Date: 2015-07-29



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

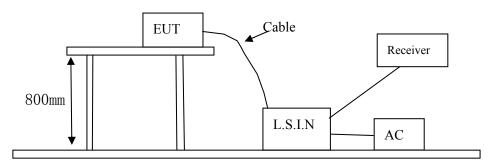

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
walkie talkie	Fujian Nan'an Baofeng Electronic	UV-82L,GT-5	ZP5BF-UV82L
	Co., Ltd.		

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1501207 Page 9 of 78

Date: 2015-07-29



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguanay (MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB \(\mu \)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: FCC1501207 Page 10 of 78

Date: 2015-07-29




Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Charging Mode

Results: Pass

Please refer to following diagram for individual

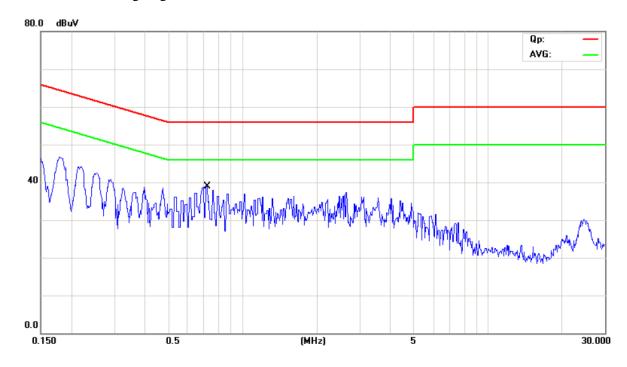

No. Mk.	Freq.			Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBu∀	dBuV	dB	Detector	Comment
1 *	0.7140	14.90	11.60	26.50	56.00	-29.50	QP	
2	0.7140	-5.20	11.60	6.40	46.00	-39.60	AVG	

Report No: FCC1501207 Page 11 of 78

Date: 2015-07-29




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Charging Mode

Results: Pass

Please refer to following diagram for individual

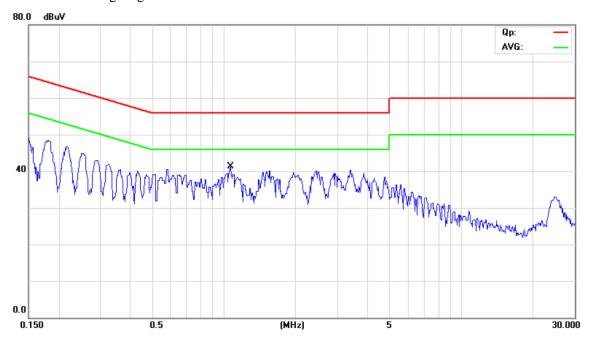

No. M	1k.	Freq.			Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *		1.0626	21.10	11.93	33.03	56.00	-22.97	QP	
2		1.0626	-0.60	11.93	11.33	46.00	-34.67	AVG	

Report No: FCC1501207 Page 12 of 78

Date: 2015-07-29



6. Frequency Tolerance

6.1 Applicable standard

According to FCC Part 90 Section 90.213,

In the 150-174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.

In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

6.2 Measurement Procedure

6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- 1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 7.4-8.4 V
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Date: 2015-07-29



6.3 TEST SETUP BLOCK DIAGRAM

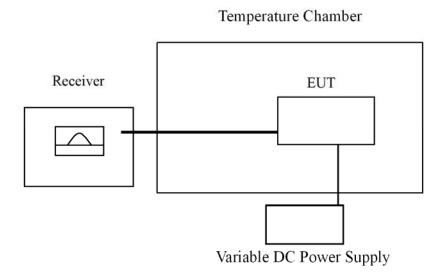


Figure 1

6.5 TEST RESULT

(1) Frequency stability versus input voltage (battery operation end point voltage is 6.3V)

VHF Band: (12.5 kHz Channel Spacing)

Channel	Power Supplied (Vdc)	* * *		Nominal Frequency	Limit(ppm)
Top channel	6.3V	173.97527	1.55	173.975MHz	2.0
Middle channel	6.3V	156.02524	1.54	156.025MHz	2.0
Bottom channel	6.3V	136.02522	1.62	136.025MHz	2.0

UHF Band: (12.5 kHz Channel Spacing)

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
Top channel	6.3V	479.97525	0.52	479.975MHz	1.0
Middle channel	6.3V	439.97529	0.66	439.975MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-07-29



Bottom channel	6.3V	400.02523	0.57	400.025MHz	1.0

(2)Frequency stability versus ambient temperature

Test Results

UHF Band: (12.5 kHz Channel Spacing)

Top channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	479.97526	0.54	479.975MHz	1.0
40	7.4	479.97534	0.71	479.975MHz	1.0
30	7.4	479.97533	0.69	479.975MHz	1.0
20	7.4	479.97535	0.73	479.975MHz	1.0
10	7.4	479.97528	0.58	479.975MHz	1.0
0	7.4	479.97527	0.56	479.975MHz	1.0
-10	7.4	479.97529	0.60	479.975MHz	1.0
-20	7.4	479.97536	0.75	479.975MHz	1.0
-30	7.4	479.97535	0.73	479.975MHz	1.0

Middle channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	439.97526	0.59	439.975MHz	1.0
40	7.4	439.97529	0.66	439.975MHz	1.0
30	7.4	439.97531	0.70	439.975MHz	1.0
20	7.4	439.97527	0.61	439.975MHz	1.0
10	7.4	439.97525	0.57	439.975MHz	1.0
0	7.4	439.97530	0.68	439.975MHz	1.0
-10	7.4	439.97528	0.64	439.975MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 15 of 78

Report No: FCC1501207

Date: 2015-07-29



-20	7.4	439.97524	0.55	439.975MHz	1.0
-30	7.4	439.97526	0.59	439.975MHz	1.0

Bottom channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	400.02530	0.75	400.025MHz	1.0
40	7.4	400.02522	0.55	400.025MHz	1.0
30	7.4	400.02525	0.62	400.025MHz	1.0
20	7.4	400.02529	0.72	400.025MHz	1.0
10	7.4	400.02527	0.67	400.025MHz	1.0
0	7.4	400.02533	0.82	400.025MHz	1.0
-10	7.4	400.02524	0.60	400.025MHz	1.0
-20	7.4	400.02532	0.80	400.025MHz	1.0
-30	7.4	400.02531	0.77	400.025MHz	1.0

VHF Band: (12.5 kHz Channel Spacing)

Top channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	173.97529	1.67	173.975MHz	2.0
40	7.4	173.97530	1.72	173.975MHz	2.0
30	7.4	173.97524	1.38	173.975MHz	2.0
20	7.4	173.97526	1.49	173.975MHz	2.0
10	7.4	173.97528	1.61	173.975MHz	2.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 16 of 78

Report No: FCC1501207

Date: 2015-07-29



0	7.4	173.97531	1.78	173.975MHz	2.0
-10	7.4	173.97533	1.90	173.975MHz	2.0
-20	7.4	173.97527	1.55	173.975MHz	2.0
-30	7.4	173.97532	1.84	173.975MHz	2.0

Middle channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	156.02525	1.60	156.025MHz	2.0
40	7.4	156.02526	1.67	156.025MHz	2.0
30	7.4	156.02528	1.79	156.025MHz	2.0
20	7.4	156.02519	1.22	156.025MHz	2.0
10	7.4	156.02527	1.73	156.025MHz	2.0
0	7.4	156.02522	1.41	156.025MHz	2.0
-10	7.4	156.02529	1.86	156.025MHz	2.0
-20	7.4	156.02524	1.54	156.025MHz	2.0
-30	7.4	156.02530	1.92	156.025MHz	2.0

Bottom channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	136.02523	1.69	136.025MHz	2.0
40	7.4	136.02522	1.62	136.025MHz	2.0
30	7.4	136.02524	1.76	136.025MHz	2.0
20	7.4	136.02526	1.91	136.025MHz	2.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-07-29



10	7.4	136.02521	1.54	136.025MHz	2.0
0	7.4	136.02525	1.84	136.025MHz	2.0
-10	7.4	136.02522	1.62	136.025MHz	2.0
-20	7.4	136.02520	1.47	136.025MHz	2.0
-30	7.4	136.02524	1.76	136.025MHz	2.0

(1) Frequency stability versus input voltage (battery operation end point voltage is 6.3V)

VHF Band: (6.25 kHz Channel Spacing)

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
Top channel	6.3V	173.97526	1.49	173.975MHz	2.0
Middle channel	6.3V	156.02525	1.60	156.025MHz	2.0
Bottom channel	6.3V	136.02521	1.54	136.025MHz	2.0

UHF Band: (6.25 kHz Channel Spacing)

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
Top channel	6.3V	479.97523	0.48	479.975MHz	1.0
Middle channel	6.3V	439.97530	0.68	439.975MHz	1.0
Bottom channel	6.3V	400.02529	0.72	400.025MHz	1.0

(2)Frequency stability versus ambient temperature

Test Results

UHF Band: (6.25 kHz Channel Spacing)

Top channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	479.97528	0.58	479.975MHz	1.0
40	7.4	479.97526	0.54	479.975MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 18 of 78

Report No: FCC1501207

Date: 2015-07-29



30	7.4	479.97527	0.56	479.975MHz	1.0
20	7.4	479.97531	0.65	479.975MHz	1.0
10	7.4	479.97534	0.71	479.975MHz	1.0
0	7.4	479.97529	0.60	479.975MHz	1.0
-10	7.4	479.97526	0.54	479.975MHz	1.0
-20	7.4	479.97533	0.69	479.975MHz	1.0
-30	7.4	479.97532	0.67	479.975MHz	1.0

Middle channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	439.97526	0.59	439.975MHz	1.0
40	7.4	439.97529	0.66	439.975MHz	1.0
30	7.4	439.97532	0.73	439.975MHz	1.0
20	7.4	439.97530	0.68	439.975MHz	1.0
10	7.4	439.97526	0.59	439.975MHz	1.0
0	7.4	439.97524	0.55	439.975MHz	1.0
-10	7.4	439.97527	0.61	439.975MHz	1.0
-20	7.4	439.97531	0.70	439.975MHz	1.0
-30	7.4	439.97528	0.64	439.975MHz	1.0

Bottom channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	400.02523	0.57	400.025MHz	1.0
40	7.4	400.02529	0.72	400.025MHz	1.0

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-07-29



30	7.4	400.02526	0.65	400.025MHz	1.0
20	7.4	400.02528	0.70	400.025MHz	1.0
10	7.4	400.02524	0.60	400.025MHz	1.0
0	7.4	400.02521	0.52	400.025MHz	1.0
-10	7.4	400.02526	0.65	400.025MHz	1.0
-20	7.4	400.02524	0.60	400.025MHz	1.0
-30	7.4	400.02525	0.62	400.025MHz	1.0

VHF Band: (6.25 kHz Channel Spacing)

Top channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	173.97524	1.38	173.975MHz	2.0
40	7.4	173.97530	1.72	173.975MHz	2.0
30	7.4	173.97526	1.49	173.975MHz	2.0
20	7.4	173.97527	1.55	173.975MHz	2.0
10	7.4	173.97520	1.15	173.975MHz	2.0
0	7.4	173.97529	1.67	173.975MHz	2.0
-10	7.4	173.97534	1.95	173.975MHz	2.0
-20	7.4	173.97533	1.90	173.975MHz	2.0
-30	7.4	173.97528	1.61	173.975MHz	2.0

Middle channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	156.02527	1.73	156.025MHz	2.0

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No: FCC1501207 Page 20 of 78

Date: 2015-07-29



40	7.4	156.02526	1.67	156.025MHz	2.0
30	7.4	156.02522	1.41	156.025MHz	2.0
20	7.4	156.02524	1.54	156.025MHz	2.0
10	7.4	156.02523	1.48	156.025MHz	2.0
0	7.4	156.02527	1.73	156.025MHz	2.0
-10	7.4	156.02530	1.92	156.025MHz	2.0
-20	7.4	156.02529	1.86	156.025MHz	2.0
-30	7.4	156.02525	1.60	156.025MHz	2.0

Bottom channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	136.02520	1.47	136.025MHz	2.0
40	7.4	136.02523	1.69	136.025MHz	2.0
30	7.4	136.02526	1.91	136.025MHz	2.0
20	7.4	136.02524	1.76	136.025MHz	2.0
10	7.4	136.02525	1.84	136.025MHz	2.0
0	7.4	136.02517	1.25	136.025MHz	2.0
-10	7.4	136.02522	1.62	136.025MHz	2.0
-20	7.4	136.02519	1.40	136.025MHz	2.0
-30	7.4	136.02521	1.54	136.025MHz	2.0

Date: 2015-07-29



Page 21 of 78

7. EMISSION BANDWIDTH and Mask

7.1 PROVISIONS APPLICABLE

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two to three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (m) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, then an alternate procedure may be used provided prior Commission approval is obtained.

Emission Mask-E:

- 6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least 30 + 16.67(fd-3 kHz) or 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument

Date: 2015-07-29




resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

7.2 MEASUREMENT PROCEDURE

- 1). The EUT was modulated by 2.5 kHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz
 - 2). Set SPA Center Frequency = fundamental frequency, RBW=100Hz, VBW= 300 Hz, Span = 50 kHz
 - 3). Set SPA Max hold. Mark peak, -26 dB.

7.3 Test Setup Block Diagram

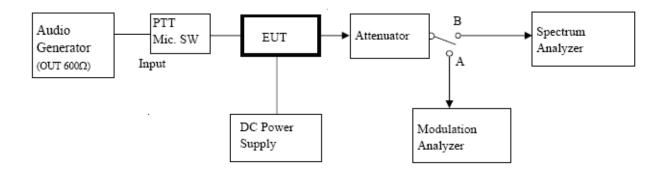

7.4 Measurement Result:

For 12.5 kHz Channel Spacing

Bandwidth						
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result		
156.025MHz (Middle)	5.71kHz	5.41kHz	11.25 kHz	Pass		
439.975MHz (Middle)	5.71kHz	5.41kHz	11.25 kHz	Pass		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 23 of 78

Report No: FCC1501207


Date: 2015-07-29



7.5 Test Plots:

VHF Band-Middle Channel

26dB Bandwidth

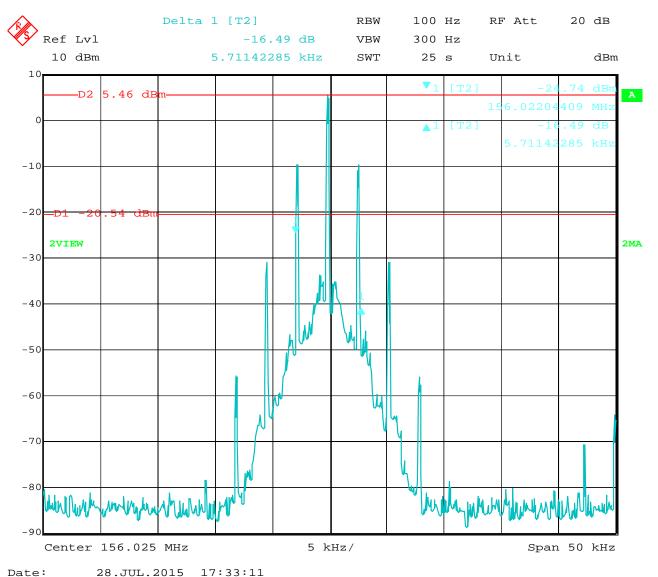

Page 24 of 78


Report No: FCC1501207

Date: 2015-07-29



VHF Band-Middle Channel

99% Bandwidth

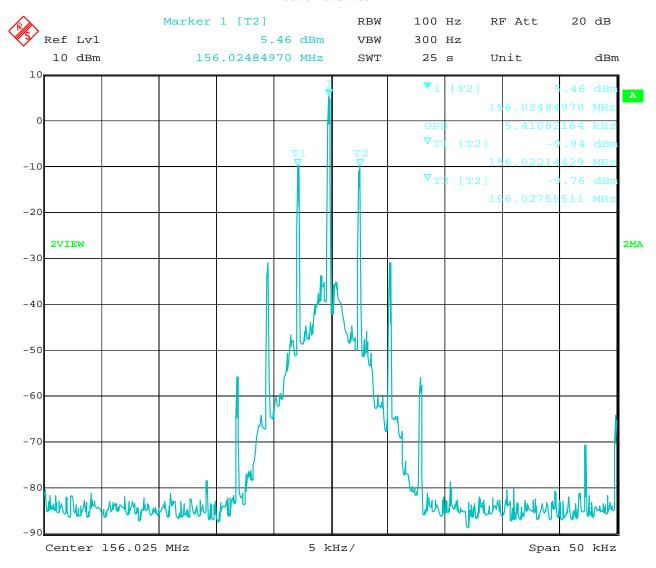

28.JUL.2015 17:31:58 Date:

Page 25 of 78


Report No: FCC1501207

Date: 2015-07-29



VHF Band-Middle Channel

Emission Mask D

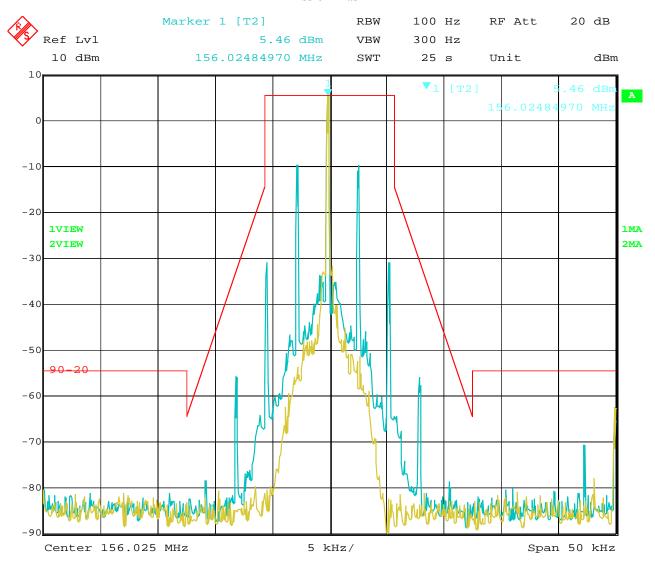

28.JUL.2015 17:31:18 Date:

Page 26 of 78


Report No: FCC1501207

Date: 2015-07-29



UHF Band-Middle Channel

26dB Bandwidth

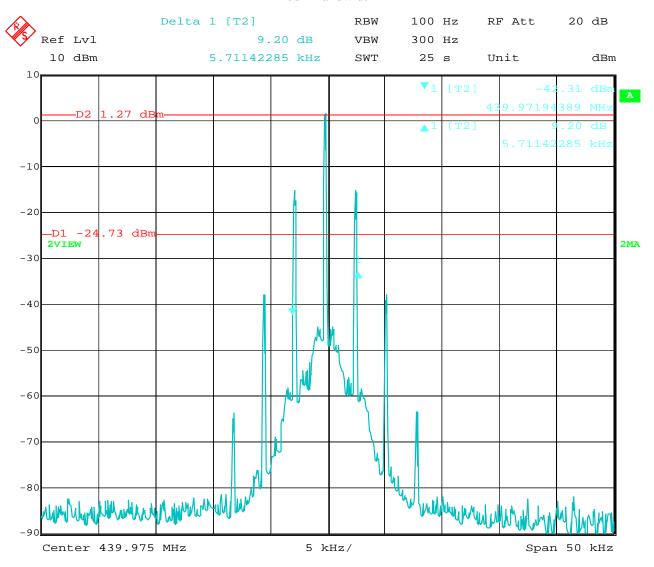

28.JUL.2015 17:23:04 Date:

Page 27 of 78


Report No: FCC1501207

Date: 2015-07-29



UHF Band-Middle Channel

99% Bandwidth

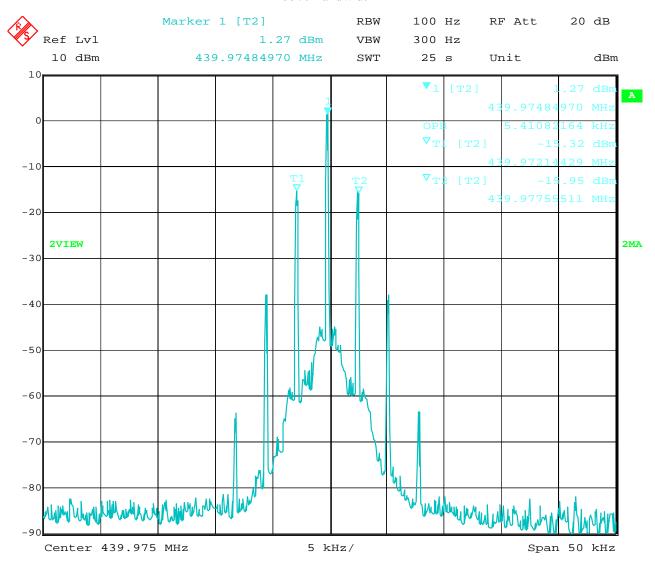

28.JUL.2015 17:22:01 Date:

Page 28 of 78


Report No: FCC1501207

Date: 2015-07-29



UHF Band-Middle Channel

Emission Mask D

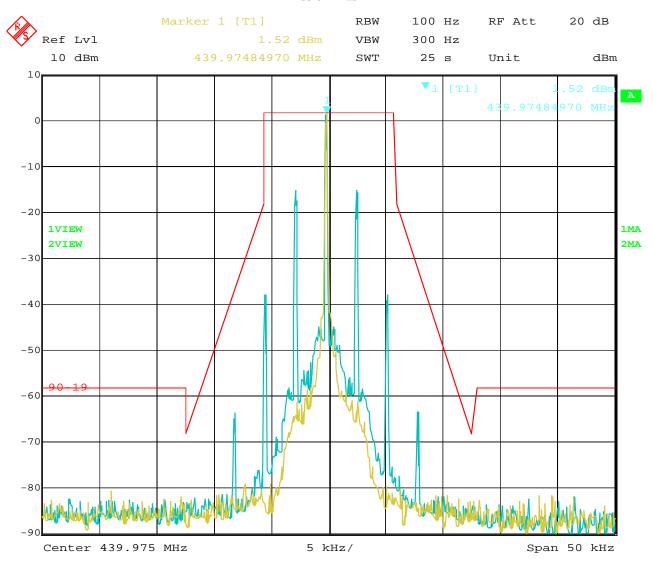

28.JUL.2015 17:21:17 Date:

Report No: FCC1501207 Page 29 of 78

Date: 2015-07-29




For 6.25 kHz Channel Spacing

Bandwidth					
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result	
156.025MHz (Middle)	2.71kHz	2.30kHz	6 kHz	Pass	
439.975MHz (Middle)	2.71kHz	2.30kHz	6 kHz	Pass	

VHF Band-Middle Channel

26dB Bandwidth

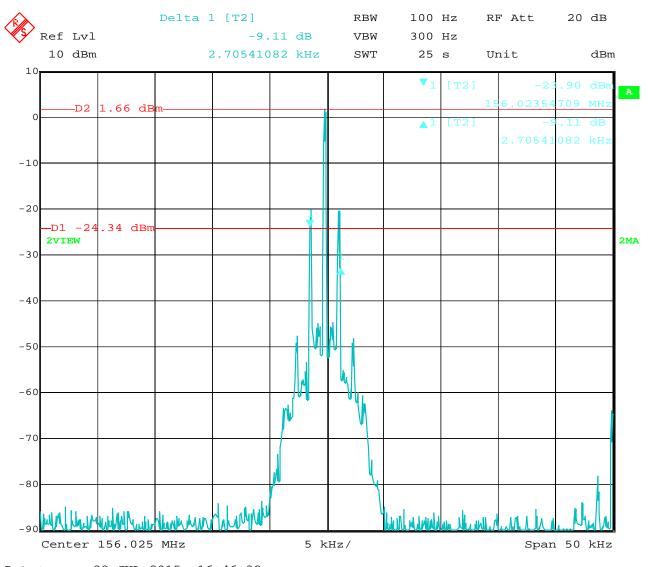

28.JUL.2015 16:46:32 Date:

Page 30 of 78


Report No: FCC1501207

Date: 2015-07-29



VHF Band-Middle Channel

99% Bandwidth

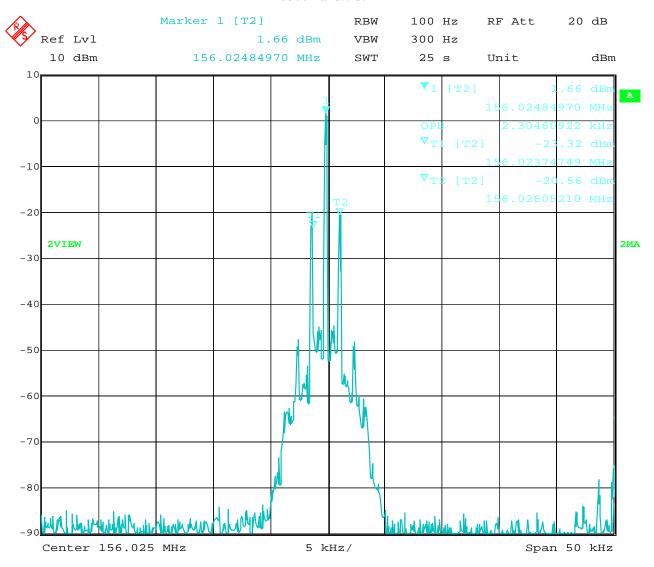

28.JUL.2015 16:44:24 Date:

Page 31 of 78


Report No: FCC1501207

Date: 2015-07-29



VHF Band-Middle Channel

Emission Mask E

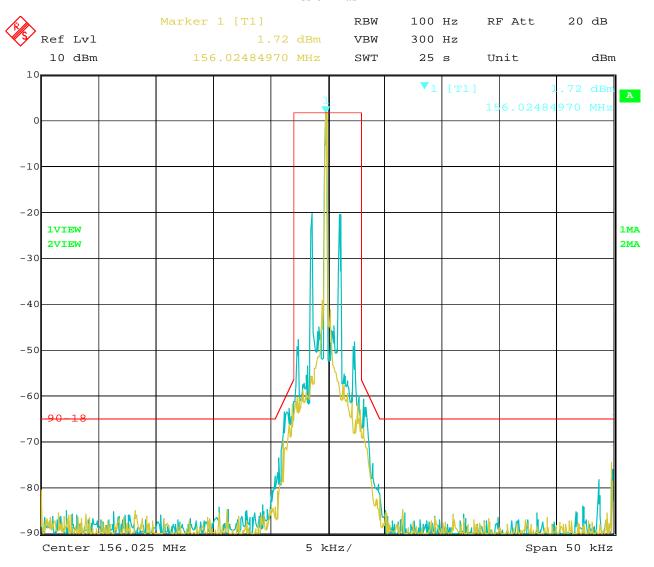

28.JUL.2015 16:43:07 Date:

Page 32 of 78


Report No: FCC1501207

Date: 2015-07-29



UHF Band-Middle Channel

26dB Bandwidth

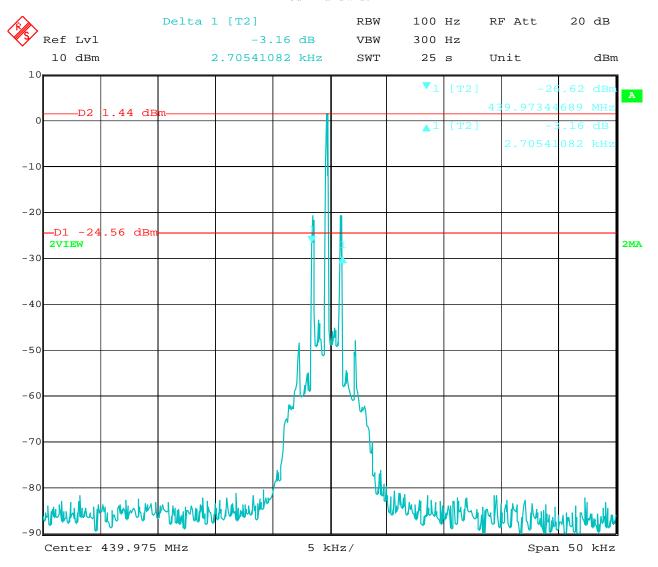

28.JUL.2015 16:51:14 Date:

Page 33 of 78


Report No: FCC1501207

Date: 2015-07-29



UHF Band-Middle Channel

99% Bandwidth

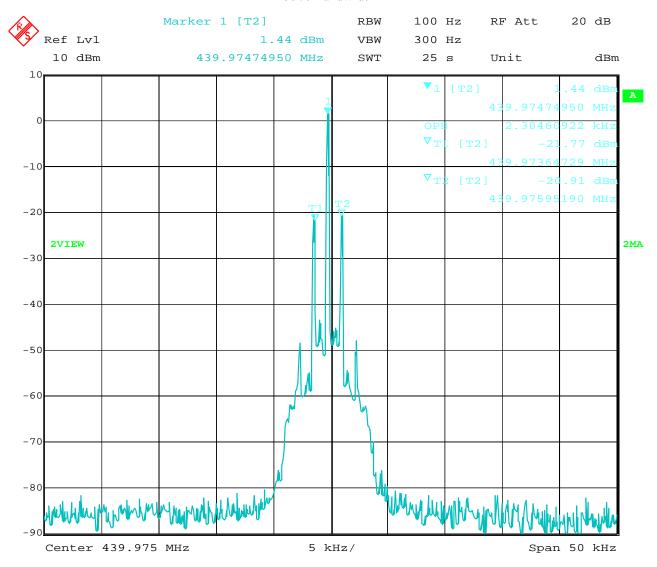

28.JUL.2015 16:50:22 Date:

Page 34 of 78


Report No: FCC1501207

Date: 2015-07-29



UHF Band-Middle Channel

Emission Mask E

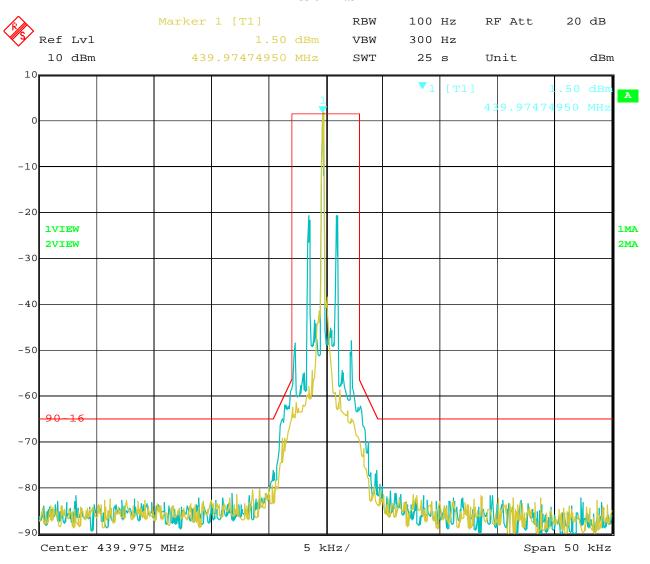

28.JUL.2015 16:49:44 Date:

Date: 2015-07-29



Page 35 of 78

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

- 8.1.1 **Emission Mask D**-According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:
- (1) On any frequency from the centre of the authorized bandwidth fo to 5.625 KHz removed from fo: Zero dB
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz)of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27(fd-2.88 KHz) dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz)of more than 12.5 kHz: At least 50+10 log(P) dB or 70 dB, whichever is the lesser attenuation.

Emission Mask-E:

- 6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least 30 + 16.67(fd-3 kHz) or 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

8.2 MEASUREMENT PROCEDURE (Radiated Emissions)

- (1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how


Date: 2015-07-29



close the emission level was approaching the limit.

- (4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6). The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8). The maximum signal level detected by the measuring receiver shall be noted.
- (9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10). Replace the antenna with a proper Antenna (substitution antenna).
- (11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12). The substitution antenna shall be connected to a calibrated signal generator.
- (13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver and Gain of Substitution antenna.
- (16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver and Gain of Substitution antenna. So the EIRP is obtained.
- (17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 Test setup Block Diagram

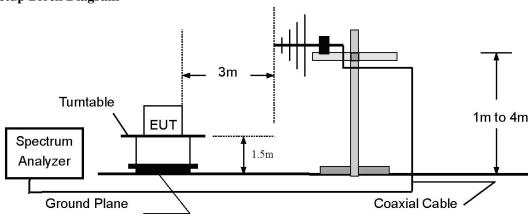

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2015-07-29



8.4 Substitution Method: (Radiated Emissions)


Radiated Below 1GHz

Ground Plane

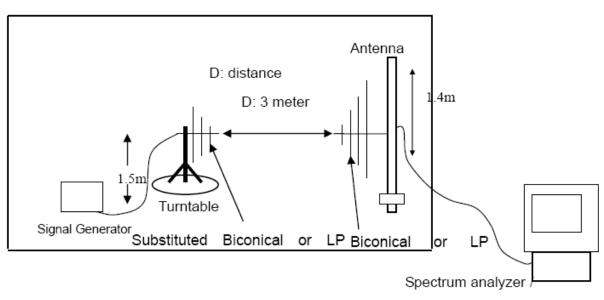

Radiated Above 1 GHz

Ground plane

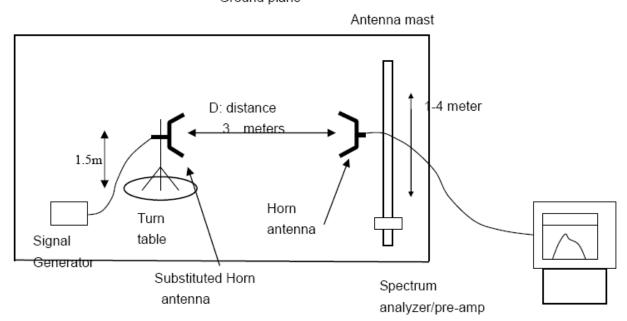

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2015-07-29



8.5 MEASUREMENT RESULTS:

Limit: $43 + 10 \log (P) dB$, (-13 dBm)

Note: The results were peak values and worse case was recorded

VHF Band

Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
272.05	Vertical	-43.9	-13
408.08	Vertical	-46.9	-13
544.12	Vertical	-52.3	-13
272.05	Horizontal	-46.2	-13
544.12	Horizontal	-51.0	-13

Middle channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
312.05	Vertical	-43.7	-13
468.08	Vertical	-48.5	-13
624.11	Vertical	-52.6	-13
312.05	Horizontal	-45.3	-13
624.11	Horizontal	-50.8	-13

Top channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
347.95	Vertical	-42.3	-13
521.93	Vertical	-46.5	-13
695.91	Vertical	-50.1	-13

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-07-29



347.95	Horizontal	-46.2	-13
521.93	Horizontal	-50.5	-13

UHF Band

Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
800.05	Vertical	-36.1	-13
1200.13	Vertical	-40.5	-13
1600.25	Vertical	-46.6	-13
800.05	Horizontal	-43.0	-13
1200.12	Horizontal	-48.2	-13

Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
879.95	Vertical	-34.8	-13
1319.93	Vertical	-40.2	-13
1759.90	Vertical	-45.6	-13
879.95	Horizontal	-44.3	-13
1319.93	Horizontal	-50.1	-13

Top channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
959.95	Vertical	-36.8	-13
1439.93	Vertical	-43.9	-13
1919.90	Vertical	-51.8	-13

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 40 of 78

Report No: FCC1501207

Date: 2015-07-29



959.95	Horizontal	-45.4	-13
1439.93	Horizontal	-50.3	-13

8.6 Conducted Emissions

8.6.1. Measurement Procedure

- 1). The eut antenna port connect to the spectrum analyzer through a attenuator.
- 2). Let the eut working in transmitter and used the spectrum to measure the conducted emission. 3). The output of the antenna shall be connected to the spectrum.

The setup of test receiver: Detector: Peak RBW: 120 kHz for 30-1000MHz, 1MHz for above1GHz

VBW: 300 kHz for 30-1000MHz 3MHz for above1GHz

8.6.2.Test Setup Block Diagram (block diagram of configuration)



8.6.3 Test Result

VHF Band

Bottom Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
272.05	-34.6	-13
408.08	-41.2	-13

Middle Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
312.05	-33.7	-13
468.08	-39.9	-13

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 41 of 78

Report No: FCC1501207

Date: 2015-07-29



Top Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
347.95	-36.7	-13
521.93	-41.7	-13

UHF Band

Bottom channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
800.05	-32.3	-13
1200.08	-39.5	-13

Middle channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
879.95	-32.5	-13
1319.93	-39.3	-13

Top Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
959.95	-33.6	-13
1439.93	-40.1	-13

Date: 2015-07-29



Page 42 of 78

9. Modulation Characteristics

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). The EUT and test equipment were set up as shown in figure 2.
- (2). Adjust the Modulation Analyzer for the following setting:
 - a) High-pass filter: offb) Low-pass filter: 15 kHzc) Detector: positive peak
 - d) Function: FM
- (3). The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- (4). With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 300 Hz to 5 kHz.
- (5). The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.

Report No: FCC1501207 Page 43 of 78

Date: 2015-07-29



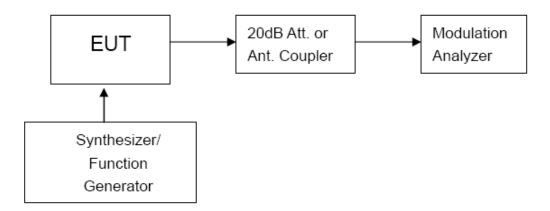


Figure 1: Modulation characteristic measurement configuration

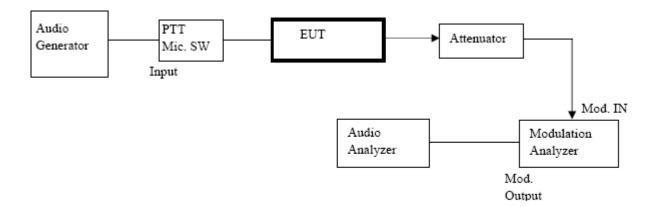


Figure 2: Audio Frequency Response Measurement Configure

Date: 2015-07-29




9.4 MEASUREMENT RESULT

(a). Modulation Limit:

Middle channel (For VHF Band, 12.5 kHz Channel Spacing)

	1			1
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.08	0.19	0.28	0.35
-15	0.11	0.3	0.39	0.55
-10	0.19	0.42	0.66	0.82
-5	0.3	0.65	0.92	1.17
0	0.32	0.96	1.23	1.4
5	0.51	1.11	1.3	1.63
10	0.66	1.25	1.49	1.86
15	0.7	1.38	1.58	2.02
20	0.78	1.6	1.77	2.15

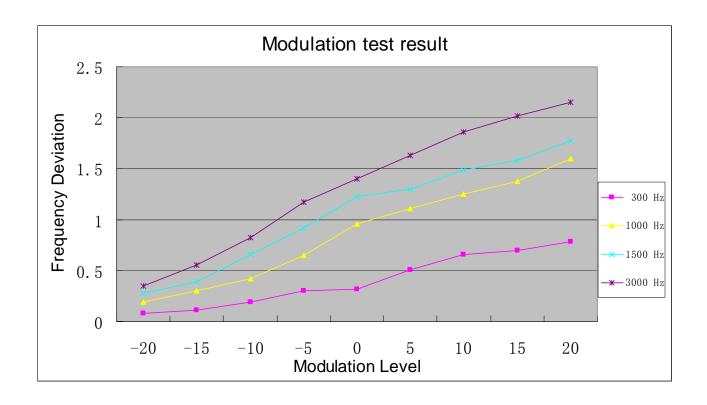

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Report No: FCC1501207 Page 45 of 78

Date: 2015-07-29



(b). Audio Frequency Response:

For VHF Band, 12.5 kHz Channel Spacing

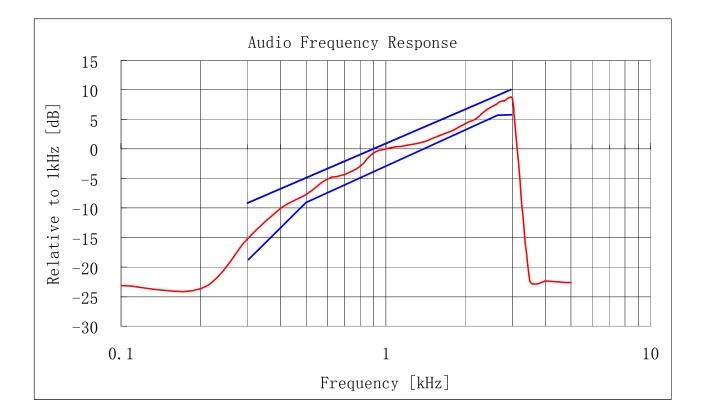


Date: 2015-07-29



Middle channel (For UHF Band, 12.5 kHz Channel Spacing)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.07	0.16	0.21	0.3
-15	0.12	0.22	0.38	0.58
-10	0.17	0.38	0.57	0.76
-5	0.26	0.52	0.88	1.02
0	0.35	0.73	1.08	1.33
5	0.56	0.92	1.26	1.5
10	0.69	1.12	1.42	1.76
15	0.73	1.32	1.62	1.96
20	0.82	1.46	1.85	2.09

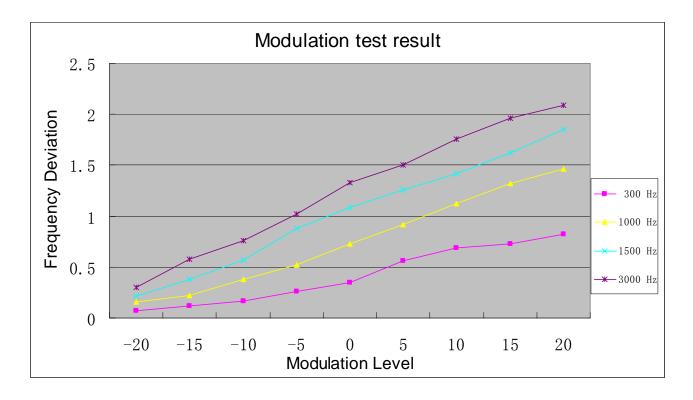


Report No: FCC1501207 Page 47 of 78

Date: 2015-07-29



(b). Audio Frequency Response:

For UHF Band, 12.5 kHz Channel Spacing

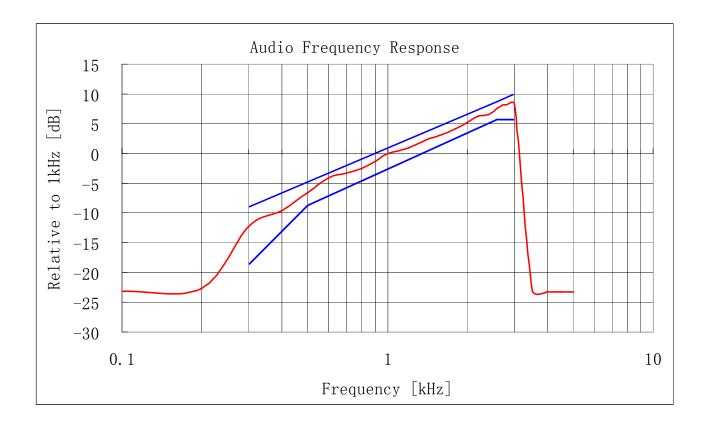


Date: 2015-07-29



(a). Modulation Limit:

Middle channel (For VHF Band, 6.25 kHz Channel Spacing)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.05	0.26	0.33	0.43
-15	0.12	0.38	0.5	0.62
-10	0.19	0.59	0.67	0.97
-5	0.27	0.62	0.82	1.21
0	0.31	0.78	1.22	1.49
5	0.5	0.9	1.29	1.61
10	0.63	1.12	1.58	1.72
15	0.71	1.33	1.72	1.93
20	0.82	1.55	1.99	2.17

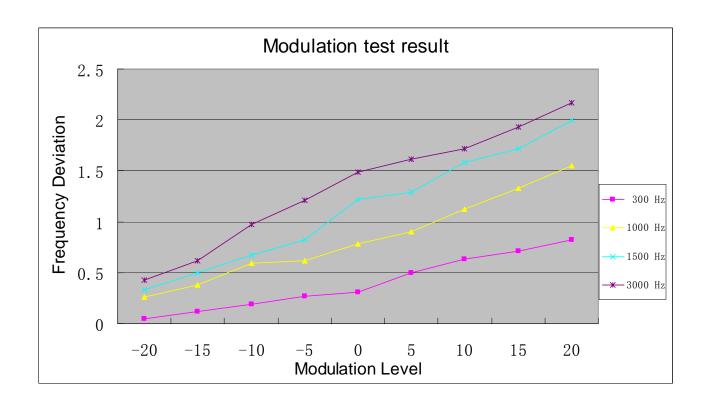


Report No: FCC1501207 Page 49 of 78

Date: 2015-07-29



(b). Audio Frequency Response:

For VHF Band, 6.25 kHz Channel Spacing

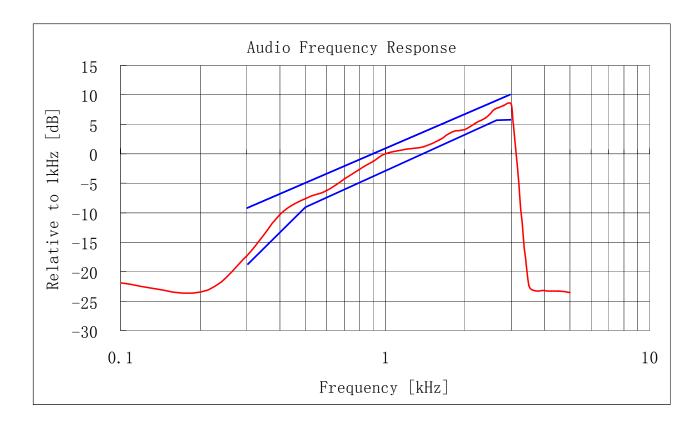


Date: 2015-07-29



Middle channel (For UHF Band, 6.25 kHz Channel Spacing)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.09	0.24	0.32	0.43
-15	0.11	0.34	0.43	0.62
-10	0.19	0.46	0.68	0.77
-5	0.25	0.59	0.8	0.99
0	0.32	0.82	0.95	1.26
5	0.46	1.01	1.22	1.56
10	0.63	1.22	1.4	1.7
15	0.69	1.37	1.55	1.82
20	0.85	1.58	1.82	2.02

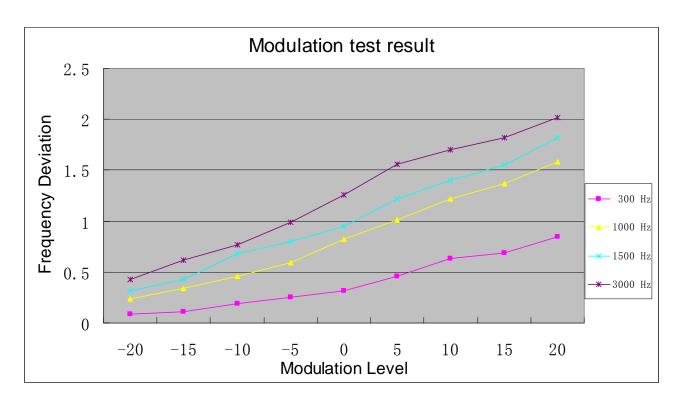


Report No: FCC1501207 Page 51 of 78

Date: 2015-07-29



(b). Audio Frequency Response:

For UHF Band, 6.25 kHz Channel Spacing

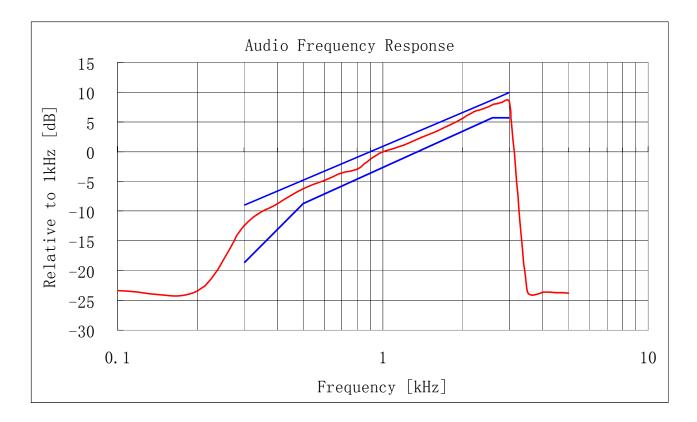

Date: 2015-07-29



10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER)

10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum EIRP is dependent upon the station's antenna HAAT and required service area.

10.2 TEST PROCEDURE

The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.

Spectrum analyzer setting: RBW=10 kHz, VBW=30 kHz, PK detector

10.3 TEST RESULT

Calculation Formula: CP = R + A + L

* Note:

CP: The final Conducted Power

R: The reading value from spectrum analyzer A: The attenuation value of the used attenuator

L: The loss of all connection cables

For 12.5 kHz Channel Spacing

Conducted Power Measurement Results				
Channel Separation Channel Measurement Result (dBm)				
	Bottom channel	35.82		
UHF Band	Middle Channel	36.63		
	Top channel	36.06		
	Bottom channel	19.38		
VHF Band	Middle Channel	19.51		
	Top channel	19.40		

Maximum EIRP=36.25+antenna Gain=36.63+1.0dBi=37.63dBm (UHF Band)

Maximum EIRP=19.51+antenna Gain=19.51+1.0dBi=20.51dBm (VHF Band)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 53 of 78

Date: 2015-07-29



For 6.25 kHz Channel Spacing

Report No: FCC1501207

Conducted Power Measurement Results				
Channel Separation Channel Measurement Result (dBm)				
	Bottom channel	35.81		
UHF Band	Middle Channel	36.57		
	Top channel	35.98		
	Bottom channel	19.33		
VHF Band	Middle Channel	19.46		
	Top channel	19.31		

Maximum EIRP=36.22+antenna Gain=36.57+1.0dBi=37.57dBm (UHF Band)

Maximum EIRP=19.46+antenna Gain=19.46+1.0dBi=20.46dBm (VHF Band)

Date: 2015-07-29



11. RANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

> t₃ is the time period from the instant when the transmitter is turned off until toff.

 $t_{\rm off}$ is the instant when the 1 kHz test signal starts to rise. 2 During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.

	Maximum	All equi	pment
Time intervals 1,2	frequency	150 to 174	421 to 512
	difference ³	MHz	MHz
	ency Behavior for perate on 25 kHz		esigned to
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
•	ency Behavior for erate on 12.5 kHz		esigned to
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms

Operate on 6.25 kHz Channels

t ₁ ⁴ t ₂ t ₃ ⁴	±6.25 kHz	5.0 ms 20.0 ms	10.0 ms 25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ on is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

Date: 2015-07-29




t₃ is the time period from the instant when the transmitter is turned off until toff.

- $t_{\rm off}$ is the instant when the 1 kHz test signal starts to rise. 2 During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.
- ³ Difference between the actual transmitter frequency and the assigned transmitter frequency.
- 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 Test Method

TIA-603-D-2010

11.3 Test setup Block Diagram

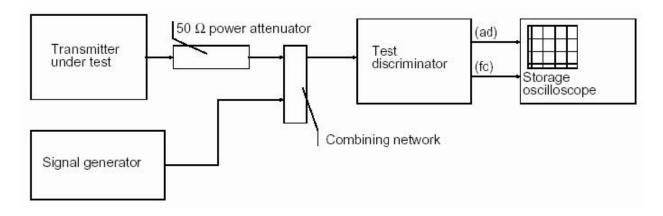


11.4 MEASURE RESULT

Date: 2015-07-29




Transmitter Frequency Behaviour @ 12.5 kHz Channel Separation--Off to On at VHF Band

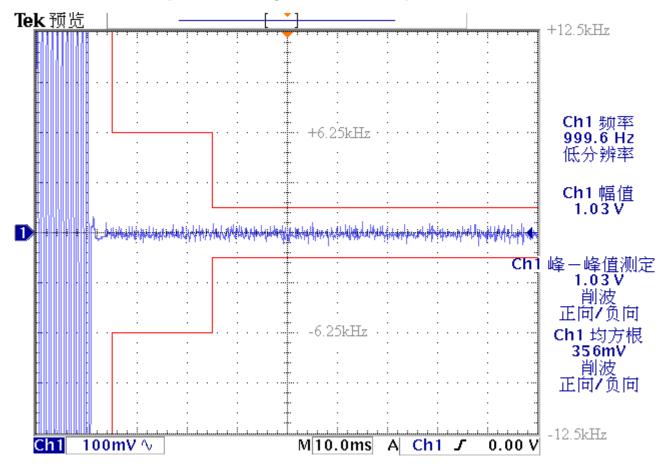

Date: 2015-07-29




Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation—On to Off at VHF Band

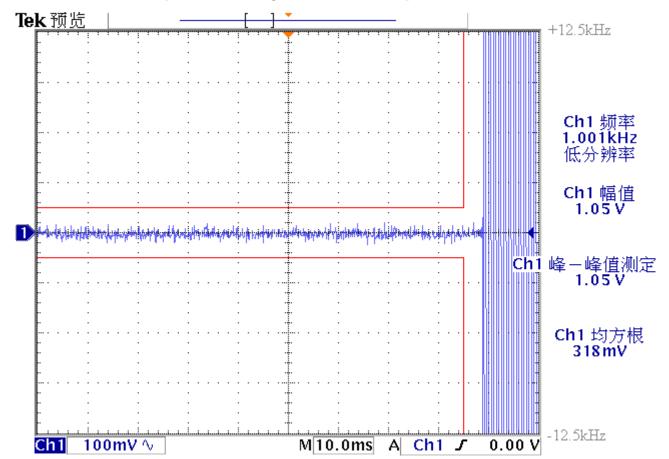

Date: 2015-07-29




Transmitter Frequency Behaviour @ 12.5 kHz Channel Separation--Off to On at UHF Band

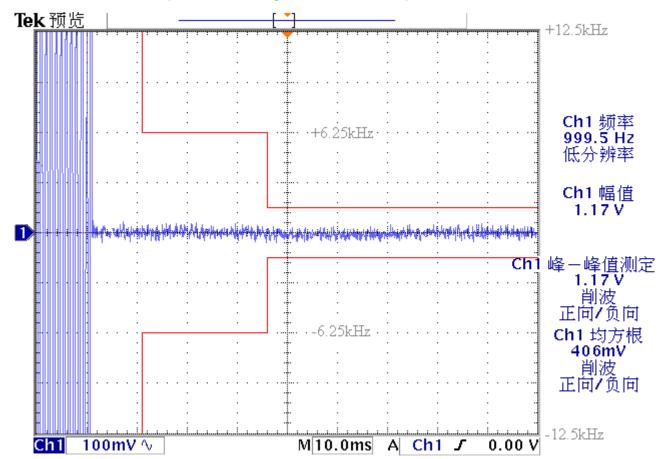

Date: 2015-07-29




Transmitter Frequency Behaviour @ 12.5 kHz Channel Separation—On to Off at UHF Band

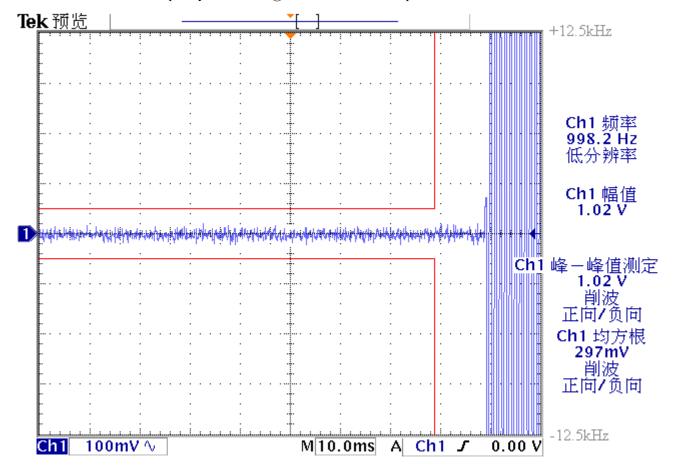

Date: 2015-07-29




Transmitter Frequency Behaviour @ 6.25 kHz Channel Separation--Off to On at VHF Band

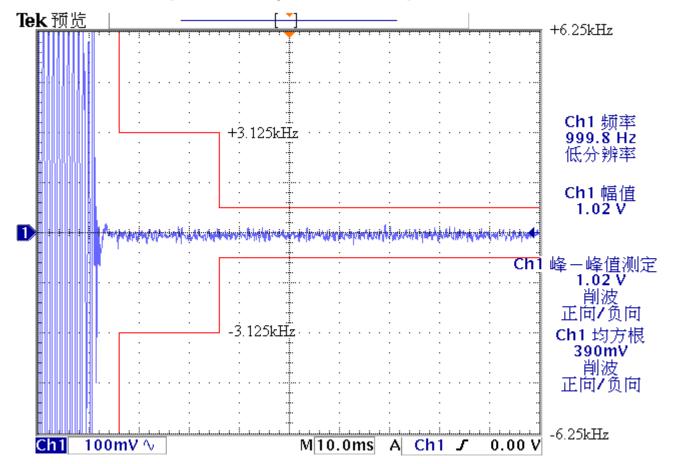

Date: 2015-07-29






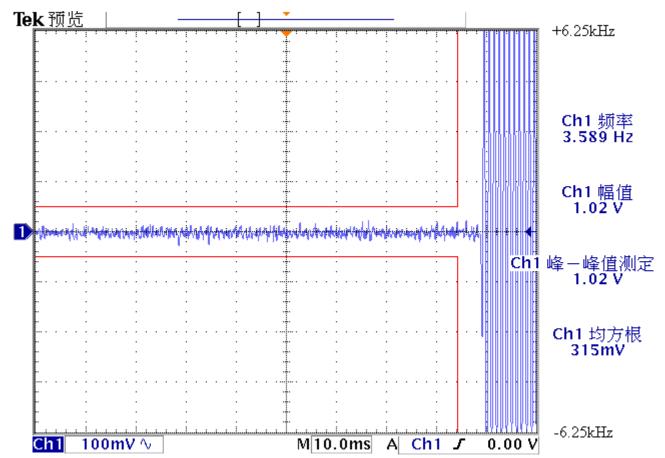

Date: 2015-07-29




Transmitter Frequency Behaviour @ 6.25 kHz Channel Separation--Off to On at UHF Band

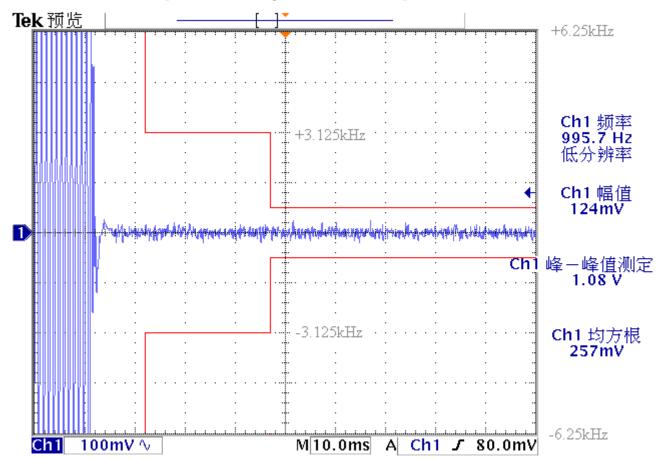

Date: 2015-07-29



Transmitter Frequency Behaviour @ 6.25 kHz Channel Separation—On to Off at UHF Band

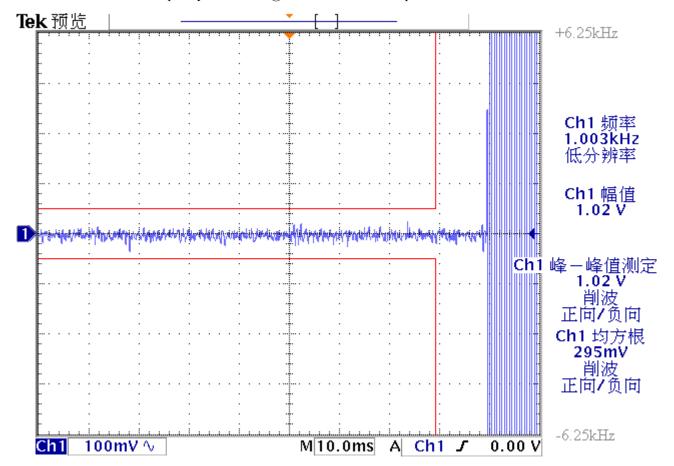

Report No: FCC1501207 Page 64 of 78

Date: 2015-07-29



12. Radiated Emission on Receiving Mode

12.1 Provisions Applicable

FCC Part 15 Subpart B Section 15.109

12.2 TEST METHOD

ANSI C 63.4: 2014

12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

Date: 2015-07-29




Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Charging and Receiving

Results: Pass

Please refer to following diagram for individual

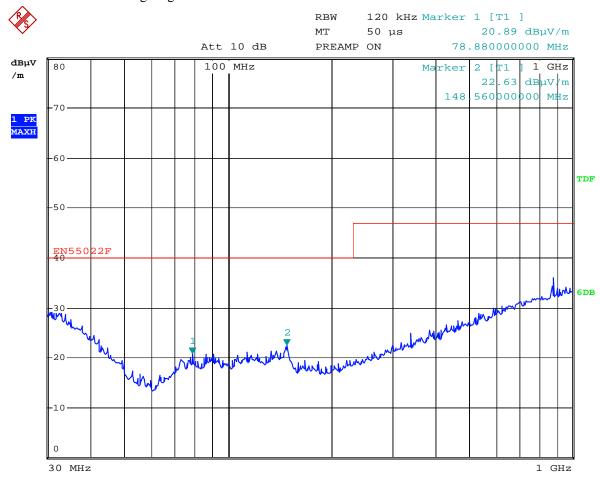

Date: 11.MAR.2015 11:24:43

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
78.880	20.89	Н	40.00
148.560	22.63	Н	43.50

Date: 2015-07-29




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Charging and Receiving

Results: Pass

Please refer to following diagram for individual

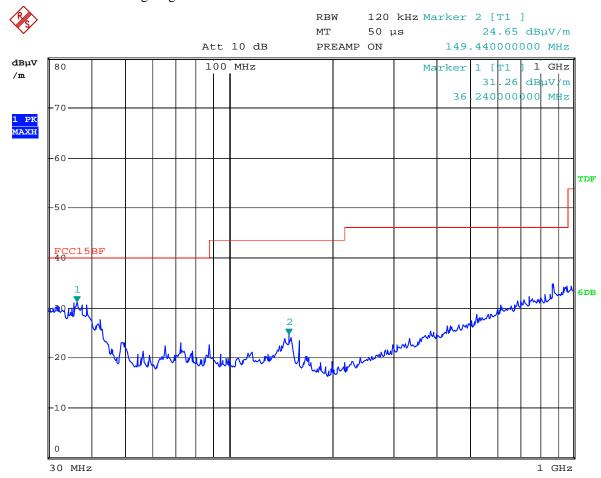

Date: 11.MAR.2015 11:21:40

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
149.440	24.65	V	43.50
36.240	31.26	V	40.00

Report No: FCC1501207 Page 67 of 78

Date: 2015-07-29



13.0 RF Exposure

(Only For VHF Band)

The threshold levels for SAR of PTT devices are given in Section 6 of KDB447498.

For held to face configuration

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f(GHz)}$] =54.445/25 * 0.395= 0.86, this value is less than 3.0 for 1-g SAR and \leq 7.5 for 10-g extremity SAR.

For body worn operation

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f(GHz)}$] =56.23/10 * 0.395= 2.22, this value is less than 3.0 for 1-g SAR and \leq 7.5 for 10-g extremity SAR.

Note: 1.The value of 0.05623W is half of the calculated EIRP (EIRP=20.51dBm=112.46mW, for middle channel 156.025MHz)

- 2. The maximum duty cycle is 50% for PTT device
- 3. A body-worn accessory is supplied with the PTT radio, a test separation distance=10 mm is applied to determine body-worn accessory SAR test exclusion
- 4. A test separation distance of 25 mm must be applied for in-front-of the face SAR test exclusion and SAR measurements
- 5. $\sqrt{f(GHz)} = \sqrt{0.156025} = 0.395$

Page 68 of 78

Report No: FCC1501207

Date: 2015-07-29



14.0 FCC ID Label

FCC ID: ZP5BF-UV82L

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 69 of 78


Report No: FCC1501207

Date: 2015-07-29



15.0 Photo of testing

15.1 Conducted test View--

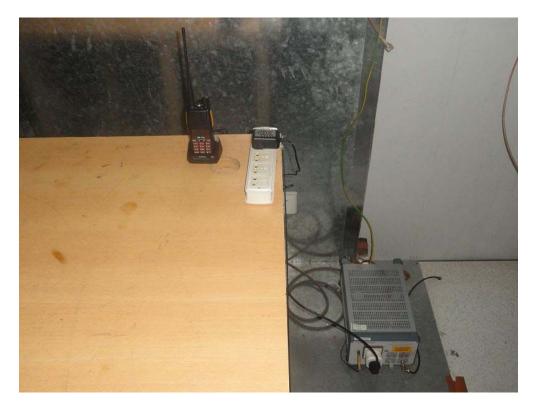

Date: 2015-07-29



15.2 Radiated emission test view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-07-29



Outside View Of GT-5





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-07-29



Outside View Of GT-5



Belt



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No: FCC1501207 Page 73 of 78

Date: 2015-07-29



Belt



Date: 2015-07-29



Interior View Of GT-5





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-07-29



Interior View Of GT-5





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-07-29



Interior View Of GT-5





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1501207 Page 77 of 78

Date: 2015-07-29



Interior View Of GT-5

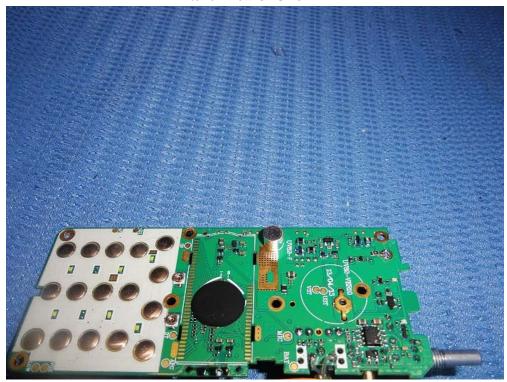

Date: 2015-07-29



Outside View Of UV-82L





-End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.