

# TEST REPORT

of

## FCC Part 15 Subpart C

☒ New Application; ☐ Class I PC; ☐ Class II PC

**Product :** Towable Tire Pressure Monitor System

**Brand:** TIRE INSIGHT

**Model:** CT63

VS-68R002-X, VS-68R002-XXXX-X (Where X may be any alpha character "a"-"z", "A"-"Z", or numeric character "0"-"9", or -, (,), or blank

**Model Difference:** Market Segmentation

**FCC ID:** ZPNVS68R002

**FCC Rule Part:** §15.231 (e)

**Applicant:** CUB ELECPARTS INC.

**Address:** No.6, Lane 546, Sec.6, Changlu Road, Fuhsin Township  
Changhua County, Taiwan

### Test Performed by:

#### International Standards Laboratory

<Lung-Tan LAB>

\*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

\*Address:

No. 120, Lane 180, Hsin Ho Rd.

Lung-Tan Dist., Tao Yuan City 325, Taiwan

\*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-17LR055FC**

Issue Date : **2017/05/03**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

## VERIFICATION OF COMPLIANCE

**Applicant:** CUB ELECPARTS INC.

**Product Description:** Towable Tire Pressure Monitor System

**Brand Name:** TIRE INSIGHT

**FCC ID:** ZPNVS68R002

**FCC Rule Part:** §15.231 (e)

**Model No.:** CT63  
VS-68R002-X, VS-68R002-XXXX-X (Where X may be any alpha character "a"-“z”, “A”-“Z”, or numeric character “0”-“9”, or -, (,), or blank)

**Model Difference:** Market Segmentation

**Date of test:** 2017/03/26 ~ 2017/5/02

**Date of EUT Received:** 2017/03/26

### We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

**Test By:**



**Date:**

2017/05/03

*Dino Chen / Engineer*

**Prepared By:**



**Date:**

2017/05/03

*Elisa Chen / Specialist*

**Approved By:**



**Date:**

2017/05/03

*Vincent Su / Technical Manager*

## Version

Version No.	Date	Description
00	2017/05/03	Initial creation of document

## Uncertainty of Measurement

Description Of Test	Uncertainty
Conducted Emission (AC power line)	2.586 dB
Field Strength of Spurious Radiation	<=30MHz: 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB
Conducted Power	2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB
Power Density	2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB
Frequency	0.0032%
Time	0.01%
DC Voltage	1%

## Table of Contents

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>6</b>
1.1	PRODUCT DESCRIPTION .....	6
1.2	RELATED SUBMITTAL(S) / GRANT (S) .....	6
1.3	TEST METHODOLOGY.....	6
1.4	TEST FACILITY .....	7
1.5	SPECIAL ACCESSORIES.....	7
1.6	EQUIPMENT MODIFICATIONS .....	7
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
2.1	EUT CONFIGURATION.....	8
2.2	EUT EXERCISE .....	8
2.3	TEST PROCEDURE.....	8
2.4	LIMITATION .....	9
2.5	CONFIGURATION OF TESTED SYSTEM.....	11
<b>3.</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>4.</b>	<b>DESCRIPTION OF TEST MODES .....</b>	<b>12</b>
<b>5.</b>	<b>AC CONDUCTED EMISSIONS TEST.....</b>	<b>13</b>
5.1	MEASUREMENT PROCEDURE: .....	13
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	13
5.3	MEASUREMENT EQUIPMENT USED: .....	13
5.4	MEASUREMENT RESULT: .....	13
<b>6.</b>	<b>RADIATED EMISSION TEST .....</b>	<b>14</b>
6.1	MEASUREMENT PROCEDURE.....	14
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	15
6.3	MEASUREMENT EQUIPMENT USED: .....	16
6.4	FIELD STRENGTH CALCULATION .....	16
6.5	MEASUREMENT RESULT .....	17
<b>7.</b>	<b>20DB / 99% OCCUPIED BANDWIDTH .....</b>	<b>20</b>
7.1	MEASUREMENT PROCEDURE.....	20
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	20
7.3	MEASUREMENT EQUIPMENT USED: .....	20
7.4	MEASUREMENT RESULTS.....	20
7.5	MEASUREMENT RESULT:.....	20

<b>8.</b>	<b>DUTY CYCLE MEASUREMENT .....</b>	<b>22</b>
8.1	MEASUREMENT PROCEDURE.....	22
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	22
8.3	MEASUREMENT EQUIPMENT USED: .....	22
8.4	MEASUREMENT RESULTS:.....	22
<b>9.</b>	<b>SILENT PERIOD TIME MEASUREMENT:.....</b>	<b>23</b>
9.1	MEASUREMENT PROCEDURE.....	23
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	23
9.3	MEASUREMENT EQUIPMENT USED: .....	23
9.4	MEASUREMENT RESULTS.....	23

## 1. GENERAL INFORMATION

### 1.1 Product Description

Product Name	Towable Tire Pressure Monitor System
Brand Name	TIRE INSIGHT
Model Name	CT63, VS-68R002-X, VS-68R002-XXXX-X (Where X may be any alpha character "a"-"z", "A"-"Z", or numeric character "0"-"9", or -, (,), or blank
Model Difference	Market Segmentation
Power Supply	12-24Vdc by car battery
Device type	safety applications

### TX:

Operating Frequency	433.92 MHz
Transmit Power	67.3dBuV/m at 3m
Modulation Technique	FSK
Number of Channels	1
Periodic Transmission Time	Transmission period : every 60.12s, Ton: 0.72s
Antenna Type	Fixed Antenna type

### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **ZPNVS68R002** filing to comply with Section 15.231 (e) of the FCC Part 15, Subpart C.

### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in C63.10: 2013 and RSS-Gen Issue 4: 2014. Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10: 2013. FCC Registration Number is: 872200; Designation Number is: TW1036, Canada Registration Number: 4067B-3.

#### 1.5 Special Accessories

Not available for this EUT intended for grant.

#### 1.6 Equipment Modifications

Not available for this EUT intended for grant.

## **2. SYSTEM TEST CONFIGURATION**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The EUT (Transmitter) was tested with a test program to fix the Tx frequency that was for the purpose of the measurements. For more information please see test data and APPENDIX 1 for set-up photographs.

### **2.3 Test Procedure**

#### **2.3.1 Conducted Emissions (Not apply in the report)**

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10: 2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

#### **2.3.2 Radiated Emissions**

The EUT is a placed on as turn table which is 0.8 m/1.5m(Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.



## 2.4 Limitation

### (1) Conducted Emission

According to section RSS-Gen §8.8 Conducted Emission Limits is as following.

Frequency range MHz	Limits dB (uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

## (2) Radiated Emission

According to (e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:


Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 <sup>1</sup>	50 to 150 <sup>1</sup>
174-260	1,500	150
260-470	1,500 to 5,000 <sup>1</sup>	150 to 500 <sup>1</sup>
Above 470	5,000	500

<sup>1</sup>Linear interpolations.

- Remark:
1. Emission level in dBuV/m =  $20 \log (\mu\text{V/m})$
  2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205
  4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of § 15.205, then the general radiated emission limits in § 15.209 apply.
  5. For the band 130-174MHz,  $\mu\text{V/m}$  at 3meters =  $22.72727 * F(\text{MHz}) - 2454.545$ ;  
For the band 260-470MHz  $\mu\text{V/m}$  at 3meters =  $16.6667 * F(\text{MHz}) - 2833.333$ ;  
Where F is the frequency in MHz.
  6.  $433.92\text{MHz AV limit} = 16.6667 * 433.92(\text{MHz}) - 2833.333 = 4398.68 \mu\text{V/m}$   
 $= 72.86\text{dBuV/m}$
  7.  $433.92\text{MHz Peak limit} = \text{AV Limit} + 20\text{dB} = 92.86\text{MHz}$

## 2.5 Configuration of Tested System

**Fig. 1 Configuration of Tested System**

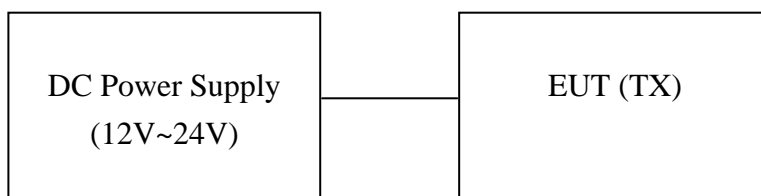

**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Power supply	MRL	TH-3205	N/A	N/A	Non-shielding
2.						

### 3. SUMMARY OF TEST RESULTS

FCC /IC Rules	Description Of Test	Result
§15.207	Conducted Emission	N/A
§15.231(e)	Radiated Emission	Compliant
§15.231(c)	20dB Bandwidth	Compliant
	Duty Cycle Test (Pulse Modulation)	N/A
§15.231(e)	transmission time, silent period	Compliant
§15.203	Antenna Requirement	Compliant

### 4. Description of test modes


The EUT has been tested under engineering test mode condition and the EUT staying in continuous transmitting mode. The Frequency 433.92 MHz is chosen for testing.

## 5. AC CONDUCTED EMISSIONS TEST

### 5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

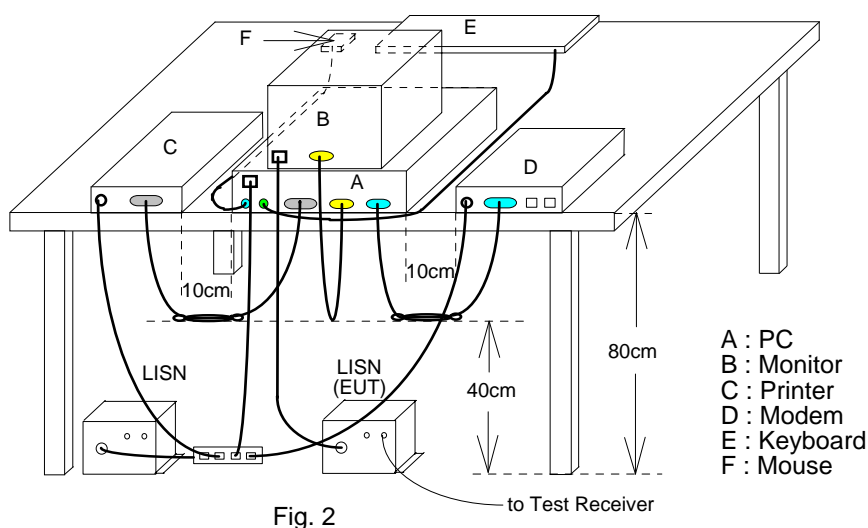

### 5.3 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 04-3 Cable	WOKEN	CFD 300-NL	Conduction 04 -3	09/12/2016	09/11/2017
EMI Receiver 16	Rohde & Schwarz	ESCI	101221	10/24/2016	10/23/2017
LISN 18	ROHDE & SCHWARZ	ENV216	101424	02/05/2017	02/04/2018
LISN 19	ROHDE & SCHWARZ	ENV216	101425	03/07/2017	03/06/2018
Test Software	Farad	EZEMC Ver:ISL-03A2	N/A	N/A	N/A

### 5.4 Measurement Result:

N/A

## **6. RADIATED EMISSION TEST**


15.231 (e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

### **6.1 Measurement Procedure**


1. The EUT was placed on a turn table which is 0.8/1.5m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

## 6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

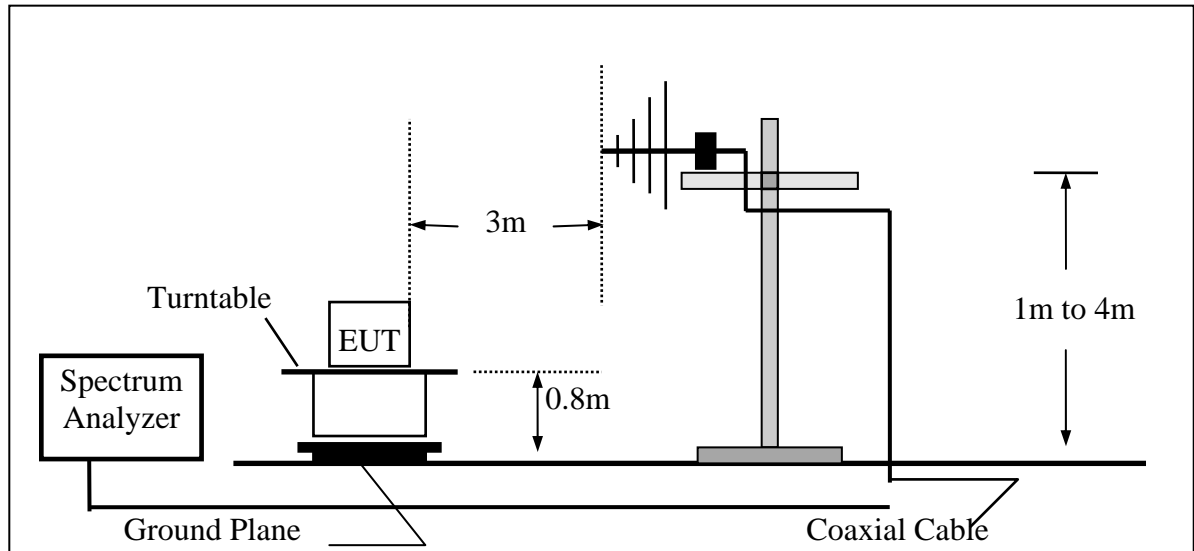

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

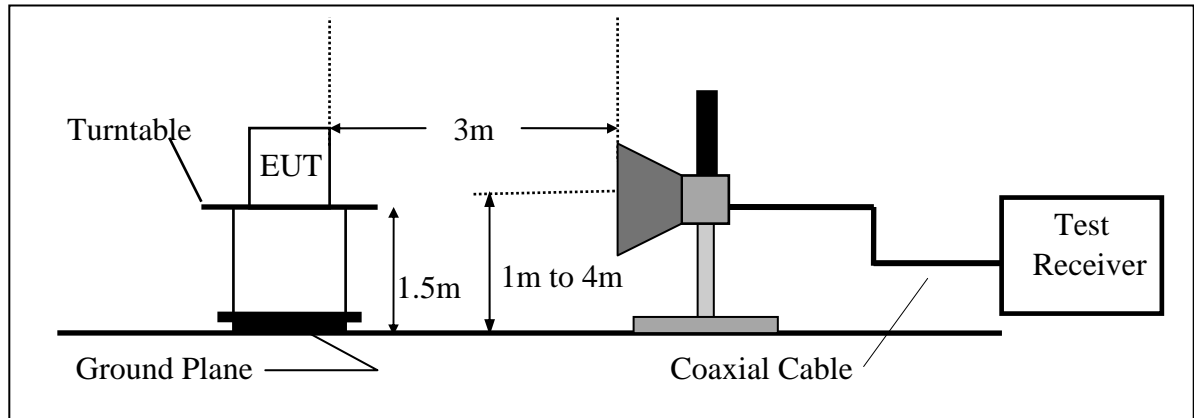

### 6.3 Measurement Equipment Used:

Chamber 19					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer 21(3Hz-44GHz)	Agilent	N9030A	MY51360021	11/14/2016	11/13/2017
Loop Antenna (9K-30M)	A.H.SYSTEM	SAS-564	294	06/17/2015	06/16/2017
Bilog Antenna (30M-1G)	SCHWARZBECK	VULB9168 w 5dB Att	736	07/22/2016	07/21/2017
Horn antenna (1G-18G)	SCHWARZBECK	9120D	9120D-1627	07/22/2016	07/21/2017
Horn antenna (18G-26G)	Com-power	AH-826	081001	07/24/2015	07/23/2017
Preamplifier (9k-1000M)	HP	8447F	3113A06362	11/13/2016	11/12/2017
Preamplifier(1G-26G)	Agilent	8449B	3008A02471	08/25/2016	08/24/2017
Preamplifier (26G-40G)	MITEQ	JS4-26004000- 27-5A	818471	07/23/2015	07/22/2017
RF Cable (9k-18G)	HUBER SUHNER	SUCOFLEX 104A	MY1397/4A	08/25/2016	08/24/2017
RF cable (18G~40G)	HUBER SUHNER	Sucoflex 102	27963/2&37421/2	11/03/2015	11/02/2017

### 6.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Average Value = Peak Value + 20 Log (Ton/Tp) .....Pulse Modulation Duty Cycle Correction Factor

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	



## 6.5 Measurement Result

### Fundamental Measurement Result

Operation Mode:	Transmitting Mode	Test Date:	2017/03/28
Fundamental Frequency:	433.92MHz	Test By:	Dino
Temp:	25	Hum.:	60%

Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
433.97	68.98	-1.68	67.30	92.86	-25.56	Peak	VERTICAL
433.97	62.63	-1.68	60.95	92.86	-31.91	Peak	HORIZONTAL

#### Remark:

- 1 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 2 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.
- 3 Average Value = Peak Value + 20 Log (Ton/Tp) .....Pulse Modulation Duty Cycle Correction Factor

**Radiated Spurious Emission Measurement Result (below 1GHz)**

Operation Mode: Transmitting Mode

Test Date: 2017/03/28

Fundamental Frequency: 433.92MHz

Test By: Dino

Temperature : 25

Humidity : 60 %

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	33.88	43.95	-6.39	37.56	40.00	-2.44	Peak	VERTICAL
2	130.88	44.61	-6.27	38.34	43.50	-5.16	Peak	VERTICAL
3	172.59	40.46	-5.59	34.87	43.50	-8.63	Peak	VERTICAL
4	183.26	47.10	-6.97	40.13	43.50	-3.37	Peak	VERTICAL
5	408.30	40.30	-2.17	38.13	46.00	-7.87	Peak	VERTICAL
6	868.08	29.97	5.39	35.36	46.00	-10.64	Peak	VERTICAL
1	106.63	38.62	-8.78	29.84	43.50	-13.66	Peak	HORIZONTAL
2	130.88	42.60	-6.27	36.33	43.50	-7.17	Peak	HORIZONTAL
3	139.61	36.46	-5.66	30.80	43.50	-12.70	Peak	HORIZONTAL
4	197.81	35.84	-8.20	27.64	43.50	-15.86	Peak	HORIZONTAL
5	285.11	33.41	-4.31	29.10	46.00	-16.90	Peak	HORIZONTAL
6	868.08	27.95	5.39	33.34	60.00	-26.66	Peak	HORIZONTAL

**Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.

### Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode: Transmitting Mode Test Date: 2017/03/28  
Fundamental Frequency: 433.92MHz Test By: Dino  
Temperature : 25 Humidity : 60 %

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2220.00	46.58	-3.16	43.42	74.00	-30.58	Peak	VERTICAL
1	2336.00	46.58	-3.11	43.47	74.00	-30.53	Peak	HORIZONTAL

#### Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

## 7. 20DB OCCUPIED BANDWIDTH

### 7.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Center Frequency = fundamental frequency, RBW= 10KHz, VBW= 30KHz, Span =3MHz.
4. Set SPA Max hold. Mark peak, -20dB. 99% Bandwidth

### 7.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Measurement.

### 7.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

### 7.4 Measurement Results

Refer to attached data chart.

The center frequency  $f_c$  is **433.92MHz**, according to the Rules, section 15.231(C), the Bandwidth of Center Frequency at-20dB should be calculated as following:

$$433.92 \times 0.0025 = 1.0848(\text{MHz})$$

So, the Uper/Lower frequencies limit should be specified as:


$$f_{(U)} = f_c + \Delta f/2 = 433.92 + 0.5424 = 434.46(\text{MHz})$$

$$f_{(L)} = f_c - \Delta f/2 = 433.92 - 0.5424 = 433.377 (\text{MHz})$$

### 7.5 Measurement Result:

389 KHz < limit 1.0848MHz

## 20dB Band Width Test Data

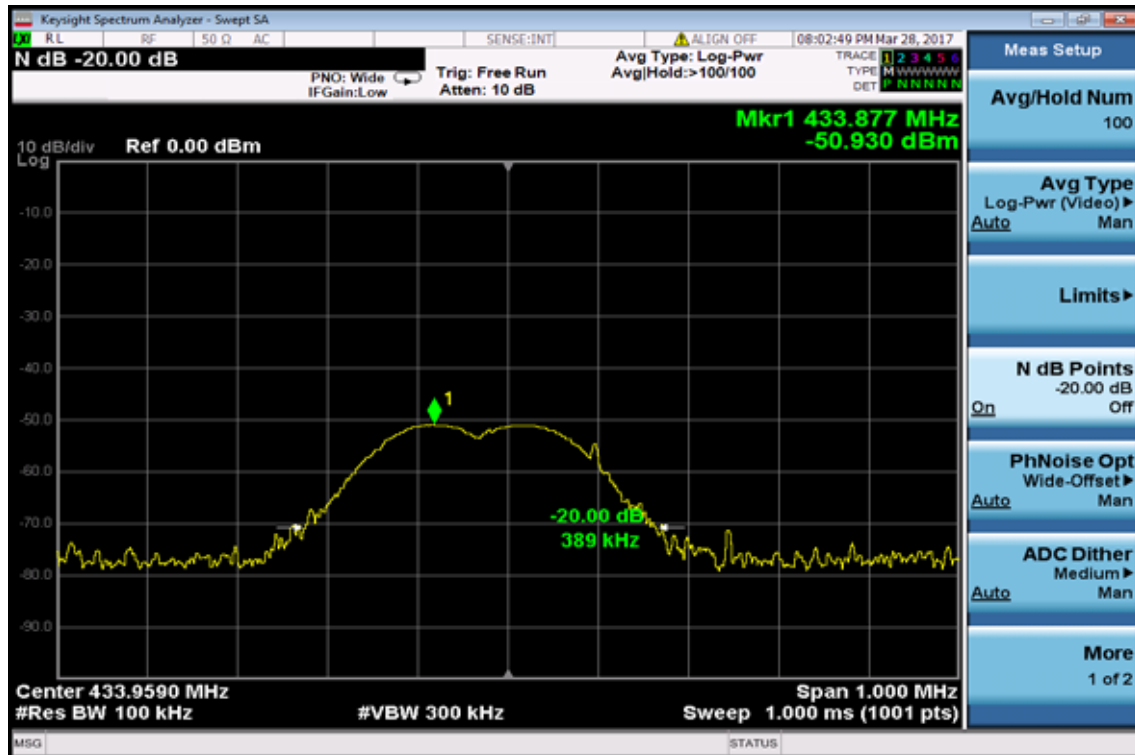

## **8. DUTY CYCLE (AVERAGE CORRECTION FACTOR) MEASUREMENT**

### **8.1 Measurement Procedure**

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set ETU normal operating mode.
3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 1.0MHz, Span =0 Hz. Adjacent sweep.
4. Set SPA View. Mark delta.

### **8.2 Test SET-UP (Block Diagram of Configuration)**

Same as 6.2 Radiated Emission Measurement.

### **8.3 Measurement Equipment Used:**

Same as 6.3 Radiated Emission Measurement.

### **8.4 Measurement Results: N/A**

Duty cycle correction factor is not used for average value.

## 9. SILENT PERIOD TIME MEASUREMENT:

15.231 (e)

devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

RSS 210 A1.1.5

(2) In addition, devices operated under the provisions of this section (A1.1.5) shall be capable of automatically limiting their operation so that the duration of each transmission shall not be greater than 1 second and the silent period between transmissions shall be at least 30 times the duration of the transmission, but in no case less than 10 seconds. However, devices that are designed for limited

use for the purpose of initial programming, reprogramming or installation, and not for regular operations, may operate up to 5 seconds provided that such devices are used only occasionally in connection with each unit being programmed or installed.

### 9.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 1MHz, Span =0Hz
3. Set EUT Power on as normal operation
4. Set SPA Max hold. Delta Mark.

### 9.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Measurement.

### 9.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

### 9.4 Measurement Results

Total transmission time of transmissions calculation:


Ton: 720 ms, < 1s

Tp: 60.12s

silent period limit(which one is lower): 10s or 720ms \*30 = 21.6s

T silent period = 60.12s – 0.72s = 59.4s > 10s

The result : PASS.

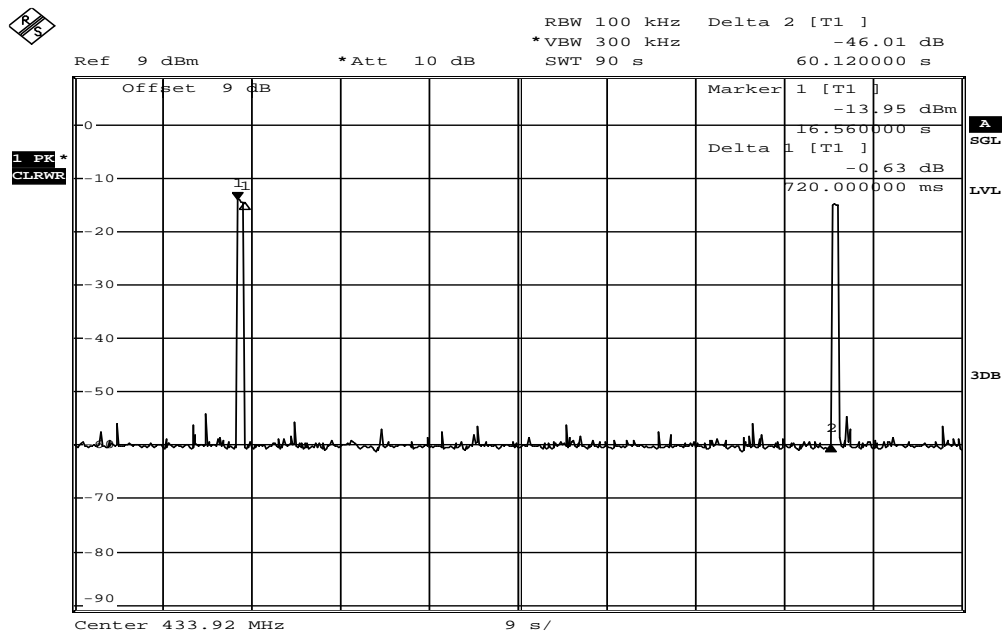

Date: 2.MAY.2017 10:30:34