

FCC Test Report

Report No.: RF150821C10-1

FCC ID: ZQ6-AP6356SDXX

Test Model: AP6356SD

Received Date: Aug. 21, 2015

Test Date: Nov. 26 ~ Dec. 26, 2015

Issued Date: Dec. 28, 2015

Applicant: AMPAK Technology Inc.

Address: 3F, No.1, Jen Ai Road, Hsinchu Industrial Park, Hsinchu, Taiwan, 30352

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Lab Address: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Set Up	16
4.1.6 EUT Operating Conditions	16
4.1.7 Test Results	17
4.2 Conducted Emission Measurement	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup	37
4.2.6 EUT Operating Conditions	37
4.2.7 Test Results	38
4.3 Transmit Power Measurement	40
4.3.1 Limits of Transmit Power Measurement	40
4.3.2 Test Setup	40
4.3.3 Test Instruments	40
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions	41
4.3.7 Test Result	42
4.4 Peak Power Spectral Density Measurement	47
4.4.1 Limits of Peak Power Spectral Density Measurement	47
4.4.2 Test Setup	47
4.4.3 Test Instruments	47
4.4.4 Test Procedures	47
4.4.5 Deviation from Test Standard	48
4.4.6 EUT Operating Conditions	48
4.4.7 Test Results	49
4.5 Frequency Stability	54
4.5.1 Limits of Frequency Stability Measurement	54
4.5.2 Test Setup	54
4.5.3 Test Instruments	54
4.5.4 Test Procedure	54
4.5.5 Deviation from Test Standard	54
4.5.6 EUT Operating Condition	54

4.5.7 Test Results	55
4.6 6dB Bandwidth Measurement.....	56
4.6.1 Limits of 6dB Bandwidth Measurement.....	56
4.6.2 Test Setup.....	56
4.6.3 Test Instruments	56
4.6.4 Test Procedure	56
4.6.5 Deviation from Test Standard	56
4.6.6 EUT Operating Condition	56
4.6.7 Test Results	57
5 Pictures of Test Arrangements.....	59
Appendix – Information on the Testing Laboratories	60



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150821C10-1	Original release	Dec. 28, 2015

1 Certificate of Conformity

Product: WLAN module for 802.11abgn(2x2) + 11ac + BT4.1

Brand: Ampak

Test Model: AP6356SD

Sample Status: Engineering Sample

Applicant: AMPAK Technology Inc.

Test Date: Nov. 26 ~ Dec. 26, 2015

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Dec. 28, 2015
Celine Chou / Specialist

Approved by : Ken Liu , **Date:** Dec. 28, 2015
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -9.62dB at 1.06103MHz.
15.407(b) (1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -4.1dB at 367.53MHz.
15.407(a)(1/2 /3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
15.407(a)(1/2 /3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	WLAN module for 802.11abgn(2x2) + 11ac + BT4.1
Brand	Ampak
Test Model	AP6356SD
Sample Status	Engineering Sample
Power Supply Rating	5Vdc (host equipment)
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	OFDM
Transfer Rate	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 150Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	5180 ~ 5240MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
Output Power	5180 ~ 5240MHz: 17.490mW 5745 ~ 5825MHz: 18.585mW
Antenna Type	PIFA antenna with 5.5dBi gain
Antenna Connector	IPEX
Accessory Device	NA
Data Cable Supplied	NA

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	TX Function
802.11a	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
802.11ac (VHT80)	2TX

* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

3.2 Description of Test Modes

For 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11ac (VHT80)		42	42	OFDM	BPSK	32.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)		155	155	OFDM	BPSK	32.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0
	802.11a	5745-5825	149 to 165		OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0
	802.11a	5745-5825	149 to 165		OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11ac (VHT80)		42	42	OFDM	BPSK	32.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)		155	155	OFDM	BPSK	32.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE _≥ 1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
RE _{<} 1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
PLC	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
APCM	25deg. C, 60%RH	120Vac, 60Hz	Frank Liu

3.3 Duty Cycle of Test Signal


802.11a: Duty cycle of test signal is > 98%, duty factor is not required.

802.11n (HT20), 802.11n (HT40), 802.11ac (VHT80): Duty cycle of test signal is < 98 %, duty factor is required.

802.11n (HT20): Duty cycle = $1.900/1.952 = 0.973$, Duty factor = $10 * \log(1/0.973) = 0.12$

802.11n (HT40): Duty cycle = $0.939/0.979 = 0.959$, Duty factor = $10 * \log(1/0.959) = 0.18$

802.11ac (VHT80): Duty cycle = $0.448/0.493 = 0.909$, Duty factor = $10 * \log(1/0.909) = 0.42$

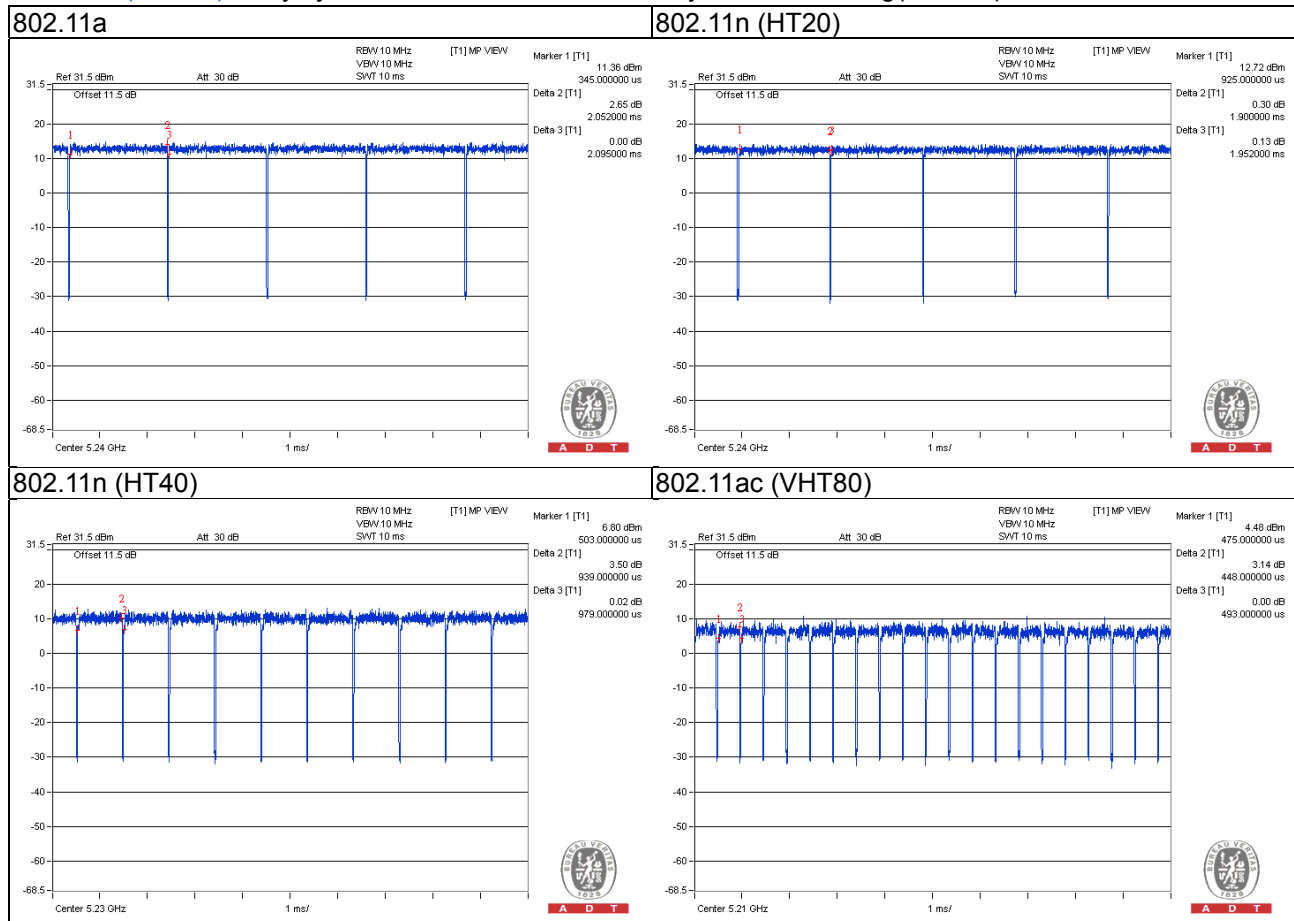

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	PC	Ampak	AC00301	NA	NA	Provided by manufacturer
B.	Monitor	Samsung	173v	NA	NA	-
C.	Keyboard	DELL	KB4021	CN-05V23T-71581-1A K-00IX-A01	FCC DoC Approved	-
D.	Mouse	DELL	MS111-P	CN-011D3V-71581-1C J-092J	FCC DoC Approved	-
E.	Convertible Board	NA	NA	NA	NA	Provided by manufacturer

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	D-sub cable	1	1.8	Y	2	-
2.	USB cable	1	1.8	Y	0	-
3.	USB cable	1	1.8	Y	0	-
4.	Mini USB cable	2	1	Y	0	Provided by manufacturer
5.	Convertible cable	1	0.5	N	0	Provided by manufacturer

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

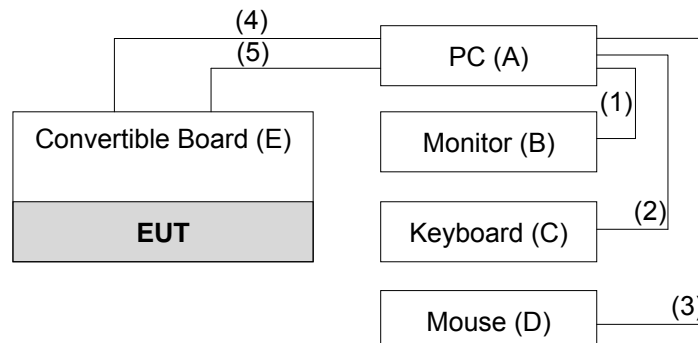

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBuV/m) ^{*1} PK:78.2 (dBuV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 12, 2015	Oct. 11, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 08, 2015	Jul. 07, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2015	Aug. 08, 2016
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-02(295012+309220)	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03(250724)	Aug. 09, 2015	Aug. 08, 2016
Software BV ADT	ADT_Radiated_V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2015	Oct. 17, 2016
High Speed Peak Power Meter	ML2495A	0824011	Jul. 09, 2015	Jul. 08, 2016
Power Sensor	MA2411B	0738171	Jul. 09, 2015	Jul. 08, 2016
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2015	Jun. 07, 2016

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

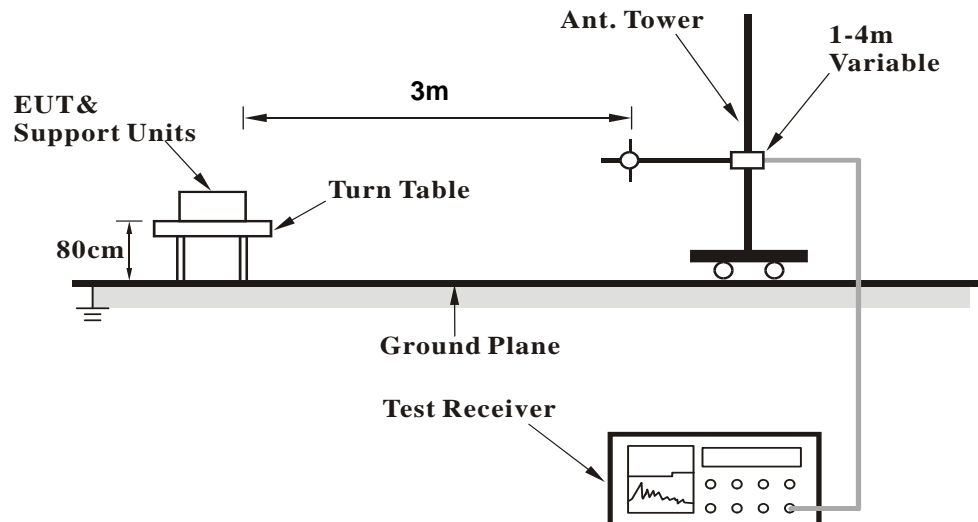

<Frequency Range above 1GHz>

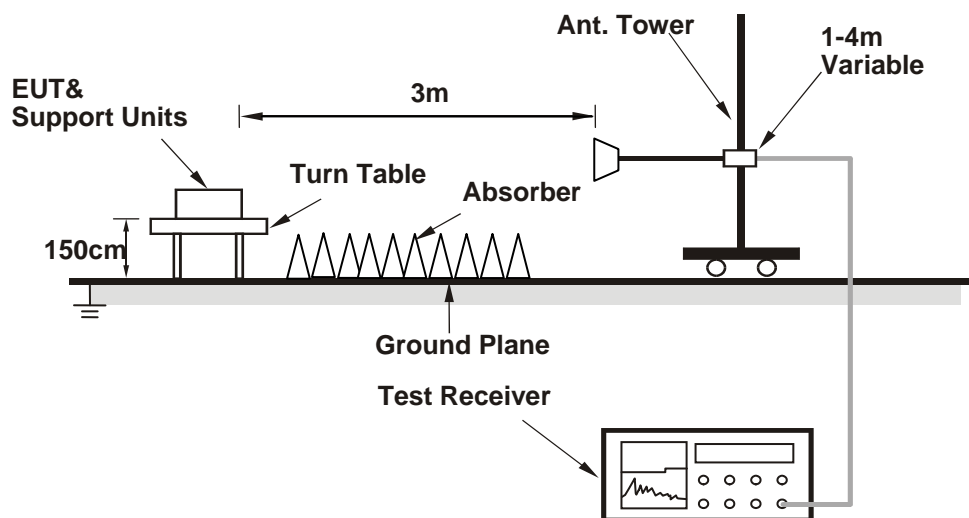

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT Operating Conditions

- Connected EUT with PC via Convertible Board through mini USB cable.
- Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Worst-Case Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.10 H	68	51.20	5.00
2	5150.00	43.7 AV	54.0	-10.3	1.10 H	68	38.70	5.00
3	*5180.00	95.3 PK			1.00 H	53	56.20	39.10
4	*5180.00	85.9 AV			1.00 H	53	46.80	39.10
5	#10360.00	58.1 PK	74.0	-15.9	1.39 H	87	41.00	17.10
6	#10360.00	45.2 AV	54.0	-8.8	1.39 H	87	28.10	17.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.7 PK	74.0	-18.3	2.30 V	314	50.70	5.00
2	5150.00	45.1 AV	54.0	-8.9	2.30 V	314	40.10	5.00
3	*5180.00	104.3 PK			2.21 V	294	65.20	39.10
4	*5180.00	94.6 AV			2.21 V	294	55.50	39.10
5	#10360.00	59.7 PK	74.0	-14.3	1.17 V	41	42.60	17.10
6	#10360.00	46.8 AV	54.0	-7.2	1.17 V	41	29.70	17.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	95.8 PK			1.00 H	54	56.60	39.20
2	*5200.00	86.2 AV			1.00 H	54	47.00	39.20
3	#10400.00	58.8 PK	74.0	-15.2	1.07 H	44	41.50	17.30
4	#10400.00	45.4 AV	54.0	-8.6	1.07 H	44	28.10	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	104.0 PK			1.19 V	295	64.80	39.20
2	*5200.00	94.2 AV			1.19 V	295	55.00	39.20
3	#10400.00	59.9 PK	74.0	-14.1	1.74 V	85	42.60	17.30
4	#10400.00	46.7 AV	54.0	-7.3	1.74 V	85	29.40	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	95.5 PK			1.00 H	48	56.30	39.20
2	*5240.00	86.2 AV			1.00 H	48	47.00	39.20
3	5350.00	56.6 PK	74.0	-17.4	1.15 H	56	51.20	5.40
4	5350.00	44.1 AV	54.0	-9.9	1.15 H	56	38.70	5.40
5	#10480.00	58.9 PK	74.0	-15.1	1.25 H	74	41.60	17.30
6	#10480.00	45.7 AV	54.0	-8.3	1.25 H	74	28.40	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	104.1 PK			1.19 V	296	64.90	39.20
2	*5240.00	94.1 AV			1.19 V	296	54.90	39.20
3	5350.00	58.4 PK	74.0	-15.6	1.26 V	315	53.00	5.40
4	5350.00	45.6 AV	54.0	-8.4	1.26 V	315	40.20	5.40
5	#10480.00	59.8 PK	74.0	-14.2	1.56 V	41	42.50	17.30
6	#10480.00	46.8 AV	54.0	-7.2	1.56 V	41	29.50	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	56.6 PK	74.0	-17.4	2.47 H	228	50.60	6.00
2	#5714.00	44.4 AV	54.0	-9.6	2.47 H	228	38.40	6.00
3	#5722.00	56.4 PK	78.2	-21.8	2.47 H	228	50.30	6.10
4	#5725.00	49.1 PK	78.2	-29.1	2.47 H	228	43.00	6.10
5	*5745.00	97.8 PK			2.55 H	233	57.50	40.30
6	*5745.00	87.8 AV			2.55 H	233	47.50	40.30
7	11490.00	59.5 PK	74.0	-14.5	1.08 H	64	41.90	17.60
8	11490.00	45.5 AV	54.0	-8.5	1.08 H	64	27.90	17.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	56.6 PK	74.0	-17.4	1.90 V	320	50.60	6.00
2	#5714.00	46.3 AV	54.0	-7.7	1.90 V	320	40.30	6.00
3	#5722.00	59.1 PK	78.2	-19.1	1.90 V	320	53.00	6.10
4	#5725.00	54.7 PK	78.2	-23.5	1.90 V	320	48.60	6.10
5	*5745.00	104.7 PK			1.83 V	311	64.40	40.30
6	*5745.00	94.5 AV			1.83 V	311	54.20	40.30
7	11490.00	60.2 PK	74.0	-13.8	1.33 V	64	42.60	17.60
8	11490.00	47.0 AV	54.0	-7.0	1.33 V	64	29.40	17.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	97.0 PK			1.00 H	232	56.70	40.30
2	*5785.00	86.8 AV			1.00 H	232	46.50	40.30
3	11570.00	59.0 PK	74.0	-15.0	1.05 H	64	41.50	17.50
4	11570.00	46.0 AV	54.0	-8.0	1.05 H	64	28.50	17.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	71.1 PK			1.04 V	298	64.80	6.30
2	*5785.00	60.9 AV			1.04 V	298	54.60	6.30
3	11570.00	60.1 PK	74.0	-13.9	1.32 V	64	42.60	17.50
4	11570.00	46.5 AV	54.0	-7.5	1.32 V	64	29.00	17.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	97.2 PK			2.50 H	233	56.80	40.40
2	*5825.00	87.4 AV			2.50 H	233	47.00	40.40
3	#5850.00	48.9 PK	78.2	-29.3	2.41 H	239	42.50	6.40
4	#5853.00	56.5 PK	78.2	-21.7	2.41 H	239	50.10	6.40
5	#5861.00	57.6 PK	74.0	-16.4	2.41 H	239	51.20	6.40
6	#5861.00	44.8 AV	54.0	-9.2	2.41 H	239	38.40	6.40
7	11650.00	58.8 PK	74.0	-15.2	1.07 H	41	41.50	17.30
8	11650.00	45.4 AV	54.0	-8.6	1.07 H	41	28.10	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	71.2 PK			1.10 V	301	64.80	6.40
2	*5825.00	61.0 AV			1.10 V	301	54.60	6.40
3	#5850.00	54.6 PK	78.2	-23.6	1.20 V	310	48.20	6.40
4	#5853.00	58.5 PK	78.2	-19.7	1.20 V	310	52.10	6.40
5	#5861.00	59.0 PK	74.0	-15.0	1.20 V	310	52.60	6.40
6	#5861.00	46.9 AV	54.0	-7.1	1.20 V	310	40.50	6.40
7	11650.00	59.9 PK	74.0	-14.1	1.08 V	96	42.60	17.30
8	11650.00	46.9 AV	54.0	-7.1	1.08 V	96	29.60	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.8 PK	74.0	-17.2	1.00 H	76	51.80	5.00
2	5150.00	44.5 AV	54.0	-9.5	1.00 H	76	39.50	5.00
3	*5180.00	96.5 PK			1.00 H	73	57.40	39.10
4	*5180.00	86.2 AV			1.00 H	73	47.10	39.10
5	#10360.00	58.9 PK	74.0	-15.1	1.00 H	86	41.80	17.10
6	#10360.00	45.8 AV	54.0	-8.2	1.00 H	86	28.70	17.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	1.02 V	128	52.60	5.00
2	5150.00	45.6 AV	54.0	-8.4	1.02 V	128	40.60	5.00
3	*5180.00	105.4 PK			1.02 V	123	66.30	39.10
4	*5180.00	95.3 AV			1.02 V	123	56.20	39.10
5	#10360.00	59.9 PK	74.0	-14.1	1.10 V	46	42.80	17.10
6	#10360.00	47.5 AV	54.0	-6.5	1.10 V	46	30.40	17.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	96.0 PK			1.00 H	74	56.80	39.20
2	*5200.00	85.6 AV			1.00 H	74	46.40	39.20
3	#10400.00	59.6 PK	74.0	-14.4	1.00 H	48	42.30	17.30
4	#10400.00	46.1 AV	54.0	-7.9	1.00 H	48	28.80	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	104.9 PK			1.02 V	122	65.70	39.20
2	*5200.00	94.4 AV			1.02 V	122	55.20	39.20
3	#10400.00	60.6 PK	74.0	-13.4	1.71 V	89	43.30	17.30
4	#10400.00	47.6 AV	54.0	-6.4	1.71 V	89	30.30	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	96.2 PK			1.00 H	20	57.00	39.20
2	*5240.00	85.7 AV			1.00 H	20	46.50	39.20
3	5350.00	56.8 PK	74.0	-17.2	1.00 H	24	51.40	5.40
4	5350.00	44.5 AV	54.0	-9.5	1.00 H	24	39.10	5.40
5	#10480.00	59.2 PK	74.0	-14.8	1.00 H	72	41.90	17.30
6	#10480.00	46.2 AV	54.0	-7.8	1.00 H	72	28.90	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	104.6 PK			1.00 V	109	65.40	39.20
2	*5240.00	94.6 AV			1.00 V	109	55.40	39.20
3	5350.00	59.2 PK	74.0	-14.8	1.00 V	109	53.80	5.40
4	5350.00	45.8 AV	54.0	-8.2	1.00 V	109	40.40	5.40
5	#10480.00	60.0 PK	74.0	-14.0	1.59 V	49	42.70	17.30
6	#10480.00	47.0 AV	54.0	-7.0	1.59 V	49	29.70	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	57.2 PK	74.0	-16.8	1.10 H	50	51.20	6.00
2	#5714.00	44.4 AV	54.0	-9.6	1.10 H	50	38.40	6.00
3	#5722.00	57.3 PK	78.2	-20.9	1.10 H	50	51.20	6.10
4	#5725.00	48.7 PK	78.2	-29.5	1.10 H	50	42.60	6.10
5	*5745.00	97.0 PK			1.00 H	33	56.70	40.30
6	*5745.00	87.0 AV			1.00 H	33	46.70	40.30
7	11490.00	58.7 PK	74.0	-15.3	1.06 H	31	41.10	17.60
8	11490.00	45.7 AV	54.0	-8.3	1.06 H	31	28.10	17.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	58.6 PK	74.0	-15.4	1.64 V	321	52.60	6.00
2	#5714.00	46.2 AV	54.0	-7.8	1.64 V	321	40.20	6.00
3	#5722.00	58.8 PK	78.2	-19.4	1.64 V	321	52.70	6.10
4	#5725.00	54.6 PK	78.2	-23.6	1.64 V	321	48.50	6.10
5	*5745.00	102.2 PK			1.58 V	319	61.90	40.30
6	*5745.00	91.4 AV			1.58 V	319	51.10	40.30
7	11490.00	60.2 PK	74.0	-13.8	1.28 V	54	42.60	17.60
8	11490.00	47.7 AV	54.0	-6.3	1.28 V	54	30.10	17.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	96.7 PK			1.00 H	34	56.40	40.30
2	*5785.00	86.6 AV			1.00 H	34	46.30	40.30
3	11570.00	59.0 PK	74.0	-15.0	1.26 H	87	41.50	17.50
4	11570.00	45.9 AV	54.0	-8.1	1.26 H	87	28.40	17.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	102.8 PK			1.69 V	316	62.50	40.30
2	*5785.00	92.6 AV			1.69 V	316	52.30	40.30
3	11570.00	60.2 PK	74.0	-13.8	1.07 V	85	42.70	17.50
4	11570.00	46.9 AV	54.0	-7.1	1.07 V	85	29.40	17.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	97.4 PK			1.05 H	35	57.00	40.40
2	*5825.00	87.4 AV			1.05 H	35	47.00	40.40
3	#5850.00	50.1 PK	78.2	-28.1	1.17 H	34	43.70	6.40
4	#5853.00	58.7 PK	78.2	-19.5	1.08 H	36	52.30	6.40
5	#5861.00	57.6 PK	74.0	-16.4	1.18 H	45	51.20	6.40
6	#5861.00	44.3 AV	54.0	-9.7	1.18 H	45	37.90	6.40
7	11650.00	59.1 PK	74.0	-14.9	1.08 H	95	41.80	17.30
8	11650.00	44.7 AV	54.0	-9.3	1.08 H	95	27.40	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	101.9 PK			1.21 V	139	61.50	40.40
2	*5825.00	91.7 AV			1.21 V	139	51.30	40.40
3	#5850.00	54.9 PK	78.2	-23.3	1.27 V	149	48.50	6.40
4	#5853.00	59.3 PK	78.2	-18.9	1.29 V	145	52.90	6.40
5	#5861.00	59.0 PK	74.0	-15.0	1.29 V	145	52.60	6.40
6	#5861.00	46.6 AV	54.0	-7.4	1.29 V	145	40.20	6.40
7	11650.00	59.9 PK	74.0	-14.1	1.05 V	74	42.60	17.30
8	11650.00	46.3 AV	54.0	-7.7	1.05 V	74	29.00	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	1.00 H	78	52.00	5.00
2	5150.00	45.2 AV	54.0	-8.8	1.00 H	78	40.20	5.00
3	*5190.00	93.5 PK			1.00 H	72	54.40	39.10
4	*5190.00	83.0 AV			1.00 H	72	43.90	39.10
5	#10380.00	57.9 PK	74.0	-16.1	1.00 H	88	40.70	17.20
6	#10380.00	44.9 AV	54.0	-9.1	1.00 H	88	27.70	17.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.1 PK	74.0	-15.9	1.04 V	123	53.10	5.00
2	5150.00	46.6 AV	54.0	-7.4	1.04 V	123	41.60	5.00
3	*5190.00	101.3 PK			1.01 V	121	62.20	39.10
4	*5190.00	91.2 AV			1.01 V	121	52.10	39.10
5	#10380.00	59.5 PK	74.0	-14.5	1.11 V	47	42.30	17.20
6	#10380.00	46.3 AV	54.0	-7.7	1.11 V	47	29.10	17.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	92.5 PK			1.00 H	20	53.30	39.20
2	*5230.00	82.0 AV			1.00 H	20	42.80	39.20
3	5350.00	57.4 PK	74.0	-16.6	1.00 H	20	52.00	5.40
4	5350.00	44.8 AV	54.0	-9.2	1.00 H	20	39.40	5.40
5	#10460.00	58.8 PK	74.0	-15.2	1.00 H	77	41.60	17.20
6	#10460.00	45.2 AV	54.0	-8.8	1.00 H	77	28.00	17.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	101.0 PK			1.00 V	123	61.80	39.20
2	*5230.00	90.8 AV			1.00 V	123	51.60	39.20
3	5350.00	59.6 PK	74.0	-14.4	1.00 V	121	54.20	5.40
4	5350.00	46.4 AV	54.0	-7.6	1.00 V	121	41.00	5.40
5	#10460.00	59.1 PK	74.0	-14.9	1.51 V	41	41.90	17.20
6	#10460.00	46.7 AV	54.0	-7.3	1.51 V	41	29.50	17.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	57.2 PK	74.0	-16.8	1.15 H	46	51.20	6.00
2	#5714.00	43.9 AV	54.0	-10.1	1.15 H	46	37.90	6.00
3	#5722.00	57.4 PK	78.2	-20.8	1.17 H	84	51.30	6.10
4	#5725.00	49.8 PK	78.2	-28.4	1.17 H	48	43.70	6.10
5	*5755.00	92.6 PK			1.00 H	36	52.30	40.30
6	*5755.00	83.1 AV			1.00 H	36	42.80	40.30
7	11510.00	58.7 PK	74.0	-15.3	1.08 H	64	41.30	17.40
8	11510.00	44.8 AV	54.0	-9.2	1.08 H	64	27.40	17.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	58.6 PK	74.0	-15.4	1.82 V	336	52.60	6.00
2	#5714.00	46.2 AV	54.0	-7.8	1.82 V	336	40.20	6.00
3	#5722.00	58.7 PK	78.2	-19.5	1.68 V	314	52.60	6.10
4	#5725.00	54.2 PK	78.2	-24.0	1.64 V	338	48.10	6.10
5	*5755.00	97.3 PK			1.72 V	324	57.00	40.30
6	*5755.00	87.8 AV			1.72 V	324	47.50	40.30
7	11510.00	60.0 PK	74.0	-14.0	1.07 V	41	42.60	17.40
8	11510.00	46.8 AV	54.0	-7.2	1.07 V	41	29.40	17.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	93.4 PK			1.00 H	31	53.10	40.30
2	*5795.00	83.5 AV			1.00 H	31	43.20	40.30
3	#5850.00	49.0 PK	78.2	-29.2	1.17 H	46	42.60	6.40
4	#5853.00	56.8 PK	78.2	-21.4	1.10 H	45	50.40	6.40
5	#5861.00	57.6 PK	74.0	-16.4	1.10 H	35	51.20	6.40
6	#5861.00	43.8 AV	54.0	-10.2	1.10 H	35	37.40	6.40
7	11590.00	58.3 PK	74.0	-15.7	1.25 H	87	41.00	17.30
8	11590.00	44.4 AV	54.0	-9.6	1.25 H	87	27.10	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	98.2 PK			1.74 V	53	57.90	40.30
2	*5795.00	87.9 AV			1.74 V	53	47.60	40.30
3	#5850.00	54.5 PK	78.2	-23.7	1.61 V	64	48.10	6.40
4	#5853.00	58.5 PK	78.2	-19.7	1.71 V	63	52.10	6.40
5	#5861.00	59.0 PK	74.0	-15.0	1.80 V	64	52.60	6.40
6	#5861.00	46.9 AV	54.0	-7.1	1.80 V	64	40.50	6.40
7	11590.00	58.8 PK	74.0	-15.2	1.11 V	74	41.50	17.30
8	11590.00	46.0 AV	54.0	-8.0	1.11 V	74	28.70	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	1.00 H	70	52.70	5.00
2	5150.00	45.7 AV	54.0	-8.3	1.00 H	70	40.70	5.00
3	*5210.00	87.5 PK			1.00 H	73	48.30	39.20
4	*5210.00	77.0 AV			1.00 H	73	37.80	39.20
5	#10420.00	57.8 PK	74.0	-16.2	1.00 H	80	40.50	17.30
6	#10420.00	44.7 AV	54.0	-9.3	1.00 H	80	27.40	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	1.00 V	128	53.90	5.00
2	5150.00	47.3 AV	54.0	-6.7	1.00 V	128	42.30	5.00
3	*5210.00	96.7 PK			1.00 V	122	57.50	39.20
4	*5210.00	86.0 AV			1.00 V	122	46.80	39.20
5	#10420.00	59.3 PK	74.0	-14.7	1.17 V	41	42.00	17.30
6	#10420.00	45.8 AV	54.0	-8.2	1.17 V	41	28.50	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	57.2 PK	74.0	-16.8	1.15 H	39	51.20	6.00
2	#5714.00	43.1 AV	54.0	-10.9	1.15 H	39	37.10	6.00
3	#5722.00	58.0 PK	78.2	-20.2	1.07 H	39	51.90	6.10
4	#5725.00	49.1 PK	78.2	-29.1	1.17 H	84	43.00	6.10
5	*5775.00	91.2 PK			1.00 H	35	50.90	40.30
6	*5775.00	80.9 AV			1.00 H	35	40.60	40.30
7	11550.00	58.9 PK	74.0	-15.1	1.47 H	87	41.50	17.40
8	11550.00	46.1 AV	54.0	-7.9	1.47 H	87	28.70	17.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	58.6 PK	74.0	-15.4	1.72 V	56	52.60	6.00
2	#5714.00	46.5 AV	54.0	-7.5	1.72 V	56	40.50	6.00
3	#5722.00	57.1 PK	78.2	-21.1	1.71 V	58	51.00	6.10
4	#5725.00	54.3 PK	78.2	-23.9	1.75 V	59	48.20	6.10
5	*5775.00	96.2 PK			1.68 V	46	55.90	40.30
6	*5775.00	85.7 AV			1.68 V	46	45.40	40.30
7	11550.00	60.0 PK	74.0	-14.0	1.08 V	64	42.60	17.40
8	11550.00	47.1 AV	54.0	-6.9	1.08 V	64	29.70	17.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data: 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	119.16	38.4 QP	43.5	-5.1	1.25 H	11	54.70	-16.30
2	239.46	38.2 QP	46.0	-7.8	1.00 H	148	53.30	-15.10
3	367.53	41.9 QP	46.0	-4.1	1.50 H	179	53.50	-11.60
4	617.84	37.8 QP	46.0	-8.2	1.00 H	333	44.40	-6.60
5	794.42	40.0 QP	46.0	-6.0	1.25 H	80	43.10	-3.10
6	873.97	37.1 QP	46.0	-8.9	1.50 H	277	39.20	-2.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	165.73	39.1 QP	43.5	-4.4	1.25 V	186	53.10	-14.00
2	367.53	41.1 QP	46.0	-4.9	1.00 V	258	52.70	-11.60
3	431.56	39.5 QP	46.0	-6.5	1.50 V	181	49.80	-10.30
4	501.42	40.1 QP	46.0	-5.9	1.00 V	206	49.40	-9.30
5	796.36	41.2 QP	46.0	-4.8	1.25 V	135	44.20	-3.00
6	872.03	36.1 QP	46.0	-9.9	1.00 V	331	38.20	-2.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 16, 2015	Nov. 15, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 26, 2014	Dec. 25, 2015
			Dec. 26, 2015	Dec. 25, 2016
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2015	Feb. 25, 2016
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 24, 2015	Jul. 23, 2016
Software ADT	BV ADT_Conc_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

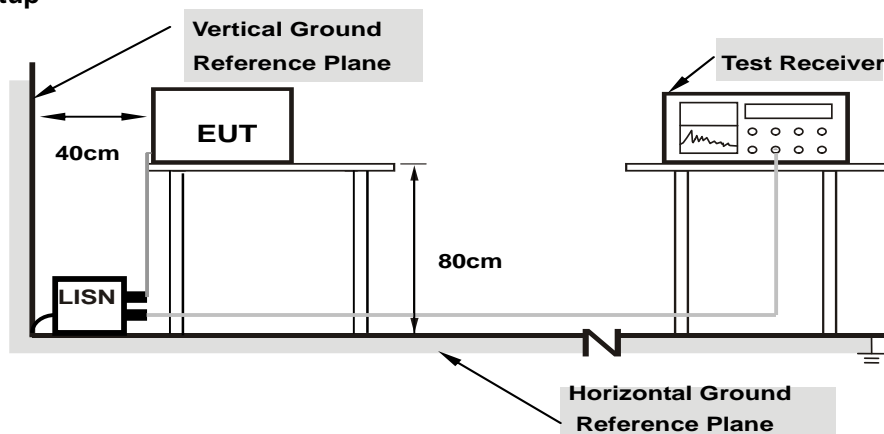

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19305	9.84	29.77	28.96	39.61	38.80	63.90	53.90	-24.30	-15.11
2	0.29076	9.86	21.54	21.22	31.40	31.08	60.50	50.50	-29.10	-19.42
3	1.06103	9.93	29.43	26.45	39.36	36.38	56.00	46.00	-16.64	-9.62
4	7.13717	10.33	13.24	12.10	23.57	22.43	60.00	50.00	-36.43	-27.57
5	16.20055	10.87	24.61	21.02	35.48	31.89	60.00	50.00	-24.52	-18.11
6	23.85633	11.24	28.66	28.44	39.90	39.68	60.00	50.00	-20.10	-10.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

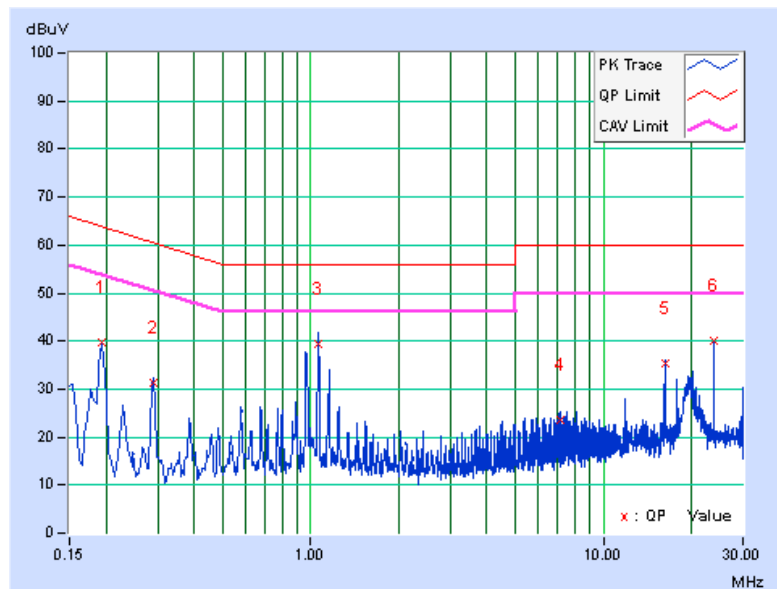


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19305	9.83	25.51	23.01	35.34	32.84	63.90	53.90	-28.57	-21.07
2	0.28967	9.85	17.87	15.85	27.72	25.70	60.53	50.53	-32.81	-24.83
3	1.06103	9.93	23.93	21.37	33.86	31.30	56.00	46.00	-22.14	-14.70
4	1.92905	9.99	12.26	10.83	22.25	20.82	56.00	46.00	-33.75	-25.18
5	11.92718	10.57	17.08	16.91	27.65	27.48	60.00	50.00	-32.35	-22.52
6	23.85633	11.01	28.79	28.71	39.80	39.72	60.00	50.00	-20.20	-10.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

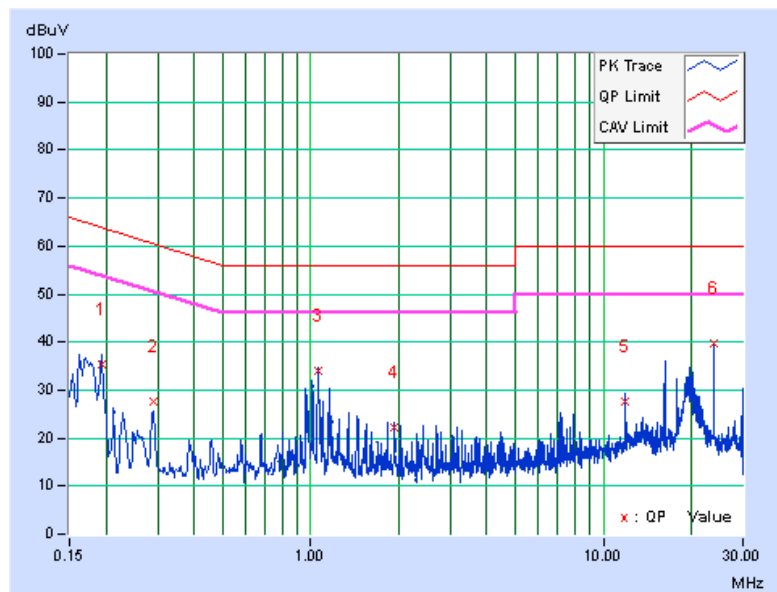

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.

4.3.2 Test Setup

For 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT20), 802.11ac (VHT40)

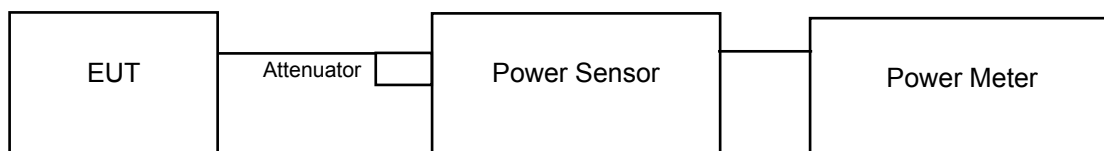

For 802.11ac (VHT80)



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to “free run”.
- c. Set RBW = 1 MHz.
- d. Set VBW \geq 3 MHz
- e. Number of points in sweep \geq 2 Span / RBW.
- f. Sweep time \leq (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	9.52	9.11	17.101	12.33	30	Pass
40	5200	9.34	9.13	16.775	12.25	30	Pass
48	5240	9.67	9.15	17.490	12.43	30	Pass
149	5745	9.02	9.38	16.650	12.21	30	Pass
157	5785	9.03	9.52	16.952	12.29	30	Pass
165	5825	9.04	9.43	16.787	12.25	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	9.27	9.05	16.488	12.17	30	Pass
40	5200	9.92	7.92	16.011	12.04	30	Pass
48	5240	9.89	8.75	17.249	12.37	30	Pass
149	5745	8.93	9.98	17.770	12.50	30	Pass
157	5785	9.44	9.91	18.585	12.69	30	Pass
165	5825	8.74	9.45	16.292	12.12	30	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	9.04	9.28	16.489	12.17	30	Pass
46	5230	10.50	7.70	17.108	12.33	30	Pass
151	5755	8.57	9.39	15.884	12.01	30	Pass
159	5795	8.17	9.32	15.112	11.79	30	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	9.66	9.02	17.227	12.36	30	Pass
155	5775	8.55	9.59	16.260	12.11	30	Pass

26dB Bandwidth:

802.11a

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	21.85	36.04	Pass
40	5200	21.91	21.93	Pass
48	5240	21.76	21.91	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	21.80	22.11	Pass
40	5200	21.92	22.12	Pass
48	5240	21.98	22.15	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	41.07	41.49	Pass
46	5230	41.01	41.28	Pass


802.11ac (VHT80)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	82.46	82.58	Pass


Spectrum Plot of Worst Value

802.11a

802.11n (HT20)

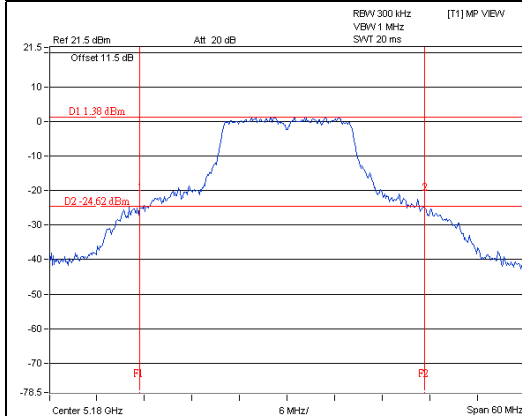


A D T

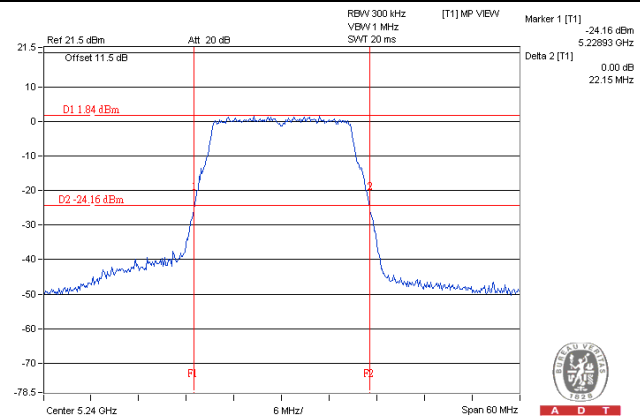


A D T

802.11n (HT40)

802.11ac (VHT80)

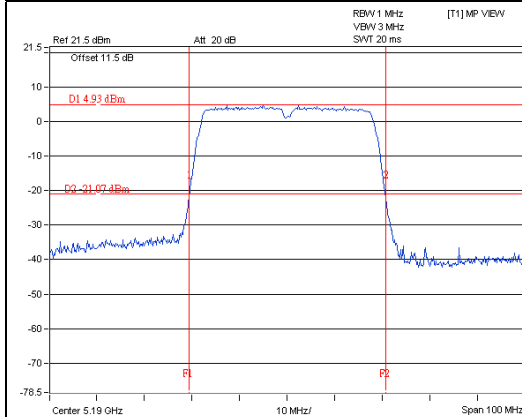

A D T

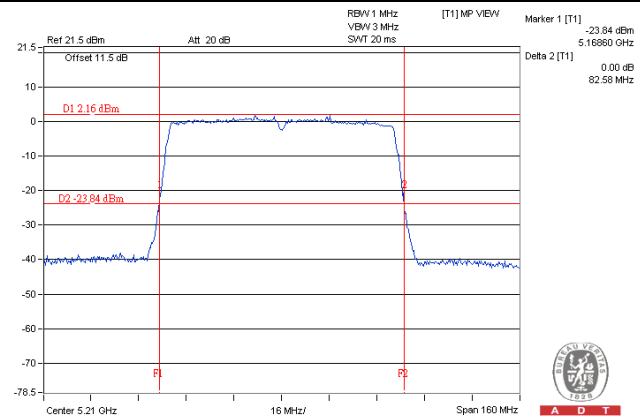

A D T

Occupied Bandwidth:

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.92	18.84
40	5200	17.04	17.16
48	5240	17.16	17.16
149	5745	17.04	17.13
157	5785	17.16	17.16
165	5825	17.04	17.04

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.00	18.24
40	5200	18.12	18.12
48	5240	18.00	18.24
149	5745	18.00	18.24
157	5785	18.00	18.24
165	5825	18.00	18.24

802.11n (HT40)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.60	36.60
46	5230	36.72	36.72
151	5755	36.72	36.84
159	5795	36.60	36.60

802.11ac (VHT80)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.88	75.88
155	5775	75.88	75.88




A D T

Spectrum Plot of Worst Value

802.11a


802.11n (HT20)

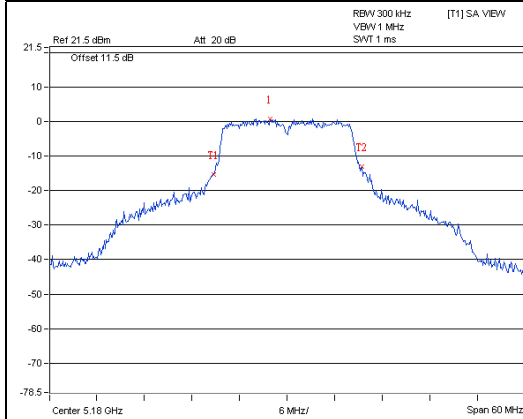

Marker 1 [T1]
0.77 dBm
5.17784 GHz
OBW 18.84 MHz
Temp 1 [T1] OBW -15.38 dBm
5.17064 GHz
Temp 2 [T1] OBW -13.14 dBm
5.18948 GHz



A D T

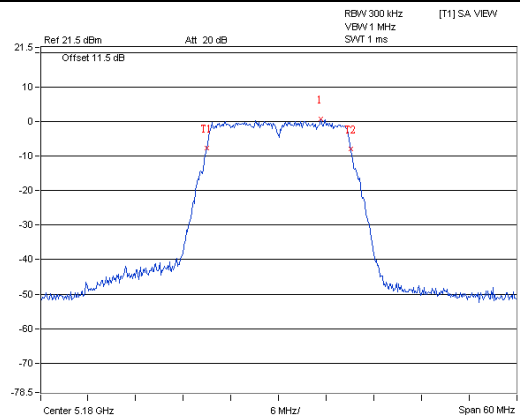


Marker 1 [T1]
0.77 dBm
5.18528 GHz
OBW 18.24 MHz
Temp 1 [T1] OBW -7.70 dBm
5.17088 GHz
Temp 2 [T1] OBW -7.97 dBm
5.18912 GHz



A D T

802.11n (HT40)


802.11ac (VHT80)

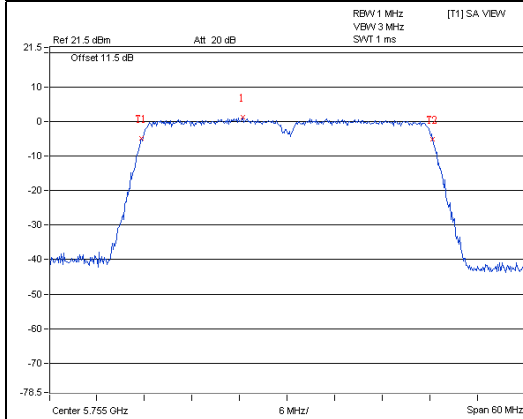

Marker 1 [T1]
1.26 dBm
5.74936 GHz
OBW 36.84 MHz
Temp 1 [T1] OBW -4.82 dBm
5.73652 GHz
Temp 2 [T1] OBW -5.02 dBm
5.77336 GHz



A D T

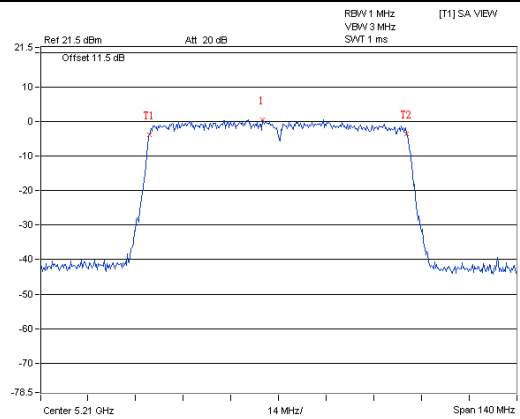

Marker 1 [T1]
0.58 dBm
5.20524 GHz
OBW 75.88 MHz
Temp 1 [T1] OBW -3.72 dBm
5.17192 GHz
Temp 2 [T1] OBW -3.48 dBm
5.24780 GHz




A D T

4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	11dBm/ MHz
		Mobile and Portable client device	
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

For U-NII-1 band:

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{ kHz})$
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

For U-NII-1 Band

802.11a

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	-7.36	-4.12	-2.43	14.49	Pass
40	5200	-5.90	-5.86	-2.87	14.49	Pass
48	5240	-5.72	-4.68	-2.16	14.49	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.51-6) = 14.49\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
36	5180	-7.45	-5.04	-3.07	0.12	-2.95	14.49	Pass
40	5200	-5.63	-5.17	-2.39	0.12	-2.27	14.49	Pass
48	5240	-5.78	-5.80	-2.78	0.12	-2.66	14.49	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.51-6) = 14.49\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
38	5190	-6.62	-5.90	-3.23	0.18	-3.05	14.49	Pass
46	5230	-6.35	-5.76	-3.03	0.18	-2.85	14.49	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.51-6) = 14.49\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.


Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
42	5210	-9.95	-9.34	-6.63	0.42	-6.21	14.49	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.5dBi + 10log(2) = 8.51dBi > 6dBi, so the power density limit shall be reduced to 17-(8.51-6) = 14.49dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a / Chain 1 / CH 36

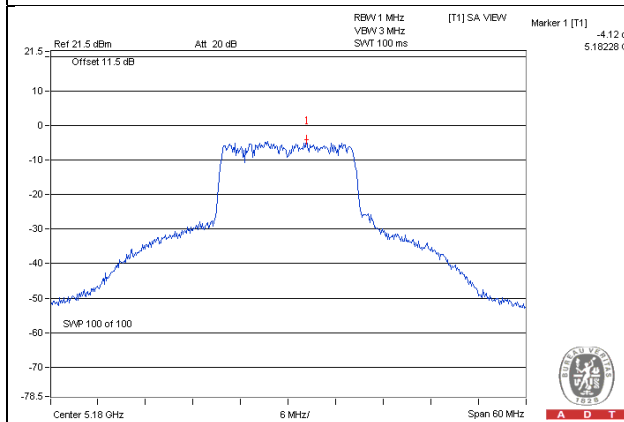


802.11n (HT20) / Chain 1 / CH 36

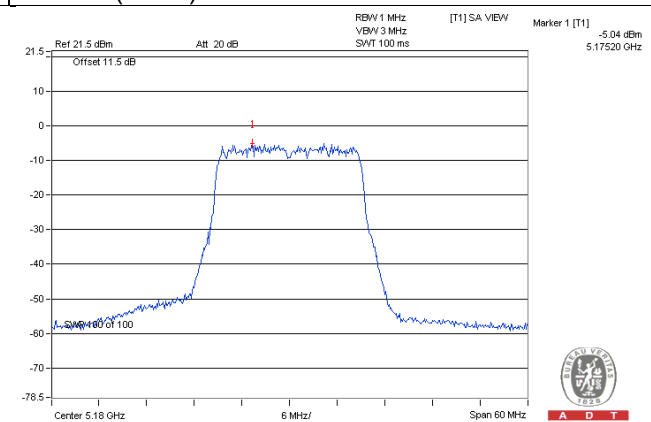

802.11n (HT40) / Chain 1 / CH 46

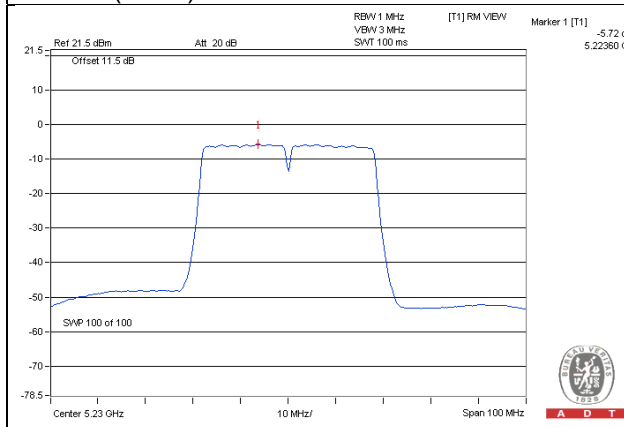

802.11ac (VHT80) / Chain 1 / CH 42

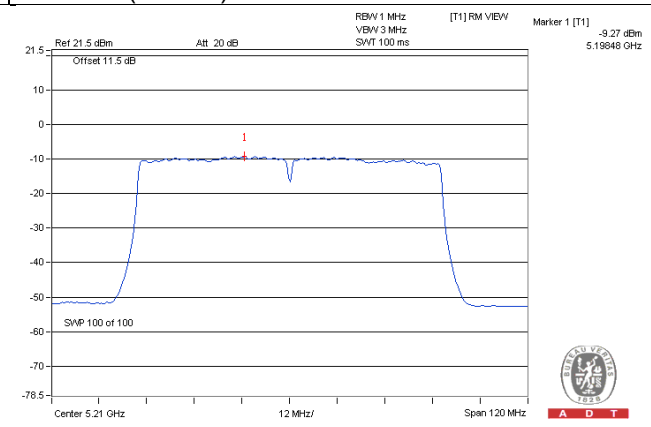

For U-NII-3 Band

802.11a

TX chain	Chan.	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=2) dB	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	Pass / Fail
0	149	5745	-12.23	-10.01	3.01	-7.00	27.49	Pass
	157	5785	-11.94	-9.72	3.01	-6.71	27.49	Pass
	165	5825	-12.41	-10.19	3.01	-7.18	27.49	Pass
1	149	5745	-13.60	-11.38	3.01	-8.37	27.49	Pass
	157	5785	-13.46	-11.24	3.01	-8.23	27.49	Pass
	165	5825	-13.68	-11.46	3.01	-8.45	27.49	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.5dBi + 10log(2) = 8.51dBi > 6dBi, so the power density limit shall be reduced to 30-(8.51-6) = 27.49dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	Pass / Fail
0	149	5745	-12.56	-10.34	3.01	0.12	-7.21	27.49	Pass
	157	5785	-12.47	-10.25	3.01	0.12	-7.12	27.49	Pass
	165	5825	-12.99	-10.77	3.01	0.12	-7.64	27.49	Pass
1	149	5745	-13.85	-11.63	3.01	0.12	-8.50	27.49	Pass
	157	5785	-13.93	-11.71	3.01	0.12	-8.58	27.49	Pass
	165	5825	-14.71	-12.49	3.01	0.12	-9.36	27.49	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.5dBi + 10log(2) = 8.51dBi > 6dBi, so the power density limit shall be reduced to 30-(8.51-6) = 27.49dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	Pass / Fail
0	151	5755	-16.98	-14.76	3.01	0.18	-11.57	27.49	Pass
	159	5795	-17.09	-14.87	3.01	0.18	-11.68	27.49	Pass
1	151	5755	-18.26	-16.04	3.01	0.18	-12.85	27.49	Pass
	159	5795	-18.11	-15.89	3.01	0.18	-12.70	27.49	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	Pass / Fail
0	155	5775	-19.19	-16.97	3.01	0.42	-13.54	27.49	Pass
1	155	5775	-20.54	-18.32	3.01	0.42	-14.89	27.49	Pass


Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.


Spectrum Plot of Worst Value

802.11a

802.11n (HT20)

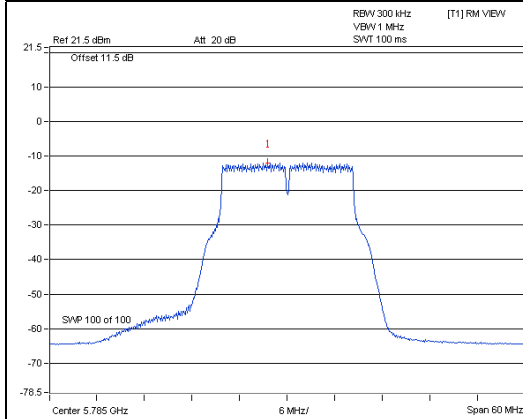


A D T

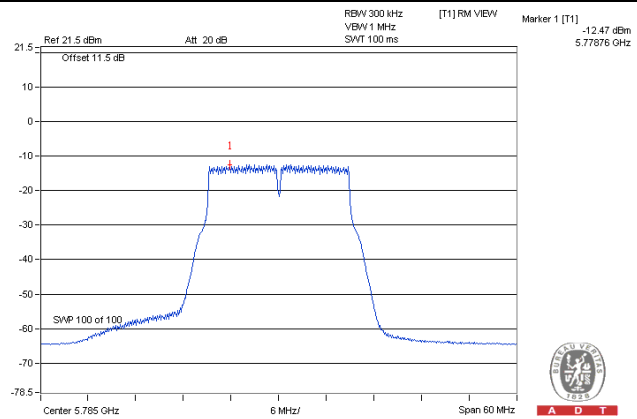


A D T

802.11n (HT40)

802.11ac (VHT80)

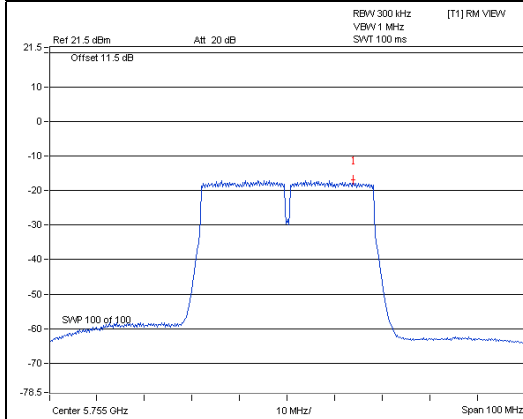

A D T

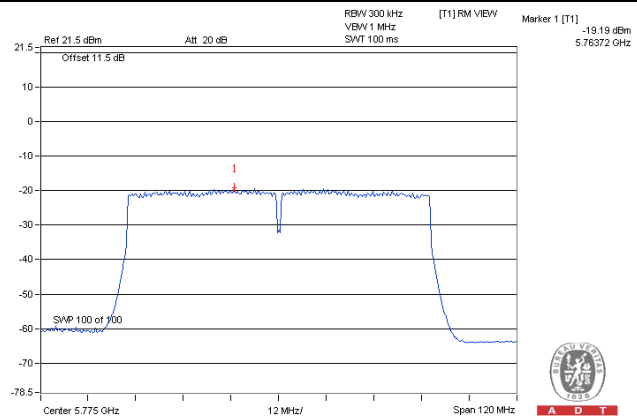


A D T

4.5 Frequency Stability

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

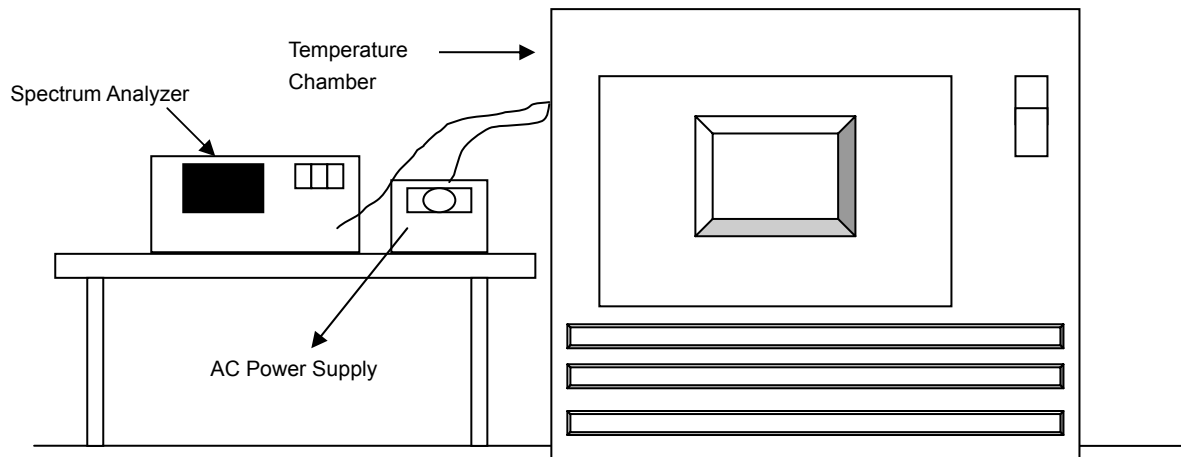

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5180.0245	0.00047	5180.0223	0.00043	5180.0248	0.00048	5180.0224	0.00043
40	120	5180.0139	0.00027	5180.0134	0.00026	5180.0156	0.00030	5180.0164	0.00032
30	120	5179.9941	-0.00011	5179.9903	-0.00019	5179.9946	-0.00010	5179.9934	-0.00013
20	120	5179.9748	-0.00049	5179.9772	-0.00044	5179.977	-0.00044	5179.9746	-0.00049
10	120	5180.0207	0.00040	5180.0239	0.00046	5180.0235	0.00045	5180.0215	0.00042
0	120	5179.985	-0.00029	5179.9804	-0.00038	5179.9814	-0.00036	5179.985	-0.00029
-10	120	5179.989	-0.00021	5179.9903	-0.00019	5179.9919	-0.00016	5179.9923	-0.00015
-20	120	5179.9748	-0.00049	5179.973	-0.00052	5179.9732	-0.00052	5179.9751	-0.00048
-30	120	5180.0101	0.00019	5180.0096	0.00019	5180.0097	0.00019	5180.0117	0.00023


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5179.9757	-0.00047	5179.9781	-0.00042	5179.9767	-0.00045	5179.975	-0.00048
	120	5179.9748	-0.00049	5179.9772	-0.00044	5179.977	-0.00044	5179.9746	-0.00049
	102	5179.9758	-0.00047	5179.9773	-0.00044	5179.9766	-0.00045	5179.9748	-0.00049

4.6 6dB Bandwidth Measurement

4.6.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11a

Chan.	Freq. (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.40	16.38	0.5	Pass
157	5785	16.44	16.42	0.5	Pass
165	5825	16.44	16.42	0.5	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.67	17.65	0.5	Pass
157	5785	17.66	17.65	0.5	Pass
165	5825	17.67	17.65	0.5	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	36.49	36.47	0.5	Pass
159	5795	36.51	36.46	0.5	Pass



802.11ac (VHT80)

Chan.	Freq. (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	76.47	76.11	0.5	Pass

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

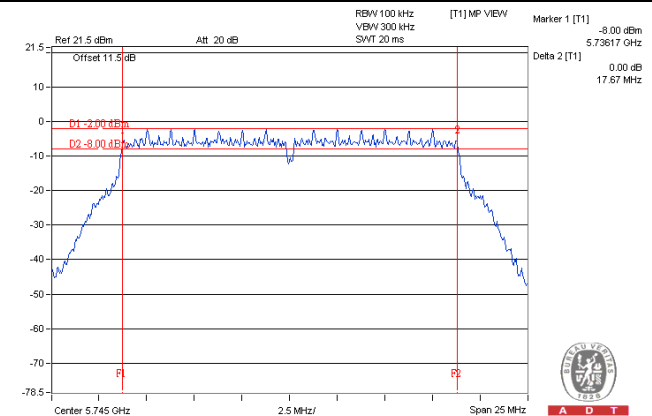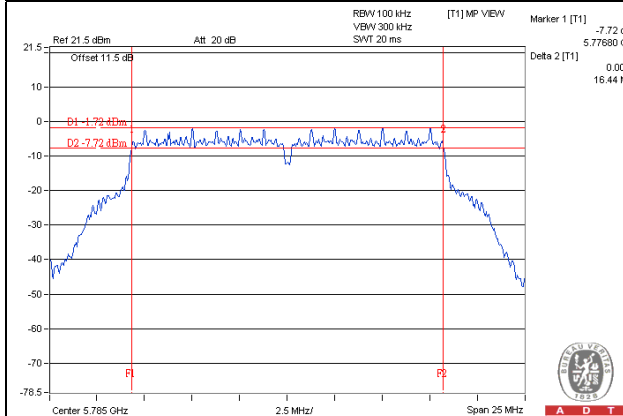

802.11n (HT40)

802.11ac (VHT80)

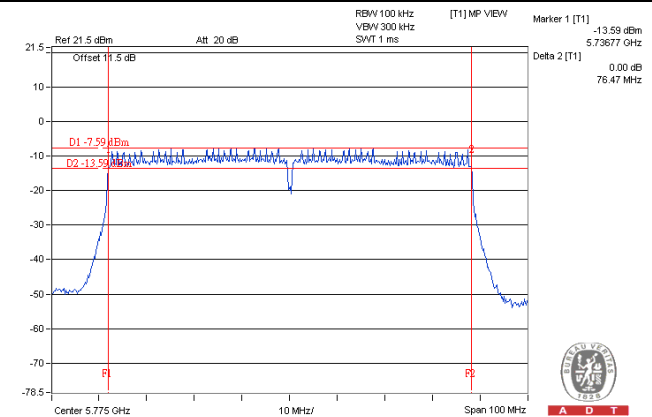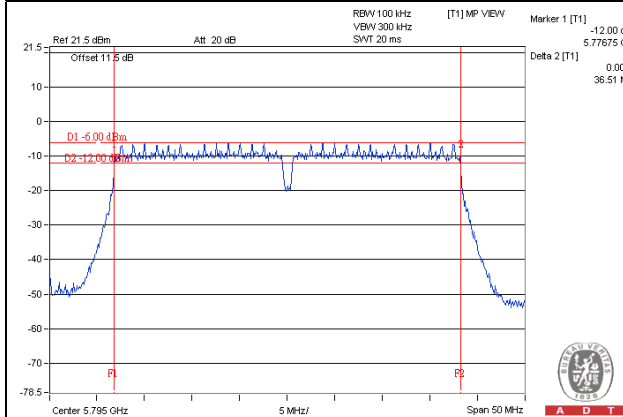

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---