

FCC Test Report

FCC ID : ZQ6-AP6234A

Equipment : Wifi Dual Band + BT combo module

Model No. : AP6234A

Brand Name : Ampak

Applicant : Ampak Technology Inc

Address : No.1 Jen Al Road, Hsinchu Industrial Park,

Hukou, Hsinchu, Taiwan, 30352

Standard : 47 CFR FCC Part 15.247

Received Date : Apr. 01, 2014

Tested Date : Apr. 21 ~ May 07, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac MRA

Testing Laboratory

Report No.: FR440102AC Report Version: Rev. 01 Page: 1 of 62



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	8
1.5	Test Standards	g
1.6	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	1C
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Emissions in Non-Restricted Frequency Bands	49
4	TEST LABORATORY INFORMATION	62



Release Record

Report No.	Version	Description	Issued Date
FR440102AC	Rev. 01	Initial issue	May 15, 2014

Report No.: FR440102AC Page: 3 of 62



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.155MHz 47.30 (Margin -8.44dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2386.00MHz 53.00 (Margin -1.00dB) - AV	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11b: 22.15 11g: 22.77 HT20: 22.71 HT40: 21.92	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR440102AC Page: 4 of 62



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)				Transmit Chains (N _{TX})	Data Rate / MCS			
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps			
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps			
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7			
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	MCS 0-7			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant No	Typo	C	Connector				
Ant. No.	Туре	2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850	Connector
1	Dipole	2	3	3	3	3	UFL

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host.
-------------------	-------------------

1.1.4 Accessories

N/A

Report No.: FR440102AC Page: 5 of 62



1.1.5 Channel List

Frequency	band (MHz)	2400~2483.5		
802.11 b /	g / n HT20	802.11n HT40		
Channel	Channel Frequency(MHz)		Frequency(MHz)	
1	2412	3	2422	
2	2417	4	2427	
3	2422	5	2432	
4	2427	6	2437	
5	2432	7	2442	
6	2437	8	2447	
7	2442	9	2452	
8	2447			
9	2452			
10	2457			
11	2462			

1.1.6 Test Tool and Duty Cycle

Test Tool	Mtool, V2.0.1.1					
	Mode	Duty cycle (%)	Duty factor (dB)			
	11b	100.00%	0.00			
Duty Cycle and Duty Factor	11g	99.31%	0.03			
	HT20	99.26%	0.03			
	HT40	98.52%	0.06			

Report No.: FR440102AC Page: 6 of 62




1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	76
11b	2437	88
11b	2462	76
11g	2412	68
11g	2437	80
11g	2462	60
HT20	2412	68
HT20	2437	78
HT20	2462	60
HT40	2422	62
HT40	2437	64
HT40	2452	56

1.2 Local Support Equipment List

	Support Equipment List							
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)		
1	Notebook	DELL	E6430		DoC	USB 1.0m shielded cable w/o core.		

1.3 Test Setup Chart

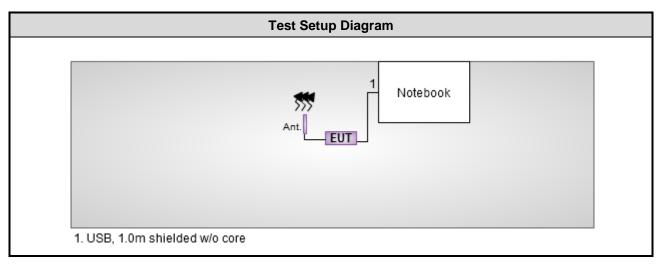

Report No.: FR440102AC Page: 7 of 62



1.4 The Equipment List

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (CO01-WS)							
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014			
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015			
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015			

Test Item	Radiated Emission	Radiated Emission						
Test Site	966 chamber1 / (03C	H01-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015			
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014			
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014			
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014			
Preamplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014			
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014			
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014			
Note: Calibration Inter	val of instruments liste	d above is one year.						

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Loop Antenna	Loop Antenna R&S		100330	Nov. 15, 2012	Nov. 14, 2014				
Note: Calibration Interval of instruments listed above is two year.									

Test Item	RF Conducted							
Test Site	(TH01-WS)							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015			
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014			
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014			
Note: Calibration Interval of instruments listed above is one year.								

Report No.: FR440102AC Page: 8 of 62



1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty							
Parameters	Uncertainty						
Bandwidth	±34.134 Hz						
Conducted power	±0.808 dB						
Frequency error	±34.134 Hz						
Power density	±0.463 dB						
Conducted emission	±2.670 dB						
AC conducted emission	±2.92 dB						
Radiated emission < 1GHz	±3.26 dB						
Radiated emission > 1GHz	±4.94 dB						

Report No.: FR440102AC Page: 9 of 62



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 68%	Skys Huang
Radiated Emissions	03CH01-WS	23-24°C / 63-65%	Haru Yang
RF Conducted	TH01-WS	24°C / 62%	Mark Liao

FCC site registration No.: 657002IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	
Fundamental Emission Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

NOTE:

Report No.: FR440102AC Page: 10 of 62

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30	60	50					
Note 1: * Decreases with the logarithm of the frequency.							

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup




Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR440102AC Page: 11 of 62




3.1.4 Test Result of Conducted Emissions

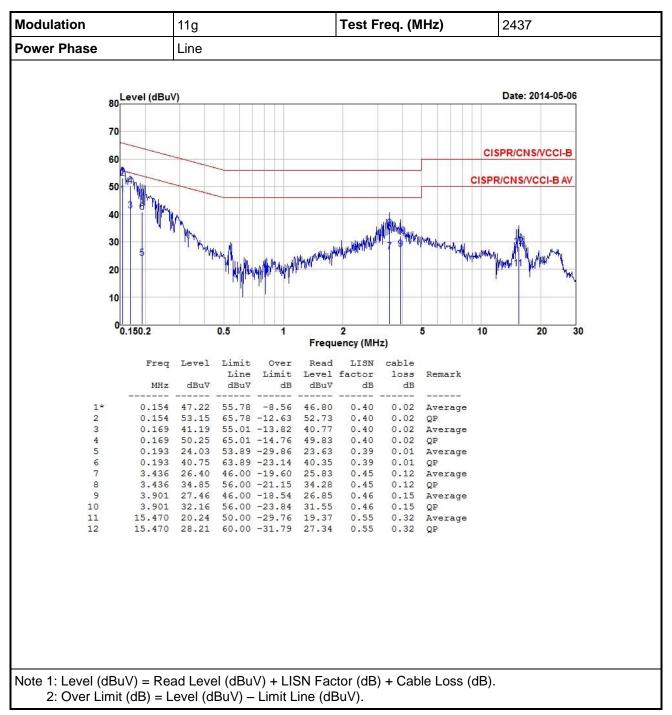

Report No.: FR440102AC Page: 12 of 62



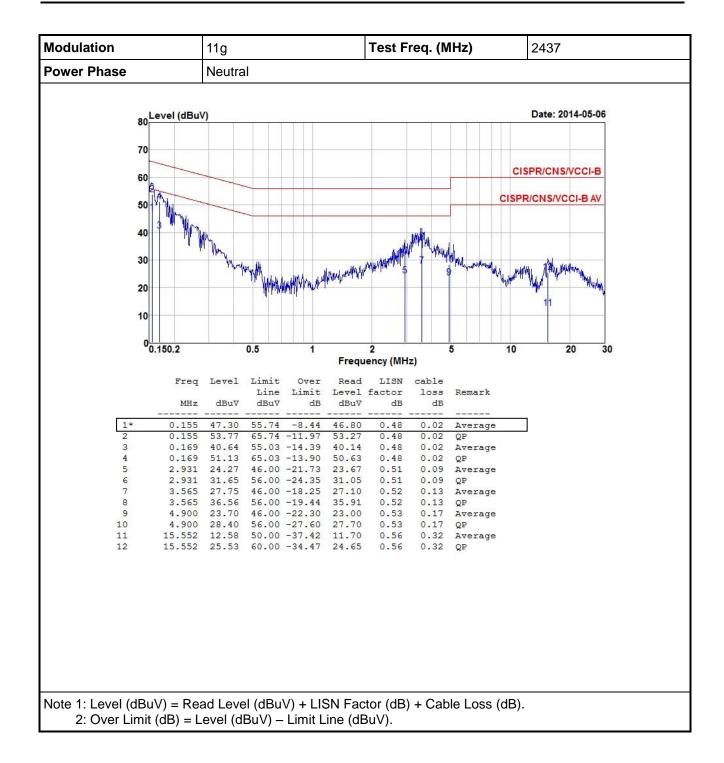

Report No.: FR440102AC Page: 13 of 62



3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Setup




Report No.: FR440102AC Page: 14 of 62



3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation	NI.	Eron (MU=)			Limit (Idua)		
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	1	2412	8.00				500
11b	1	2437	8.00				500
11b	1	2462	8.06				500
11g	1	2412	16.06				500
11g	1	2437	15.07				500
11g	1	2462	15.07				500
HT20	1	2412	15.13				500
HT20	1	2437	14.20				500
HT20	1	2462	15.07				500
HT40	1	2422	35.13				500
HT40	1	2437	35.13				500
HT40	1	2452	35.13				500

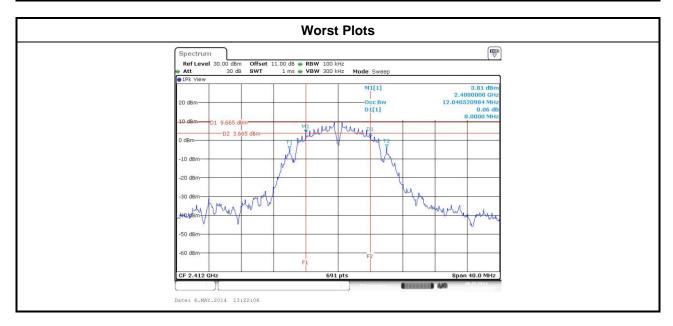

Report No.: FR440102AC Page: 15 of 62



Modulation	N	Freq.	99% Occupied Bandwidth (MHz)					
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3		
11b	1	2412	12.01					
11b	1	2437	12.81					
11b	1	2462	12.01					
11g	1	2412	16.53					
11g	1	2437	16.71					
11g	1	2462	16.50					
HT20	1	2412	17.51					
HT20	1	2437	17.58					
HT20	1	2462	17.51					
HT40	1	2422	36.27					
HT40	1	2437	36.27					
HT40	1	2452	36.27					



Report No.: FR440102AC Page: 16 of 62



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR440102AC Page: 17 of 62



3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Peak		d output power Bm)		Total Power	Total Power	Limit
Wiode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11b	1	2412	20.01				100.231	20.01	30
11b	1	2437	22.15				164.059	22.15	30
11b	1	2462	20.18				104.232	20.18	30
11g	1	2412	22.16				164.437	22.16	30
11g	1	2437	22.77				189.234	22.77	30
11g	1	2462	21.47				140.281	21.47	30
HT20	1	2412	22.07				161.065	22.07	30
HT20	1	2437	22.71				186.638	22.71	30
HT20	1	2462	21.26				133.660	21.26	30
HT40	1	2422	21.61				144.877	21.61	30
HT40	1	2437	21.92				155.597	21.92	30
HT40	1	2452	20.81				120.504	20.81	30

Modulation Mode	N _{TX}	Freq.	· (abiii)			Total Power	Total Power	Limit	
Wode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11b	1	2412	16.93				49.317	16.93	30
11b	1	2437	19.84				96.383	19.84	30
11b	1	2462	17.21				52.602	17.21	30
11g	1	2412	14.42				27.669	14.42	30
11g	1	2437	17.43				55.335	17.43	30
11g	1	2462	12.75				18.836	12.75	30
HT20	1	2412	14.31				26.977	14.31	30
HT20	1	2437	17.26				53.211	17.26	30
HT20	1	2462	12.73				18.750	12.73	30
HT40	1	2422	13.59				22.856	13.59	30
HT40	1	2437	14.33				27.102	14.33	30
HT40	1	2452	12.17				16.482	12.17	30

Note: Conducted average output power is for reference only.

Report No.: FR440102AC Page: 18 of 62



3.4 Power Spectral Density

3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




Report No.: FR440102AC Page: 19 of 62



3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	1	2412	-4.71	8
11b	1	2437	-1.19	8
11b	1	2462	-4.24	8
11g	1	2412	-8.50	8
11g	1	2437	-6.93	8
11g	1	2462	-11.14	8
HT20	1	2412	-9.96	8
HT20	1	2437	-7.23	8
HT20	1	2462	-11.77	8
HT40	1	2422	-13.41	8
HT40	1	2437	-12.34	8
HT40	1	2452	-15.13	8

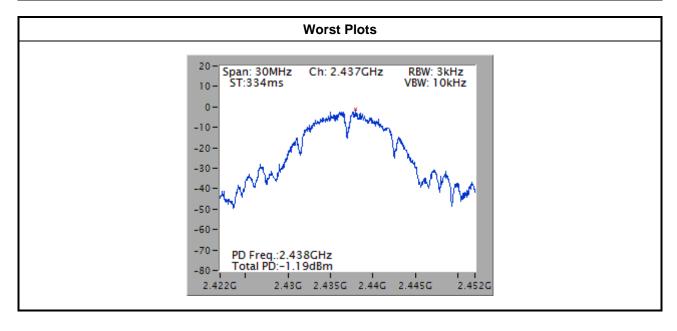

Report No.: FR440102AC Page: 20 of 62



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit								
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)					
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300					
0.490~1.705	24000/F(kHz)	33.8 - 23	30					
1.705~30.0	30	29	30					
30~88	100	40	3					
88~216	150	43.5	3					
216~960	200	46	3					
Above 960	500	54	3					

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR440102AC Page: 21 of 62



3.5.3 Test Setup

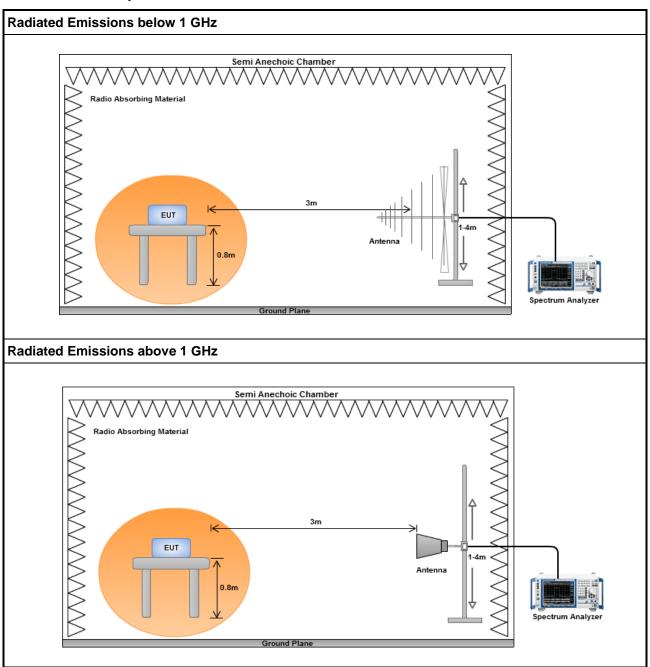


Report No.: FR440102AC

Page: 22 of 62



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

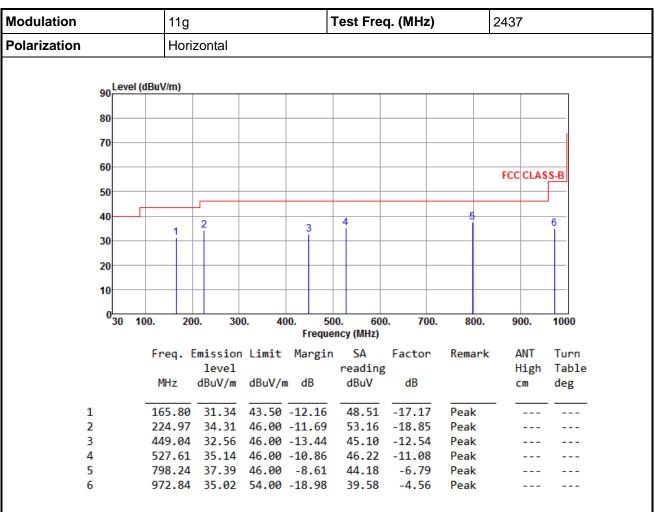

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR440102AC Page: 23 of 62



Modulation	110	11g				Test Freq. (MHz)			2437	
Polarization	Vertical									
	-1 (dD-1/)									
90 Leve	el (dBuV/m)									
80										
70										
60								FCC CLA	ASS-B	
50										
40							3	5	6	
				2						
30	1									
20										
10										
030	100. 2	200. 30	0. 40	00. 50	00. 600	0. 700.	800.	900.	1000	
				Freque	ency (MHz)					
	Freq.	Emission	n Limit	Margir		Factor	Remark		Turn	
	MHz	level	dBuV/r	n dB	reading dBuV	dB		High cm	n Table deg	
	MITZ	ubuv/III	ubuv/i	ıı ub	ubuv	ub		CIII	ueg	
1	165.8	0 25.99	43.50	-17.51	43.16	-17.17	Peak			
2	439.3			-17.57	41.19	-12.76	Peak			
3	776.9		46.00		44.62	-6.98	Peak			
4 5		4 42.35 2 40.44			49.14 46.70	-6.79 -6.26	Peak Peak			
6		6 39.13			43.70	-4.57	Peak			


*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR440102AC Page: 24 of 62



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

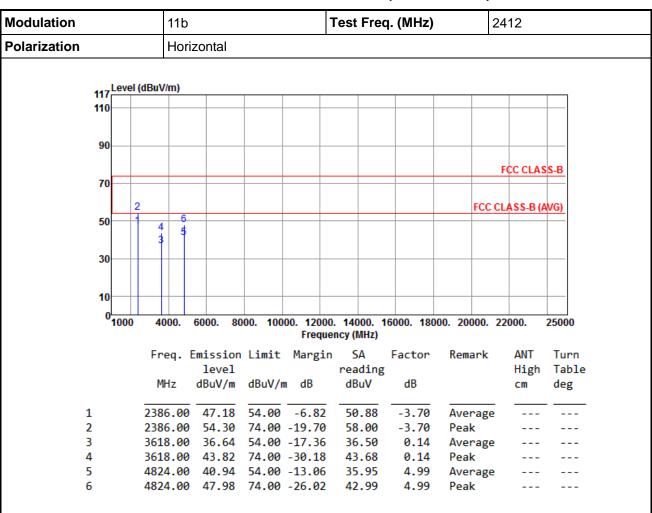


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR440102AC Page: 25 of 62



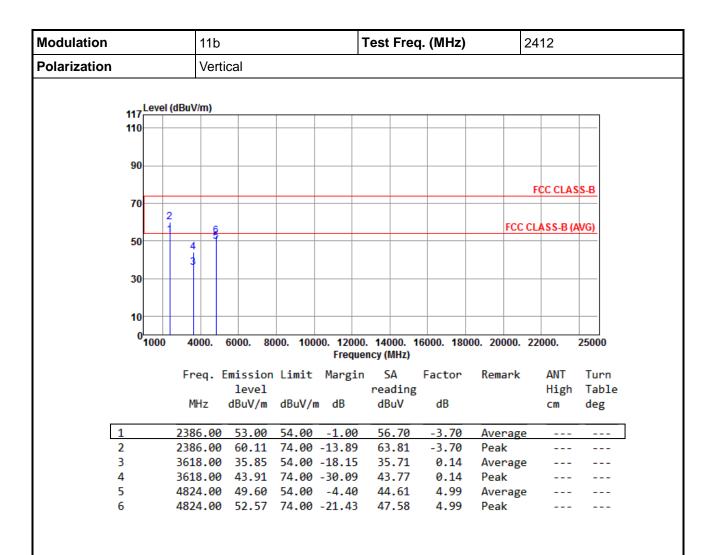


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 26 of 62



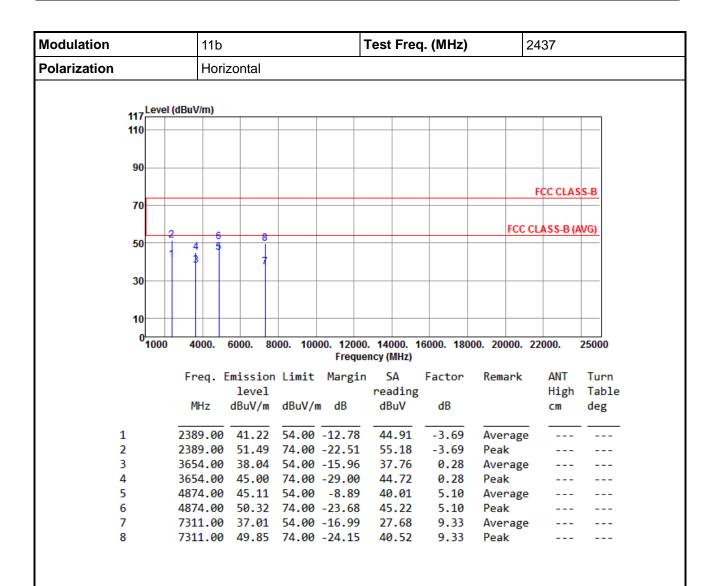


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 27 of 62



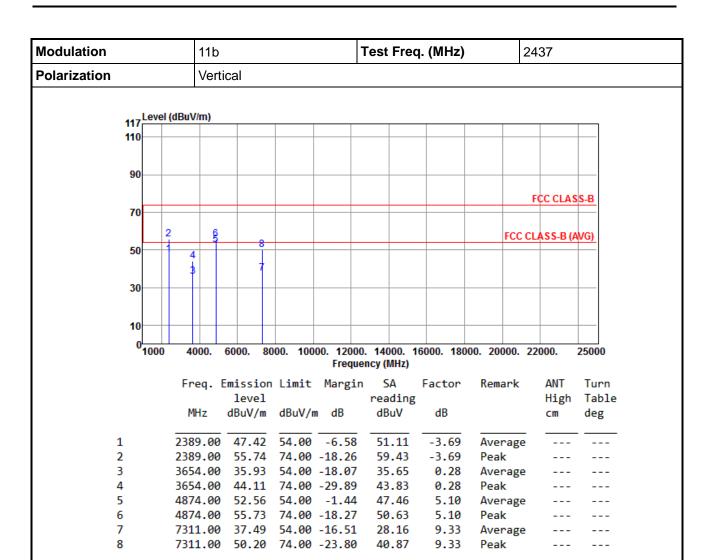


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 28 of 62



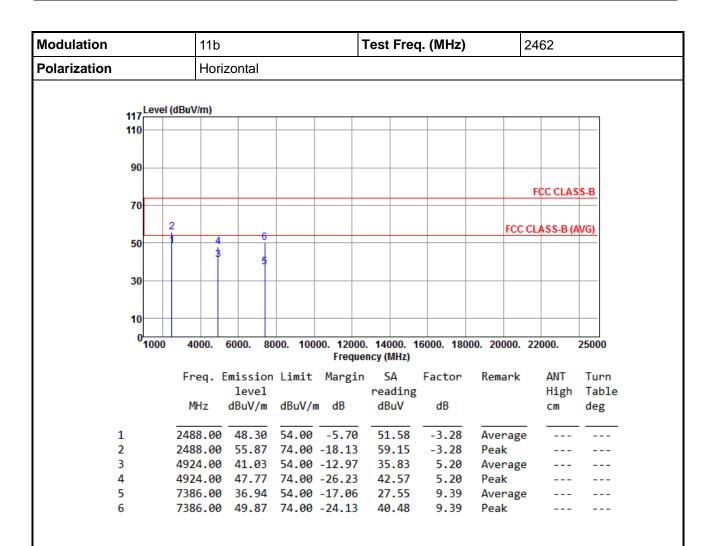


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 29 of 62



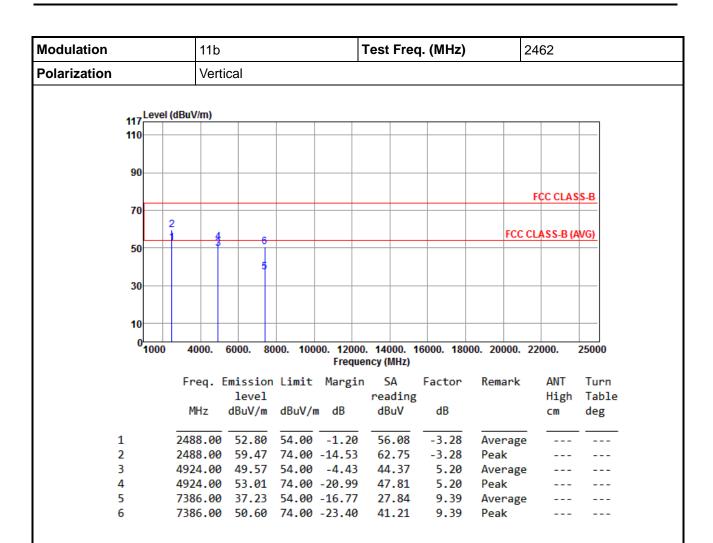


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 30 of 62



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

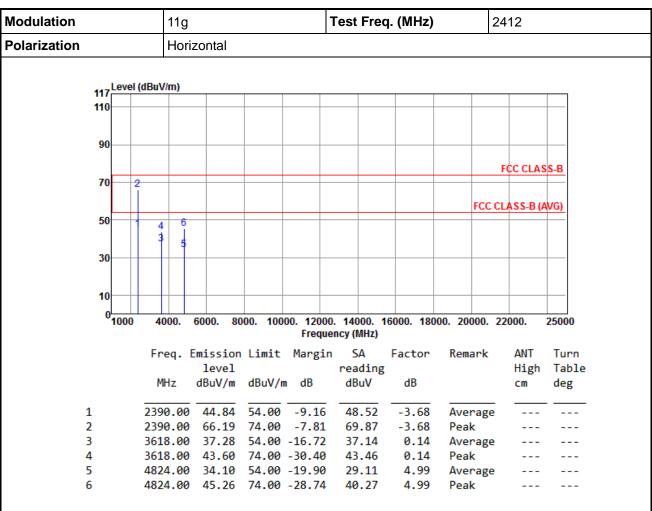


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR440102AC Page: 31 of 62



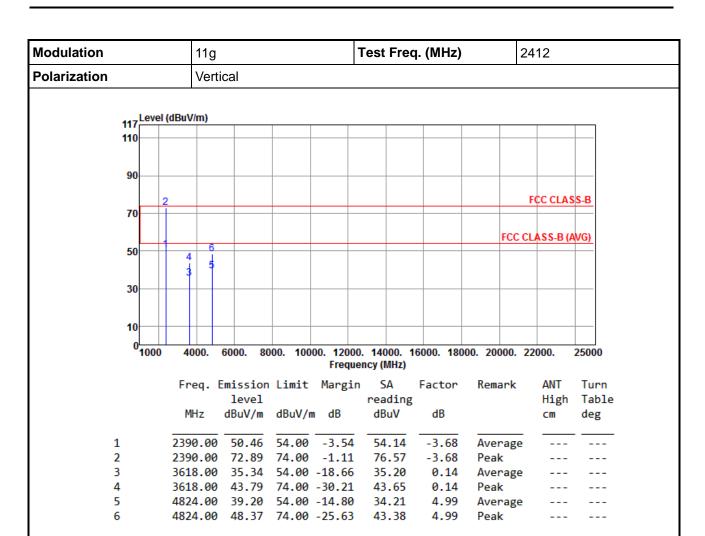


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 32 of 62



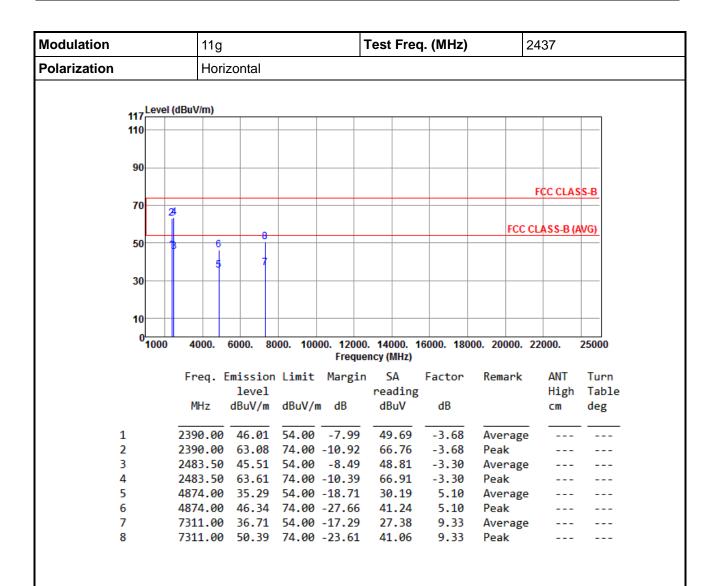


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 33 of 62



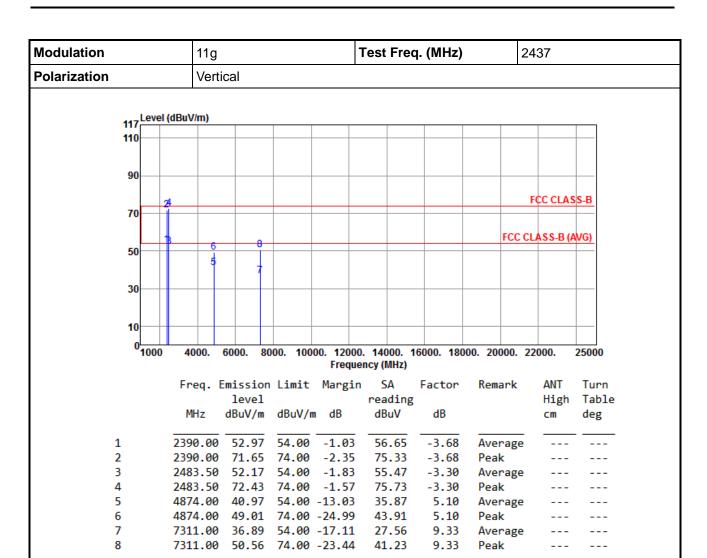


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 34 of 62



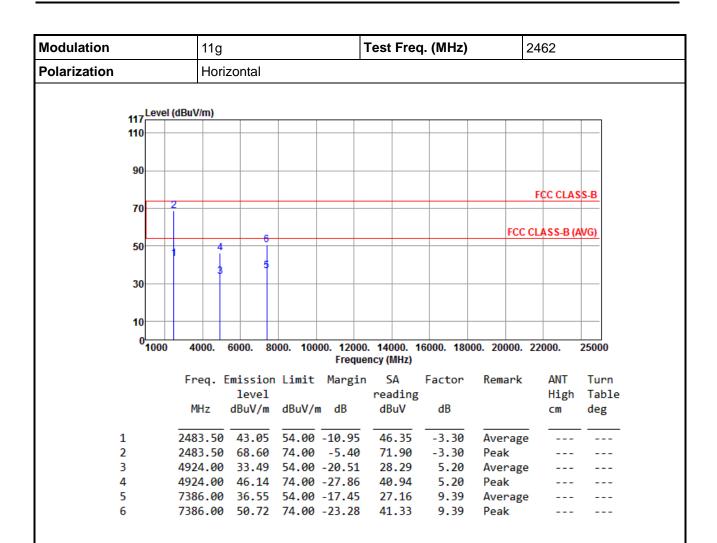


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 35 of 62



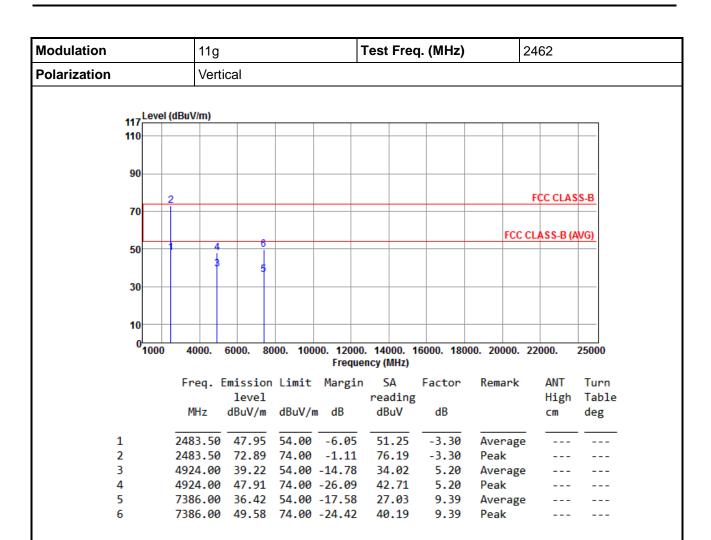


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 36 of 62



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

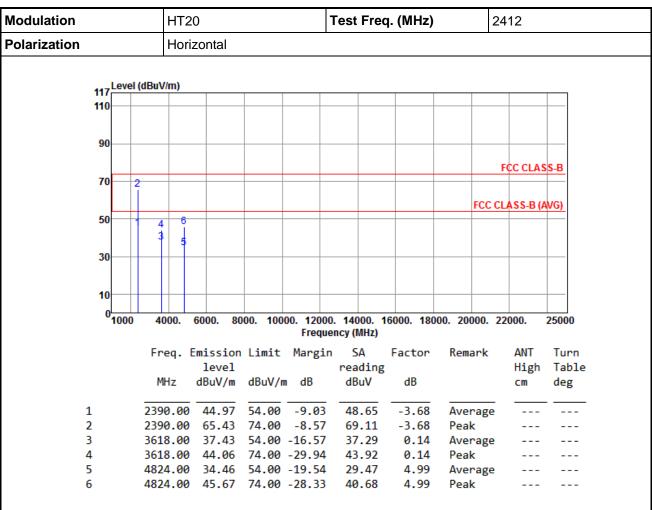

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR440102AC Page: 37 of 62



Modulation				HT2	20			Test	Freq	ı. (MHz)		24	12	
Polarization		Vertical												
			(ID.)											
		Level	(dBuV	//m)										
	110													
	90													
		2	2									F	CC CLAS	S-B
	70													
		,									F	CC CL/	ASS-B (A	VG)
	50		4	6										
			3	5										
	30													
	10													
	0	1000		000.	6000. 80	100 400	100 420	00 440	00 40	6000. 180	00 2000	0 22	000	25000
		1000	41	JUU.	0000. 80	JUU. 100		uency (I		0000. 180	00. 2000	10. 22	000.	23000
			Fr	eq.	Emission	Limit	Marg:	in S	Α	Factor	Remar	rk	ANT	Turn
					level				ding				High	Table
			М	Hz	dBuV/m	dBuV/	m dB	dB	uV	dB			cm	deg
	1		239	0.00	50.95	54.00	-3.0	5 54	.63	-3.68	Avera	age		
	2			0.00			-1.0		.63	-3.68	Peak			
	3		361	8.00	35.62			35	.48	0.14	Avera			
	4					74.00			.27	0.14	Peak			
!	5		482	4.00	39.64	54.00	-14.3	5 34	.65	4.99	Avera	age		

4.99

Peak


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

4824.00 48.06 74.00 -25.94 43.07

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 38 of 62



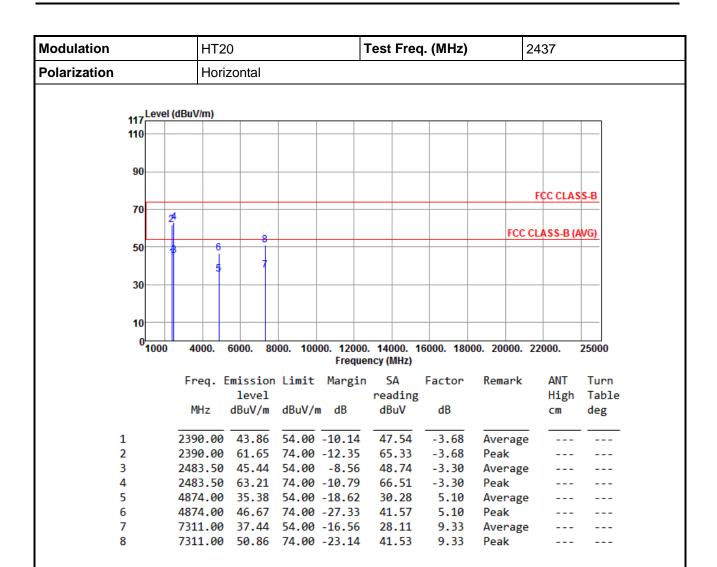

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 39 of 62



Modulation			HT2	0			Test Fred	q. (MHz)	2	437	
Polarization			Vert	ical		.			· · · · · · · · · · · · · · · · · · ·		
			l .								
	117	Level	(dBuV/m)								
	110										
	90										
	90										
		2	4							FCC CLAS	S-B
	70										
		-	B .						FCC C	LASS-B (A	VG)
	50		6								
			1	1 1							
	30										
	10										
	0	1000	4000.	6000. 80	000. 100			16000. 180	00. 20000. 2	2000.	25000
							ncy (MHz)				
			Freq. I		Limit	Margin		Factor	Remark	ANT	Turn
			MII-	level	JD. 377		reading			High	Table
			MHz	dBuV/m	abuv/i	п ав	dBuV	dB		cm	deg
	1		2390.00	52.90	54.00	-1.10	56.58	-3.68	Average		
	2		2390.00		74.00		75.48	-3.68	Peak		
3	3		2483.50	52.60	54.00	-1.40	55.90	-3.30	Average		
	4		2483.50				75.27	-3.30	Peak		
	5		4874.00			-12.79	36.11	5.10	Average		
	5		4874.00				44.28	5.10	Peak		
	7		7311.00	3/.41			28.08	9.33	Average		

9.33

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

7311.00 50.67 74.00 -23.33 41.34


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 40 of 62

Report Version: Rev. 01

8



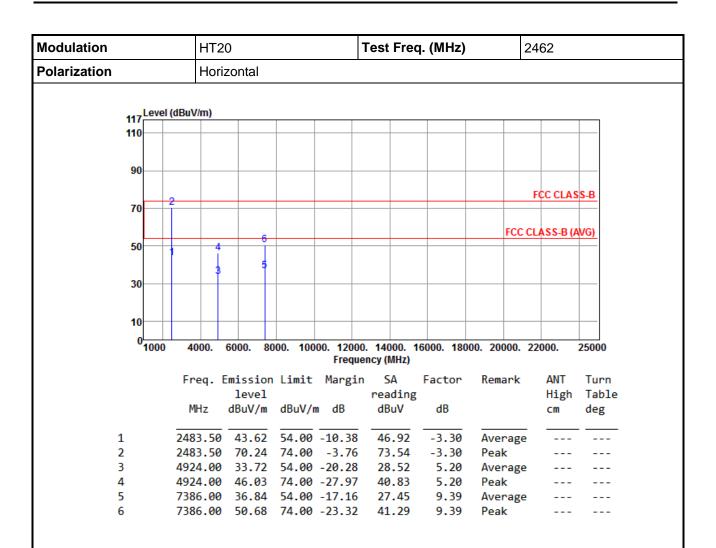


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 41 of 62



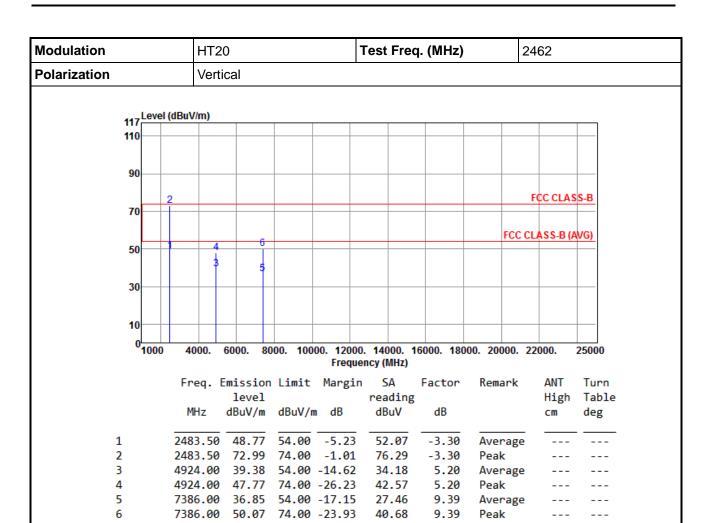


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 42 of 62



3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

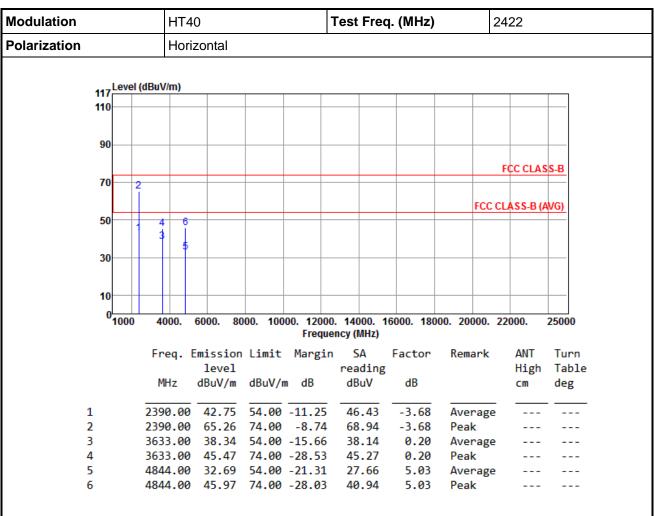

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR440102AC Page: 43 of 62



Modulation		HT4	0		,	Test Fred	q. (MHz)	2	422			
Polarization		Vertical										
	evel ((dBuV/m)										
117- 110												
90-												
90-	2								FCC CLAS	S-B		
70												
50-	_	4 6						FCC C	LASS-B (A	VG)		
		3 5										
30-												
10-												
01	1000	4000.	6000. 80	00. 100			16000. 180	00. 20000. 2	22000.	25000		
		Freq. (Emission	Limit		ency (MHz) SA	Factor	Remark	ANT	Turn		
		MHz	level dBuV/m	dBuV/ı	n dB	reading dBuV	dB		High cm	Table deg		
1 2		2390.00 2390.00			-4.05 -1.07	53.63 76.61	-3.68 -3.68	Average Peak				
3		3633.00				37.18	0.20	Average				
4		3633.00			-28.84	44.96	0.20	Peak				
-												

5.03

Peak


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

4844.00 47.55 74.00 -26.45 42.52

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 44 of 62



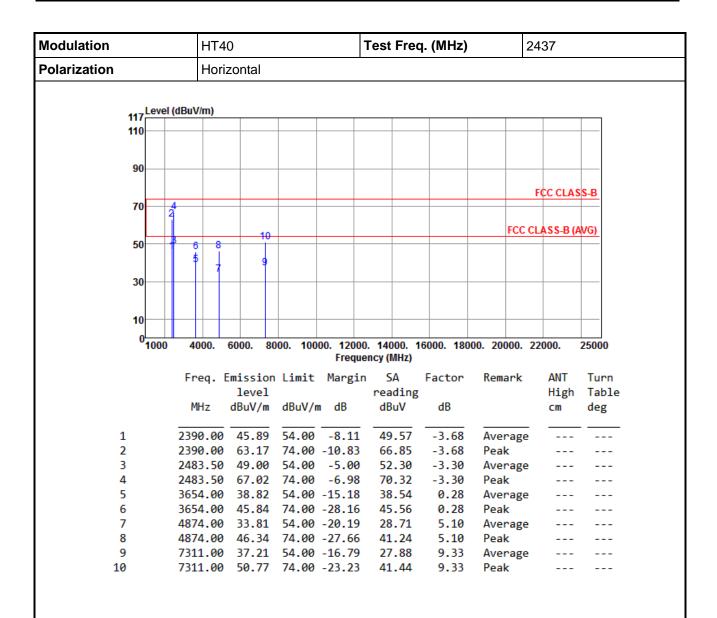


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 45 of 62



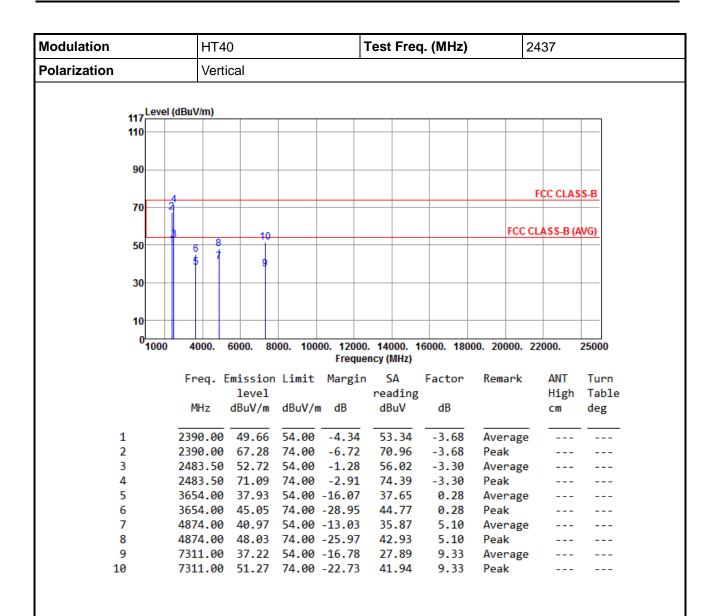


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 46 of 62



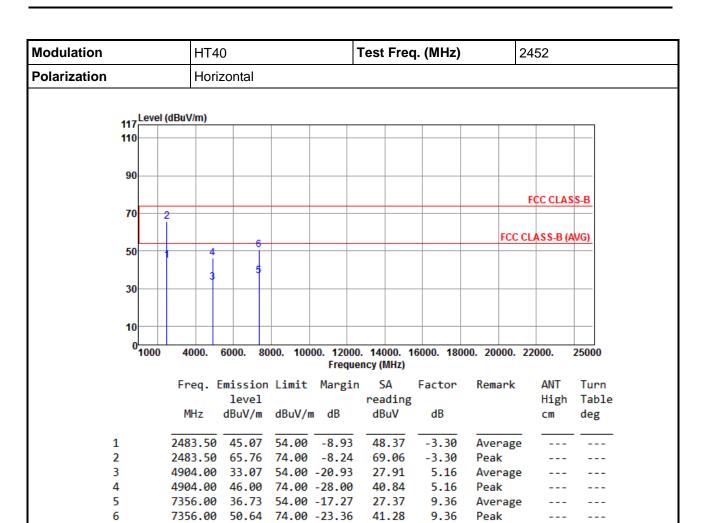


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 47 of 62



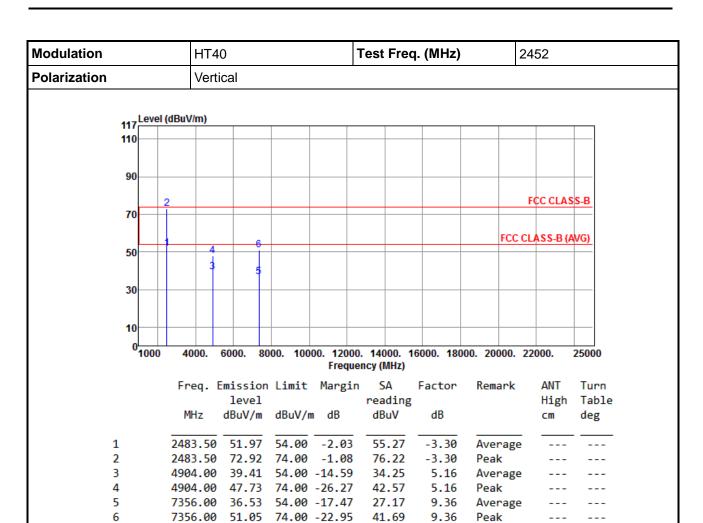

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR440102AC Page: 48 of 62



3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.6.4 Test Setup

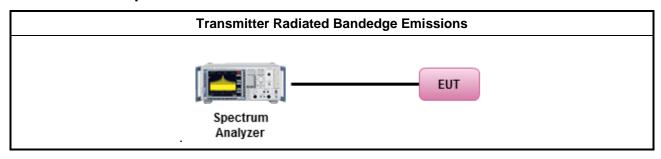


Report No.: FR440102AC Page: 49 of 62




3.6.5 Test Result of Emissions in non-restricted frequency bands

802.11b

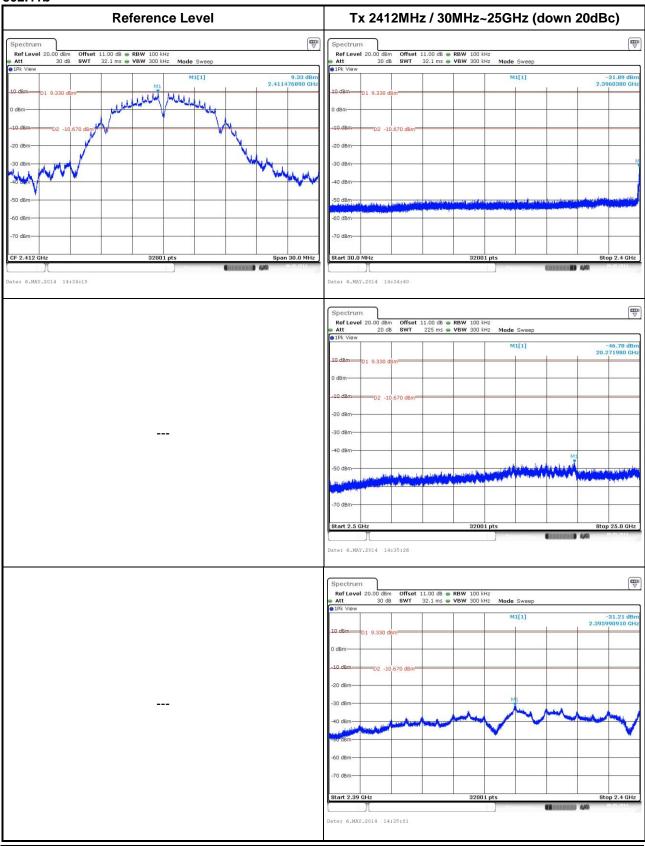


Report No.: FR440102AC Report Version: Rev. 01



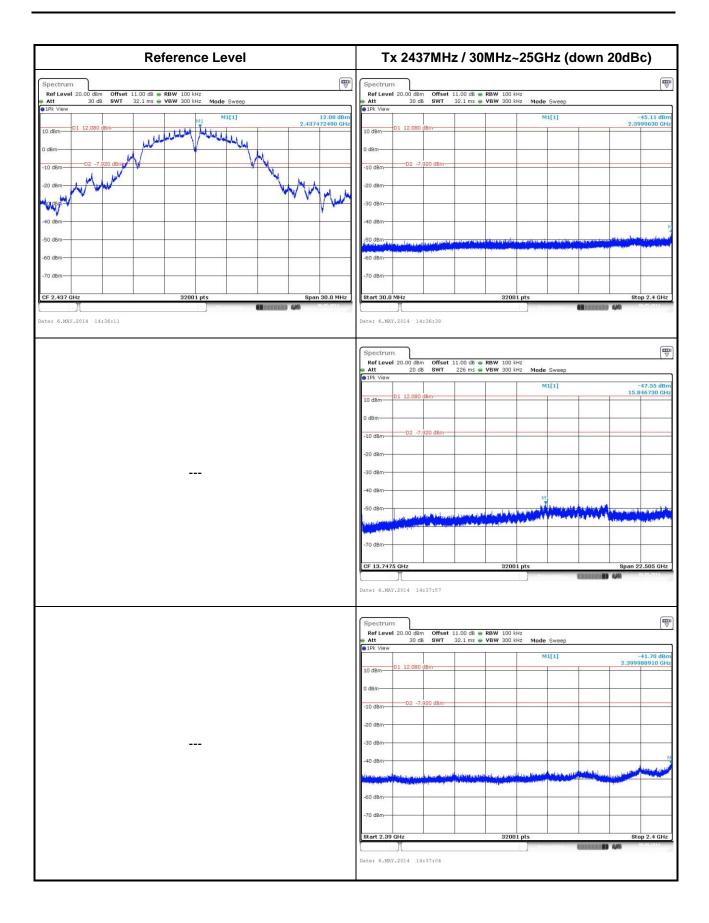


Report No.: FR440102AC Page: 51 of 62



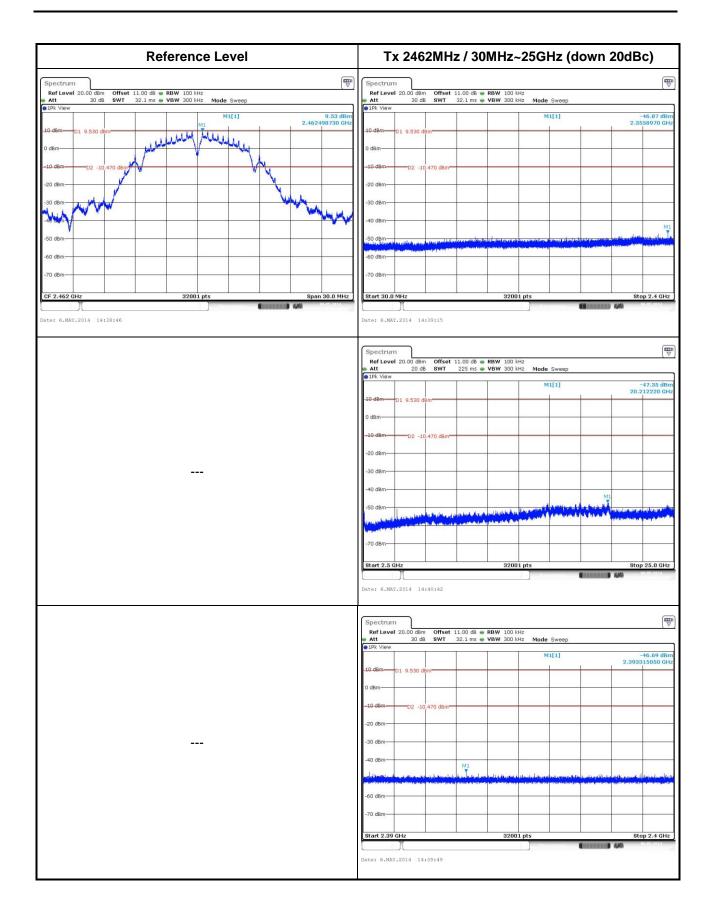


Report No.: FR440102AC Page: 52 of 62



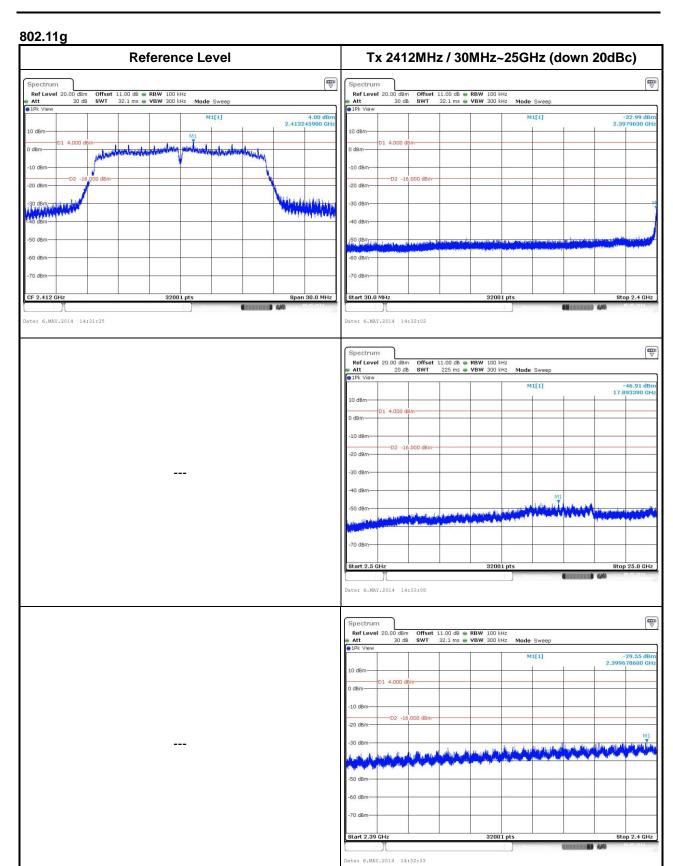


Report No.: FR440102AC Page: 53 of 62



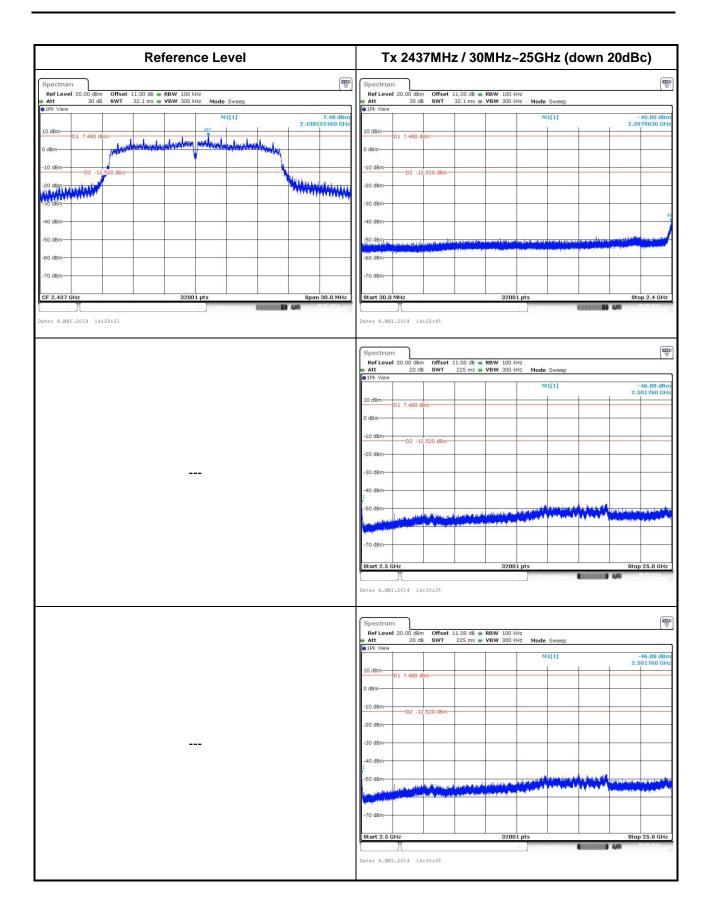

Report No.: FR440102AC Page: 54 of 62




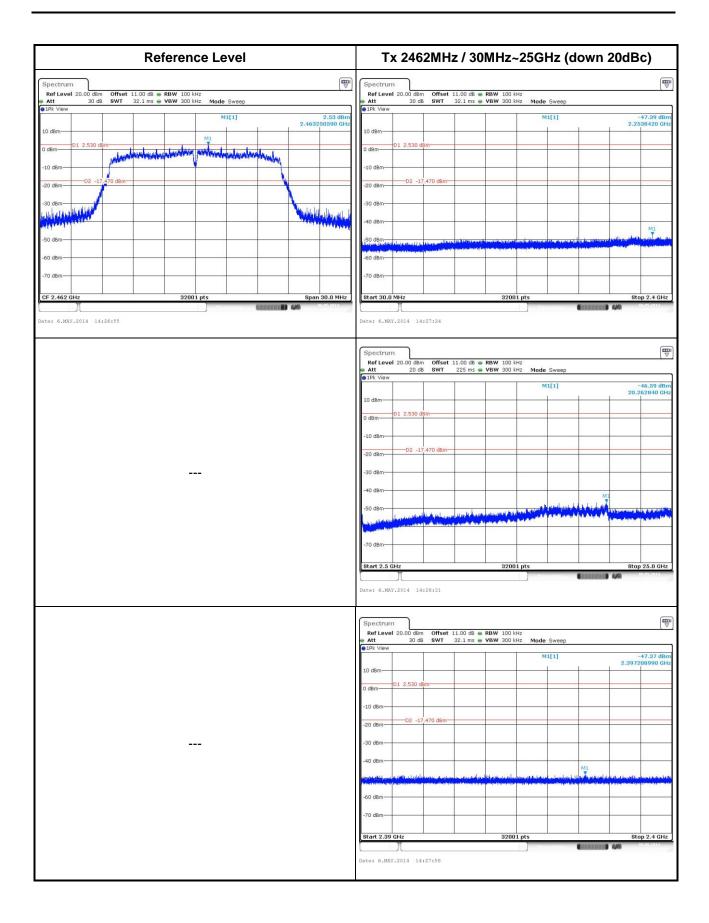

Report No.: FR440102AC Page: 55 of 62




802.11n HT20

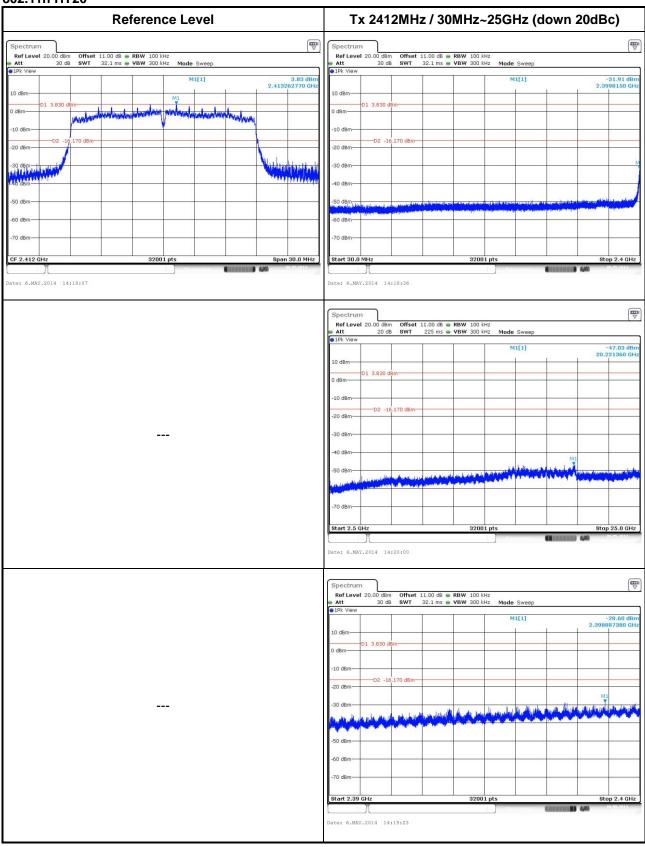


Report No.: FR440102AC Page: 56 of 62



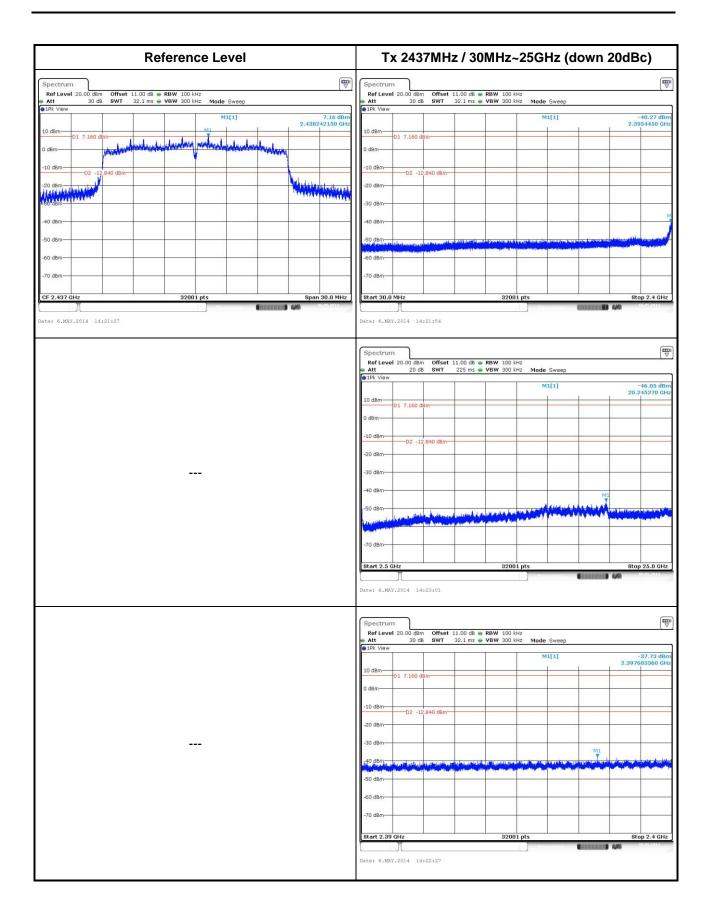

Report No.: FR440102AC Page: 57 of 62




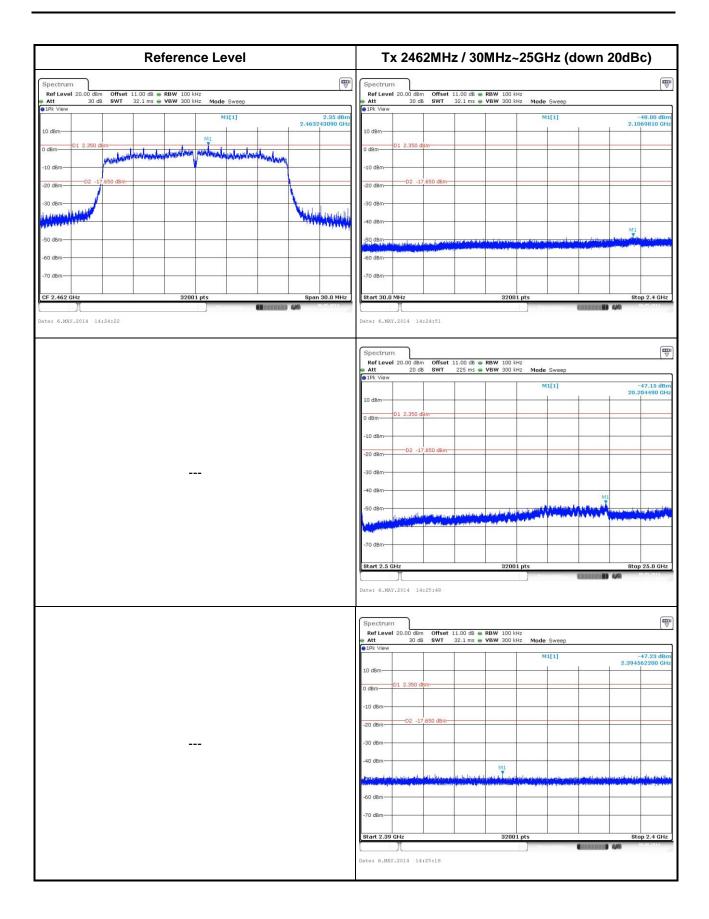

Report No.: FR440102AC Page: 58 of 62




802.11n HT40

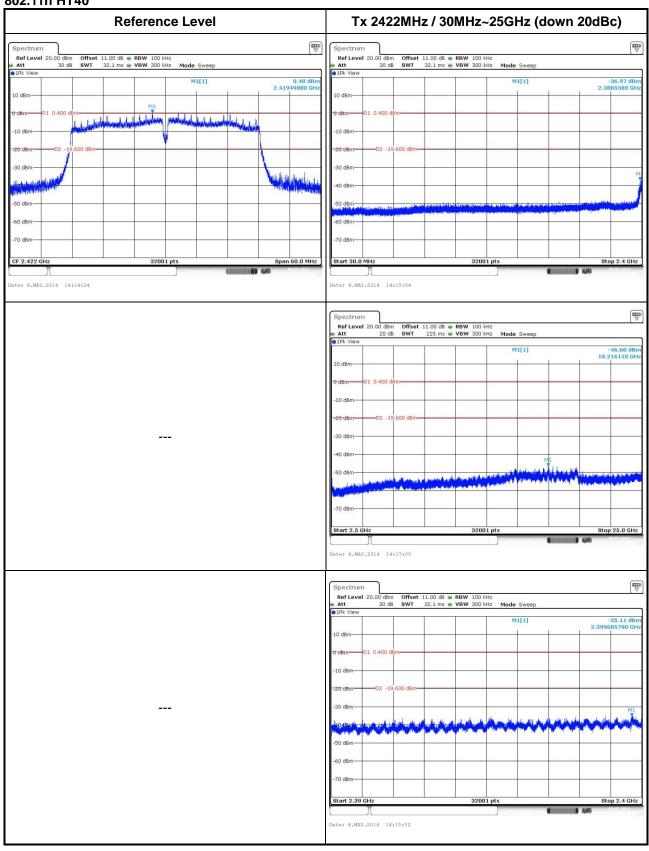


Report No.: FR440102AC Page: 59 of 62



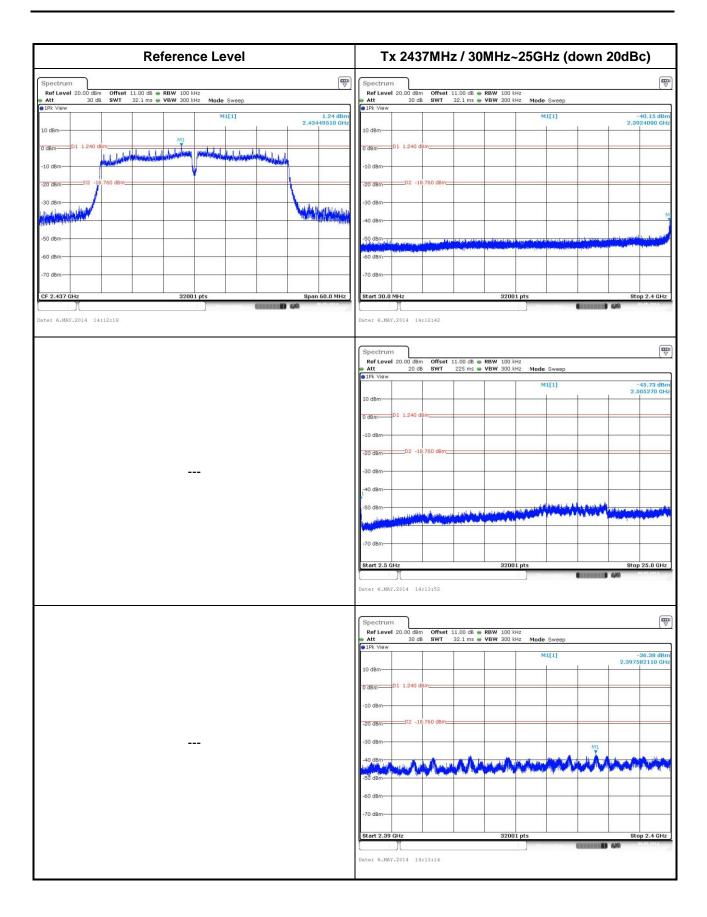

Report No.: FR440102AC Page: 60 of 62



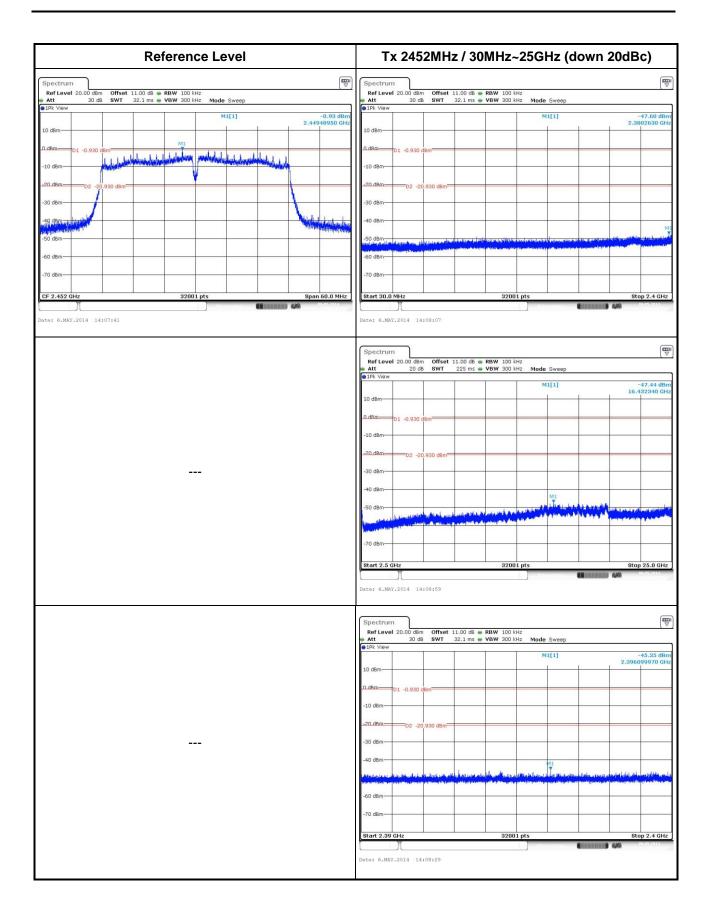

Report No.: FR440102AC Page: 61 of 62



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website http://www.icertifi.com.tw.

Linkou Kwei Shan

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR440102AC Page: 62 of 62