

FCC TEST REPORT

FCC ID : ZTJ-UAM90
Applicant : Shenzhen Uniwisdom Technologies Co., Ltd.
Address : Bldg.91-94 3rd Industrial Zone, Lisonglang, Gongming Town, Bao'an District,
Shenzhen, P.R.China

Equipment Under Test (EUT) :

Product Name : Wireless Microphone System
Model No. : UAM-90; PV-1 U1 HH(RECEIVER); PV-1 U1 BL(RECEIVER);
PV-1U1 BHS(RECEIVER); PV-1 U1 BG(RECEIVER)

Standards : FCC Part 15 Subpart B:2009


Date of Test : July 18, 2011 ~ July 20, 2011

Date of Issue : July 21, 2011

Test Engineer : Hunk yan



Reviewed By : Philo zhong



Test Result	: PASS
--------------------	---------------

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,
Shenzhen 518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

- ☆ The sample detailed above has been tested to the requirements of Council Directives ANSI C63.4:2003. The test results have been reviewed against the Directives above and found to meet their essential requirements.

WALTEK SERVICES

Reference No.: WT11073614-E-E-F

2 Test Summary

FCC Part 15 Subpart B Requirements			
Test Items	Test Requirement	Test Method	Result
Radiated Emission (30MHz to 5GHz)	FCC Part 15 Subpart B Section 15.109:2009	ANSI C63.4: 2003	PASS
Conducted Emission (150KHz to 30MHz)	FCC Part 15 Subpart B Section 15.107:2009	ANSI C63.4: 2003	PASS

3 Contents

1	COVER PAGE.....	1
2	TEST SUMMARY	2
3	CONTENTS.....	3
4	GENERAL INFORMATION	4
4.1	CLIENT INFORMATION	4
4.2	GENERAL DESCRIPTION OF E.U.T.	4
4.3	DETAILS OF E.U.T.....	4
4.4	DESCRIPTION OF SUPPORT UNITS.....	4
4.5	STANDARDS APPLICABLE FOR TESTING	4
4.6	TEST FACILITY	5
4.7	TEST LOCATION	5
5	EQUIPMENT USED DURING TEST	6
6	FCC PART 15 SUBPART B REQUIREMENTS	8
6.1	CONDUCTED EMISSION DATA	8
6.1.1	<i>E.U.T. Operation</i>	8
6.1.2	<i>EUT Setup.....</i>	9
6.1.3	<i>Conducted Emission Test Result.....</i>	9
6.1.4	<i>Photograph – Conducted Emission Test Setup.....</i>	16
6.2	RADIATION EMISSION DATA	17
6.2.1	<i>Measurement Uncertainty.....</i>	17
6.2.2	<i>EUT Setup.....</i>	18
6.2.3	<i>Spectrum Analyzer Setup</i>	19
6.2.4	<i>Test Procedure.....</i>	20
6.2.5	<i>Corrected Amplitude & Margin Calculation.....</i>	20
6.2.6	<i>Summary of Test Results</i>	20
6.2.7	<i>Photograph – Radiation Emission Test Setup</i>	33
7	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	34
7.1	PRODUCT VIEW	34
7.2	EUT – FRONT VIEW	34
7.3	EUT – BACK VIEW	35
7.4	EUT – OPEN VIEW	35
7.5	PCB – FRONT VIEW	36
7.6	PCB – BACK VIEW	36
8	FCC LABEL.....	37

4 General Information

4.1 Client Information

Applicant : Shenzhen Uniwisdom Technologies Co., Ltd.
Address of Applicant : Bldg.91-94 3rd Industrial Zone, Lisonglang, Gongming Town, Bao'an District, Shenzhen, P.R.China

Manufacturer : Shenzhen Uniwisdom Technologies Co., Ltd.
Address of Manufacturer : Bldg.91-94 3rd Industrial Zone, Lisonglang, Gongming Town, Bao'an District, Shenzhen, P.R.China

4.2 General Description of E.U.T.

Product Name : Wireless Microphone System
Model No. : UAM-90; PV-1 U1 HH(RECEIVER); PV-1 U1 BL(RECEIVER); PV-1U1 BHS(RECEIVER); PV-1 U1 BG(RECEIVER)
Differences describe : All of models have the same circuit and apparence, they only have different model number.
Operation Frequency : 906MHz ~ 928MHz

4.3 Details of E.U.T.

Technical Data: : 120VAC 60Hz

4.4 Description of Support Units

The EUT has been tested as an independent unit. All the test was performed in the condition of AC 120V/60Hz input.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Wireless Microphone System. The standards used were FCC Part 15 Subpart B:2009.

4.6 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: IC7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, Aug.03, 2010.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.7 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114943	W2008001	9k-26.5GHz	Aug-2010	Aug-2011	Wws20081596	±1dB
Trilog Broadband Antenne	SCHWARZBECK MESS-ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug-2010	Aug-2011	-	±1dB
Broad-band Horn Antenna	SCHWARZBECK MESS-ELEKTROM / BBHA 9120D(1201)	667	W2008003	1-18GHz	Aug-2010	Aug-2011	-	f<10 GHz: ±1dB 10GHz<f<18 GHz: ±1.5dB
Broadband Preamplifier	SCHWARZBECK MESS-ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug-2010	Aug-2011	-	±1.2dB
10m Coaxial Cable with N-male Connectors	SCHWARZBECK MESS-ELEKTROM / AK 9515 H	-	-	-	Aug-2010	Aug-2011	-	-
10m 50 Ohm Coaxial Cable	SCHWARZBECK MESS-ELEKTROM / AK 9513	-	-	-	Aug-2010	Aug-2011	-	-
Positioning Controller	C&C LAB/ CC-C-IF	-	-	-	N/A	N/A	-	-
Color Monitor	SUNSPOT/ SP-14C	-	-	-	N/A	N/A	-	-
Test Receiver	ROHDE&SCHWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug-2010	Aug-2011	Wws20080942	±1dB
EMI Receiver	Beijingkehua	KH3931	-	9k-1GHz	Aug-2010	Aug-2011	-	-
Two-Line V-Network	ROHDE&SCHWARZ/ ENV216	100115	W2005002	50Ω/50μH	Aug-2010	Aug-2011	Wws20080941	±10%
Digital Power Analyzer	Em Test AG/Switzerland/ DPA 500	V0745103095	W2008012	Power: 2000VA Vol-range: 0-300V Freq_range: 10-80Hz	Aug-2010	Aug-2011	Wwd20081185	Voltage distinguish:0.025% Power_freq distinguish:0.02Hz
Power Source	Em Test AG/Switzerland/ ACS 500	V0745103096	W2008013	Vol-range: 0-300V Power_freq: 10-80Hz				

WALTEK SERVICES

Reference No.: WT11073614-E-E-F

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Fraq-range: 9K-1GHz RF voltage: -60 dBm-+10dBm	Aug-2010	Aug-2011	Wws200 81890	Power_freq distinguish0.1Hz RFelectricity distinguish 0.1 B
CDN M-Type	TESEQ GmbH/ CDN M016	25112	W2008009	Voltage correct factor 9.5 dB	Aug-2010	Aug-2011	Wwc200 82396	150K-80MHz: ±1dB 80-230MHz:-2-+3dB
EM-Clamp	TESEQ GmbH/ KEMZ 801	25453	W2008010	Freq_range: 0.15-1000 MHz	Aug-2010	Aug-2011	Wwc200 82397	0.3-400 MHz: ±4dB Other freq: ±5dB
Attenuator 6dB	TESEQ GmbH/ ATN6050	25365	-	-	Aug-2010	Aug-2011	Wws200 81597	-
All Modules Generator	SCHAFFNER/6150	34579	W2008006	voltage:200V-4.4KV Pulse current: 100A-2.2KA	Aug-2010	Aug-2011	Wwc200 82401	voltage: ±10% Pulse current: ±10%
Capacitive Coupling Clamp	SCHAFFNER/ CDN 8014	25311	-	-	Aug-2010	Aug-2011	Wwc200 82398	-
Signal and Data Line Coupling Network	SCHAFFNER/ CDN 117	25627	W2008011	1.2/50μS	Aug-2010	Aug-2011	Wwc200 82399	-

6 FCC Part 15 Subpart B Requirements

6.1 Conducted Emission Data

Test Requirement:	FCC Part 15.107
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C
Humidity: 51 % RH
Atmospheric Pressure: 1012 mbar

EUT Operation:


The EUT was test in working mode.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.1.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B 15.107 limits.

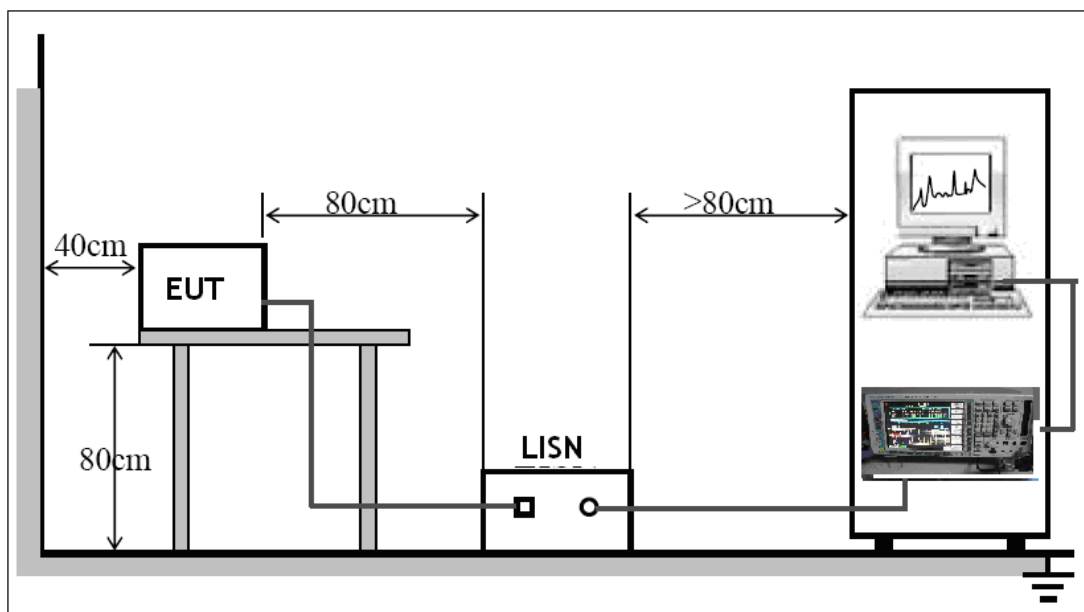


The EUT was placed on the test table in shielding room

6.1.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.
The EUT was working in normal operation mode.


Low channel

Live line:

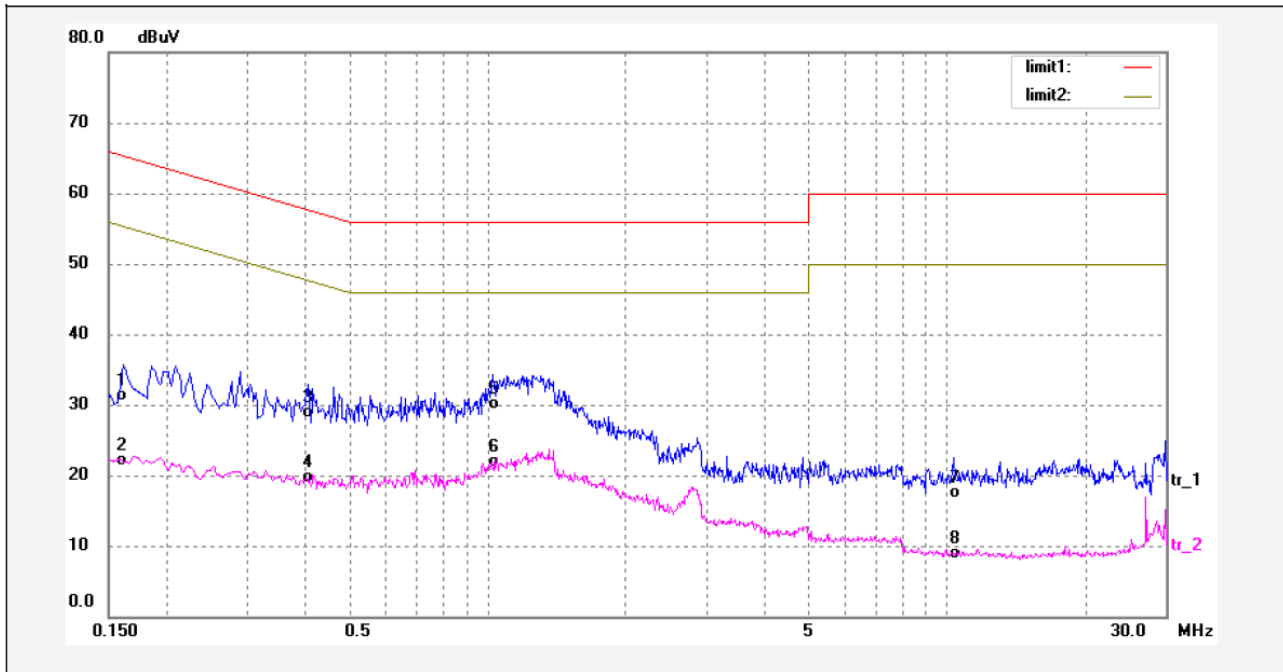


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	19.83	10.62	30.45	65.36	-34.91	QP	
2	0.1620	10.77	10.62	21.39	55.36	-33.97	AVG	
3	0.4100	17.34	10.70	28.04	57.65	-29.61	QP	
4	0.4100	8.12	10.70	18.82	47.65	-28.83	AVG	
5	1.0300	17.09	12.19	29.28	56.00	-26.72	QP	
6	1.0300	8.89	12.19	21.08	46.00	-24.92	AVG	
7	10.3860	4.64	12.08	16.72	60.00	-43.28	QP	
8	10.3860	-3.93	12.08	8.15	50.00	-41.85	AVG	

Neutral line:

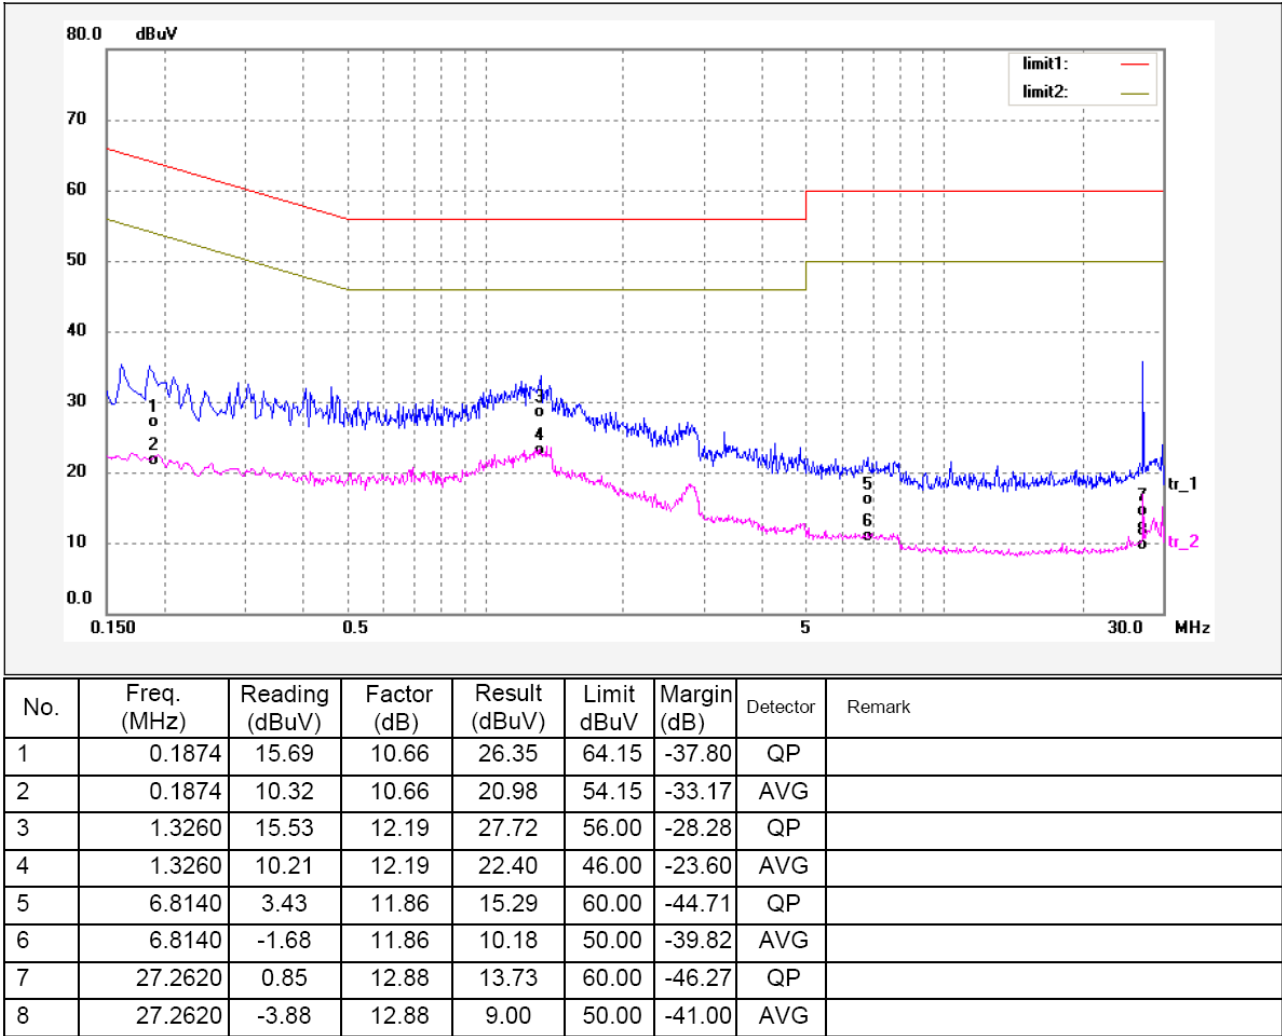


Middle channel

Live line:

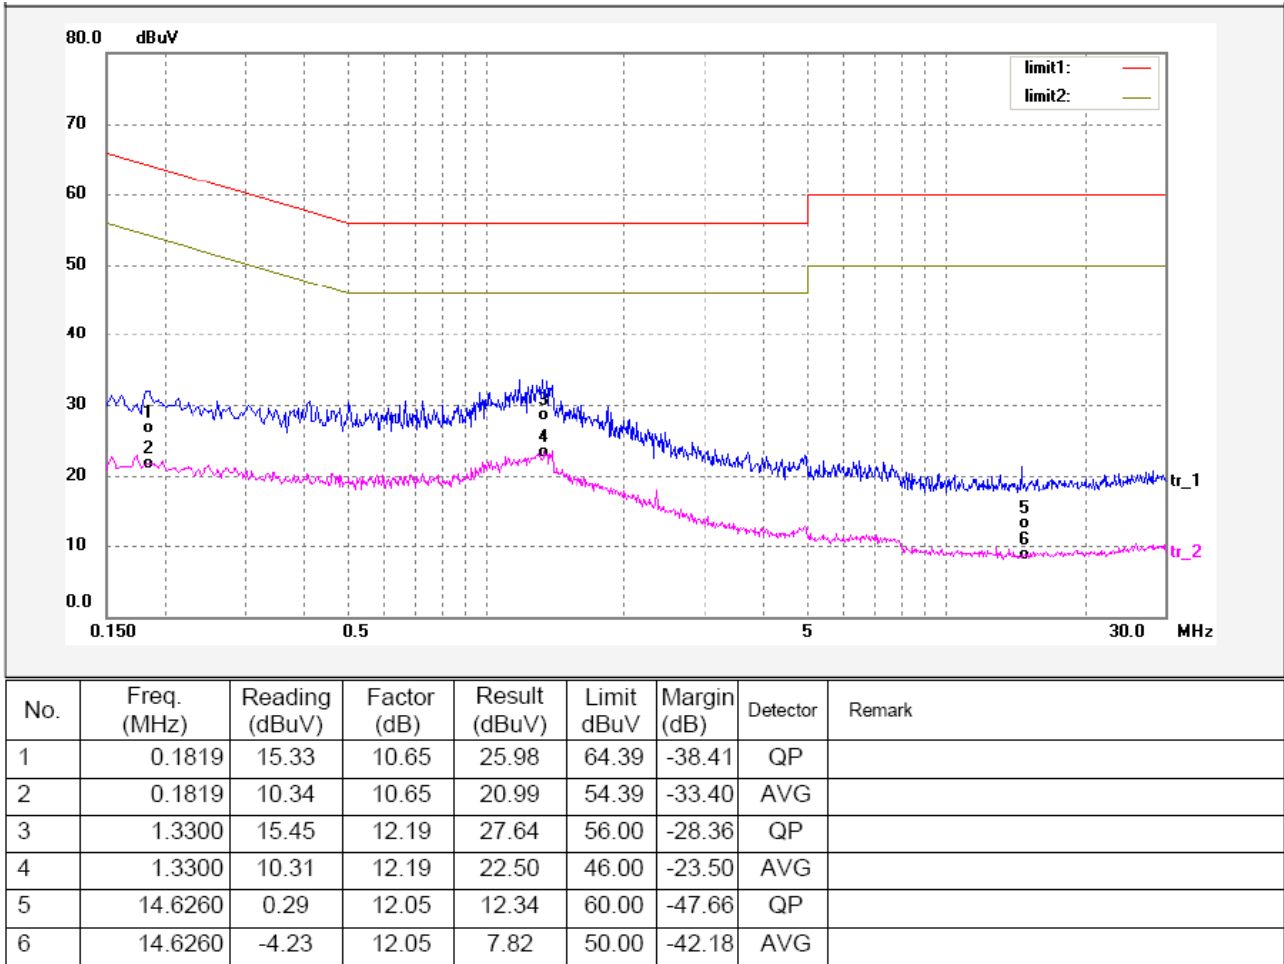


Neutral line:

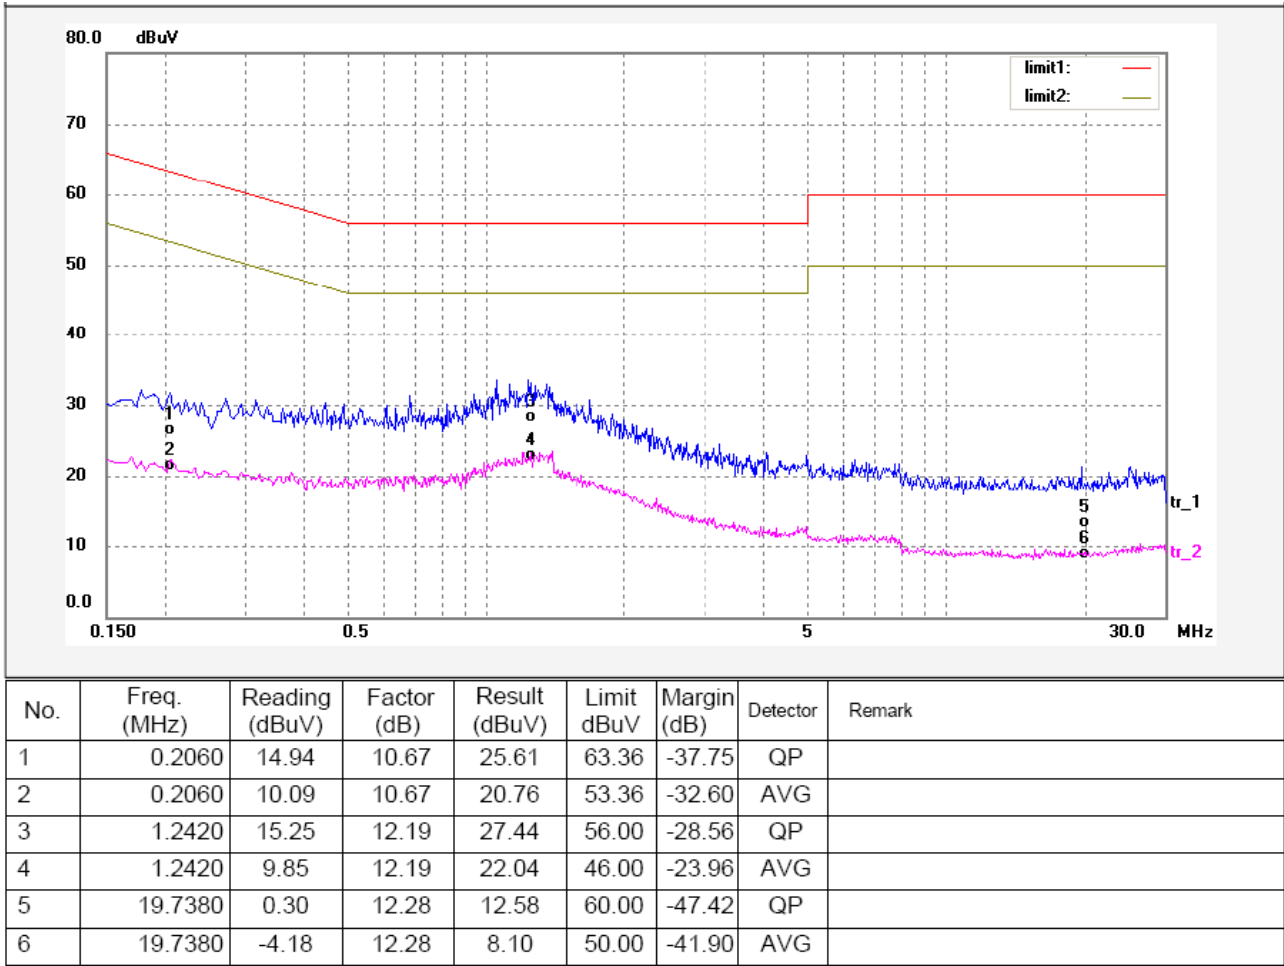


High channel

Live line:

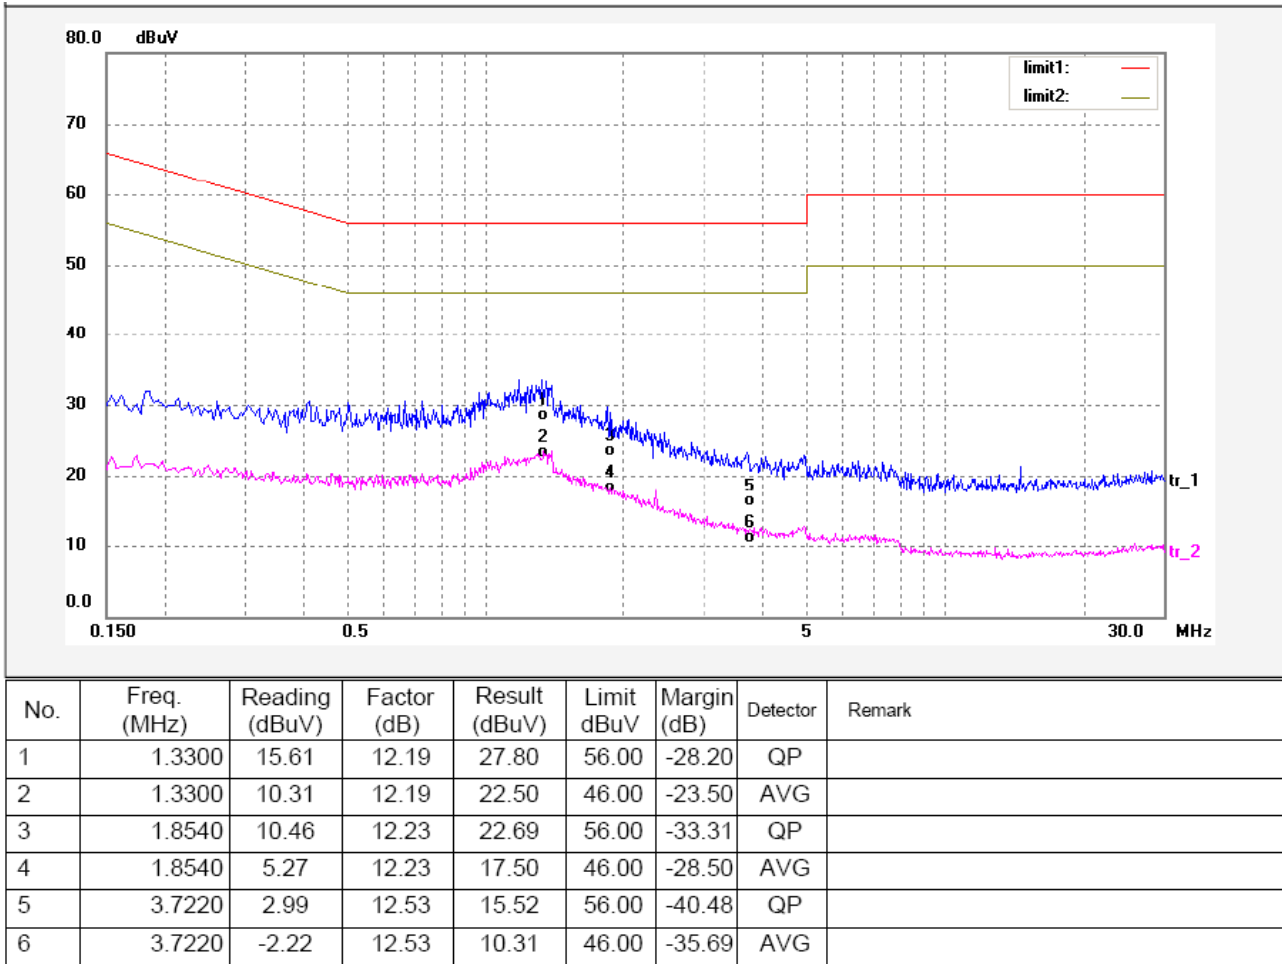

Neutral line:

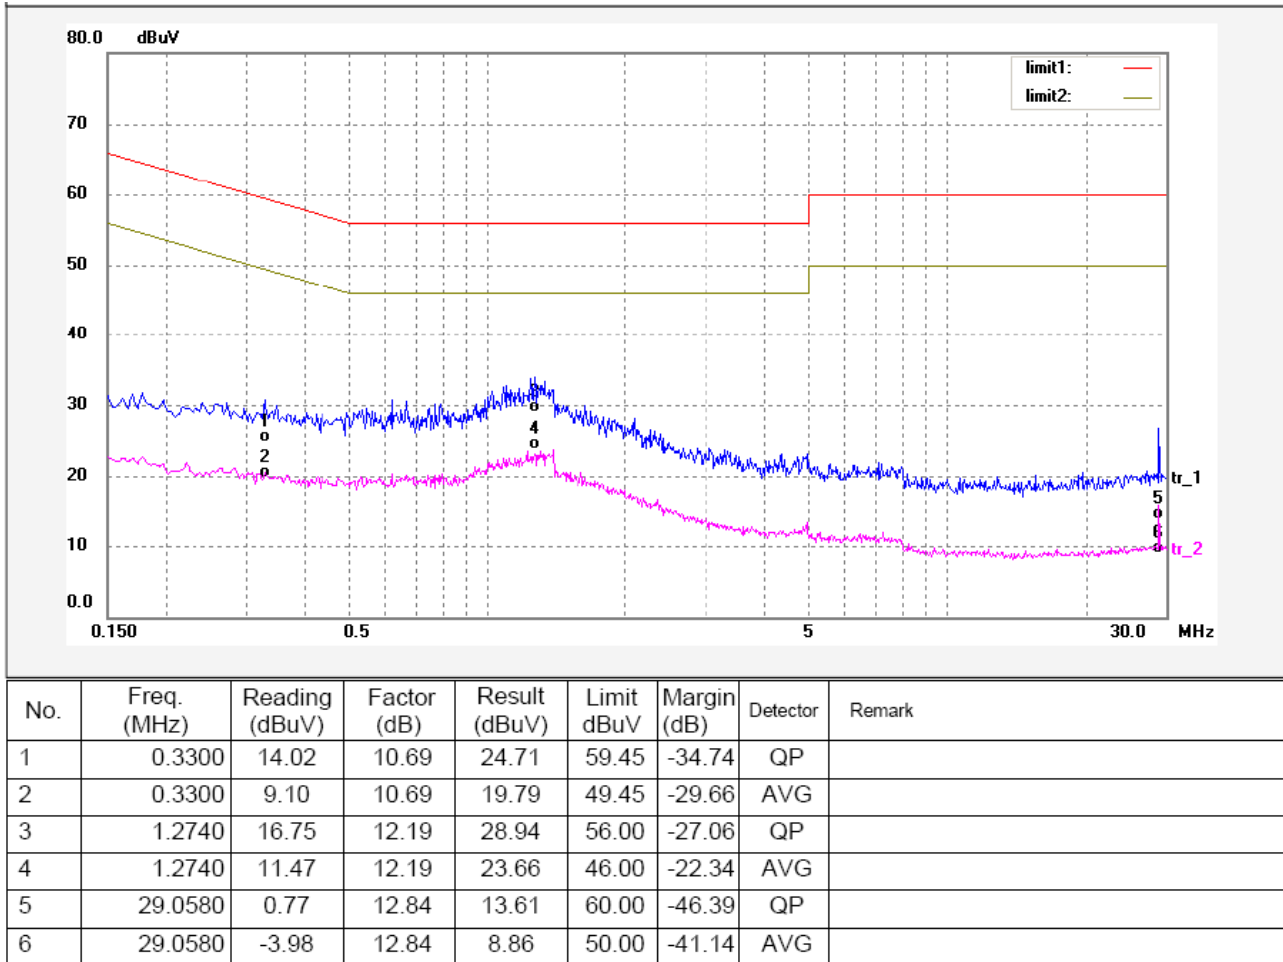

WALTEK SERVICES

Reference No.: WT11073614-E-E-F

6.1.4 Photograph – Conducted Emission Test Setup



6.2 Radiation Emission Data

Test Requirement:	FCC Part15.109
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	30MHz to 5GHz
Measurement Distance:	3m
Class:	Class B
Limit:	40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

EUT Operation:

The EUT was pre-testrd in two mode: standby mode and receive mode. The worst mode is receive mode, so the report show that data only.


6.2.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is ± 5.03 dB.

6.2.2 EUT Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B limits.

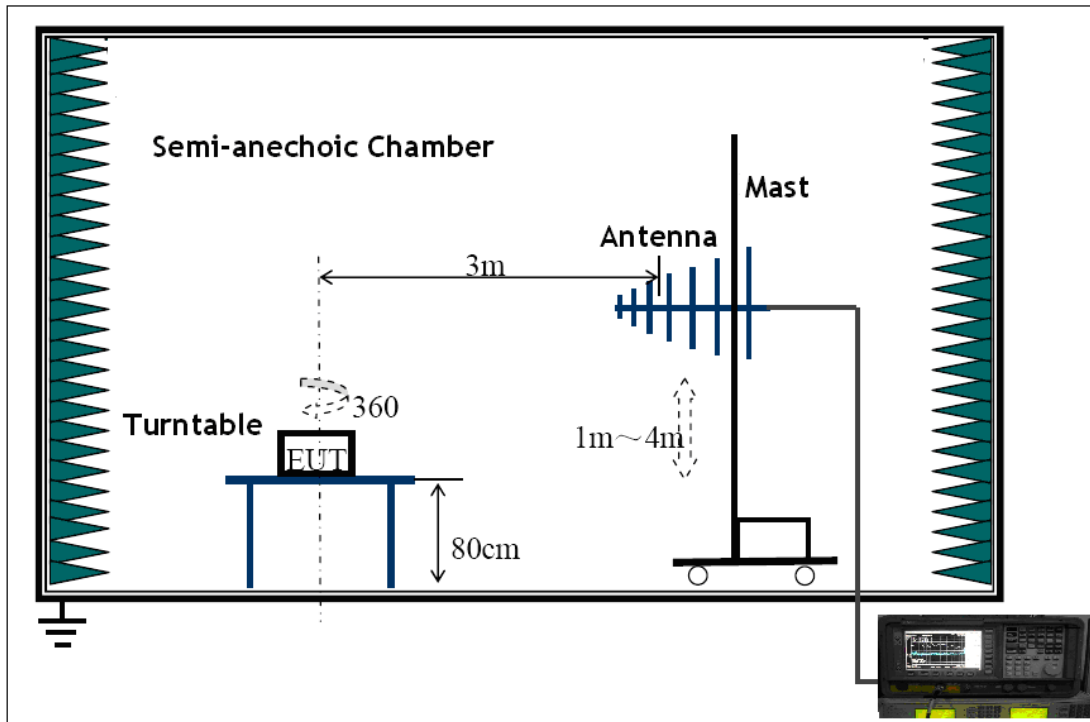

The EUT was placed on the test table in shielding room.

6.2.3 Spectrum Analyzer Setup

According to FCC Part15 B Rules, the system was tested 30 to 5000MHz.

Below 1GHz

Start Frequency	30 MHz
Stop Frequency	1000MHz
Sweep Speed	Auto
IF Bandwidth.....	120 KHz
Video Bandwidth.....	100KHz
Quasi-Peak Adapter Bandwidth	120 KHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	100KHz

Above 1GHz

Start Frequency	1000 MHz
Stop Frequency	5000MHz
Sweep Speed	Auto
IF Bandwidth.....	120 KHz
Video Bandwidth.....	1MHz
Quasi-Peak Adapter Bandwidth	120 KHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	1MHz

6.2.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X(normal uses) axis positioning. And all the modes was tested in the report.Only the worst case is shown in the report.
8. The EUT was pre-testrd in two mode:standby mode and receive mode.According to ANSI STANDARD C63.4-2003 12.1.1.2 OTHER TYPES OF RECEIVERS: In receive mode,a typical signal or an unmodulated CW signal at the operating frequency of the EUT shall be supplied to the EUT for all measurements. Such a signal may be supplied by either a signal generator and an antenna in close proximity to the EUT or directly conducted into the antenna terminals of the EUT. The signal level shall be sufficient to the local oscillator of the EUT.In this report, the antenna of the signal generator is under the turntable.

6.2.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$


6.2.6 Summary of Test Results

According to the data in this section, the EUT complied with the FCC Part15 B standards. The EUT was working in normal operation mode.

Low channel
Frequency Range: 30MHz ~ 1000MHz
Antenna polarization: Vertical

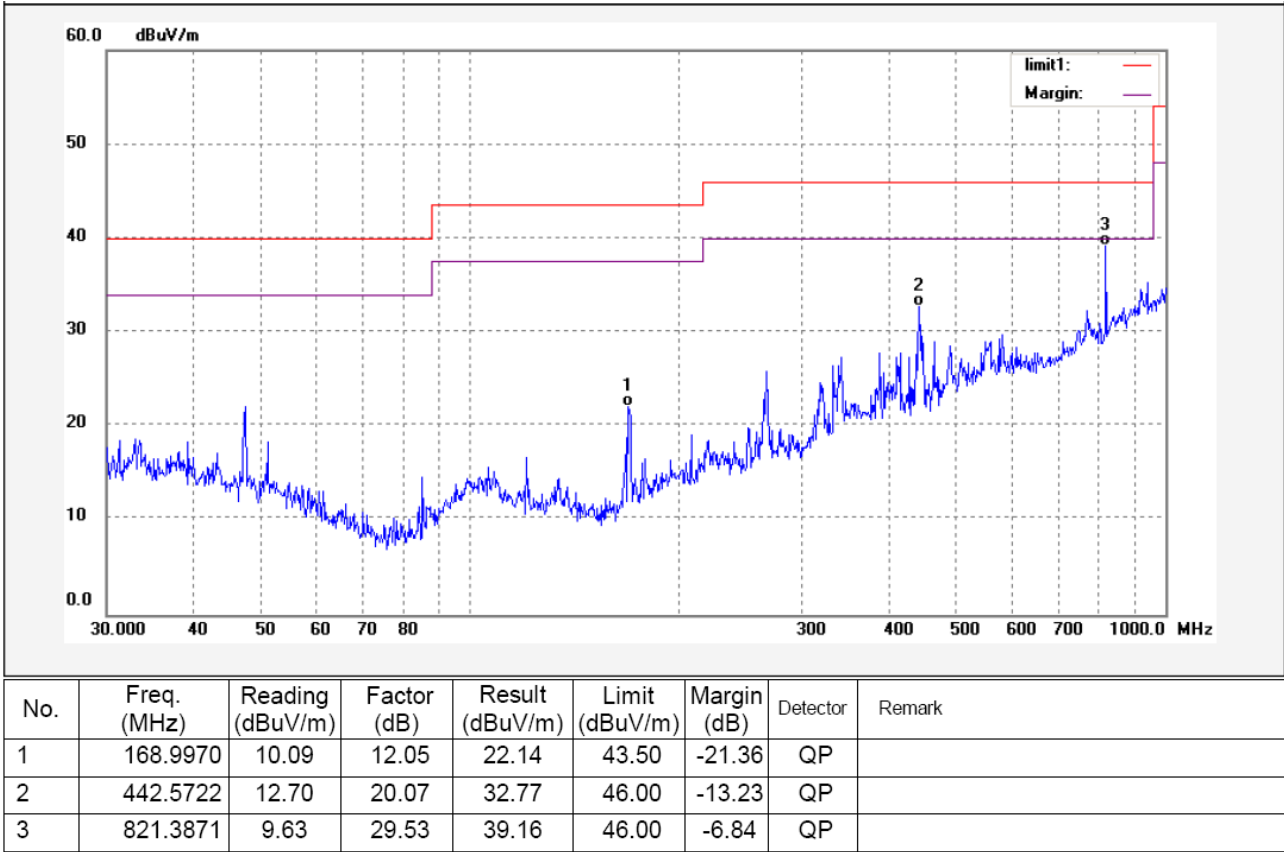


Antenna polarization: Horizontal

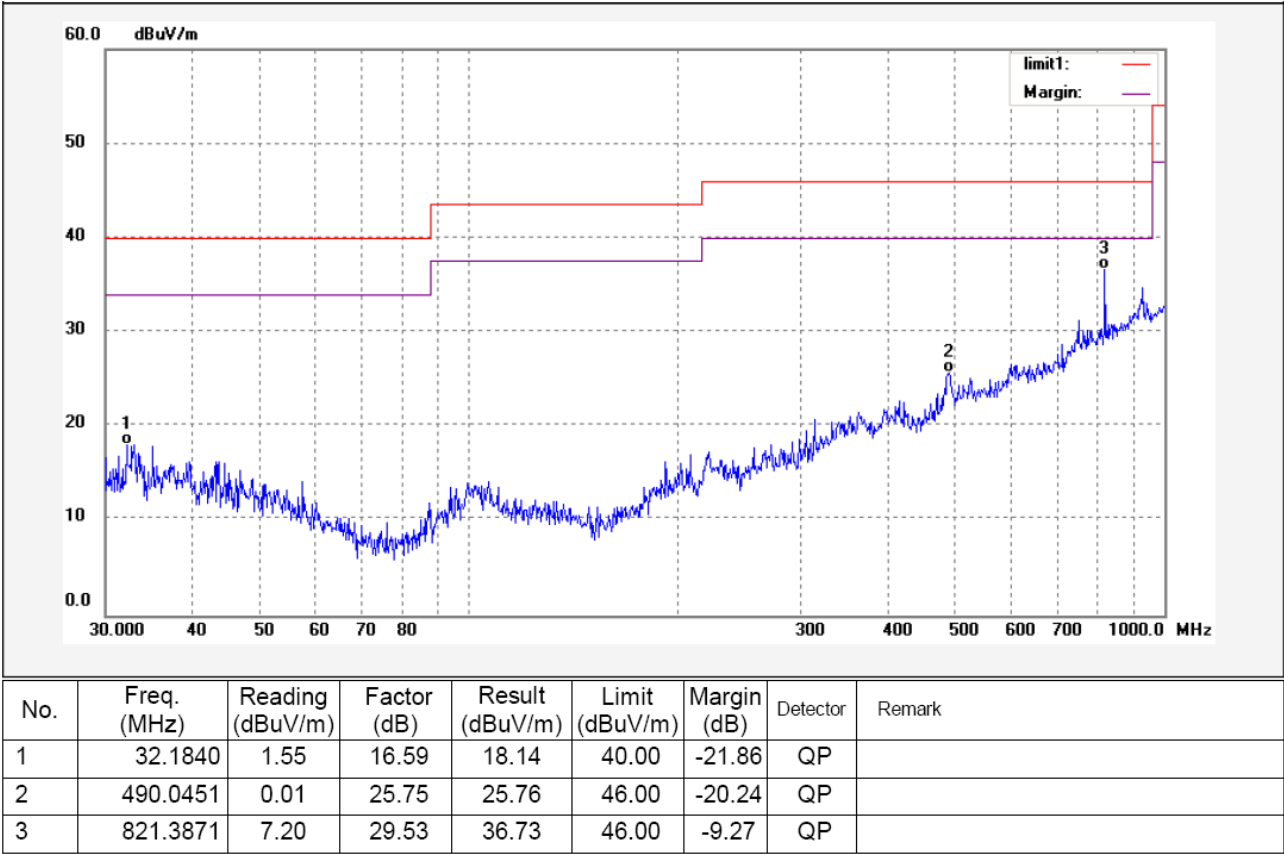


Frequency Range: 1GHz ~ 5GHz

Antenna polarization: Vertical

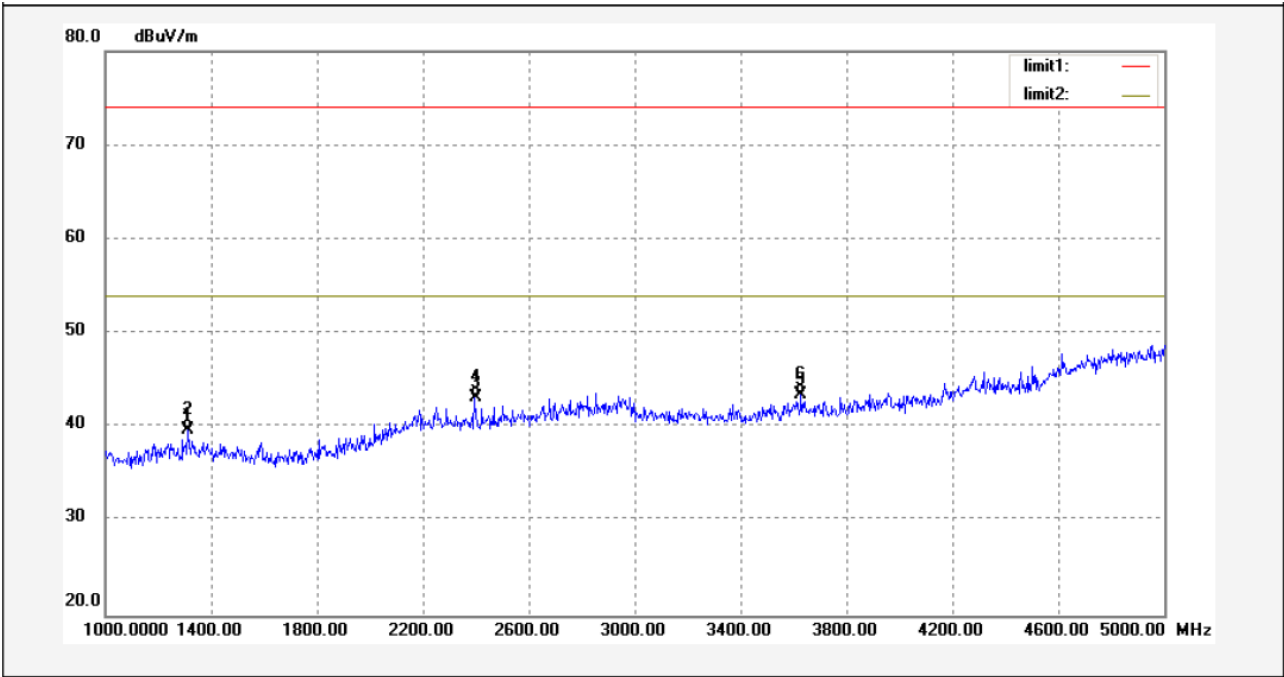

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1312.625	41.64	-1.85	39.79	74.00	-34.21	peak	
2	1312.625	41.64	-1.85	39.79	54.00	-14.21	AVG	
3	2394.790	40.74	2.38	43.12	74.00	-30.88	peak	
4	2394.790	40.74	2.38	43.12	54.00	-10.88	AVG	
5	3629.258	38.42	5.01	43.43	74.00	-30.57	peak	
6	3629.258	38.42	5.01	43.43	54.00	-10.57	AVG	


Antenna polarization: Horizontal

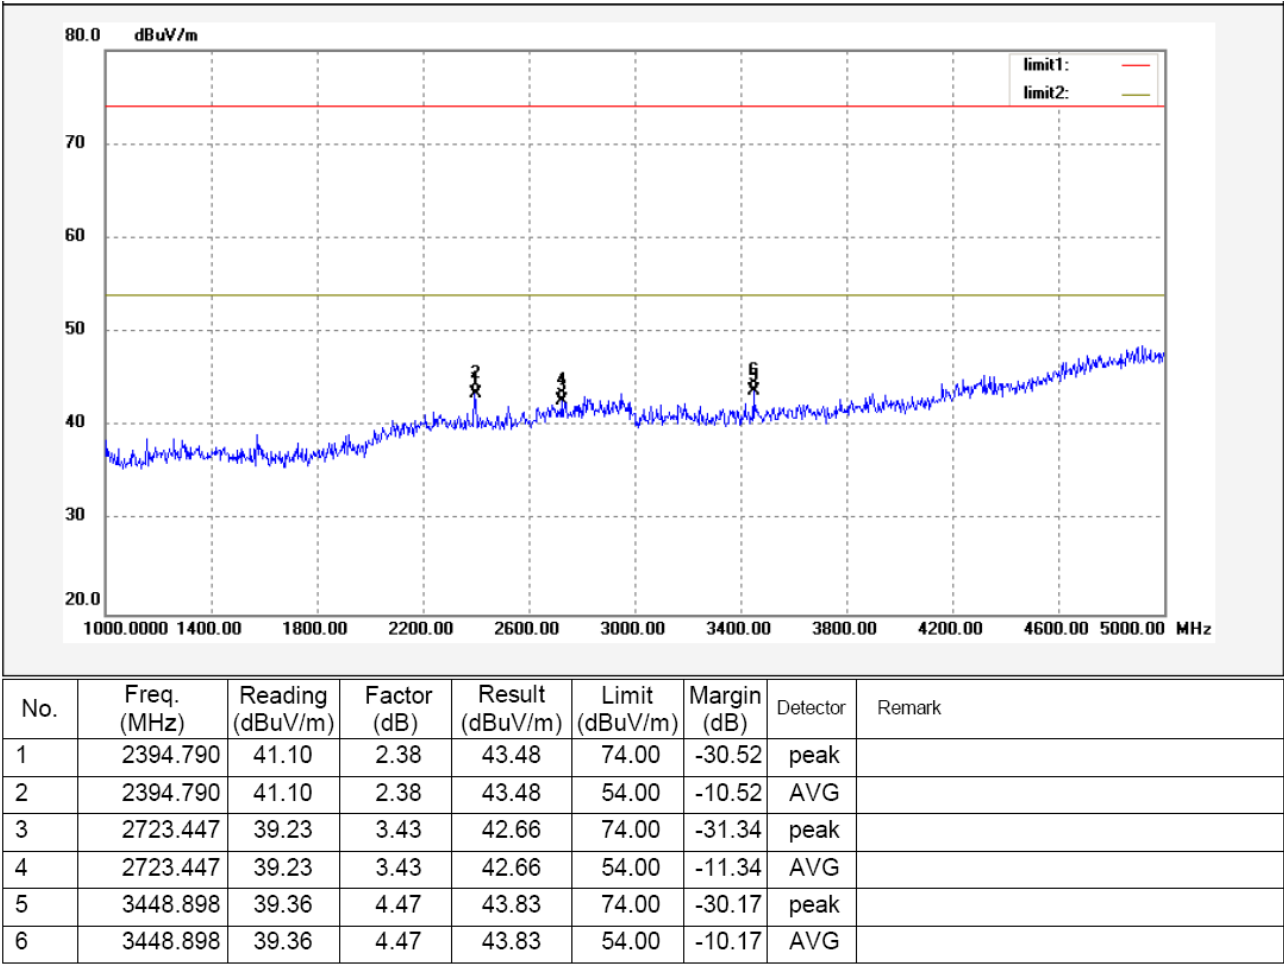

Middle channel


Frequency Range: 30MHz ~ 1000MHz

Antenna polarization: Vertical

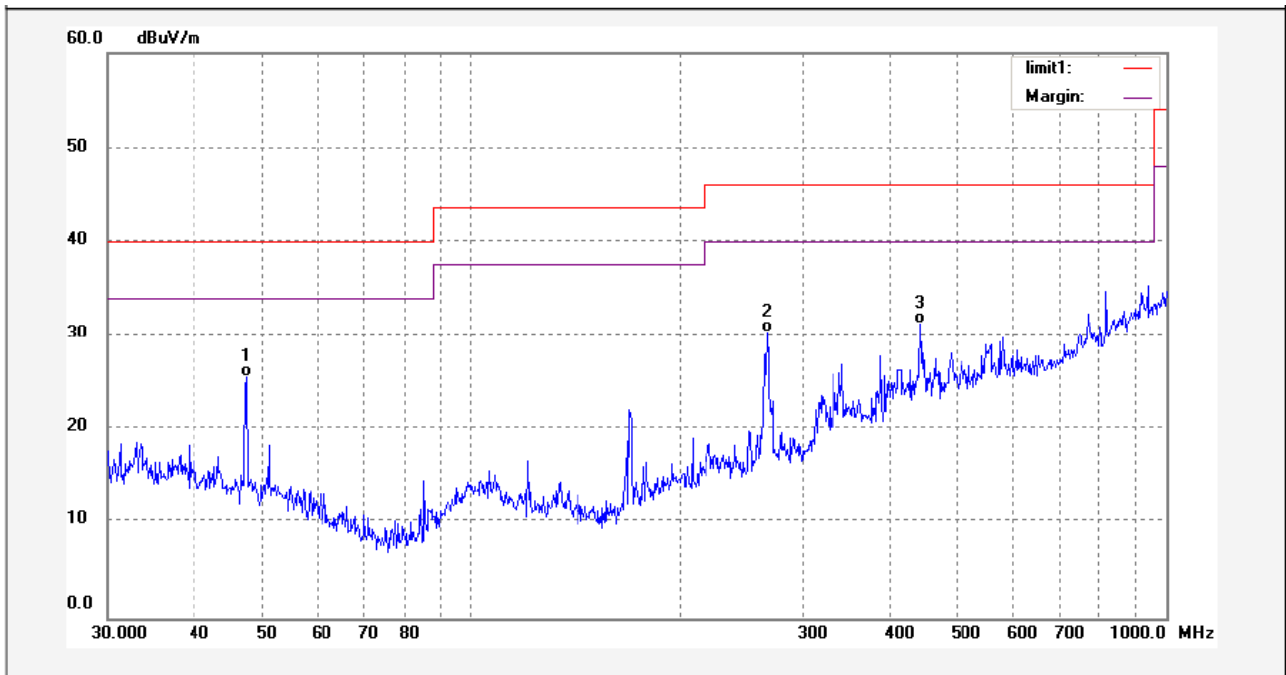


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.5354	10.94	14.62	25.56	40.00	-14.44	QP	
2	266.8394	13.84	16.50	30.34	46.00	-15.66	QP	
3	442.5722	11.20	20.07	31.27	46.00	-14.73	QP	

Antenna polarization: Horizontal

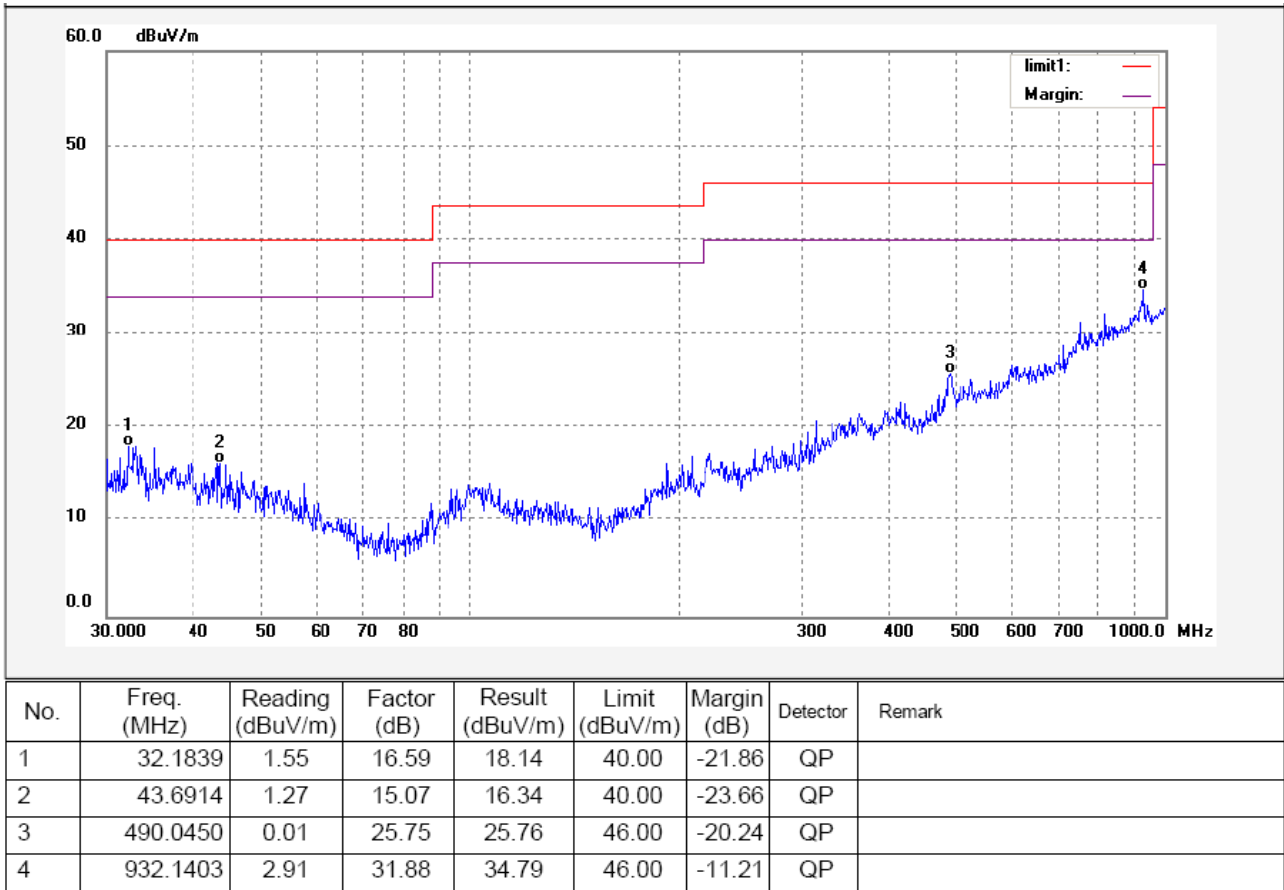


Frequency Range: 1GHz ~ 5GHz

Antenna polarization: Vertical

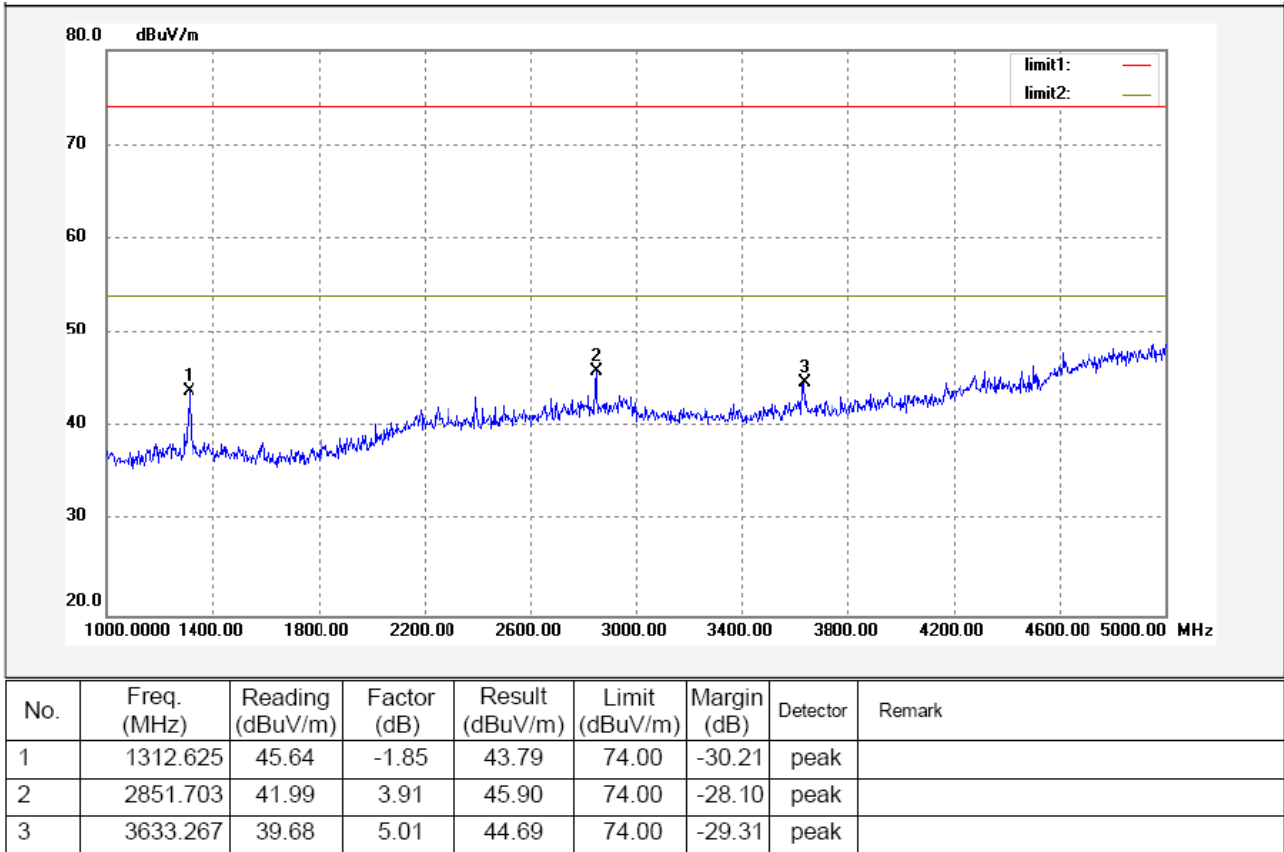


Antenna polarization: Horizontal

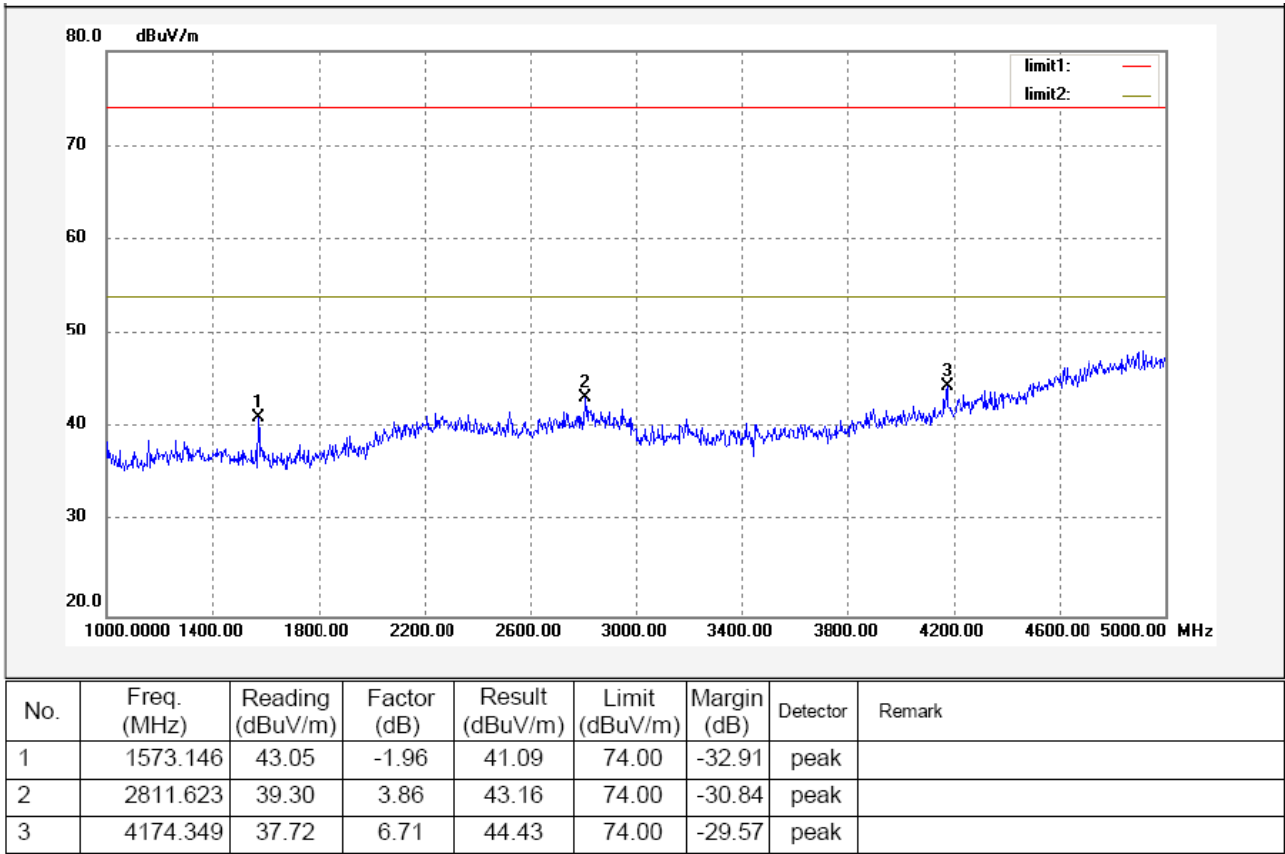


High channel

Frequency Range: 30MHz ~ 1000MHz


Antenna polarization: Vertical

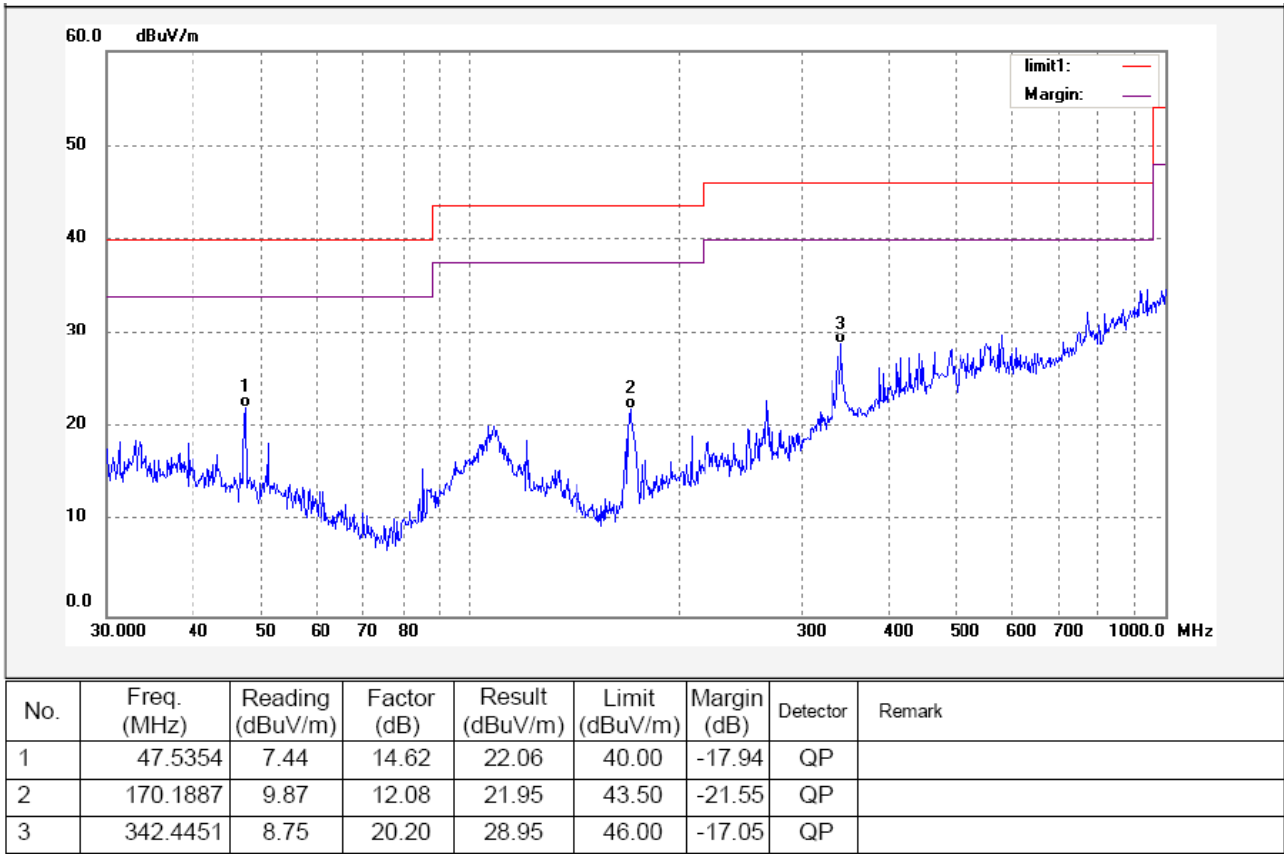


Antenna polarization: Horizontal

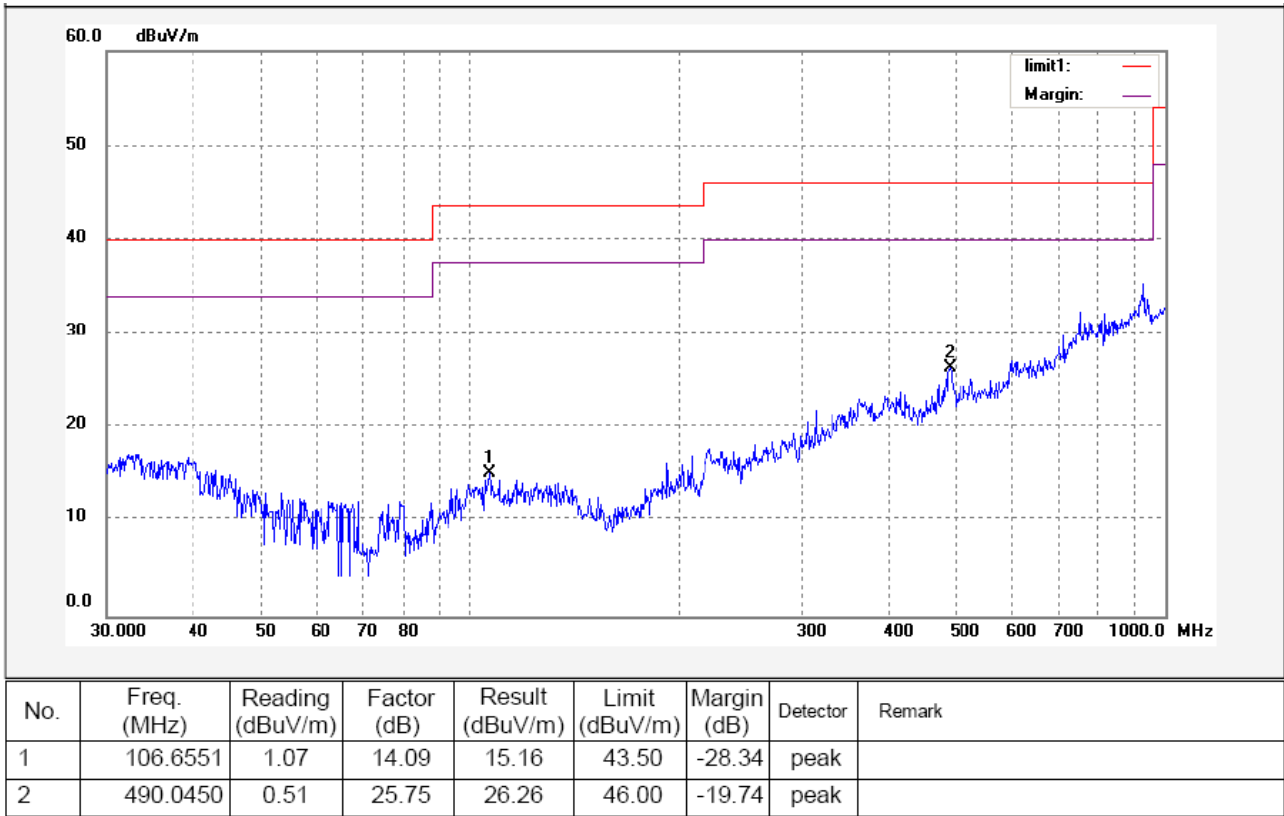

Frequency Range: 1GHz ~ 5GHz
Antenna polarization: Vertical

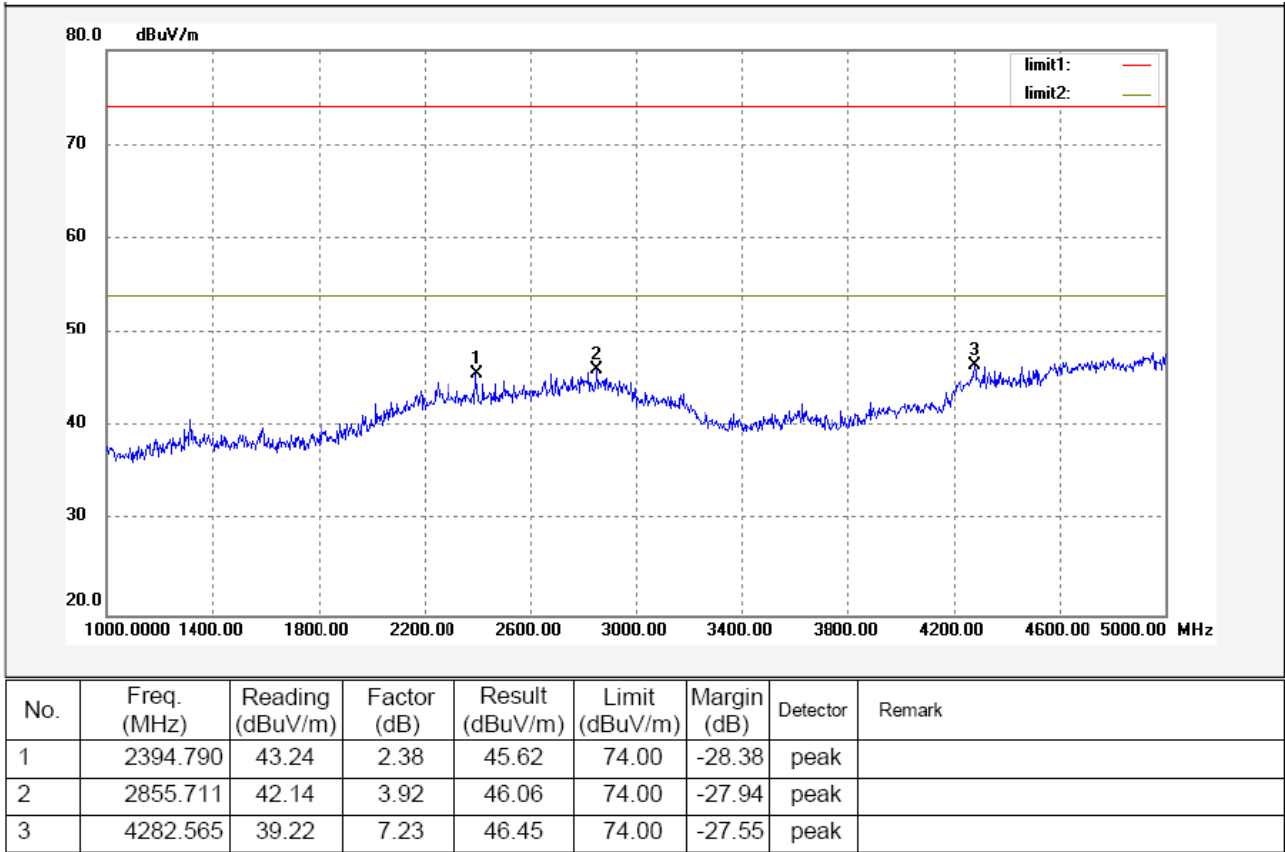


Antenna polarization: Horizontal

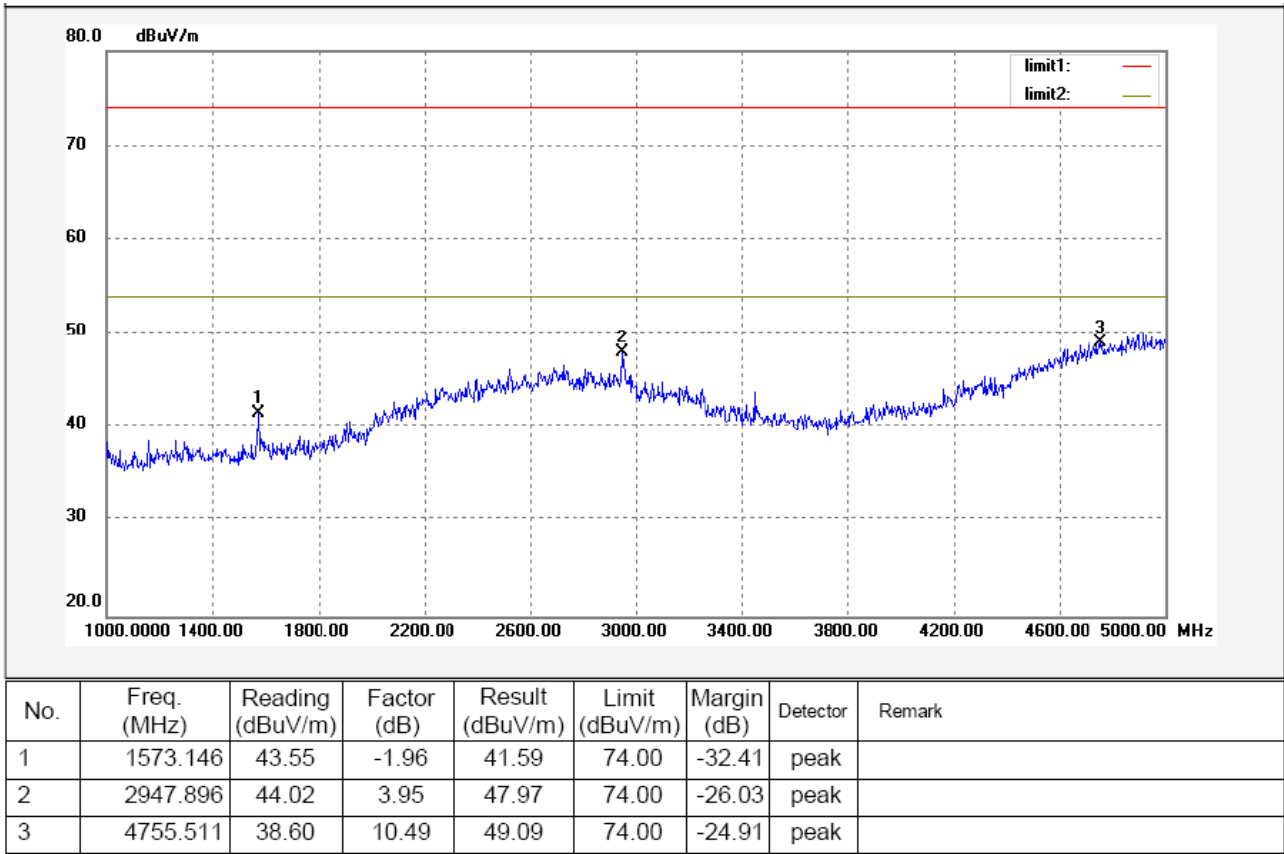


6.2.7 Photograph – Radiation Emission Test Setup

Below 1GHz

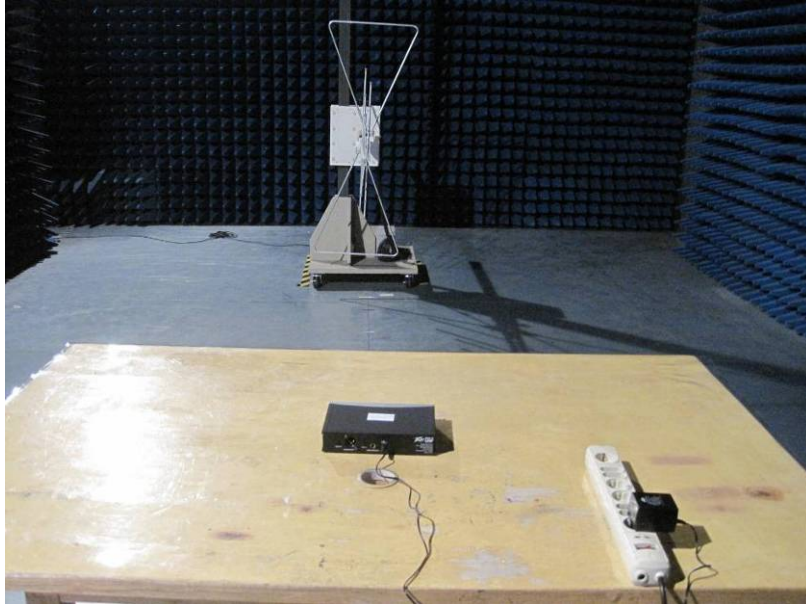

Above 1GHz

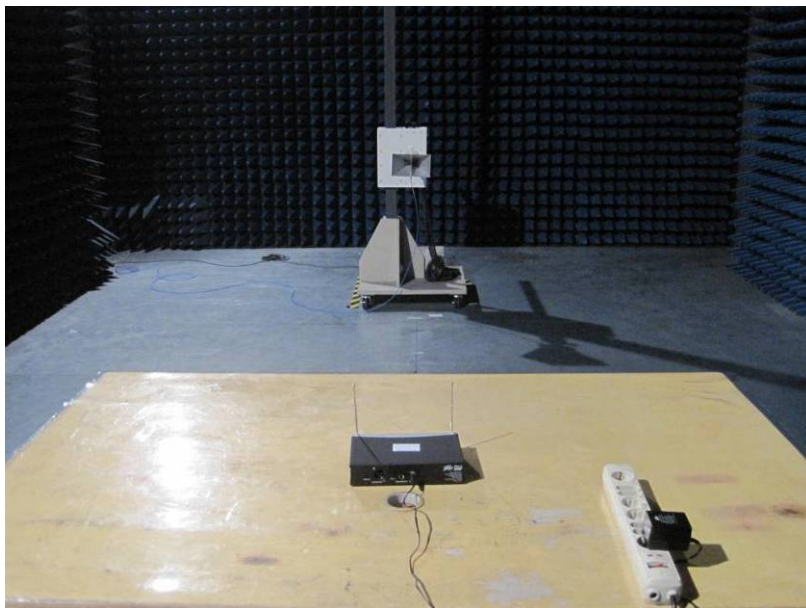


7 Photographs - Constructional Details

7.1 Product View




7.2 EUT – Front View

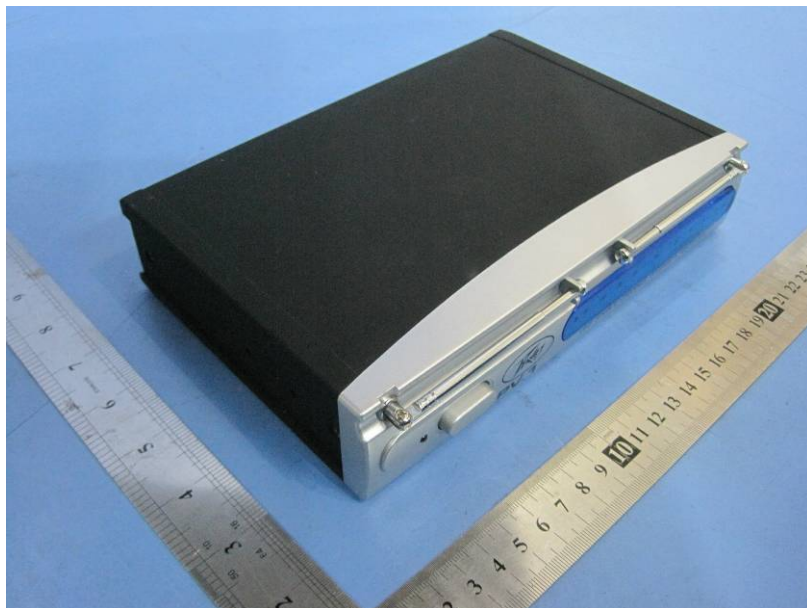

7.3 EUT – Back View




7.4 EUT – Open View

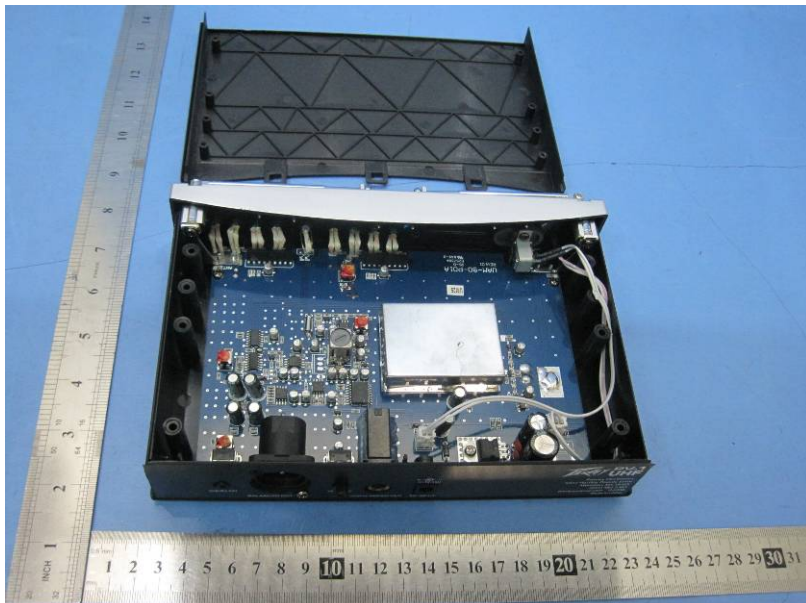


WALTEK SERVICES

Reference No.: WT11073614-E-E-F

7.5 PCB – Front View

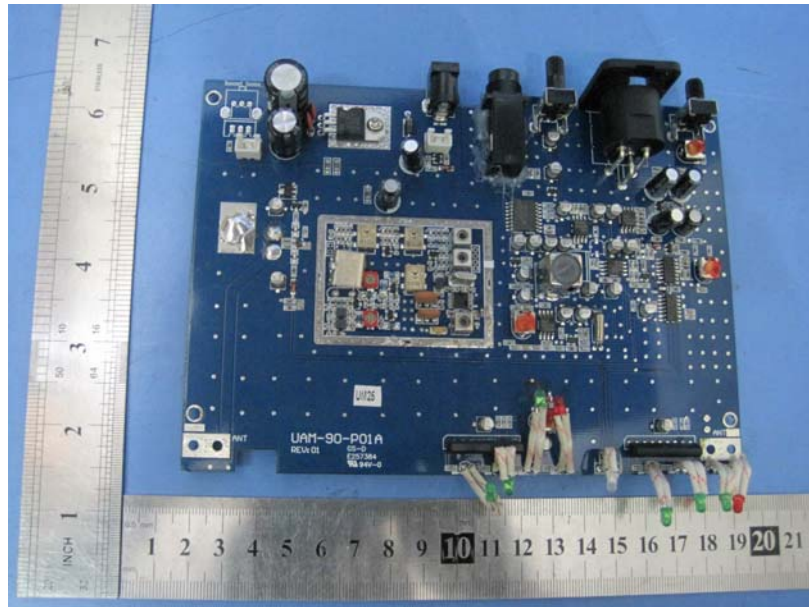

7.6 PCB – Back View

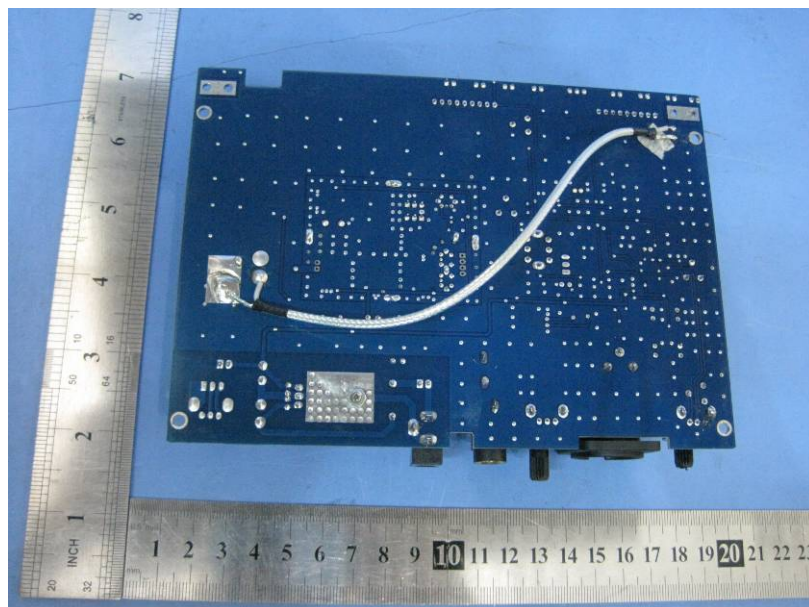

8 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

