amped wireless

Model: APA2600M

Designed in the USA by Amped Wireless. Assembled in China.

SSID (5GHz): Amped AthenaAP 5.0

Security Key WPA/WPAZ; wireless

ATHENA-AP - High Power AC2600 Wi-Fi Access Point with MU-MIMO

5/N:

MAC (2,4GHz)

MAC (5GHz):

WPS Pin:

Factory Default Settings:

To reset to factory default settings, hold down the reset button for 10 seconds.

Login Settings

Web Menu: http://setup.ampedwireless.com

IP Address: 192,168,80,240

Wi-Fi Settings

SSID (2.4GHz): Amped_AthenaAP_2.4

Security Key WPA/WPA2; wireless

Power Rating: DC 12V, 3.5A

LED INDICATORS


For product support, installation guides, software updates and frequently asked questions, please visit: http://www.ampedwireless.com/support/

This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.





FCC ID: ZTT-APA2600M IC: 10233A-APA2600M CAN ICES-3(B) / NM8-3(B)

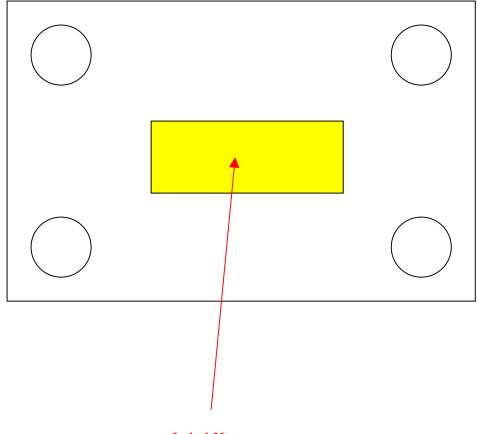

Label Here