


ITEM NO.	CHANGE

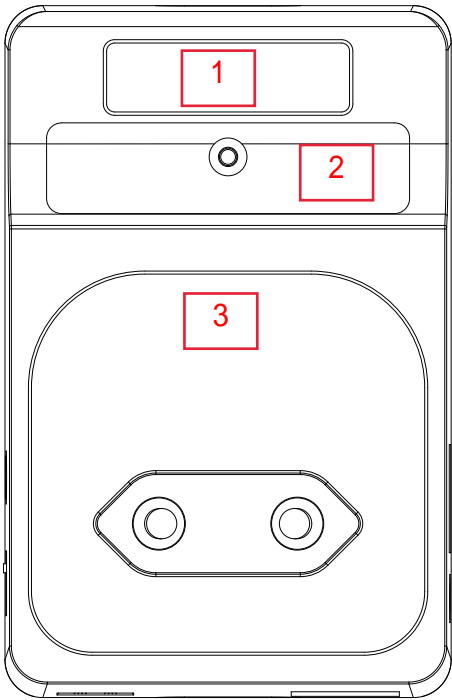

厚度：0.2mm

DIMENSIONAL TOLERANCES	●								UNIT	mm	REV.	EDIMAX 訊舟科技股份有限公司			
	M1	M2	S1	S2	P1	P2	C		MATERIAL						
0-6	0.05	0.10	0.15	0.20	0.05	0.10	0.5		FINISH		 THIRD ANGLE PROJECTION SIZE A4	DRAWN		MODEL NO.	
6-30	0.10	0.20	0.15	0.25	0.10	0.15	1.0		SCALE	1:1		DESIGNED			
30-80	0.15	0.25	0.20	0.30	0.20	0.40	2.0		DATE			CHECKED		PART NAME	
80-180	0.15	0.30	0.25	0.45	0.40	0.80	3.0		SHEET			APPROVED		PART NO.	
180-315	0.20	0.50	0.40	0.60	0.60	1.20	3.0								
ANGULAR	0.25	0.25	0.25	0.25	0.25	0.25	0.25								

1

MAC (2.4GHz): FF:FF:FF:FF:FF:FF

MAC (5GHz): FF:FF:FF:FF:FF:FF

WPS Pin: 12345678

2

amped|wireless **AC750 Plug-In
Wi-Fi Range Extender****Model: B750EX**Designed In the USA by Amped Wireless.
Assembled In China.**Login Settings**Web Menu: <http://setup.ampedwireless.com>

IP Address: 192.168.1.240

Wi-Fi Settings

2.4GHz SSID: Amped_B750EX_2.4

5GHz SSID: Amped_B750EX_5.0

Factory Default Settings

Hold down Reset button for 10 seconds.

3

S/N:



KAB5USWUFU2EKECUWRU5

Indoor Use Only

Input: 100-240V~50-60Hz, 0.16A

FCC ID: ZTT-B750EX
IC: 10233A-B750EX
CAN ICES-3(B) / NMB-3(B)For product support, installation guides, software updates and FAQs,
please visit: www.ampedwireless.com/support

This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.