

FCC Test Report

FCC ID : ZTT-REA20V2

Equipment : High Power AC1200 Wi-Fi Range Extender

Model No. : REA20v2

Brand Name : Amped Wireless

Applicant : Amped Wireless

Address : 13089 Peyton Dr. #C307 Chino Hills, California

91709 United State

Standard : 47 CFR FCC Part 15.407

Received Date : Mar. 06, 2015

Tested Date : Mar. 26 ~ Apr. 10, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac-MRA

Testing Laboratory

Report No.: FR530604-02AN Report Version: Rev. 01 Page: 1 of 73



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	
1.4	The Equipment List	10
1.5	Testing Applied Standards	11
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	
3	TRANSMITTER TEST RESULTS	14
3.1	Conducted Emissions	14
3.2	Emission Bandwidth	19
3.3	RF Output Power	22
3.4	Peak Power Spectral Density	24
3.5	Transmitter Radiated and Band Edge Emissions	
3.6	Frequency Stability	71
4	TEST LABORATORY INFORMATION	73



Release Record

Report No.	Version	Description	Issued Date
FR530604-02AN	Rev. 01	Initial issue	Apr. 17, 2015

Report No.: FR530604-02AN Page: 3 of 73



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.150MHz 64.49 (Margin -1.51dB) - QP	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5715.00MHz 67.98 (Margin -0.22dB) - PK	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5150-5250MHz: 22.54 5725-5850MHz: 20.21	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR530604-02AN Page: 4 of 73



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250	а	5180-5240	36-48 [4]	2	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	2	MCS 0-15
5150-5250	n (HT40)	5190-5230	38-46 [2]	2	MCS 0-15
5150-5250	ac (VHT20)	5180-5240	36-48 [4]	2	MCS 0-9
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	2	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	2	MCS 0-9

Note 1: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{⊤x})	Data Rate / MCS	
5725-5850	а	5745-5825	149-165 [5]	2	6-54 Mbps	
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	MCS 0-15	
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	MCS 0-15	
5725-5850	ac (VHT20)	5745-5825	149-165 [5]	2	MCS 0-9	
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	2	MCS 0-9	
5725-5850	ac (VHT80)	5775	155 [1]	2	MCS 0-9	

Note 1: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

1.1.2 Antenna Details

Ant No	Type Connector		Antenna Gain (dBi)		
Ant. No.	Туре	Connector	2400~2483.5MHz	5150~5250 MHz	5725~5850 MHz
1	Dipole	R-SMA	2	3	3

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from AC adapter
-------------------	-----------------------

Report No.: FR530604-02AN Page: 5 of 73



1.1.4 Accessories

	Accessories				
No.	Equipment	Description			
		Brand Name: ATW			
		Model Name: ATW-1225US			
1	AC Adapter 1	Power Rating: I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12Vdc, 2.5A			
		Power Line: 1.73m non-shielded cable w/o core			
		Brand Name: ATW			
	AC Adapter 2	Model Name: ATW-1215AUS			
2		Power Rating: I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12Vdc, 1.5A			
		Power Line: 1.73m non-shielded cable w/o core			

1.1.5 Channel List

For Frequency band 5150-5250 MHz					
802.11 a / H	HT20 / VHT20	HT40 /	VHT40		
Channel	Frequency(MHz)	Channel	Frequency(MHz)		
36	5180	38	5190		
40	5200	46	5230		
44	5220	VH	Γ 80		
48	5240	42	5210		

For Frequency band 5725~5850 MHz				
802.11 a / H	802.11 a / HT20 / VHT20		VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	
149	5745	151	5755	
153	5765	159	5795	
157	5785	VH	T80	
161	5805	155	5775	
165	5825			

Report No.: FR530604-02AN Page: 6 of 73



1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI, ver. 2.3			
	Mode	Duty cycle (%)	Duty factor (dB)	
	11a	98.26%	0.08	
Duty Cycle and Duty Factor	VHT20	98.15%	0.08	
	VHT40	94.23%	0.26	
	VHT80	89.05%	0.50	

1.1.7 Power Setting

	For Frequency band 5150-5250 MHz					
Modulation Mode	Test Frequency (MHz)	Power Set				
11a	5180	19				
11a	5200	19.5				
11a	5240	18.5				
HT20	5180	19				
HT20	5200	19.5				
HT20	5240	19				
HT40	5190	14.5				
HT40	5230	20				
VHT20	5180	19				
VHT20	5200	19.5				
VHT20	5240	19				
VHT40	5190	14.5				
VHT40	5230	20				
VHT80	5210	13				

Report No.: FR530604-02AN Page: 7 of 73



For Frequency band 5725~5850 MHz							
Modulation Mode	Test Frequency (MHz)	Power Set					
11a	5745	22.5					
11a	5785	22.5					
11a	5825	22.5					
HT20	5745	22.5					
HT20	5785	22.5					
HT20	5825	22.5					
HT40	5755	22.00					
HT40	5795	23.50					
VHT20	5745	22.5					
VHT20	5785	22.5					
VHT20	5825	22.5					
VHT40	5755	22.00					
VHT40	5795	23.50					
VHT80	5775	19.00					


Report No.: FR530604-02AN Page: 8 of 73



1.2 Local Support Equipment List

	Support Equipment List								
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)				
1	Notebook	DELL	Latitude E5420	DoC	RJ45, 10m non-shielded w/o core.				

1.3 Test Setup Chart

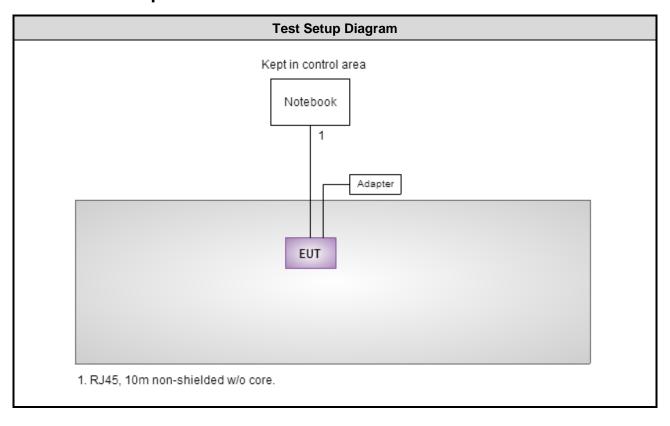

Report No.: FR530604-02AN Page: 9 of 73



1.4 The Equipment List

Test Item	Conducted Emission	Conducted Emission									
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)									
Instrument	Manufacturer	Calibration Until									
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015						
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015						
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015						
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015						
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015						
Measurement Software	AUDIX	e3	6.120210k	NA	NA						
Note: Calibration Interval of instruments listed above is one year.											

Test Item	Radiated Emission									
Test Site	966 chamber 2 / (03C	966 chamber 2 / (03CH02-WS)								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until					
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015					
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016					
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 16, 2014	Oct. 15, 2015					
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 14, 2014	Oct. 13, 2015					
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015					
Loop Antenna	Loop Antenna R&S		11900	Nov. 10, 2014	Nov. 09, 2015					
Preamplifier	Burgeon	BPA-530	100218	Nov. 10, 2014	Nov. 09, 2015					
Preamplifier	Agilent	83017A	MY39501309	Sep. 29, 2014	Sep. 28, 2015					
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015					
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015					
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 16, 2014	Dec. 15, 2015					
Measurement Software	AUDIX	e3	6.120210g	NA	NA					
Note: Calibration Inter	val of instruments listed	d above is one year.								

Test Item	RF Conducted	RF Conducted									
Test Site	(TH01-WS)										
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until						
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016						
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 03, 2014	Dec. 02, 2015						
Power Meter	Anritsu	ML2495A	1241002	Sep. 29, 2014	Sep. 28, 2015						
Power Sensor	Anritsu	MA2411B	1207366	Sep. 29, 2014	Sep. 28, 2015						
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA						
Note: Calibration Interval of instruments listed above is one year.											

Report No.: FR530604-02AN Page: 10 of 73



1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 789033 D02 General UNII Test Procedures New Rules v01

FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty							
Parameters	Uncertainty						
Bandwidth	±34.134 Hz						
Conducted power	±0.808 dB						
Frequency error	±34.134 Hz						
Power density	±0.463 dB						
Conducted emission	±2.670 dB						
AC conducted emission	±2.92 dB						
Radiated emission ≤ 1GHz	±3.62 dB						
Radiated emission > 1GHz	±5.6 dB						
Time	±0.1%						
Temperature	±0.6 °C						

Report No.: FR530604-02AN Page: 11 of 73



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	19°C / 66%	Kevin Ma
Radiated Emissions	03CH02-WS	23-25°C / 65-68%	Aska Huang Lance Xiao Brad Wu
RF Conducted	TH01-WS	22°C / 63%	Felix Sung

FCC site registration No.: 657002IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

	For Frequency band 5150-5250 MHz									
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration						
Conducted Emissions	VHT20	5200	MCS 0							
Radiated Emissions ≤1GHz	VHT20	5200	MCS 0							
	11a	5180 / 5200 / 5240	6 Mbps							
	HT20	5180 / 5200 / 5240	MCS 0							
RF Output Power	HT40	5190 / 5230	MCS 0							
Tri Odiput i owei	VHT20	5180 / 5200 / 5240	MCS 0							
	VHT40	5190 / 5230	MCS 0							
	VHT80	5210	MCS 0							
	11a	5180 / 5200 / 5240	6 Mbps							
Radiated Emissions >1GHz	VHT20	5180 / 5200 / 5240	MCS 0							
Emission Bandwidth Peak Power Spectral Density	VHT40	5190 / 5230	MCS 0							
Total Tomor Opposition Donoity	VHT80	5210	MCS 0							
Frequency Stability	Un-modulation	5200								

NOTE:

Report No.: FR530604-02AN Page: 12 of 73

^{1. 2} AC adapters had been covered during pretest. The worst model is ATW-1225US

^{2.} The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.



	For Freque	ncy band 5725-5850 MHz		
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5795	MCS 0	
Radiated Emissions ≤1GHz	VHT40	5795	MCS 0	
	11a	5745 / 5785 / 5825	6 Mbps	
	HT20	5745 / 5785 / 5825	MCS 0	
RF Output Power	HT40	5755 / 5795	MCS 0	
Ni Odiput i Owei	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Radiated Emissions >1GHz	11a	5745 / 5785 / 5825	6 Mbps	
Emission Bandwidth	VHT20	5745 / 5785 / 5825	MCS 0	
6dB bandwidth	VHT40	5755 / 5795	MCS 0	
Peak Power Spectral Density	VHT80	5775	MCS 0	
Frequency Stability	Un-modulation	5785		

NOTE:

- 1. 2 AC adapters had been covered during pretest. The worst model is ATW-1225US
- 2. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

Report No.: FR530604-02AN Page: 13 of 73



3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit								
Frequency Emission (MHz)	quency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *						
0.5-5	56	46						
5-30	60	50						
Note 1: * Decreases with the logarithm of the frequency.								

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup




Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR530604-02AN Page: 14 of 73




3.1.4 Test Result of Conducted Emissions

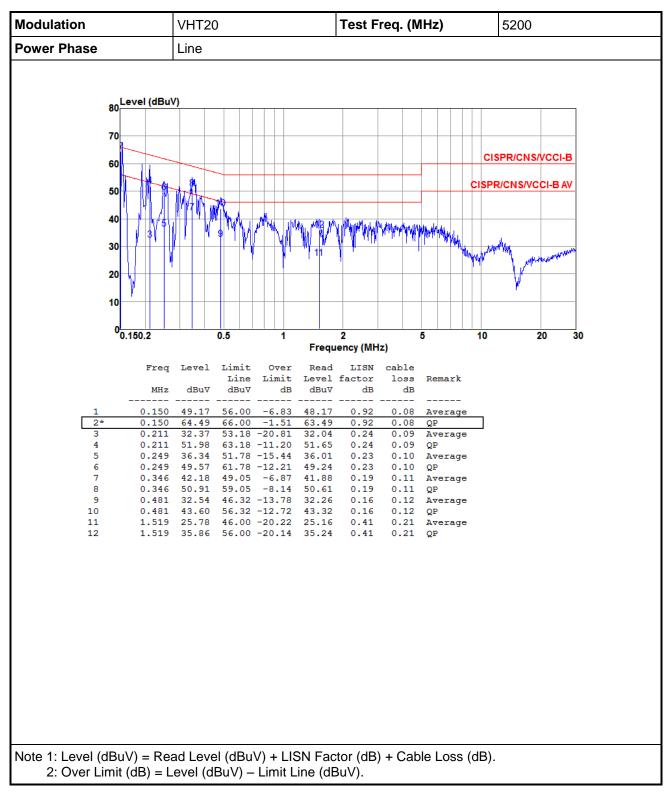


Report No.: FR530604-02AN Page: 15 of 73



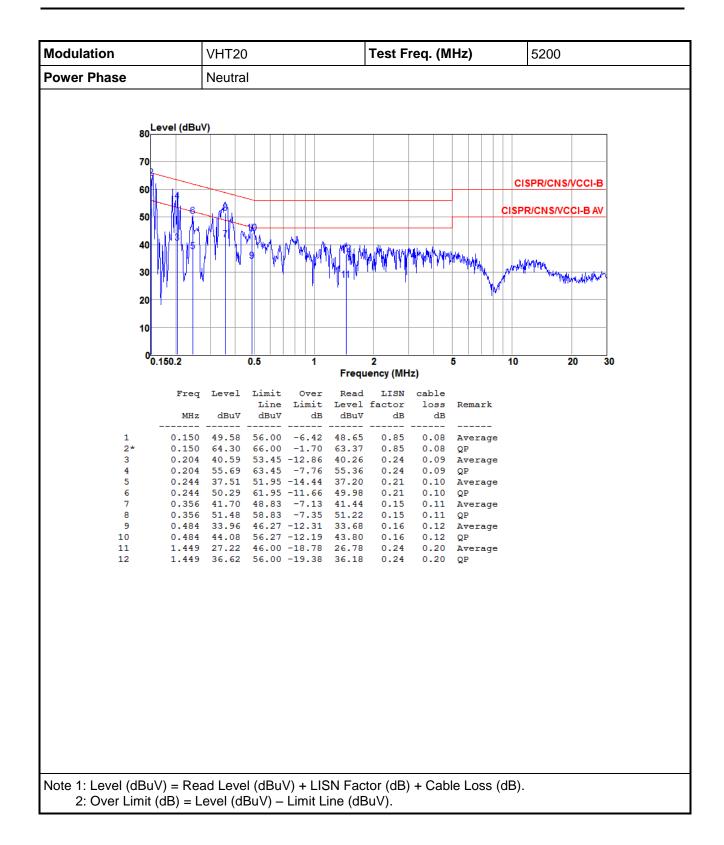


Report No.: FR530604-02AN Page: 16 of 73



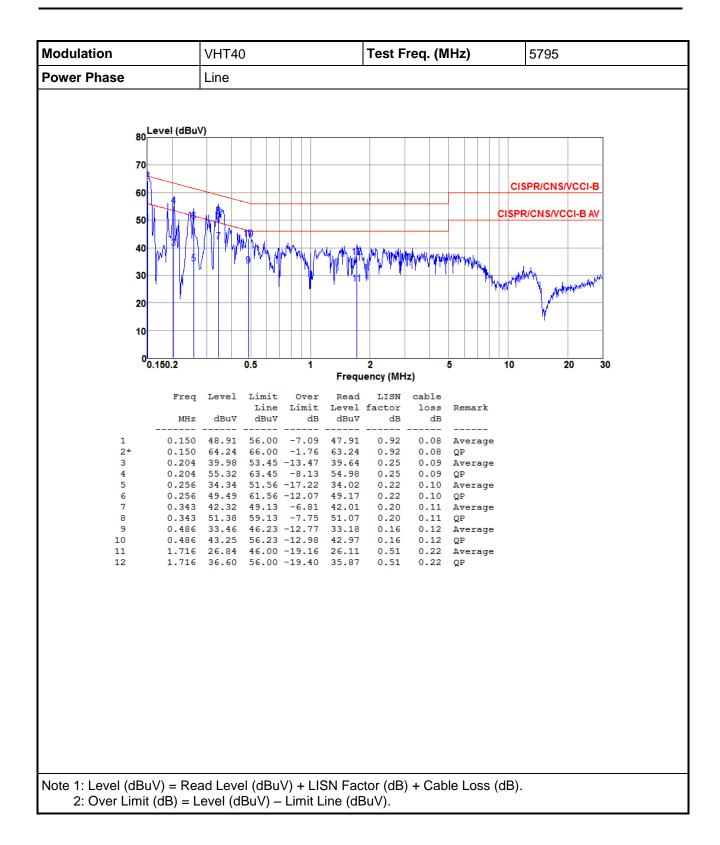

Report No.: FR530604-02AN Page: 17 of 73



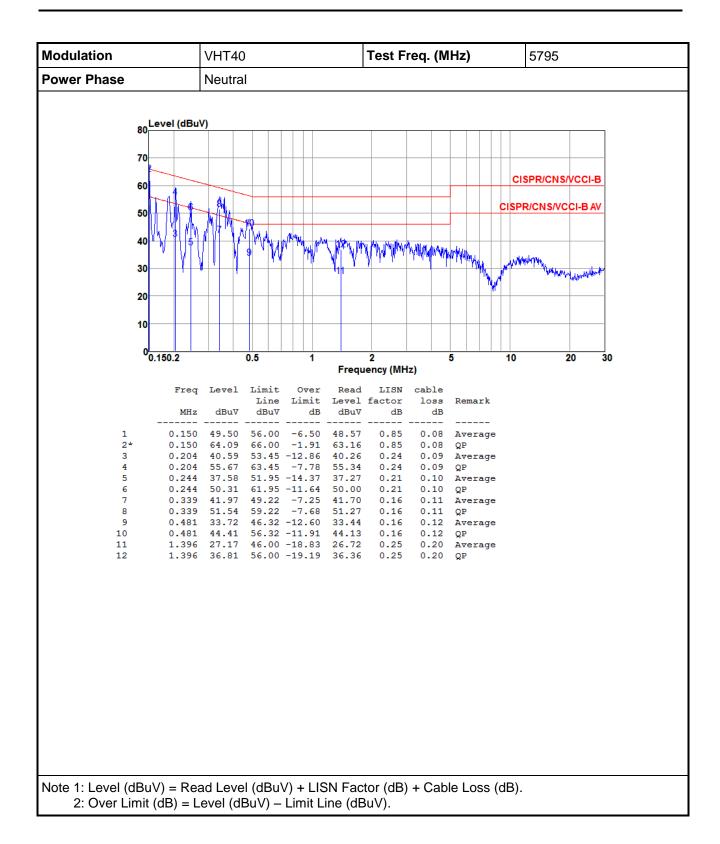

Report No.: FR530604-02AN Page: 18 of 73



3.2 Emission Bandwidth

3.2.1 Limit of Emission bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.2.2 Test Procedures

26dB Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW, Detector = Peak.
- Trace mode = max hold.
- 4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

- 1. Set RBW = 1 % to 5 % of the OBW
- 2. Set VBW ≥ 3 RBW
- 3. Sample detection and single sweep mode shall be used
- 4. Use the 99 % power bandwidth function of the instrument

6dB Bandwidth

- 1. Set RBW = 100kHz, VBW = 300kHz
- 2. Detector = Peak, Trace mode = max hold.
- 3. Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

3.2.3 Test Setup




Report No.: FR530604-02AN Page: 19 of 73



3.2.4 Test Result of Emission Bandwidth


	For Frequency band 5150-5250 MHz										
	Emission Bandwidth										
Mode	l N	Freq.	2	26dB Band	width (MHz)	l.	99% Bandv	vidth (MHz)		
Wode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5180	22.09	21.91			16.76	16.73			
11a	2	5200	23.07	26.03			16.76	16.81			
11a	2	5240	22.96	23.94			16.77	16.76			
VHT20	2	5180	23.13	24.41			17.89	17.99			
VHT20	2	5200	23.07	25.97			17.95	17.97			
VHT20	2	5240	23.13	27.54			17.87	17.98			
VHT40	2	5190	45.45	45.22			36.66	36.82			
VHT40	2	5230	46.03	56.12			36.64	36.88			
VHT80	2	5210	85.33	86.26			76.32	76.20			

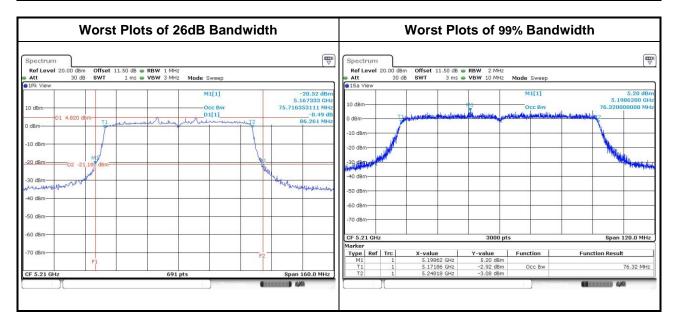

Report No.: FR530604-02AN Page: 20 of 73



	For Frequency band 5725-5850 MHz										
	Emission Bandwidth										
			O	BW Band	width (MH	z)		6dB B	andwidth	(MHz)	
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	6dB BW Limit (MHz)
11a	2	5745	16.72	16.68			16.35	16.35			0.5
11a	2	5785	16.73	16.67			16.35	16.35			0.5
11a	2	5825	16.76	16.69			16.29	16.35			0.5
VHT20	2	5745	17.88	17.84			17.57	17.57			0.5
VHT20	2	5785	17.83	17.86			16.93	17.57			0.5
VHT20	2	5825	17.92	17.84			17.57	17.57			0.5
VHT40	2	5755	36.72	36.68			36.06	36.06			0.5
VHT40	2	5795	36.62	36.76			35.83	36.06			0.5
VHT80	2	5775	76.20	76.56			75.36	76.06			0.5

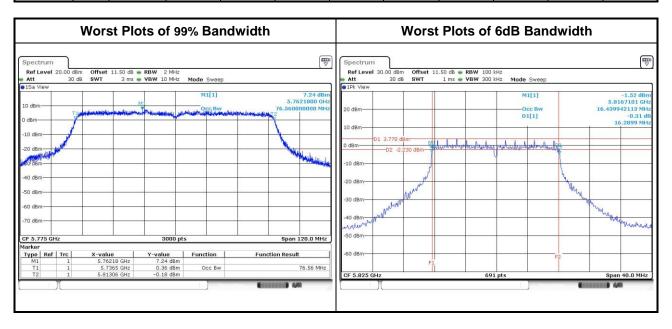

Report No.: FR530604-02AN Page: 21 of 73



3.3 RF Output Power

3.3.1 Limit of RF Output Power

	Frequ	iency band 5150-5250 MHz
Оре	erating Mode	Limit
	Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
	Indoor access point	Conducted Power: 1 W
	Fixed point-to-point access points	Conducted Power: 1 W
	Mobile and portable client devices	Conducted Power: 250 mW

Fred	quency Band (MHz)	Limit
	5250 ~ 5350	250mW or 11dBm+10 log B
	5470 ~ 5725	250mW or 11dBm+10 log B
	5725 ~ 5850	1 W
Note	e: "B" is the 26dB emission bandwidth i	n MHz.

3.3.2 Test Procedures

Method PM-G (Measurement using a gated RF average power meter)

Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.3.3 Test Setup



Report No.: FR530604-02AN Page: 22 of 73



3.3.4 Test Result of Maximum Conducted Output Power

			For Frequ	uency band	5150-5250	MHz			
		F (1411.)	С	onducted I	Power (dBn	Total	Total	Limit	
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Power (mW)	Power (dBm)	(dBm)
11a	2	5180	17.62	19.66			150.279	21.77	30.00
11a	2	5200	18.12	20.29			171.769	22.35	30.00
11a	2	5240	17.16	19.33			137.703	21.39	30.00
HT20	2	5180	17.61	19.72			151.433	21.80	30.00
HT20	2	5200	18.06	20.43			174.381	22.42	30.00
HT20	2	5240	17.55	19.87			153.936	21.87	30.00
HT40	2	5190	12.01	14.36			43.175	16.35	30.00
HT40	2	5230	18.02	20.38			172.531	22.37	30.00
VHT20	2	5180	17.68	19.81			154.333	21.88	30.00
VHT20	2	5200	18.15	20.57			179.338	22.54	30.00
VHT20	2	5240	17.62	19.95			156.665	21.95	30.00
VHT40	2	5190	12.09	14.44			43.978	16.43	30.00
VHT40	2	5230	18.17	20.45			176.532	22.47	30.00
VHT80	2	5210	10.47	12.63			29.466	14.69	30.00

			For Freque	uency band	1 5725-5850	MHz			
			C	onducted I	Power (dBn	Total	Total	Limit	
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Power (mW)	Power (dBm)	(dBm)
11a	2	5745	17.64	16.08			98.627	19.94	30.00
11a	2	5785	16.75	16.46			91.574	19.62	30.00
11a	2	5825	14.53	16.35			71.531	18.54	30.00
HT20	2	5745	17.82	16.03			100.621	20.03	30.00
HT20	2	5785	16.69	16.44			90.721	19.58	30.00
HT20	2	5825	14.52	16.39			71.865	18.57	30.00
HT40	2	5755	16.53	15.14			77.637	18.90	30.00
HT40	2	5795	16.98	17.29			103.468	20.15	30.00
VHT20	2	5745	17.88	16.12			102.302	20.10	30.00
VHT20	2	5785	16.77	16.57			92.928	19.68	30.00
VHT20	2	5825	14.58	16.49			73.273	18.65	30.00
VHT40	2	5755	16.60	15.21			78.898	18.97	30.00
VHT40	2	5795	17.05	17.34			104.899	20.21	30.00
VHT80	2	5775	13.41	12.52			39.793	16.00	30.00

Report No.: FR530604-02AN Page: 23 of 73



3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

	Frequ	iency band 5150-5250 MHz
Оре	erating Mode	Limit
	Outdoor access point	17 dBm / MHz
	Indoor access point	17 dBm / MHz
	Fixed point-to-point access points	17 dBm / MHz
\boxtimes	Mobile and portable client devices	11 dBm / MHz

Free	quency Band (MHz)	Limit
	5250 ~ 5350	11 dBm / MHz
	5470 ~ 5725	11 dBm / MHz
\boxtimes	5725 ~ 5850	30 dBm / 500 kHz

Report No.: FR530604-02AN Page: 24 of 73



3.4.2 Test Procedures

For 5150 ~ 5250 MHz

- Method SA-1 (For 802.11a / 11ac VHT20)
 - 1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
 - 2. Trace average 100 traces.
 - 3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative (For 802.11ac VHT40 / VHT80)
 - 1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
 - 2. Set sweep time ≥ 10 * (number of points in sweep) * (total on/off period of the transmitted signal).
 - 3. Perform a single sweep.
 - 4. Use the peak marker function to determine the maximum amplitude level.
 - 5. Add 10 log(1/x), where x is the duty cycle.

For 5725 ~ 5850 MHz

- Method SA-1 (For 802.11a / 11ac VHT20)
 - 1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
 - 2. Trace average 100 traces.
 - 3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative (For 802.11ac VHT40 / VHT80)
 - 1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
 - 2. Set sweep time ≥ 10 * (number of points in sweep) * (total on/off period of the transmitted signal).
 - 3. Perform a single sweep.
 - 4. Use the peak marker function to determine the maximum amplitude level.
 - 5. Add 10 log(1/x), where x is the duty cycle.

3.4.3 Test Setup



Report No.: FR530604-02AN Page: 25 of 73




3.4.4 Test Result of Peak Power Spectral Density

			For Frequency	band 5150-5250 MF	lz						
Co	ndition			Peak Power Spectral Density (dBm/MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)					
11a	2	5180	8.52	0.00	8.52	16.99					
11a	2	5200	8.82	0.00	8.82	16.99					
11a	2	5240	8.15	0.00	8.15	16.99					
VHT20	2	5180	7.95	0.00	7.95	16.99					
VHT20	2	5200	8.25	0.00	8.25	16.99					
VHT20	2	5240	8.04	0.00	8.04	16.99					
VHT40	2	5190	-1.00	0.26	-0.74	16.99					
VHT40	2	5230	4.98	0.26	5.24	16.99					
VHT80	2	5210	-5.93	0.50	-5.43	16.99					

Note:

- 1. D.F is duty factor.
- 2. Test result is bin-by-bin summing measured value of each TX port
- Directional gain = 3+10* log(2/1) = 6.01 dBi > 6 dBi.
 Limit shall be reduced to 17 dBm (6.01 dBi 6 dBi) = 16.99 dBm.

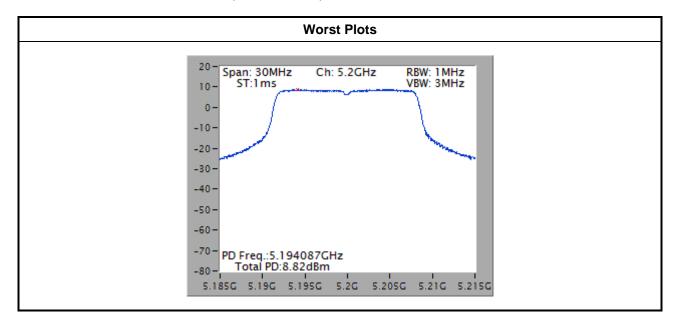


Report No.: FR530604-02AN Page: 26 of 73



			For Frequency	band 5725-5850 MF	lz						
Co	ndition	1	F	Peak Power Spectral Density (dBm/500kHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)					
11a	2	5745	4.58	0.00	4.58	29.99					
11a	2	5785	4.75	0.00	4.75	29.99					
11a	2	5825	4.25	0.00	4.25	29.99					
VHT20	2	5745	4.23	0.00	4.23	29.99					
VHT20	2	5785	4.38	0.00	4.38	29.99					
VHT20	2	5825	3.66	0.00	3.66	29.99					
VHT40	2	5755	0.13	0.26	0.39	29.99					
VHT40	2	5795	1.75	0.26	2.01	29.99					
VHT80	2	5775	-6.24	0.50	-5.74	29.99					

Note:

- 1. D.F is duty factor.
- 2. Test result is bin-by-bin summing measured value of each TX port
- 3. Directional gain = 3+10* log(2/1) = 6.01 dBi > 6 dBi. Limit shall be reduced to 30 dBm - (6.01 dBi - 6 dBi) = 29.99 dBm.

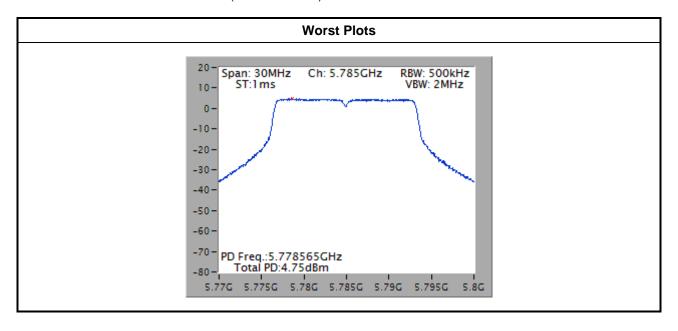

Report No.: FR530604-02AN Page: 27 of 73



3.5 Transmitter Radiated and Band Edge Emissions

3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

	Un-restricted band emissions above 1GHz Limit
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	5.715 5.725 GHz: e.i.r.p17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Report No.: FR530604-02AN Page: 28 of 73



3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR530604-02AN Page: 29 of 73




3.5.3 Test Setup

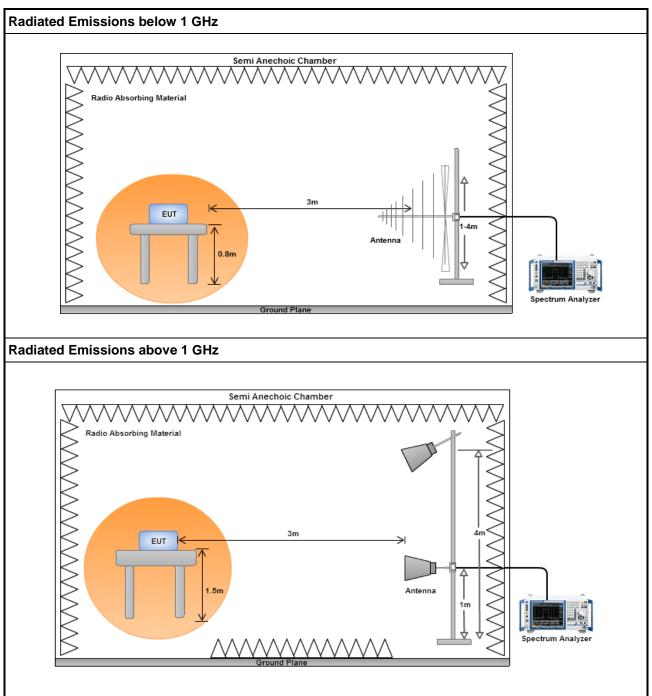

Report No.: FR530604-02AN Page: 30 of 73



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

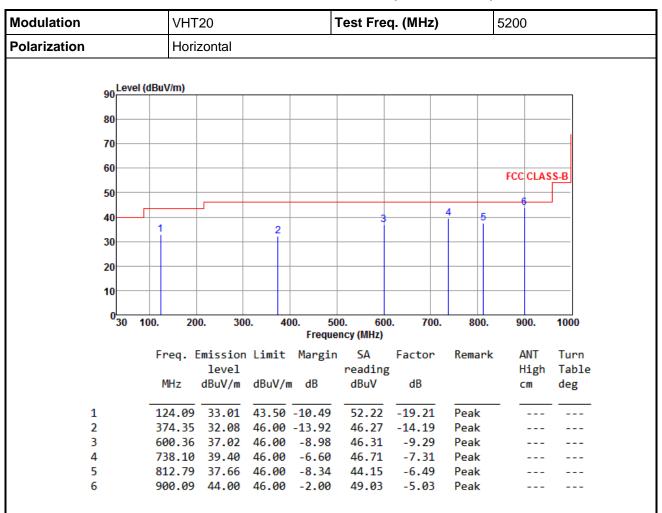

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR530604-02AN Page: 31 of 73



Polarization	Vert					q. (MHz)		5200			
		ical	Vertical								
90 Leve	l (dBuV/m)			T							
80											
00											
70											
60											
								FCC CLAS	SS-B		
50											
40 1			4				5	6			
30	2 3										
30											
20											
10											
030	100. 20	0. 30	0. 4		00. 60	0. 700.	800.	900.	1000		
				Freque	ency (MHz)						
	Freq.		Limit	Margin		Factor	Remark		Turn		
		level	4D-377	- ID	reading			High	Table		
	MHz	dBuV/m	aBuv/	т ав	dBuV	dB		cm	deg		
1	49.40	36.92	40.00	-3.08	53.42	-16.50	Peak				
2	101.78			-11.63	53.50	-21.63	Peak				
3	159.01	32.29	43.50	-11.21	49.15	-16.86	Peak				
4	374.35		46.00		51.85	-14.19	Peak				
5 6	814.73 874.87		46.00 46.00		47.13 45.14	-6.45 -5.45	Peak Peak				

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR530604-02AN Page: 32 of 73



Modulation			VHT40 Test Freq. (MHz) 5795									
Polarization			Hori	zontal		•				•		
	Lev	el (dBu	V/m)									
!	90											
	80											_
	70-											
	70											
(60									FCC	CLASS	R R
	50									100		
		2							5	6		
•	40				3		- 4					
;	30											
:	20											
	10											_
	030	100.	20	0. 30	0. 4	00. 50 Freque	0. 60 ncy (MHz)	0. 700.	800.	90	0.	1000
		F	rea. E	mission	Limit	Margin	SA	Factor	Remark	c Al	NT	Turn
				level		Ü	reading	5		H:	igh	Table
		ı	MHz	dBuV/m	dBuV/	m dB	dBuV	dB		CI	m	deg
1		_	64.55	31.74	40 00	-8 26	49.71	-17.97	Peak			
2					43.50		60.44		QP			
3			75.36			-11.72	48.43		Peak			
4		6	00.27	38.54	46.00	-7.46	47.83	-9.29	Peak			
5			50.42		46.00		47.85		Peak			
6		90	00.24	42.30	46.00	-3.70	47.33	-5.03	QP			

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR530604-02AN Page: 33 of 73



Modulation Polarization		VHT	VHT40				Test Freq. (MHz)			5795		
		Verti	Vertical									
	90 ^L	_evel (dBuV/m)									
	80											
	70											_
	60									FCC	CLAS	S-B
	50											_
	40	1 [_		3			4	5	5 L		
	40											
	30											
	20											
	10											
	0	RO 10	00. 20	0. 300	0. 40	0. 50	0. 600). 700.	800.	or	00.	1000
	•	,,	50. 20	0. 300	0. 40		ncy (MHz)	. 700.	000.	30		1000
			Freq. E	Emission	Limit	Margin	SA	Factor	Remark	. A	NT	Turn
				level		Ü	reading			Н	ligh	Table
			MHz	dBuV/m	dBuV/m	dB	dBuV	dB		C	m	deg
			47.30	70.61	40.00	-0.36	FC 22	46.61	<u> </u>			
	1 2		47.32 125.21		40.00 43.50	-0.36 -6.95		-16.64 -19.08	QP Peak			
				10.17	40.00	-0.55	22.02	-12.00	reak			
	3		375.15		46.00	-5.61		-14.16	Peak			

-7.09

-6.15

48.96

Peak

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

750.38 39.68 46.00 -6.32 46.77

833.35 42.81 46.00 -3.19


Report No.: FR530604-02AN Page: 34 of 73

Report Version: Rev. 01

6



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

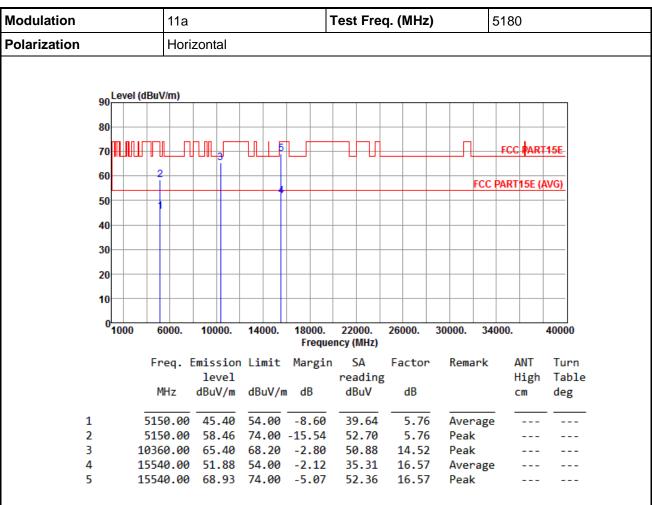


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 35 of 73



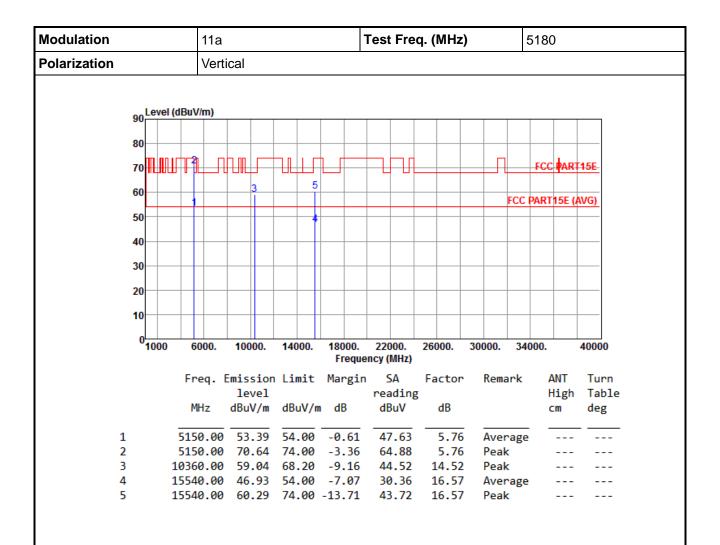


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 36 of 73



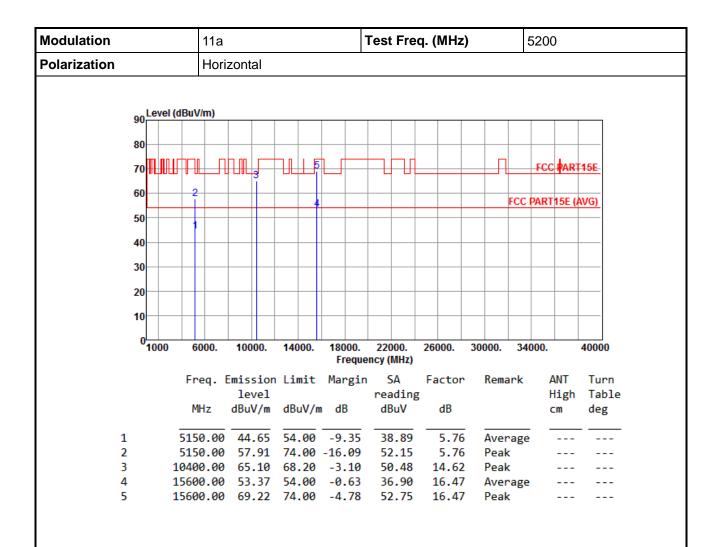


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 37 of 73



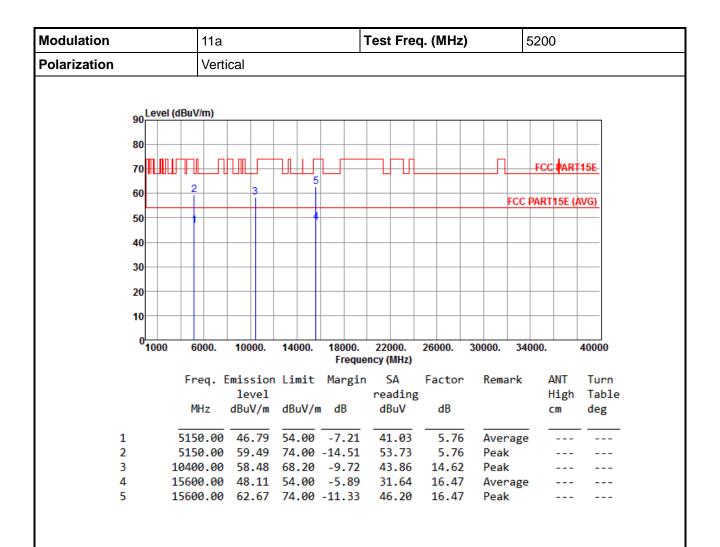


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 38 of 73



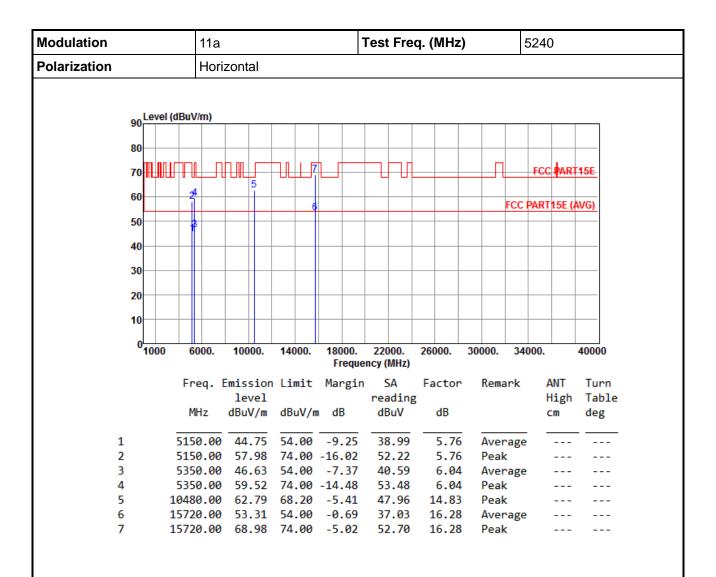


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 39 of 73



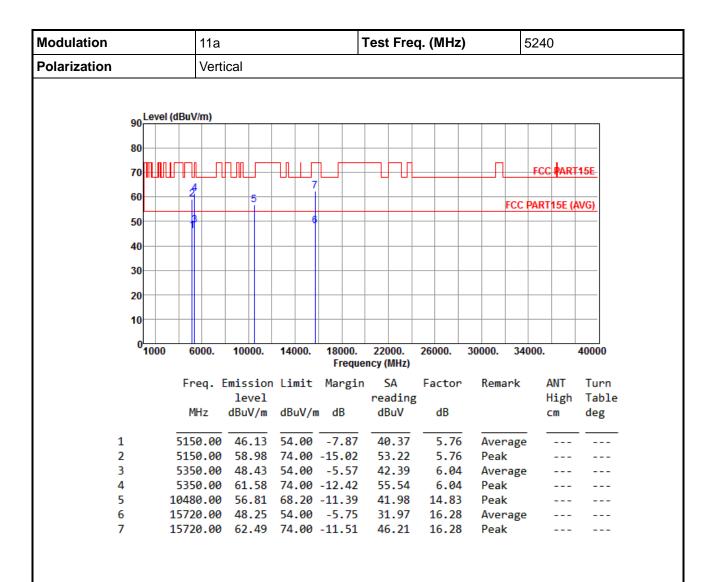


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 40 of 73



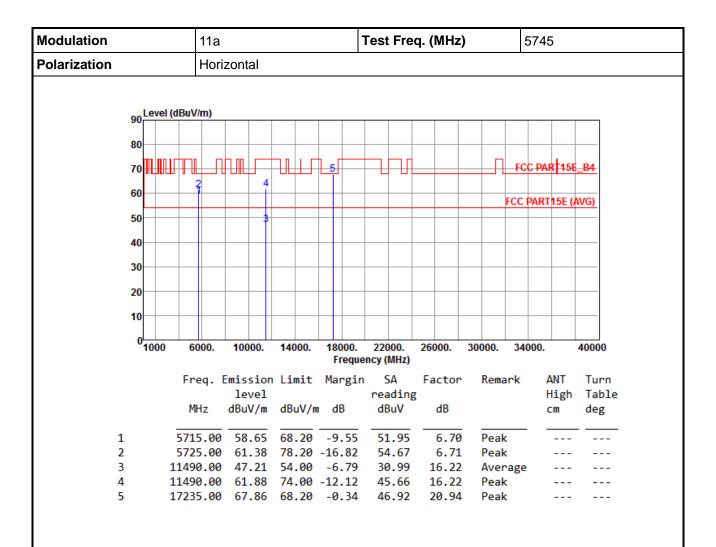


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 41 of 73



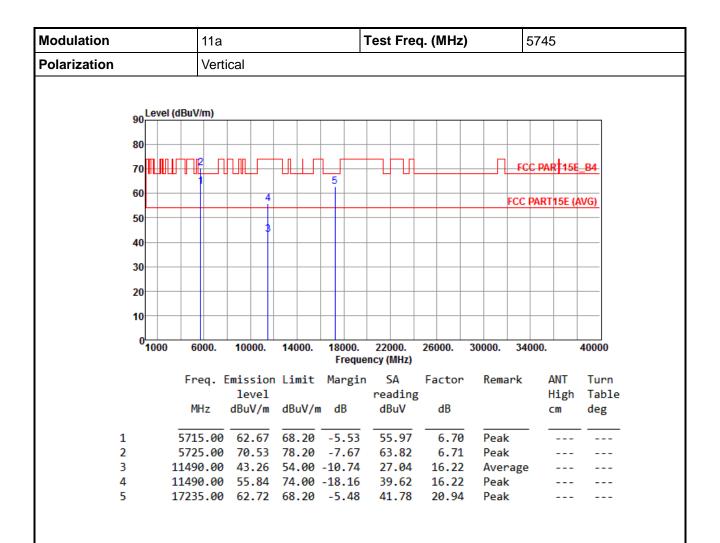


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 42 of 73



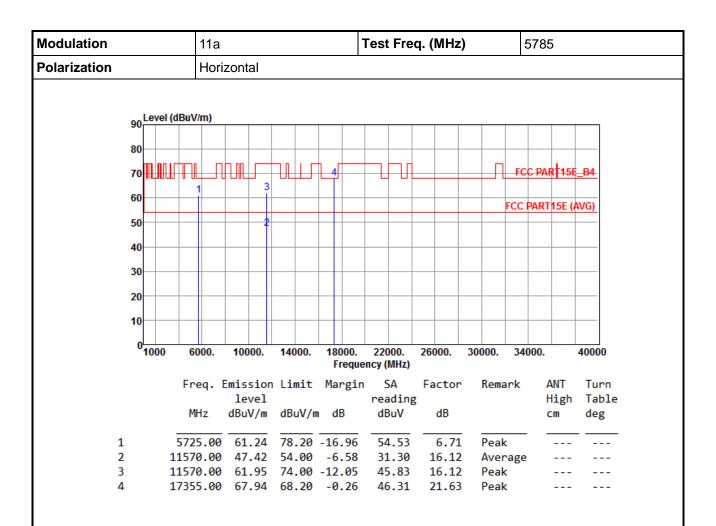


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 43 of 73



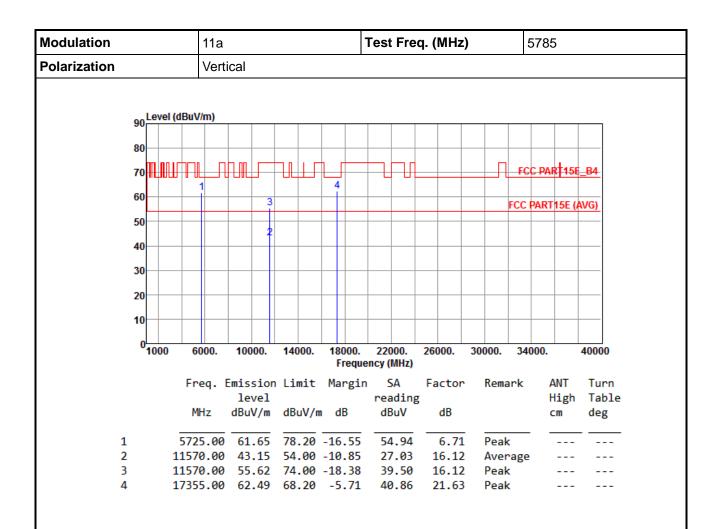


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 44 of 73



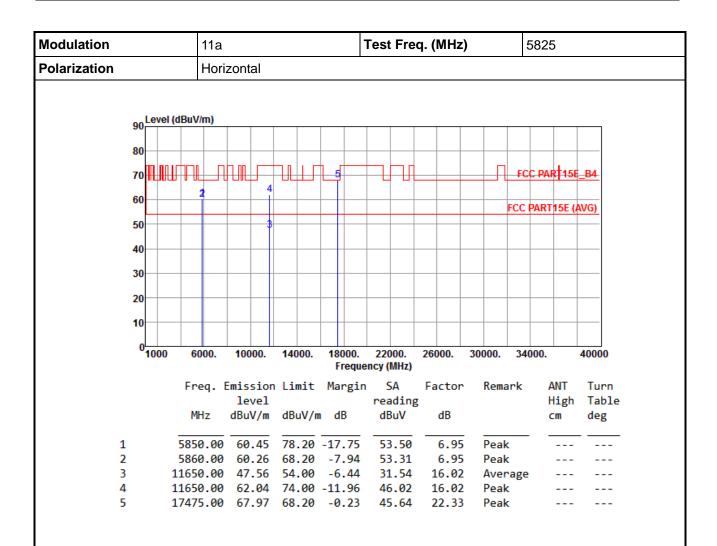


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 45 of 73



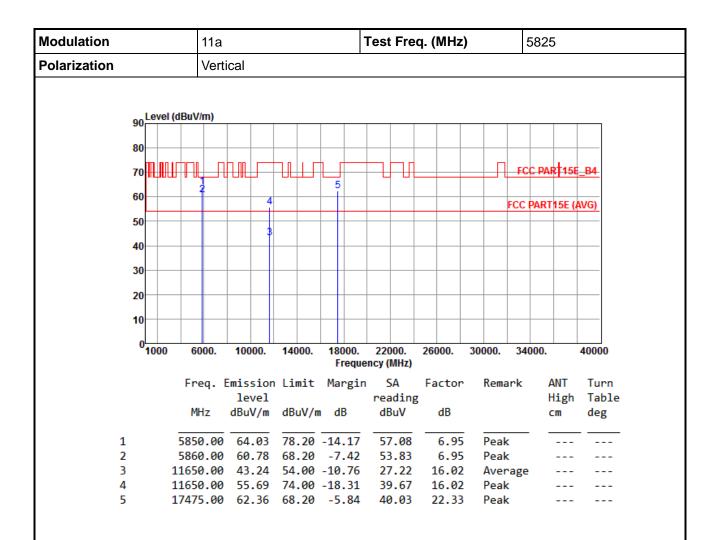


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 46 of 73



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

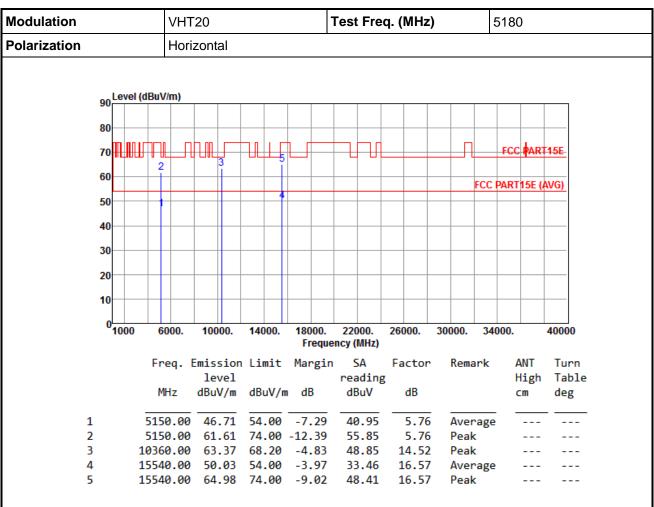

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 47 of 73



Modulation				VHT	20					1	est	Fre	q. (MHz	2)			5180)	
Polarization				Verti	cal												I			
	1	evel	(dBu\	//m)																
	90	-	(aba t																	
	80	+		-																
	70		H	Щп												П		FCC	∳ AR	T15E
			֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓	\top		2		5			٦									
	60		1			Ĭ											FCC	PART	15E (AVG)
	50	+						4												
	40	+	+						_											
	30-																			
	20																			
	10	+																		
	0_	200	Щ		400		4400	\prod	400/		000							200		****
	1	000	6	000.	100	00.	1400	0.	1800 Fre		220 ncy (1		260	000.	300	00.	34	000.		4000
			Fr	eq. E	mis	sion	Limi	it	Mar	gin	S	Δ.	Fa	ctor	.	Rema	ark	1	ANT	Tu
						vel					rea							H	ligh	
			М	Hz	dBu\	V/m	dBu\	//m	dB		dB	υV		dB				(-m	de
	1		515	0.00	53	.40	54.6	90	-0.	50	47	.64	_	5.76	5 7	Aver	age	-		
	2			0.00		.95	74.6		-1.			.19		5.76	5	Peak	ς -			-
	3		1036	0.00	58	.65	68.2	20	-9.	55	44	.13	1	4.52	2	Peak	C			-

15540.00 46.69 54.00 -7.31 30.12 16.57

15540.00 61.32 74.00 -12.68 44.75 16.57

Average

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR530604-02AN Page: 48 of 73

Report Version: Rev. 01

4

5



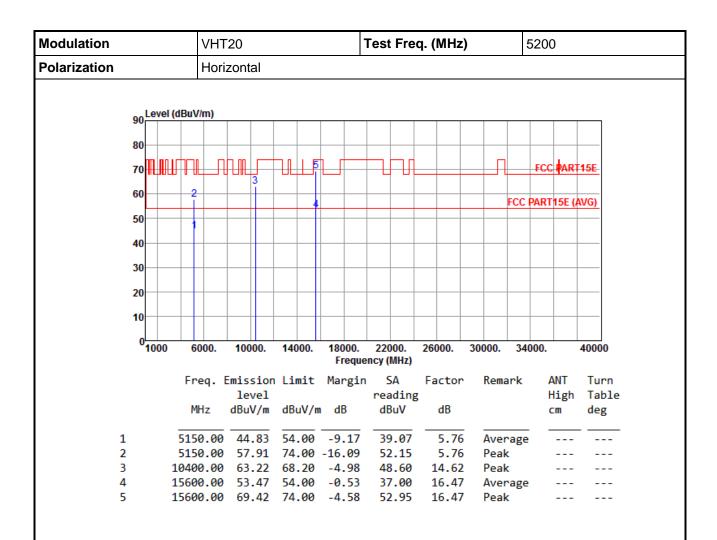


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 49 of 73



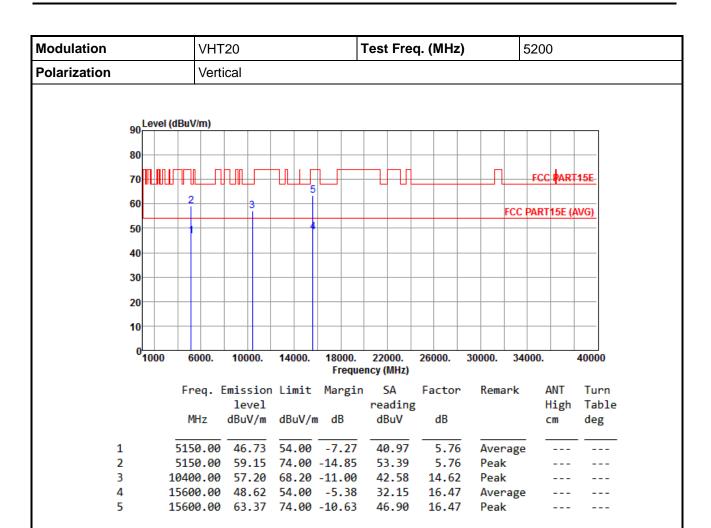


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 50 of 73



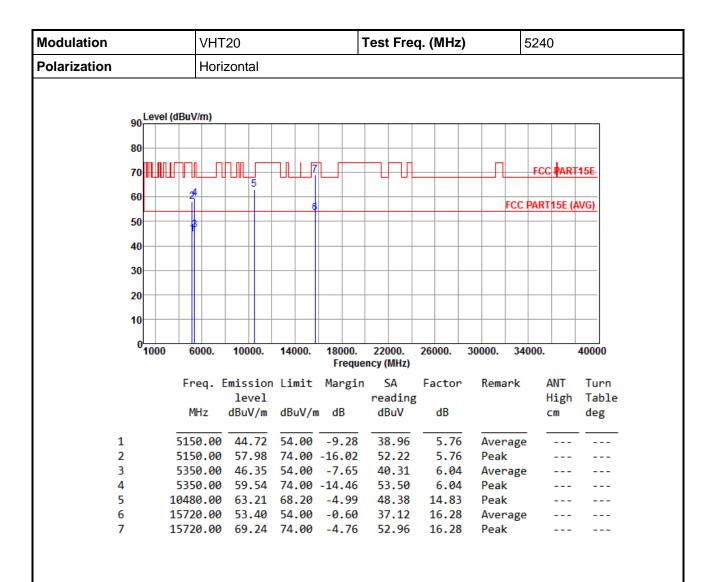


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 51 of 73



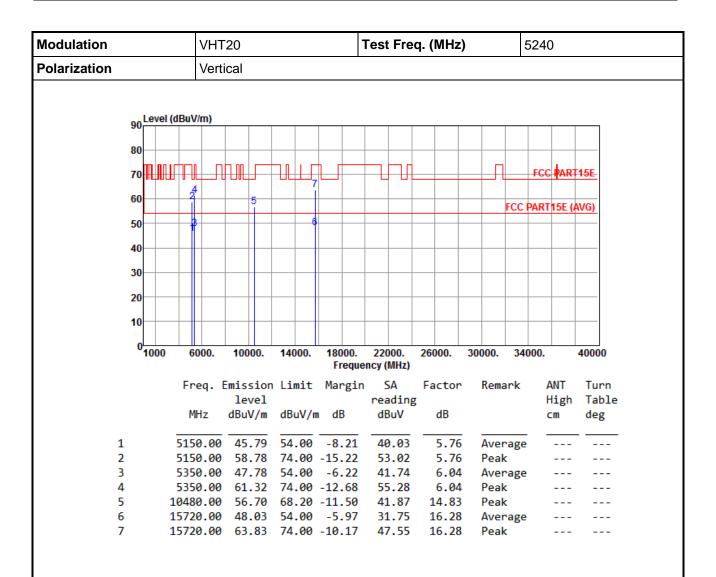


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 52 of 73



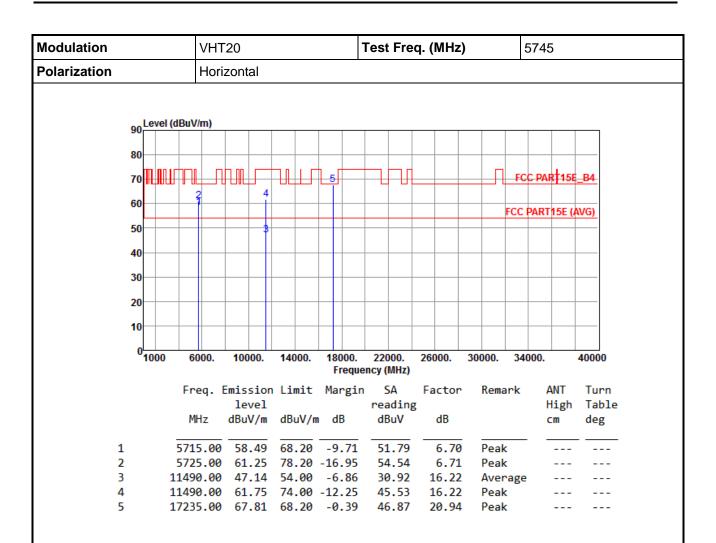


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 53 of 73



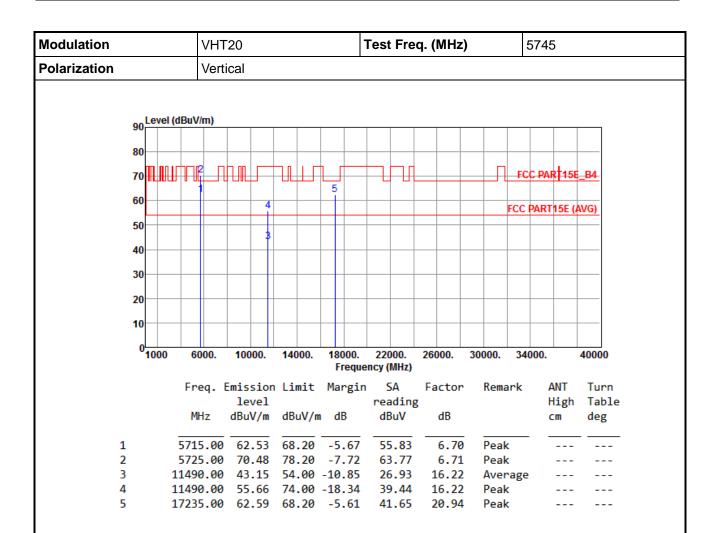


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 54 of 73



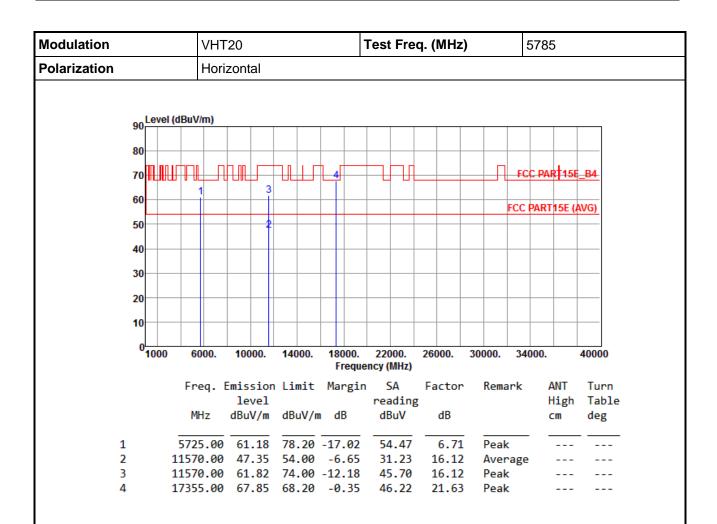


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 55 of 73



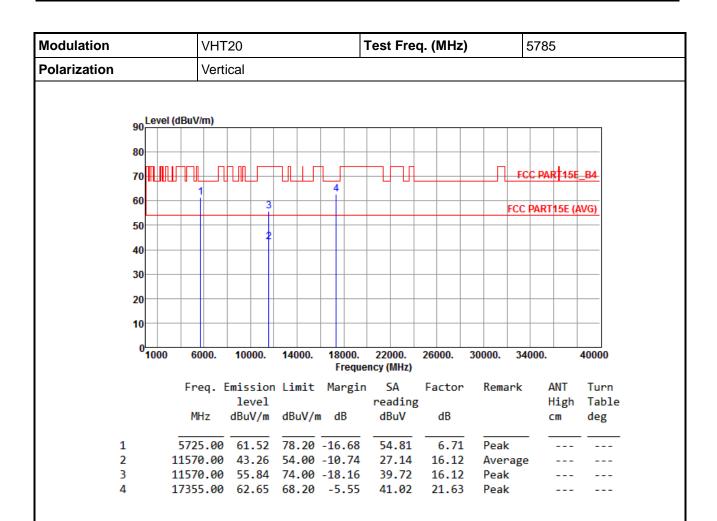


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 56 of 73



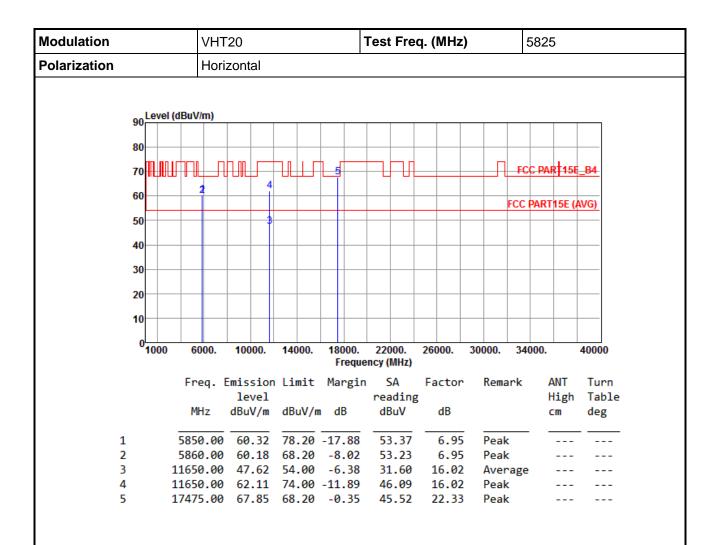


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 57 of 73



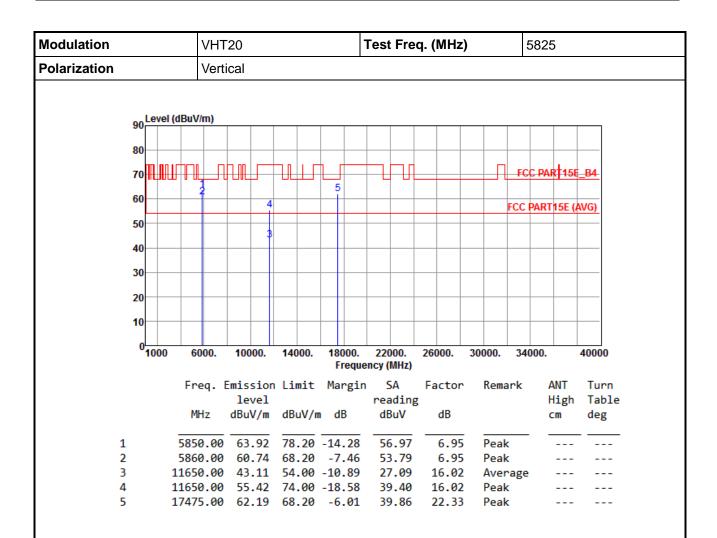


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 58 of 73



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

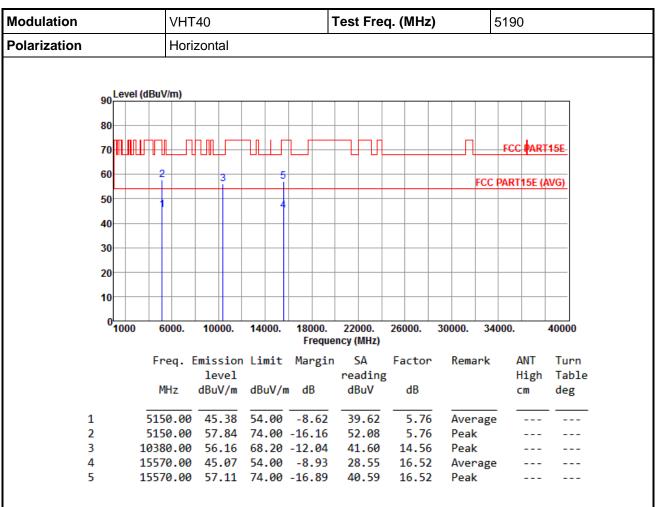


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 59 of 73



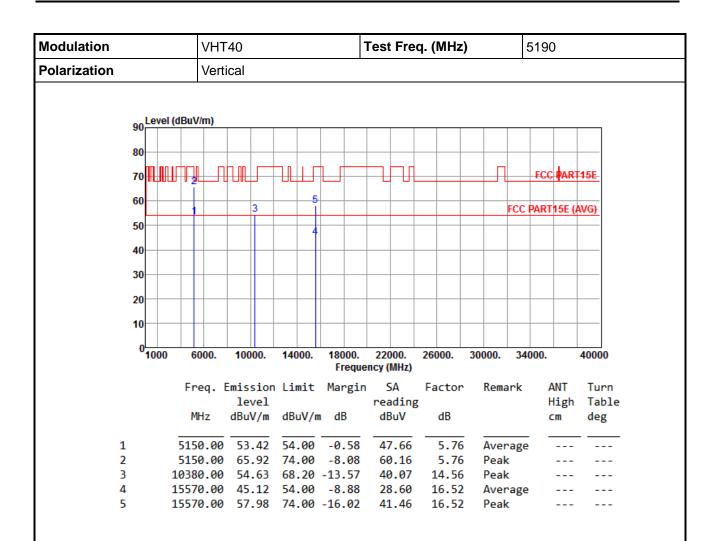


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 60 of 73



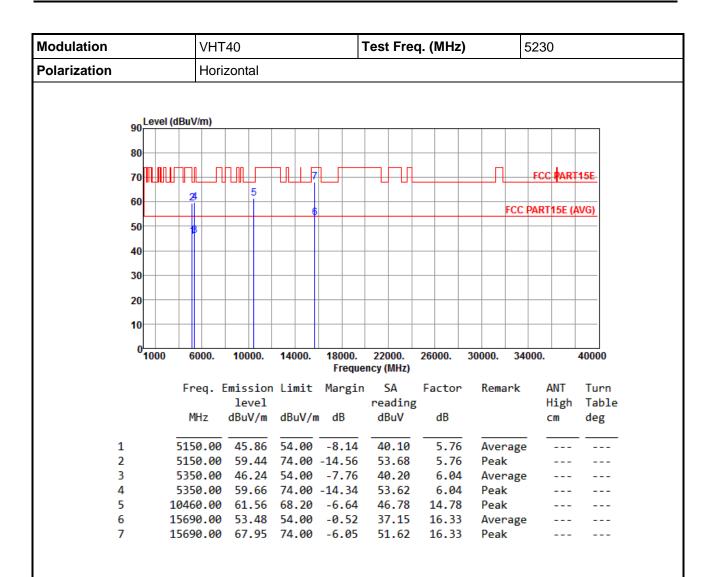

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 61 of 73



Modulation			VHT	40				Test	Fre	q. (MH	z)		5230	0	
Polarization			Verti	cal			•								
			•												
		(dD	1//												
	90 Le	vel (dBu	V/m)												
	80				+										
	70								\Box			Д	FCC	PART	15E
	60	- 2	24	5			7								
	Ľ						-					FCC	PART	15E (/	AVG)
	50		B		\top										
	40														
	30				_										
	20				_										
	10				+										
	010	00 (6000.	10000	0.	14000.	18000. Frequ	220 ency (26000.	3000	0. 34	1000.		40000
		Fi	req. [missi	ion	Limit	Margi	n <u>S</u>	A	Facto	r Re	emark	1	ANT	Turn
				leve					ding				H	High	Table
		ı	MHz	dBuV/	/m	dBuV/	m dB	dE	₿uV	dB			(cm	deg
	1	51	50.00	47.9	96	54.00	-6.04	42	.20	5.7	6 A	/erage			
	2						-12.43		.81	5.7		eak			
	3						-6.74		.22	6.0		/erage	2		
	4						-13.59		.37			eak			
	5						-9.54		.88	14.7		eak			
	6					54.00	-2.51		.16	16.3		/erage	2		

16.33

Peak


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

15690.00 62.25 74.00 -11.75 45.92

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 62 of 73



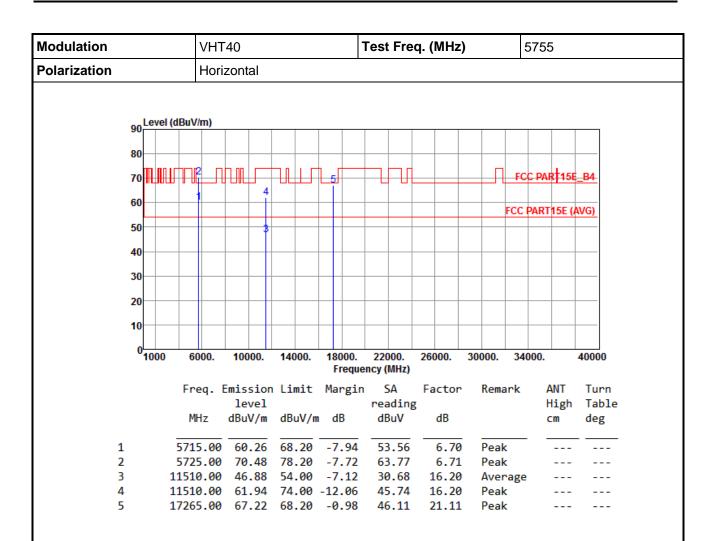


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 63 of 73



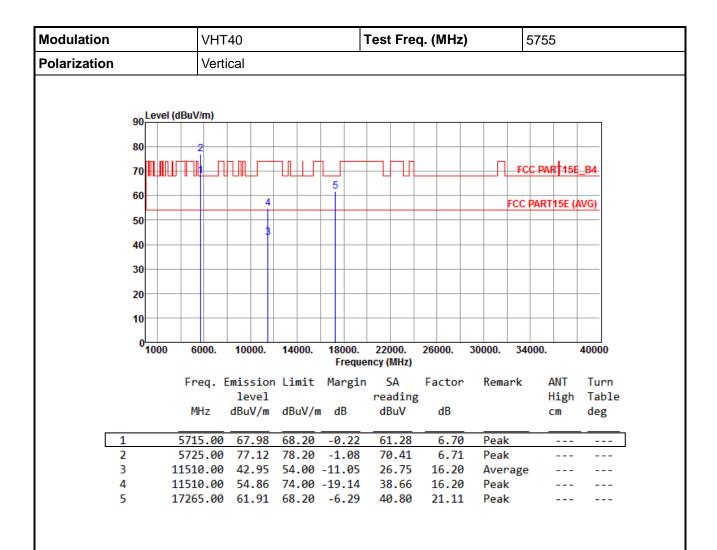


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 64 of 73



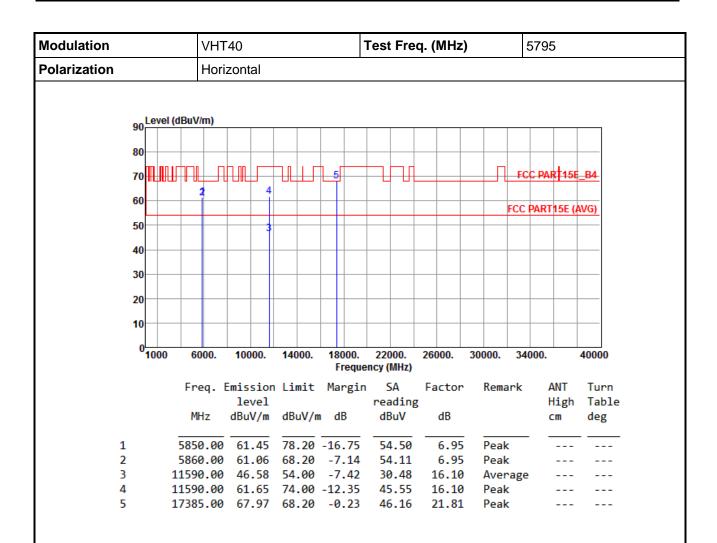


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 65 of 73



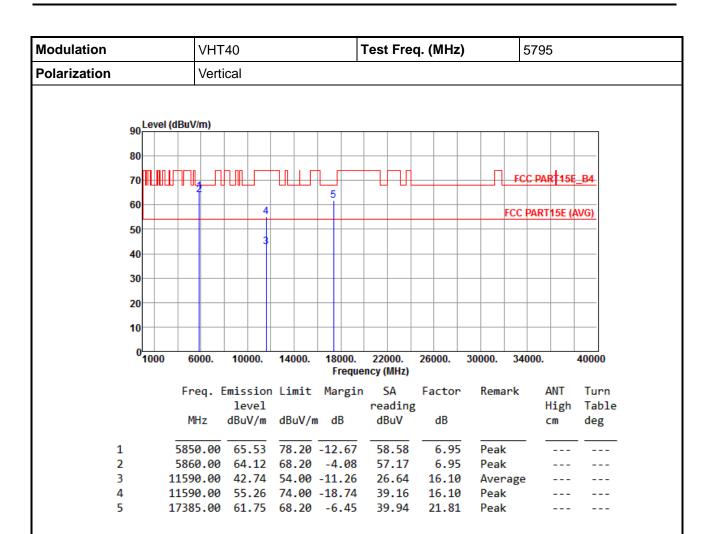


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 66 of 73



3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

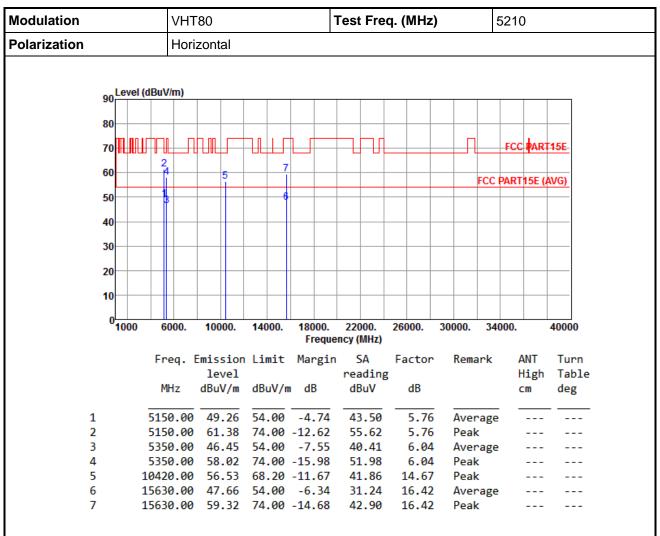


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 67 of 73

^{*}Factor includes antenna factor, cable loss and amplifier gain



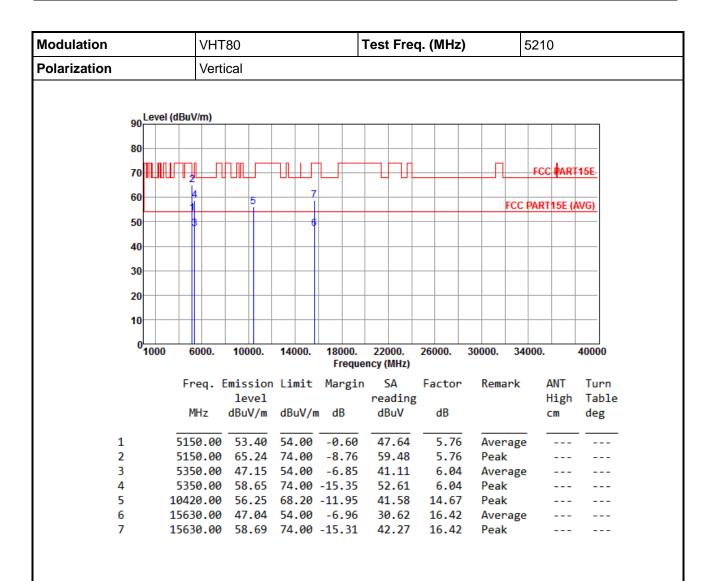


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 68 of 73



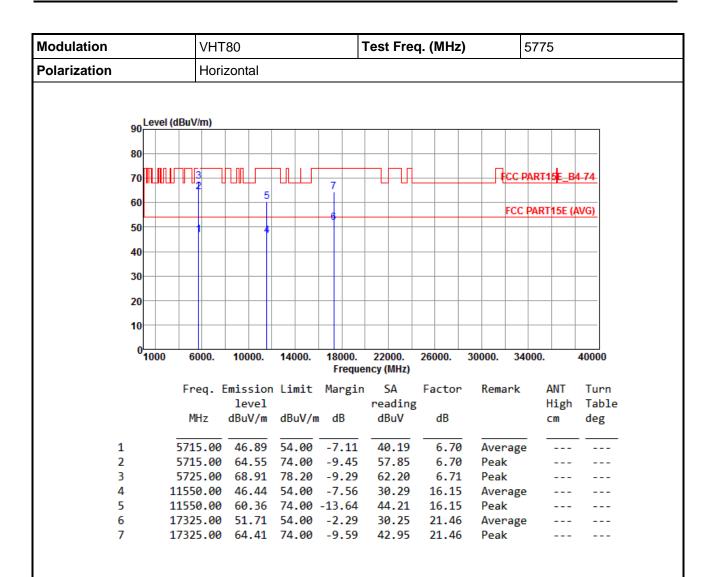

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 69 of 73



Modulation				VHT	80					1	Test	Fred	q. (MI	Hz)			577	5	
Polarization				Vert	ical											•			
			(dD-)	\															
	90 L	.evei	(dBuV	<u>/m)</u>															
	80											_							
		m nn		3 2			ا ۱ ا					٦,				-		4.	
	70				ΠIL				7		-4	ш		+	#	ICC	PART1	pie_B	4-74
	60	+				- 5			-+			_		+		FCC	PART	AET /	A) (C)
	50								6							rcc	PART	ISE (AVG
	30					1													
	40	+										\dashv		+		+			
	30											_							
	-																		
	20																		
	10	+										\dashv		+		+			
	0																		
	ັ1	000	60	000.	100	000.	1400	0.	180 Fr		2200 ncy (M		26000	. :	30000.	34	1000.		40000
			En	0.0	Fmic	cion	Lim	i+					Fact	on	Ron	ıark		ΔNT	Turi
				cq.		vel	LI	10	riai	8111	read			.01	iteli	iai K		digh	
			М	Hz	dBu	V/m	dBu	V/m	dE	3	dBu		dB					cm	deg
					_			_											_
	1			5.00		.19			-0.		46.			70		erage	9		
	2 3			5.00 5.00		.65 .18	74. 78.		-3. -3.		63. 68.			70 71	Pea Pea				
	4		1155			.80	54.		-8.		29.		16.			rage	e		
	5						74.				42.		16.		Pea	_			

17325.00 50.77 54.00 -3.23 29.31 21.46

17325.00 63.11 74.00 -10.89 41.65

Average

Peak

21.46

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR530604-02AN Page: 70 of 73

Report Version: Rev. 01

6

7



3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

- 1. The EUT is installed in an environment test chamber with external power source.
- Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
- 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
- 4. When temperature is stabled, measure the frequency stability.
- 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.6.3 Test Setup

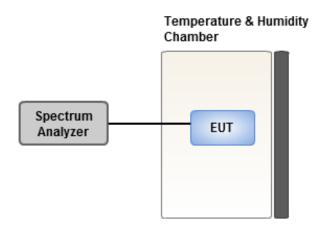

Report No.: FR530604-02AN Page: 71 of 73



3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)									
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes						
T20°CVmax	5.97	6.26	5.63	5.43						
T20°CVmin	4.68	5.67	4.96	5.81						
T50°CVnom	4.41	5.02	4.68	4.86						
T40°CVnom	4.61	4.82	4.92	4.38						
T30°CVnom	4.16	3.69	4.08	3.94						
T20°CVnom	3.98	3.55	3.44	3.36						
T10°CVnom	3.60	2.99	3.48	2.97						
T0°CVnom	3.00	3.31	3.08	3.43						
T-10°CVnom	2.56	1.90	2.52	2.38						
T-20°CVnom	1.15	1.37	1.31	1.45						
T-30°CVnom	1.32	1.32	1.32	1.32						
Vnom [Vac]: 120	,	Vmax [Vac]: 138	Vmin [Vac]: 1	Vmin [Vac]: 102						
Tnom [°C]: 20	-	Tmax [°C]: 50	Tmin [°C]: -30	Tmin [°C]: -30						

Frequency: 5785 MHz						
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes		
T20°CVmax	4.46	4.57	4.98	4.44		
T20°CVmin	4.07	4.58	3.72	4.62		
T50°CVnom	3.14	3.42	3.23	3.91		
T40°CVnom	3.57	3.95	3.41	3.91		
T30°CVnom	2.94	2.88	3.53	2.92		
T20°CVnom	2.05	2.48	2.60	2.46		
T10°CVnom	2.13	2.04	2.60	2.73		
T0°CVnom	2.85	3.27	3.01	3.54		
T-10°CVnom	1.13	1.17	1.40	1.61		
T-20°CVnom	1.07	1.26	1.14	0.69		
T-30°CVnom	1.17	1.83	1.36	1.11		
Vnom [Vac]: 120	Vr	nax [Vac]: 138	Vmin [Vac]	Vmin [Vac]: 102		
Tnom [°C]: 20	Tr	nax [°C]: 50	Tmin [°C]:	Tmin [°C]: -30		

Report No.: FR530604-02AN Page: 72 of 73



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan,

R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

<u>==END</u>==

Report No.: FR530604-02AN Page: 73 of 73