

# **FCC Test Report**

for

## **PenPal Wireless**

**Model No. : PP2xx, AMW059xx**

**FCC ID : ZU2PP200RF**

**Report Number : RF- P430-1107-397**

**Date of Receipt : August 13, 2011**

**Date of Report : August 25, 2011**

Prepared for

## **Salient Technology International LLC**

PO Box 23425, Pleasant Hill, CA 94523, USA

Prepared by



**Central Research Technology Co.**

**EMC Test Laboratory**

No.11, Lane41, Fushuen St., Jungshan Chiu, Taipei, Taiwan, 104, R.O.C.



NVLAP LAB CODE 200575-0

**This report shall not be reproduced, except in full, without the written approval of Central Research Technology Co.. It may be duplicated completely in its entirety for legal use with the permission of the applicant. It should not be used to claim product endorsement by NVLAP, NIST or any U.S. government agency. The test result in the report applies only to the sample tested.**

# Verification of Compliance

Equipment under Test : PenPal Wireless  
Model No. : PP2xx, AMW059xx  
FCC ID : ZU2PP200RF  
Applicant : Salient Technology International LLC  
Address : PO Box 23425, Pleasant Hill, CA 94523, USA  
Applicable Standards : 47 CFR part 15, Subpart C  
Date of Testing : August 13 ~ 25, 2011  
Deviation : N/A  
Condition of Test Sample : Engineering Sample

We, **Central Research Technology Co.**, hereby certify that one sample of the designated product was tested in our facility during the period mentioned above. The test records, data evaluation and Equipment Under Test (EUT) configurations shown in the present report are true and accurate representation of the measurements of the sample's RF characteristics under the conditions herein specified.

The test results show that the EUT as described in the present report is in compliance with the requirements set forth in the standards mentioned above and apply to the tested sample identified in the present report only. The test report shall not be reproduced, except in its entirety, without the written approval of Central Research Technology Co.

PREPARED BY : Cathy Chen , DATE : Aug. 26, 2011  
(Cathy Chen/ Technical Manager)

APPROVED BY : J. Y. Shih , DATE : Aug. 26, 2011  
(Tsun-Yu Shih/General Manager)

## **Contents**

<b>1</b>	<b>General Description .....</b>	<b>4</b>
1.1	General Description of EUT .....	4
1.2	Applied standards .....	5
1.3	The Support Units .....	8
1.4	Layout of Setup .....	8
1.5	Test Capability .....	9
1.6	Measurement Uncertainty .....	11
<b>2</b>	<b>Field Strength of Fundamental.....</b>	<b>12</b>
2.1	Applied standard .....	12
2.2	Test Instruments .....	12
2.3	Measurement Procedure .....	13
2.4	Test configuration .....	14
2.5	Test Data .....	15
<b>3</b>	<b>Radiated Emission Measurement .....</b>	<b>22</b>
3.1	Limit for Radiated Emission Measurement.....	22
3.2	Test Instruments .....	23
3.3	Test Procedures .....	24
3.4	Test Configuration .....	25
3.5	Test Results .....	26

**Attachment 1 – Photographs of the Test Configurations**

**Attachment 2 –External Photographs of EUT**

**Attachment 3 –Internal Photographs of EUT**

## **1 General Description**

### **1.1 General Description of EUT**

Equipment under Test : PenPal Wireless

Model No. : PP2xx, AMW059xx

Power in : 3Vdc by the internal battery

Test Voltage : 3Vdc by the internal battery

Channel Numbers : 16

Frequency Range : 2402MHz ~ 2478MHz

Channel Frequency : 2402MHz, 2408MHz, 2414MHz, 2419MHz, 2423MHz,  
2424MHz, 2431MHz, 2439MHz, 2444MHz, 2448MHz,  
2456MHz, 2459MHz, 2466MHz, 2472MHz, 2475MHz,  
2478GHz

Modulation : GFSK

Function Description :

The EUT is used to transmit control command. Please refer to the user's manual for the details.

Perform the function of EUT continuously by executing the test program supplied by manufacturer.

Since the EUT is considered a portable unit, it was pre-tested on the positioned in each of 3 axis. Therefor only the test data of the worse case - Z axiz was used for Radiated test.

## 1.2 Applied standards

### (1) Conduction Emission Requirement

For intentional device, according to §15.207(a) line conduction emission limit is as below table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

### (2) Field strength of emissions

According to 15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

**(3) Radiated Emission Requirement**

According to 15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

For intentional device, according to §15.209, the general requirement of field strength of radiated emissions from intentional radiator at a distance of 3 meters shall not exceed the below table.

<b>Frequency (MHz)</b>	<b>Measurement Distance (m)</b>	<b>Field Strength (uV/m)</b>	<b>Field Strength (dBuV/m)</b>
30 – 88	3	100	40.0
88 – 216	3	150	43.5
216 – 960	3	200	46.0
960 – 1610	3	500	54.0
above 1610	3	500	54.0

Note 1- The lower limit shall apply at the transition frequency.

## (4) Restricted Band


Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
<sup>2</sup> 1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

**1.3 The Support Units**

No.	Unit	Model No./ Serial No.	Trade Name	Power Cord	Supported by lab.
N/A	*	*	*	*	*

**1.4 Layout of Setup****Connecting Cables :**

No.	Cable	Length	Shielded	Core	Shielded Backshell	Supported by lab.	Note
N/A	*	*	*	*	*	*	*



## 1.5 Test Capability

### Test Facility

The test facility used for evaluating the conformance of the EUT with each standard in the present report meets what required in CISPR16-1-4, CISPR16-2-3 and ANSI C63.4:2003.

Test Room	Type of Test Room	Descriptions
TR1	10m semi-anechoic chamber (23m×14m×9m)	Complying with the NSA requirements in documents CISPR 22 and ANSI C63.4:2003 for the radiated emission measurement.
TR11	3m semi-anechoic chamber (9m × 6m × 6m)	
TR13	Test Site	For the RF conducted emission measurement.
TR5	Shielding Room (8m×5m×4m)	For the conducted emission measurement.

**Test Laboratory Competence Information**

Central Research Technology Co. has been accredited / filed / authorized by the agencies listed in the following table.

<b>Certificate</b>	<b>Nation</b>	<b>Agency</b>	<b>Code</b>	<b>Mark</b>
Accreditation Certificate	USA	NVLAP	200575-0	ISO/IEC 17025
	R.O.C. (Taiwan)	TAF	0905	ISO/IEC 17025
	R.O.C. (Taiwan)	BSMI	SL2-IN-E-0033, SL2-IS-E-0033, SL2-R1/R2-E-0033, SL2-A1-E-0033 SL2-L1-E-0033	ISO/IEC 17025
Site Filing Document	USA	FCC	474046, TW1053	Test facility list & NSA Data
	Canada	IC	4699A-1, -3	Test facility list & NSA Data
	Japan	VCCI	R-1527,C-1609,T-131,T-1441, G-10	Test facility list & NSA Data
Authorization Certificate	Germany	TUV	10021687	ISO/IEC 17025
	Norway	Nemko	ELA212	ISO/IEC 17025

The copy of each certificate can be downloaded from our web site: [www.crc-lab.com](http://www.crc-lab.com)

## 1.6 Measurement Uncertainty

The assessed measurement uncertainty with a suitable coverage factor K to ensure 95% confidence level for the normal distribution are shown as below, the values are less than  $U_{cispr}$  in table 1 of CISPR 16-4-2.

Test Item	Measurement Uncertainty	
Radiated Emission: (30MHz~200MHz)	Horizontal 3.5dB ; Vertical 3.8dB	
Radiated Emission: (200MHz~1GHz)	Horizontal 3.9dB ; Vertical 3.9dB	
Radiated Emission: (1GHz~18GHz)	Horizontal 3.5dB ; Vertical 3.6dB	
Radiated Emission: (18GHz~26.5GHz)	Horizontal 4.4dB ; Vertical 4.5dB	
Line Conducted Emission	ESH2-Z5	3.1dB
	ENV 4200	2.8dB

## 2 Field Strength of Fundamental

Result: Pass

### 2.1 Applied standard

Fundamental Frequency	Peak	Average
<input type="checkbox"/> 902 – 928 MHz	500mV/m ( <b>114dBuV/m</b> )	50mV/m ( <b>94dBuV/m</b> )
<input checked="" type="checkbox"/> 2400 – 2483.5 MHz	500 mV/m ( <b>114dBuV/m</b> )	50 mV/m ( <b>94dBuV/m</b> )
<input type="checkbox"/> 5725 – 5875 MHz	500 mV/m ( <b>114dBuV/m</b> )	50 mV/m ( <b>94dBuV/m</b> )
<input type="checkbox"/> 24.0 – 24.25 GHz	2500 mV/m ( <b>128dBuV/m</b> )	250 mV/m ( <b>108dBuV/m</b> )

### 2.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Spectrum Analyzer	Agilent	E4407B/ MY45106795	2011/5/2	2012/5/2
Antenna	EMCO	3117/82847	2011/3/1	2012/3/1
PRE-AMPLIFIER	MITEQ	JS4-00101800-28-5A/ 742229	2010/12/15	2011/12/15
RF Cable	N/A	N/A/C0081	2011/4/19	2011/10/19
Semi - anechoic Chamber	ETS. LINDGREN	TR11/ 906-A	2011/4/17	2012/4/17

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

**Instrument Setting**

<b>RBW</b>	<b>VBW</b>	<b>Detector</b>	<b>Trace</b>	<b>Comment</b>
1MHz	1MHz	Peak	Maxhold	Peak
1MHz	10Hz	Peak	Maxhold	Average

**Climatic Condition**


Ambient Temperature : 28°C

Relative Humidity : 54%

**2.3 Measurement Procedure**

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit and receive data at operating frequency.
- c. If the EUT is tabletop equipment, it should be placed on a wooden table with a height of 0.8 meters above the reference ground plane in the semi-anechoic chamber. If the EUT is floor-standing equipment, it should be placed on a non-conducted support with a height of 12 millimeters above the reference ground plane in the semi-anechoic chamber.
- d. The EUT is set 3m away from the receiving antenna.
- e. Rapidly sweep the signal in the test frequency range by using the spectrum through the Maximum-peak detector.
- f. Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4 meters above the reference ground plane continuously to determine higher emission level and record it.
- g. Then measure frequency found from step f. by using the spectrum with rotating the EUT and positioning the receiving antenna height to determine the maximum level.
- h. Set the spectrum detector to be Peak or Average to find out the maximum level occurred.
- i. Record frequency, azimuth angle of the turntable, height, and polarization of the receiving antenna and compare the maximum level with the required limit.
- j. Change the receiving antenna to another polarization to measure radiated emission by following step e. to i. again.

## 2.4 Test configuration

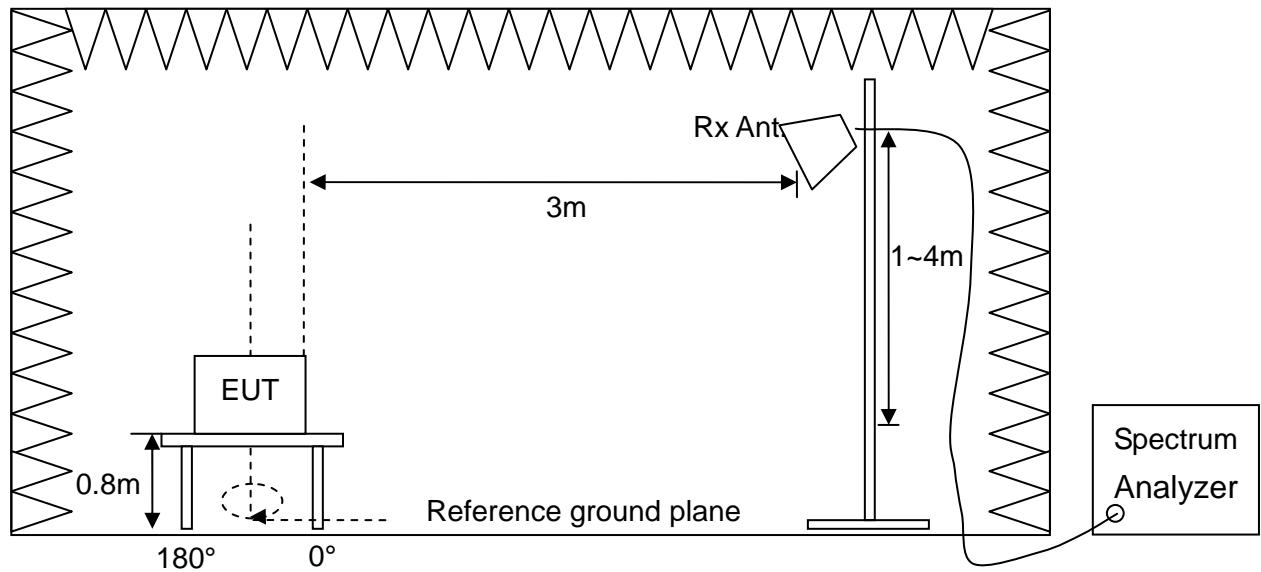

## 2.5 Test Data



Test Mode : Continuous Transmitting

Tester : Liu



Frequency (MHz)	Polarization	Reading Data (dBuV)		Correction Factor (dB/m)	Output Field Strength (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2402	V	84.72	84.57	0.92	85.64	85.49	114	94	28.36	8.51
	H	76.87	76.41	0.92	77.79	77.33	114	94	36.21	16.67
2456	V	85.49	85.10	1.05	86.54	86.15	114	94	27.46	7.85
	H	78.24	77.78	1.05	79.29	78.83	114	94	34.71	15.17
2478	V	82.49	82.36	1.11	83.60	83.47	114	94	30.40	10.53
	H	79.85	79.76	1.11	80.96	80.87	114	94	33.04	13.13



Note :



1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Output Field Strength (dBuV/m) = Reading Data + Correction Factor
3. Margin (dB) = Limit – Output Field Strength

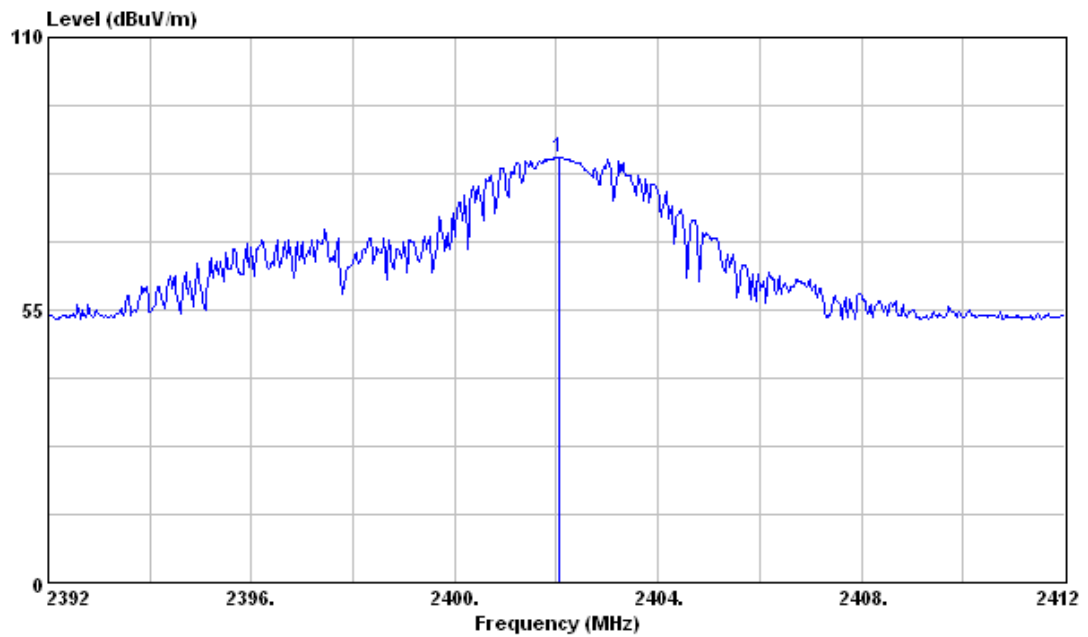
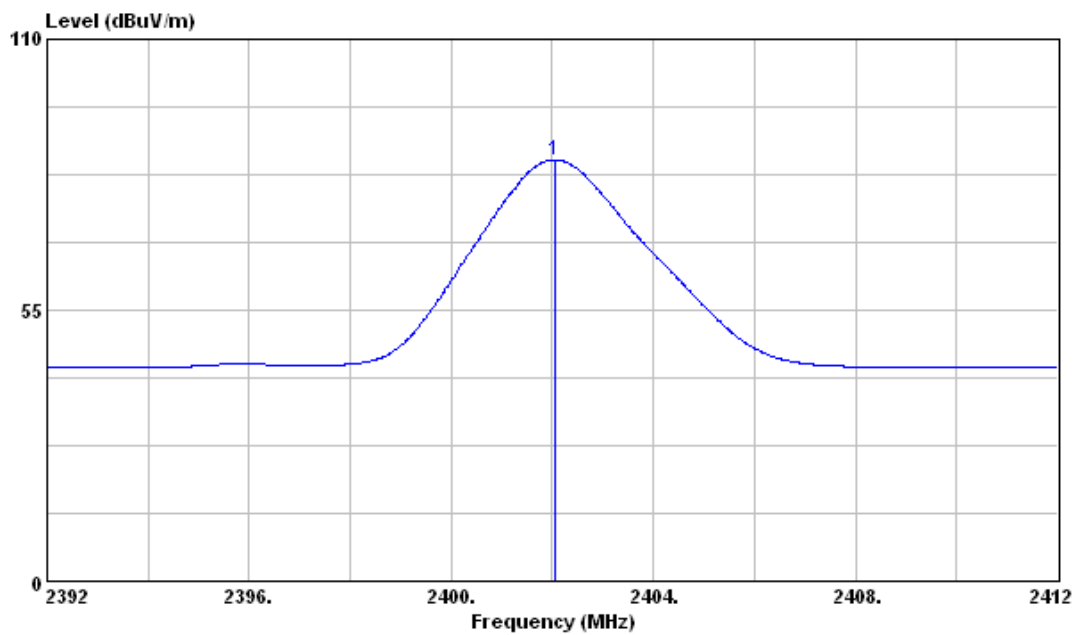
**2402MHz, Vertical Polarization - Peak****2402MHz, Vertical Polarization - Average**

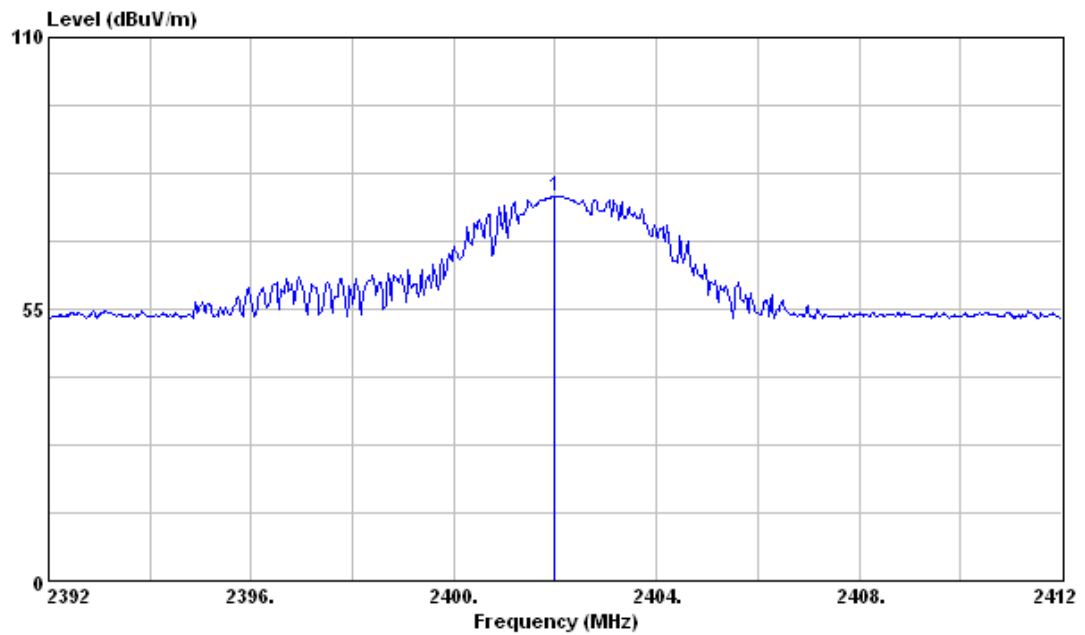
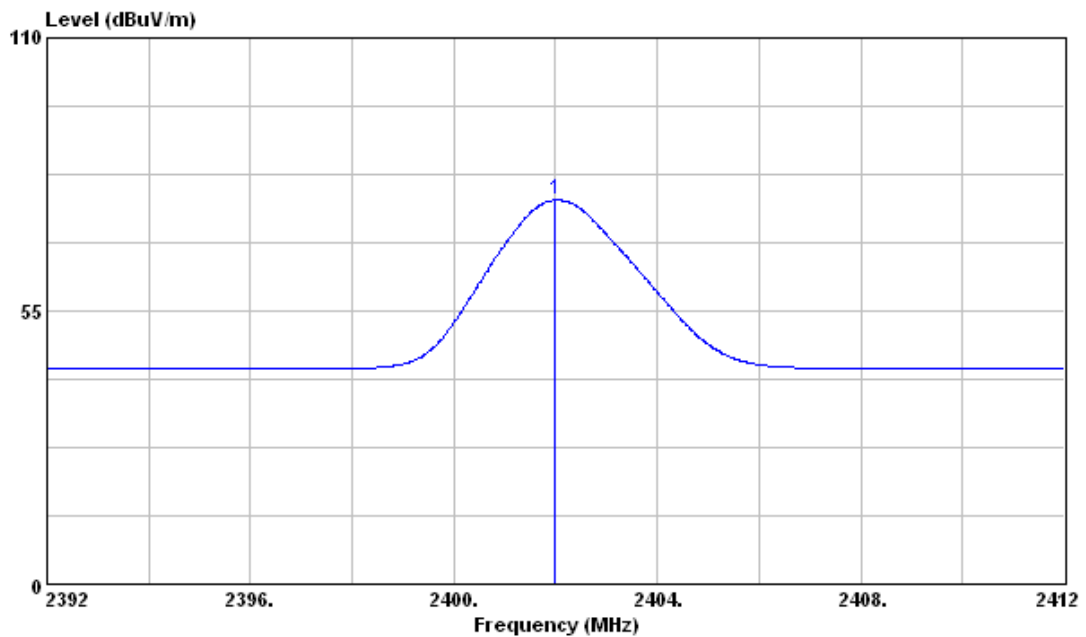


**2402MHz, Horizontal Polarization - Peak****2402MHz, Horizontal Polarization - Average**

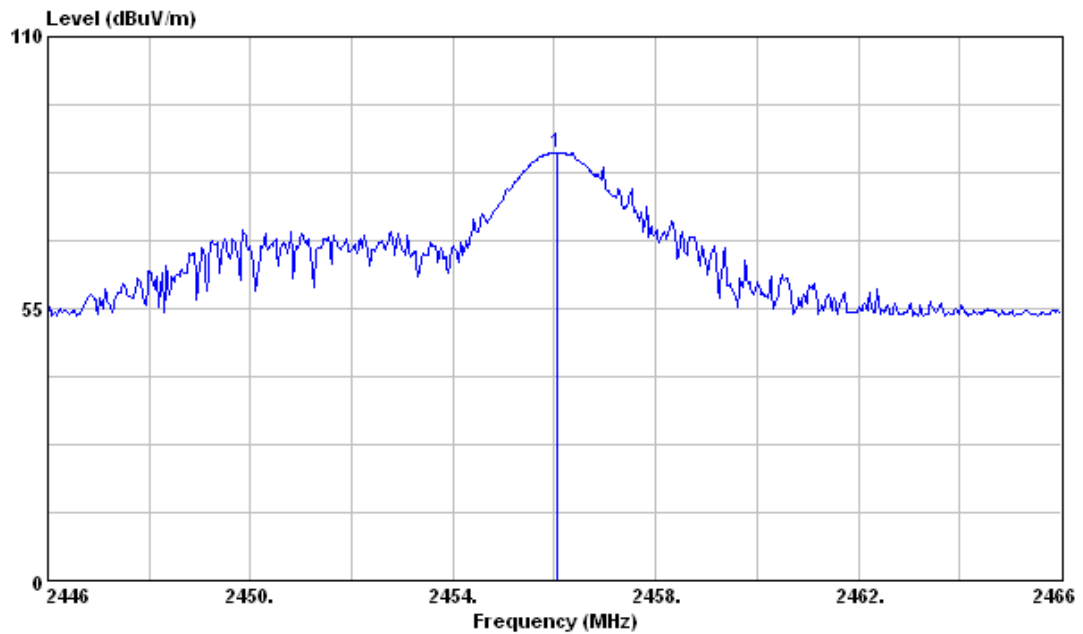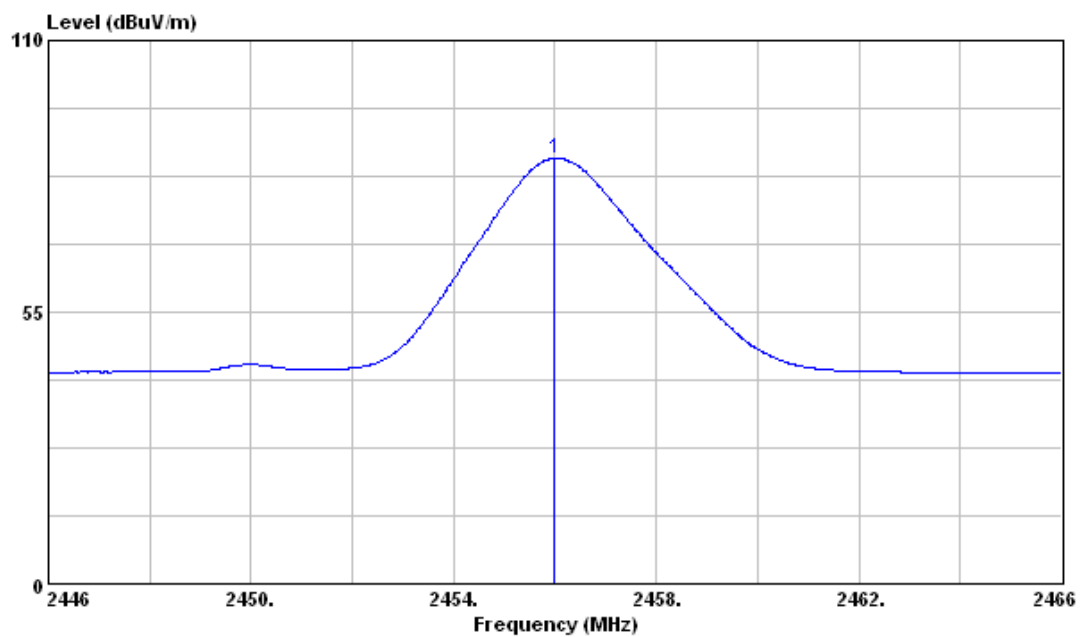**2456MHz, Vertical Polarization - Peak****2456MHz, Vertical Polarization - Average**

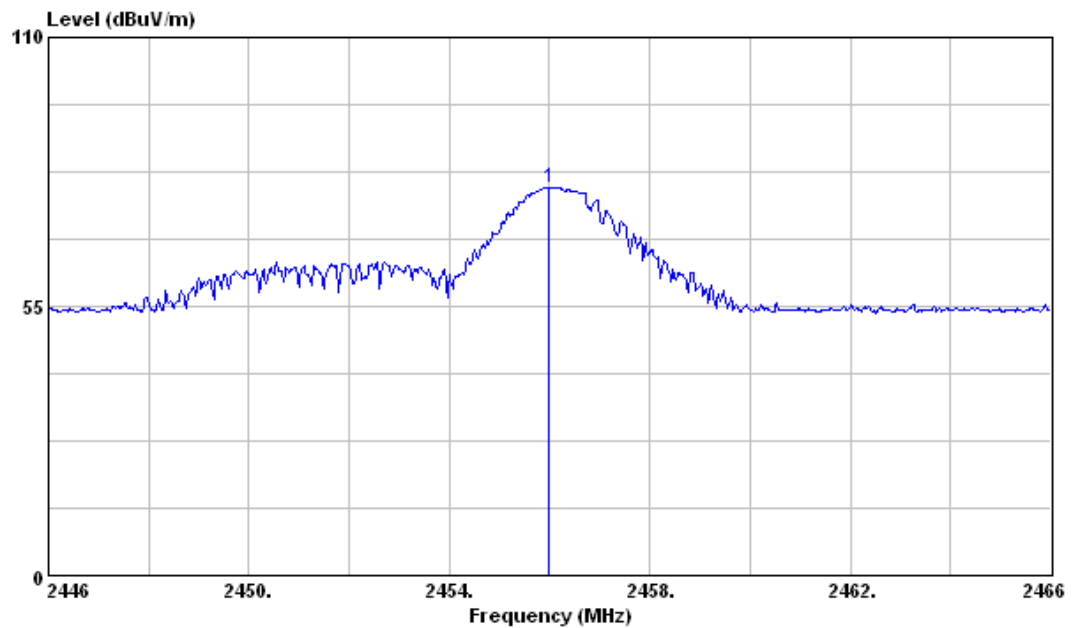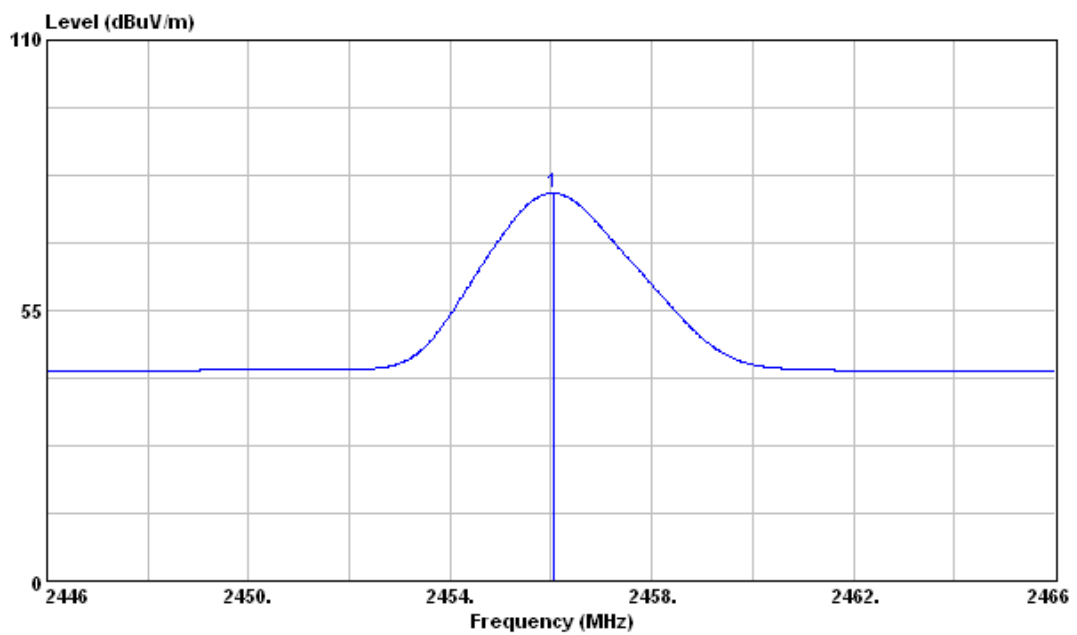**2456MHz, Horizontal Polarization - Peak****2456MHz, Horizontal Polarization - Average**

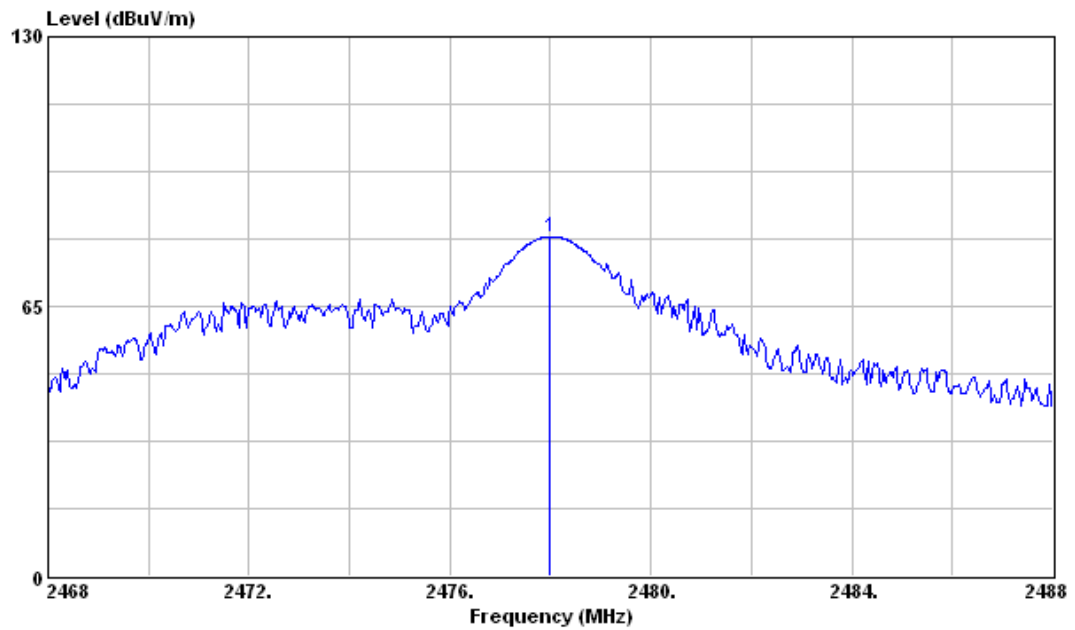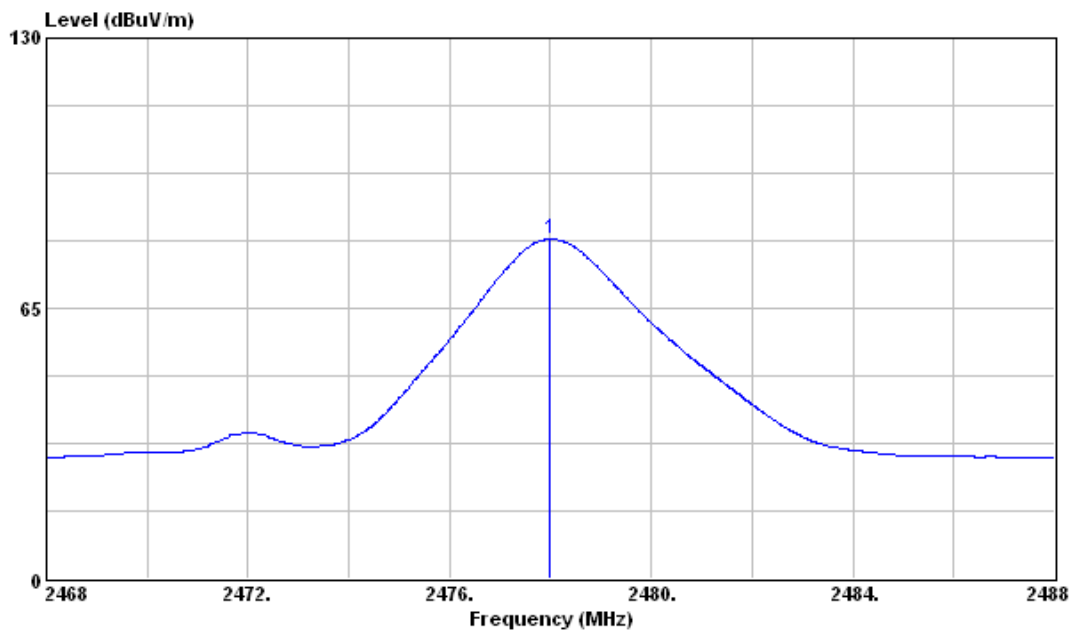**2478MHz, Vertical Polarization - Peak****2478MHz, Vertical Polarization - Average**

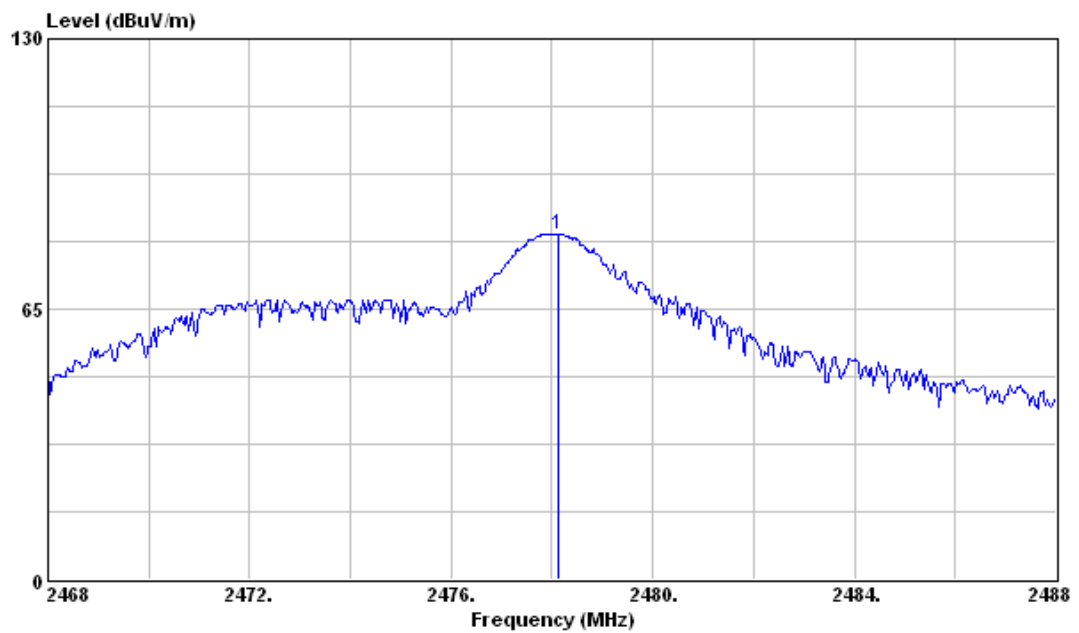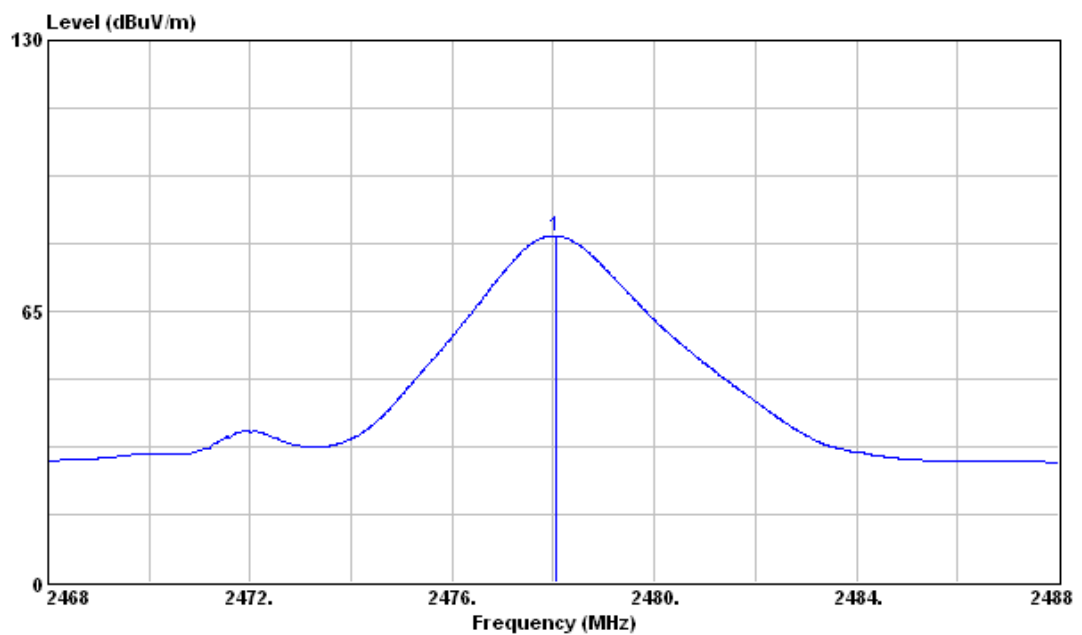**2478MHz, Horizontal Polarization - Peak****2478MHz, Horizontal Polarization - Average**

### 3 Radiated Emission Measurement

Result: PASS

#### 3.1 Limit for Radiated Emission Measurement

##### Limit for Harmonics Radiation Emission Measurement

Fundamental Frequency	Field Strength of Harmonics
<input type="checkbox"/> 902 – 928 MHz	500 uV/m ( 54dBuV/m )
<input checked="" type="checkbox"/> 2400 – 2483.5 MHz	500 uV/m ( 54dBuV/m )
<input type="checkbox"/> 5725 – 5875 MHz	500 uV/m ( 54dBuV/m )
<input type="checkbox"/> 24.0 – 24.25 GHz	2500 uV/m( 68dBuV/m )

##### Limit for Other Emissions except Harmonics

Frequency (MHz)	Quasi-peak (dBμV/m)	
30 to 88	40	
88 to 216	43.5	
216 to 960	46	
960 to 1000	54	
Frequency (MHz)	Peak (dBμV/m)	Average (dBμV/m)
Above 1000	74	54
Note 1- The lower limit shall apply at the transition frequency.		
Note 2- Additional provisions may be required for cases where interference occurs.		

## 3.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
Spectrum Analyzer	Agilent	E4407B/ MY45106795	2011/5/2	2012/5/2
EMI Test Receiver	R&S	ESCI/100019	2011/5/25	2012/5/25
Broadband Antenna	EMCO	3142C/52088	2011/5/19	2012/5/19
Antenna	EMCO	3117/82847	2011/3/1	2012/3/1
Pre-Amplifier	MITEQ	JS4-00101800-28-5A/ 742229	2010/12/15	2011/12/15
Pre-Amplifier	MITEQ	JS4-00101800-28-1 0P/1498979	2010/12/10	2011/12/10
Pre-Amplifier	Mini Circuit	ZKL-2/004	2011/2/7	2012/2/7
RF Cable	N/A	N/A/C0080	2011/8/6	2012/2/6
RF Cable	N/A	N/A/C0081	2011/4/19	2011/10/19
Semi - anechoic Chamber	ETS. LINDGREN	TR11/ 906-A	2011/4/17	2012/4/17

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

## Instrument Setting

RBW	VBW	Detector	Trace	Comment
120kHz	N/A	Quasi-Peak	Maxhold	Below 1GHz
1MHz	1MHz	Peak	Maxhold	Above 1GHz Peak
1MHz	10Hz	Peak	Maxhold	Above 1GHz Average

## Climatic Condition

Ambient Temperature : 28°C; Relative Humidity : 52%


### **3.3 Test Procedures**

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit and receive data at operating frequency.(if necessary)
- c. If the EUT is tabletop equipment, it should be placed on a wooden table with a height of 0.8 meters above the reference ground plane in the semi-anechoic chamber. If the EUT is floor-standing equipment, it should be placed on a non-conducted support with a height of 12 millimeters above the reference ground plane in the semi-anechoic chamber.
- d. The EUT is set 3m away from the interference receiving antenna.
- e. Rapidly sweep the signal in the test frequency range by using the spectrum through the Maximum-peak detector.
- f. Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4 meters above the reference ground plane continuously to determine at least six frequencies associated with higher emission levels and record them.
- g. Then measure each frequency found from step f. by using the spectrum with rotating the EUT and positioning the receiving antenna height to determine the maximum level.
- h. For measurement of frequency below 1000MHz, set the receiver detector to be Quasi-Peak per CISPR 16-1 to find out the maximum level occurred.
- i. For measurement of frequency above 1000MHz, set the spectrum detector to be Peak or Average to find out the maximum level occurred, if any.
- j. Record frequency, azimuth angle of the turntable, height, and polarization of the receiving antenna and compare the maximum level with the required limit.
- k. Change the receiving antenna to another polarization to measure radiated emission by following step e. to j. again.
- l. If the peak emission level below 1000MHz measured from step f. is 4dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate Q.P. value will be measured and presented.
- m. If the peak emission level above 1000MHz measured from step f. is 20dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate A.V. value will be measured and presented.




### 3.4 Test Configuration

#### Radiated Emission Measurement below 1000MHz

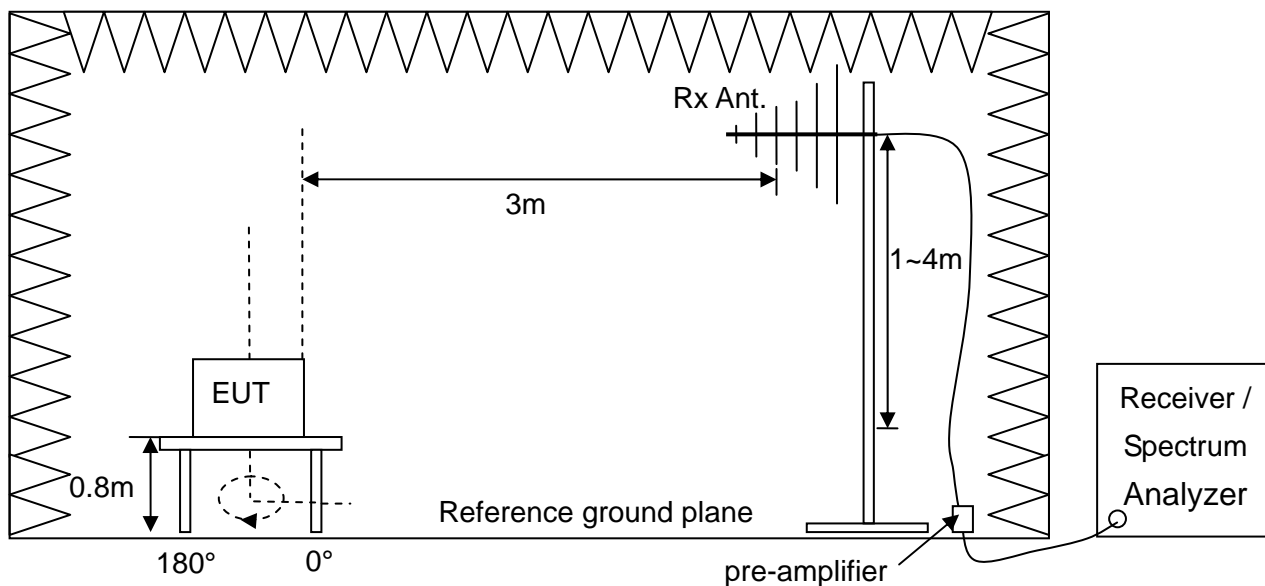

#### Radiated Emission Measurement above 1000MHz

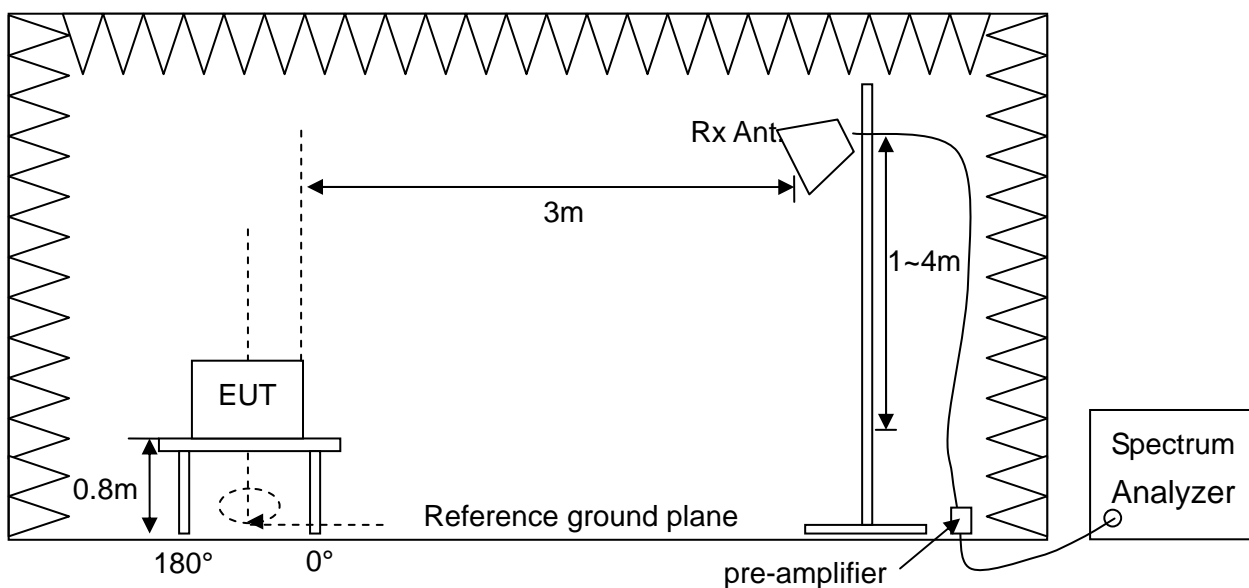

### 3.5 Test Results

#### Band Edge

Test Mode : Continuous Transmitting

Test Distance : 3m


Tester : Liu

Test Range	Polarization	Frequency (MHz)	Reading Data (dBuV)		Correction Factor (dB/m)	Emission (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
			PK.	AV.		PK.	AV.	PK.	AV.	PK.	AV.
Lowest	V	2400.00	105.11	87.77	-36.18	68.93	51.59	74	54	5.07	2.41
	H	2400.00	93.89	74.18	-36.18	57.71	38.00	74	54	16.29	16.00
Highest	V	2483.55	89.02	68.66	-35.99	53.03	32.67	74	54	20.97	21.33
	H	2483.65	85.38	67.19	-35.99	49.39	31.20	74	54	24.61	22.80


Note:

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor
3. Margin (dB) = Limit – Emission Level


## Lowest Channel, Vertical - Peak

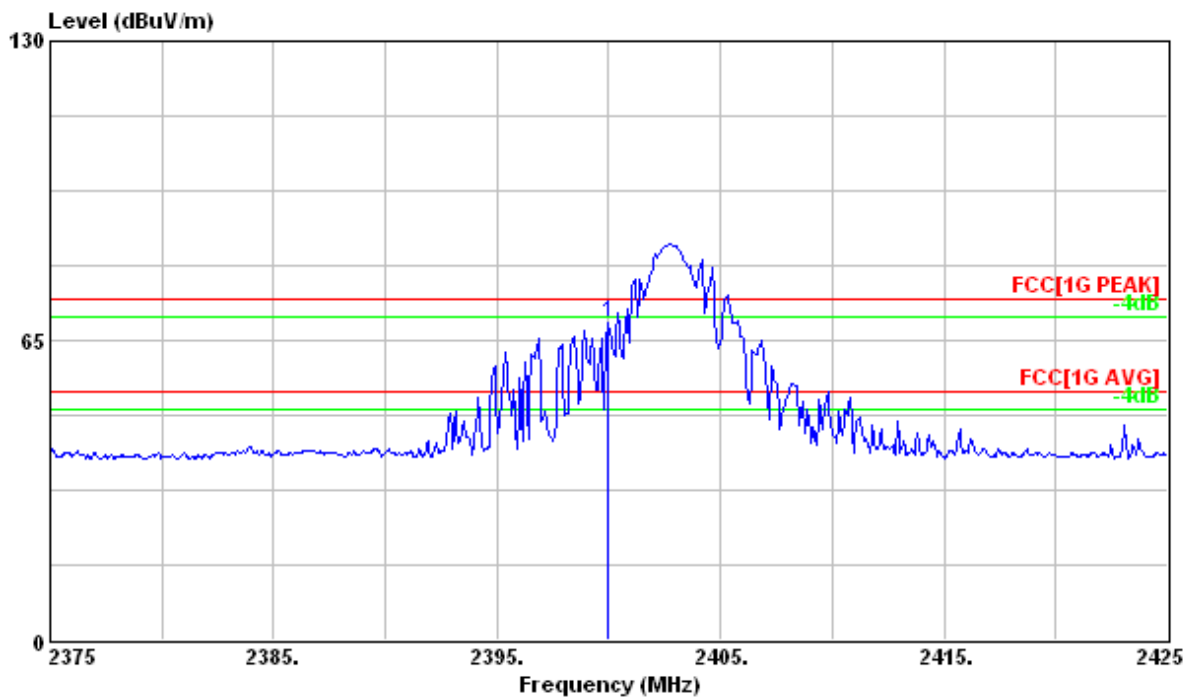


## Lowest Channel, Vertical - Average

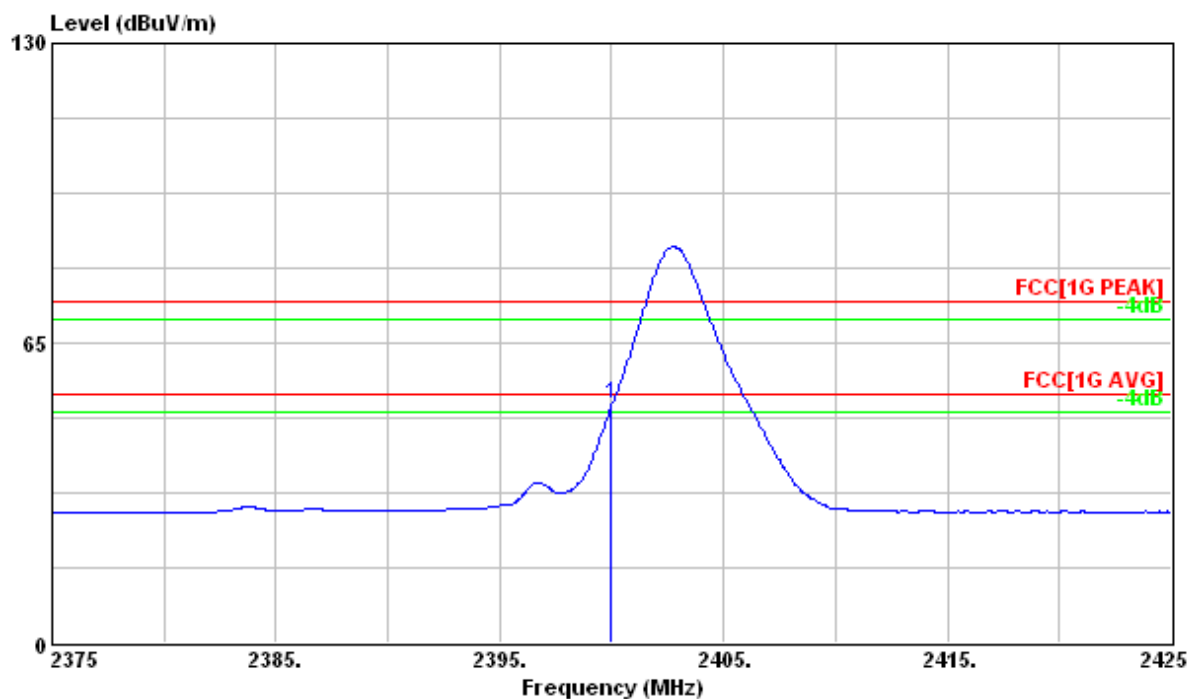


## Lowest Channel, Horizontal - Peak

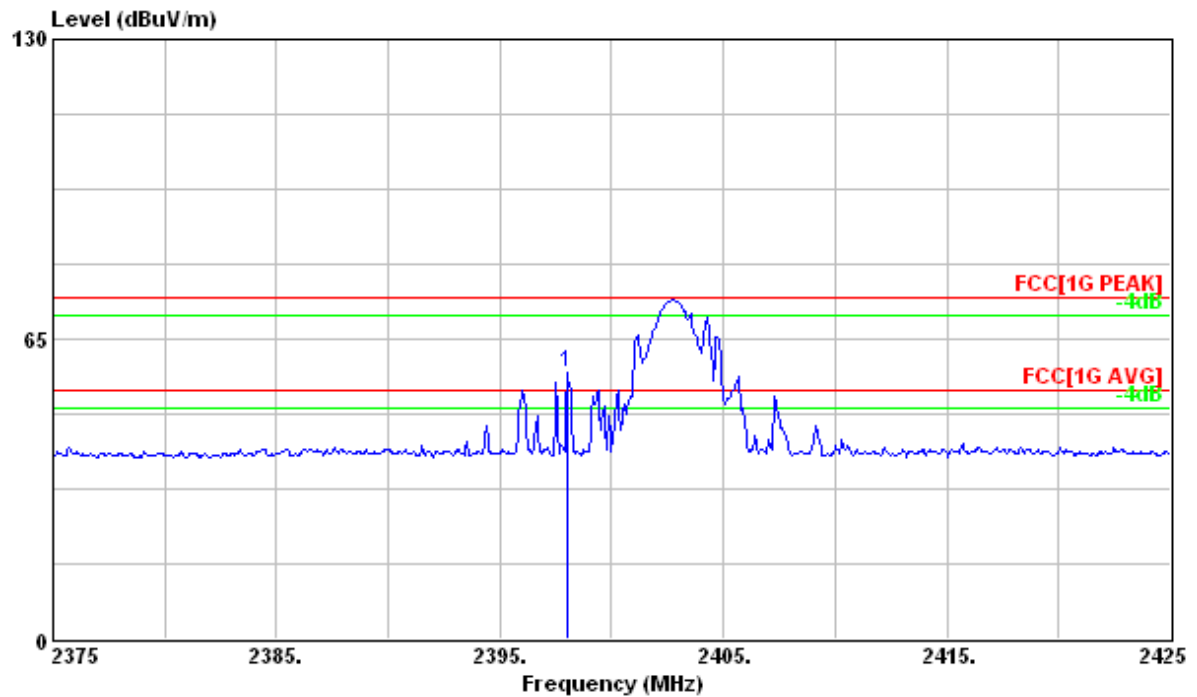


## Lowest Channel, Horizontal - Average

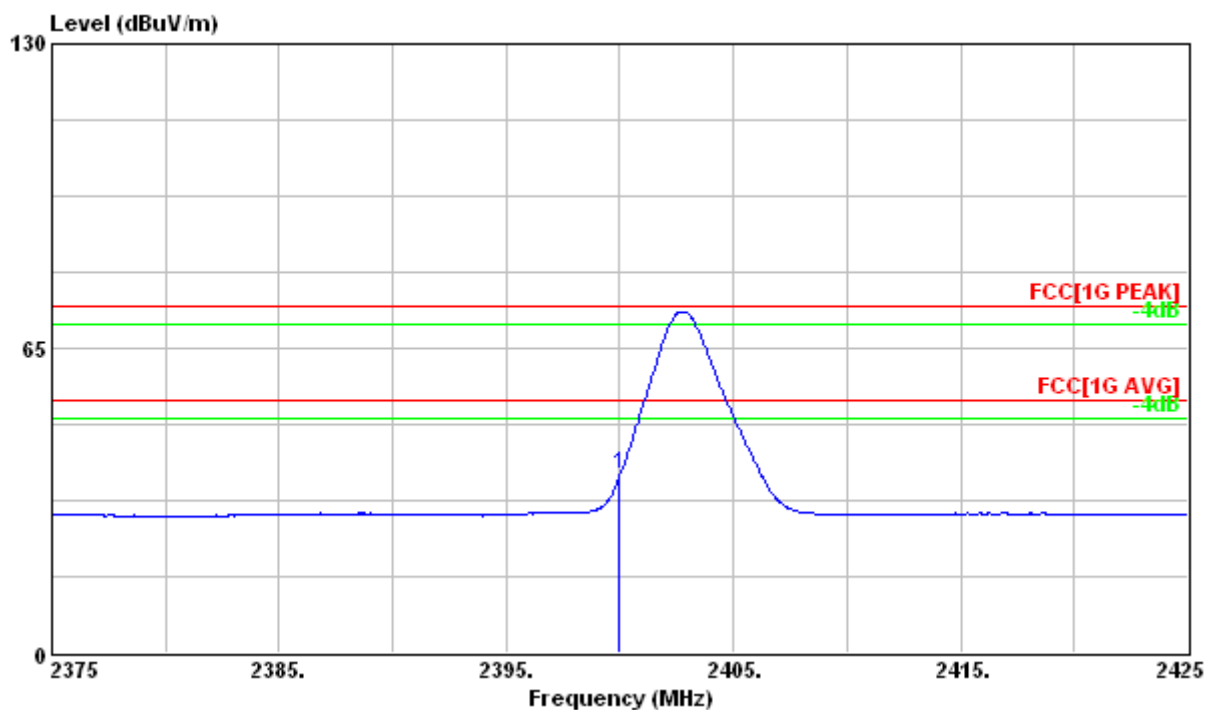


## Highest Channel, Vertical - Peak

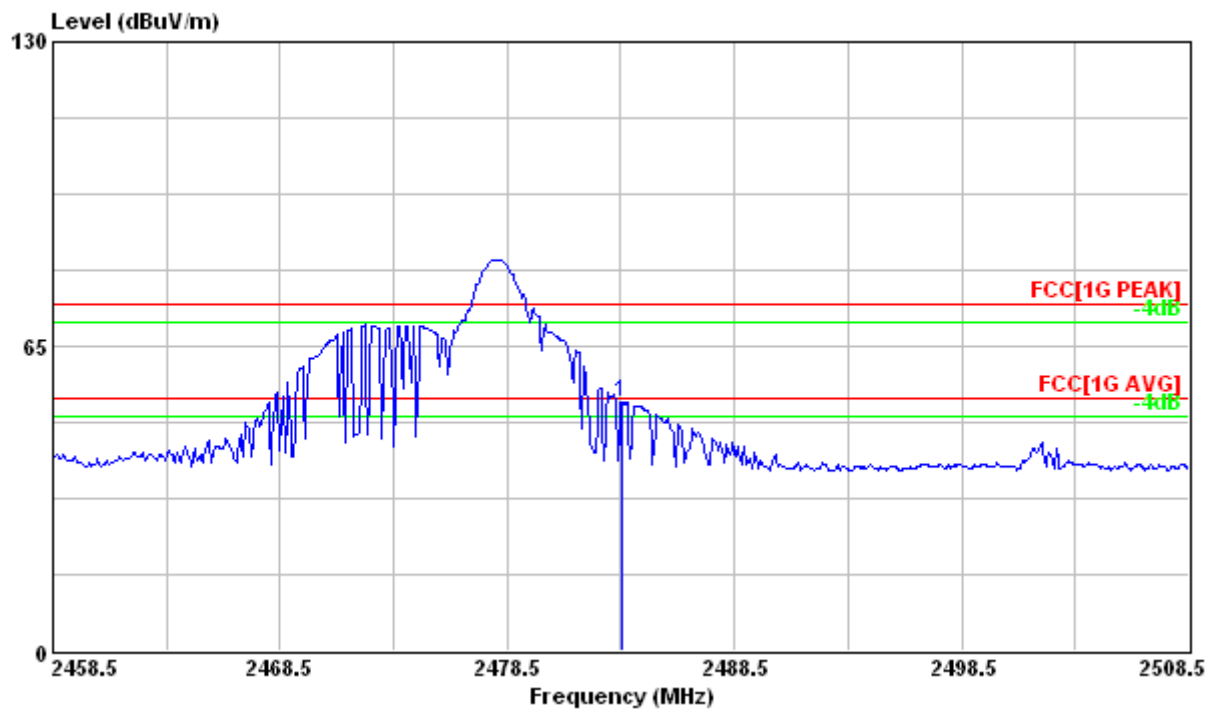


## Highest Channel, Vertical - Average

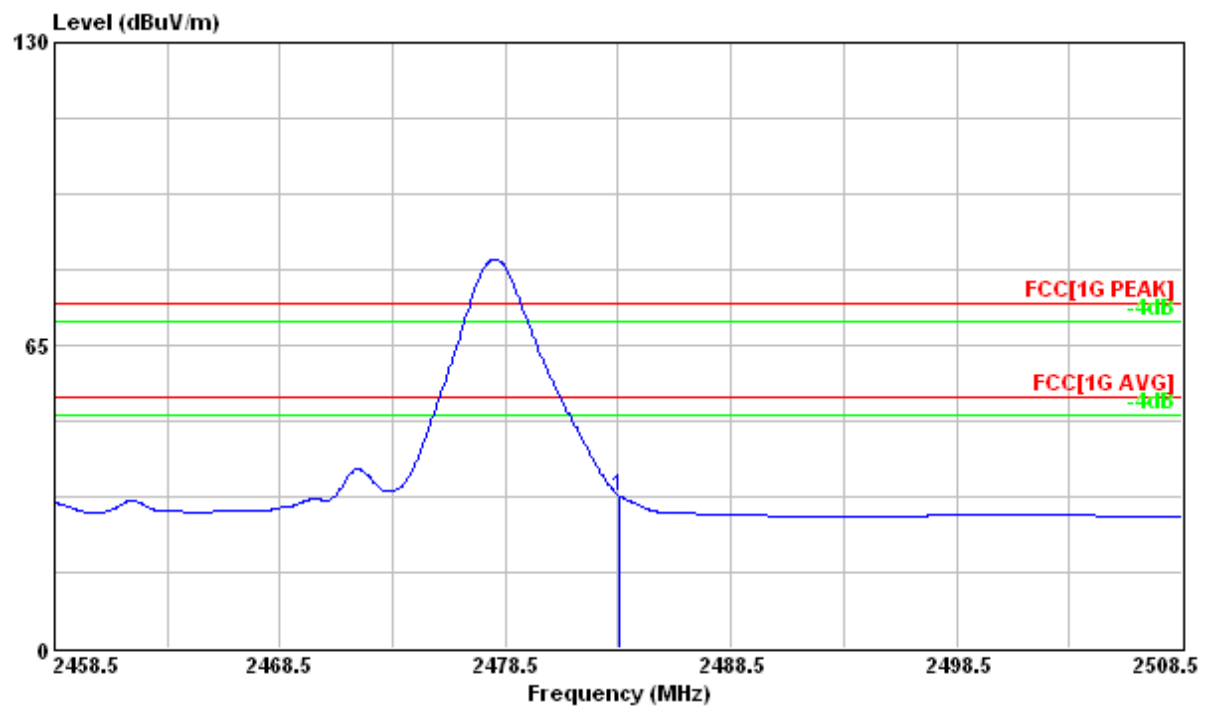

## Highest Channel, Horizontal - Peak

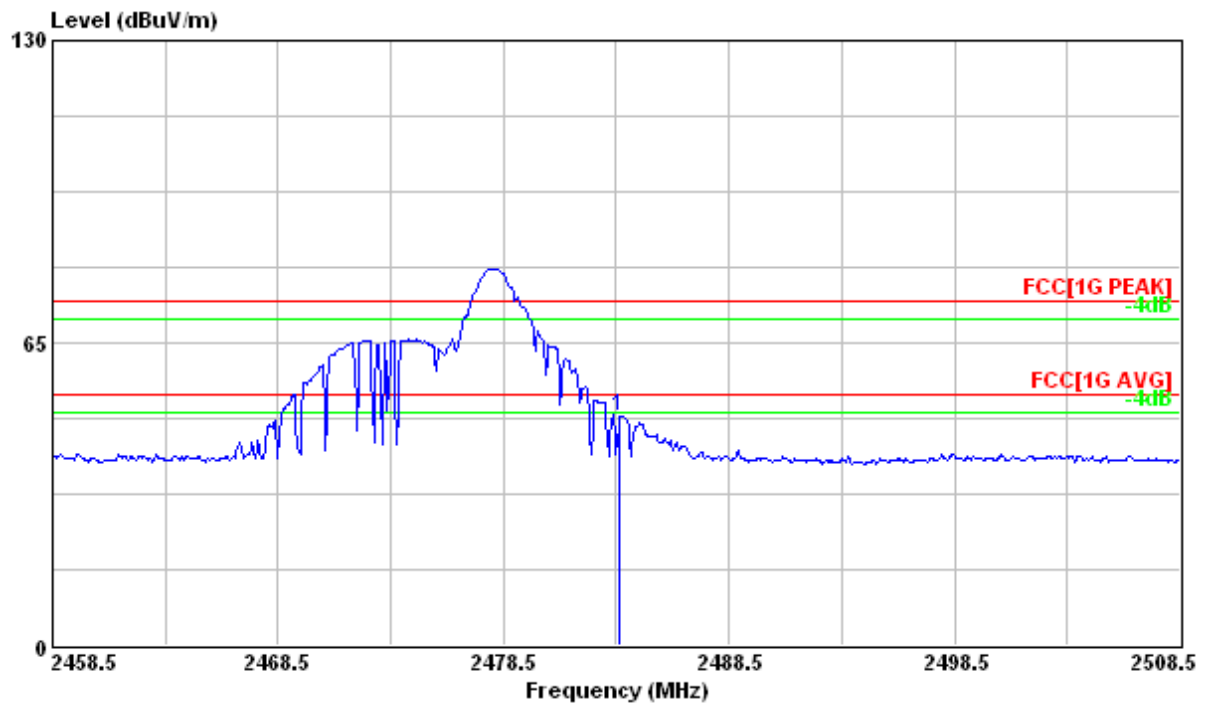


## Highest Channel, Horizontal - Average

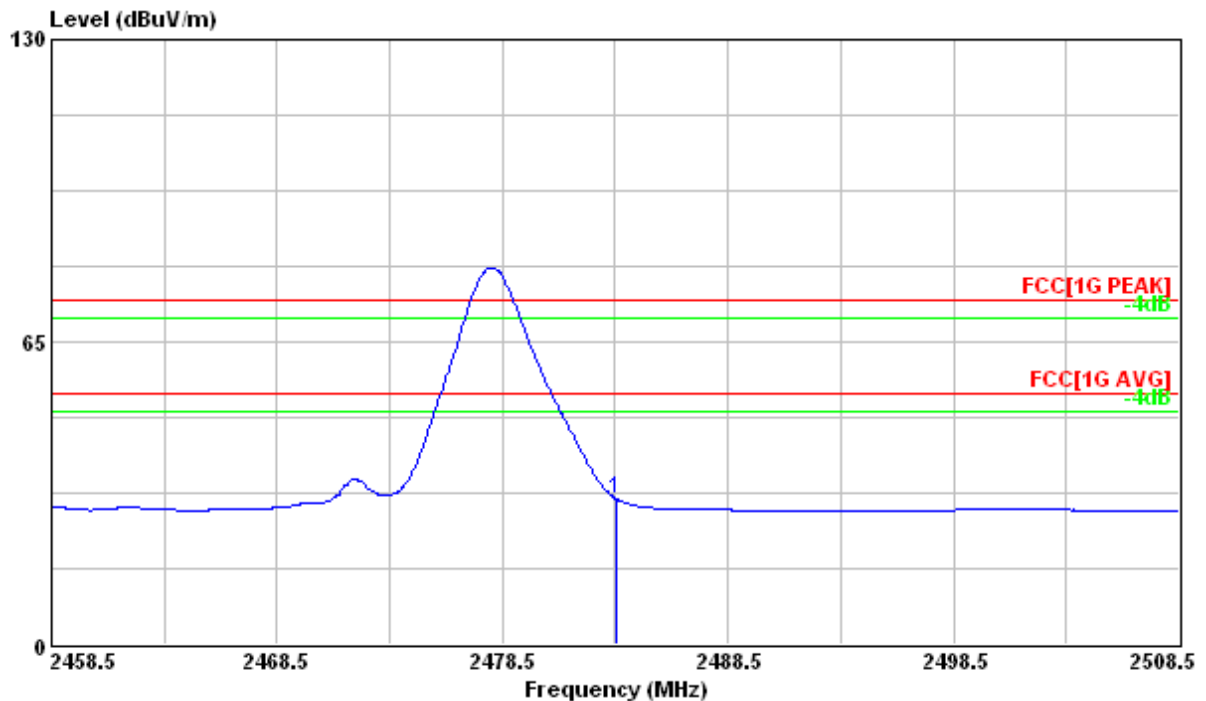

## Transmitter Radiated Emission Measurement

## Below 1000MHz

Test Mode : 2402MHz, Continuous Transmitting  
 Test Distance : 3m Tester : Liu  
 Polarization : Vertical Frequency Range : 30MHz~1000MHz

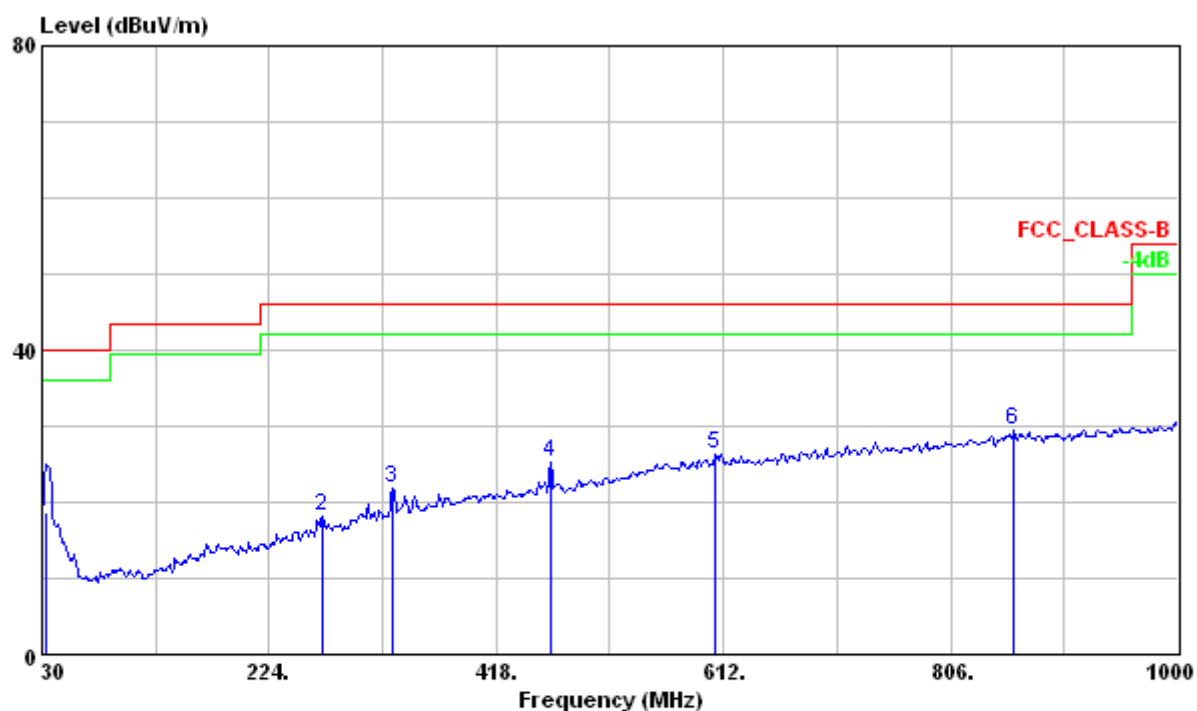


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.880	18.66	-10.72	29.38	40.00	-21.34	100	323	VERTICAL	QP
2	269.590	18.22	-13.30	31.52	46.00	-27.78	---	---	VERTICAL	Peak
3	328.760	21.88	-11.18	33.06	46.00	-24.12	---	---	VERTICAL	Peak
4	464.560	25.27	-7.90	33.17	46.00	-20.73	---	---	VERTICAL	Peak
5	605.210	26.41	-4.61	31.02	46.00	-19.59	---	---	VERTICAL	Peak
6	860.320	29.55	-1.28	30.83	46.00	-16.45	---	---	VERTICAL	Peak

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.
3. Q.P is abbreviation of quasi-peak.

**Test Mode** : 2402MHz, Continuous Transmitting  
**Test Distance** : 3m **Tester** : Liu  
**Polarization** : Horizontal **Frequency Range** : 30MHz~1000MHz

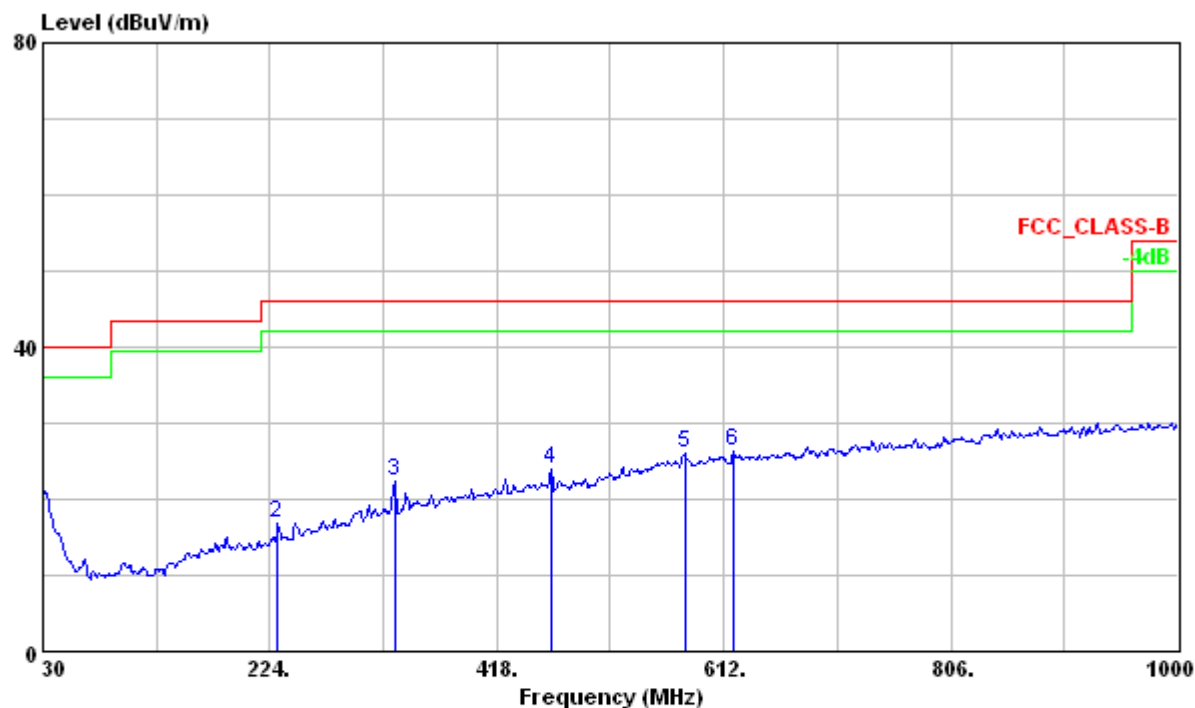


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	30.000	15.16	-8.35	23.51	40.00	-24.84	100	9	HORIZONTAL	QP
2	230.790	16.76	-14.76	31.52	46.00	-29.24	---	---	HORIZONTAL	Peak
3	330.700	22.40	-11.11	33.51	46.00	-23.60	---	---	HORIZONTAL	Peak
4	464.560	24.00	-7.90	31.90	46.00	-22.00	---	---	HORIZONTAL	Peak
5	579.020	26.05	-5.00	31.05	46.00	-19.95	---	---	HORIZONTAL	Peak
6	619.760	26.26	-4.50	30.76	46.00	-19.74	---	---	HORIZONTAL	Peak

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.
3. Q.P is abbreviation of quasi-peak.



**Test Mode** : 2456MHz, Continuous Transmitting  
**Test Distance** : 3m **Tester** : Liu  
**Polarization** : Vertical **Frequency Range** : 30MHz~1000MHz

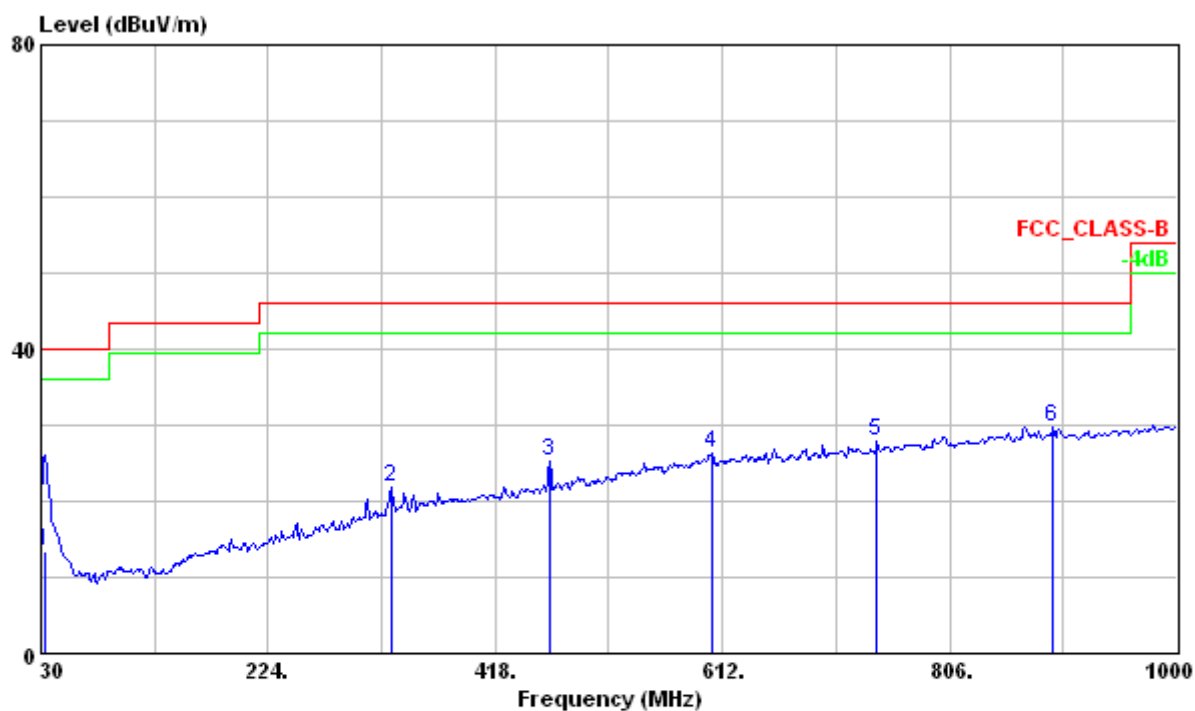


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.880	13.51	-10.72	24.23	40.00	-26.49	100	310	VERTICAL	QP
2	328.760	21.89	-11.18	33.07	46.00	-24.11	---	---	VERTICAL	Peak
3	464.560	25.38	-7.90	33.28	46.00	-20.62	---	---	VERTICAL	Peak
4	603.270	26.29	-4.62	30.91	46.00	-19.71	---	---	VERTICAL	Peak
5	743.920	27.96	-2.73	30.69	46.00	-18.04	---	---	VERTICAL	Peak
6	894.270	29.75	-0.77	30.52	46.00	-16.25	---	---	VERTICAL	Peak

## Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.
3. Q.P is abbreviation of quasi-peak.

**Test Mode** : 2456MHz, Continuous Transmitting  
**Test Distance** : 3m **Tester** : Liu  
**Polarization** : Horizontal **Frequency Range** : 30MHz~1000MHz

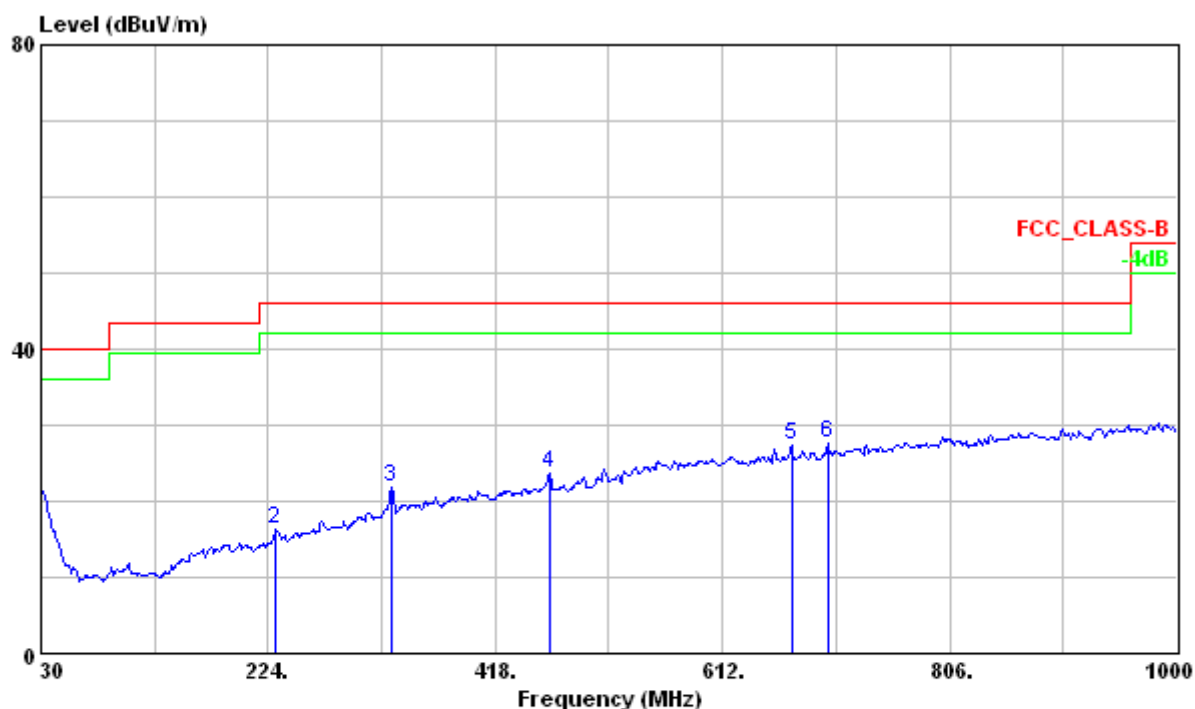


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	30.000	14.96	-8.35	23.31	40.00	-25.04	100	25	HORIZONTAL	QP
2	230.790	16.30	-14.76	31.06	46.00	-29.70	---	---	HORIZONTAL	Peak
3	328.760	21.80	-11.18	32.98	46.00	-24.20	---	---	HORIZONTAL	Peak
4	464.560	23.57	-7.90	31.47	46.00	-22.43	---	---	HORIZONTAL	Peak
5	671.170	27.42	-3.76	31.18	46.00	-18.58	---	---	HORIZONTAL	Peak
6	702.210	27.53	-3.07	30.60	46.00	-18.47	---	---	HORIZONTAL	Peak

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.
3. Q.P is abbreviation of quasi-peak.

**Test Mode** : 2478MHz, Continuous Transmitting  
**Test Distance** : 3m **Tester** : Liu  
**Polarization** : Vertical **Frequency Range** : 30MHz~1000MHz

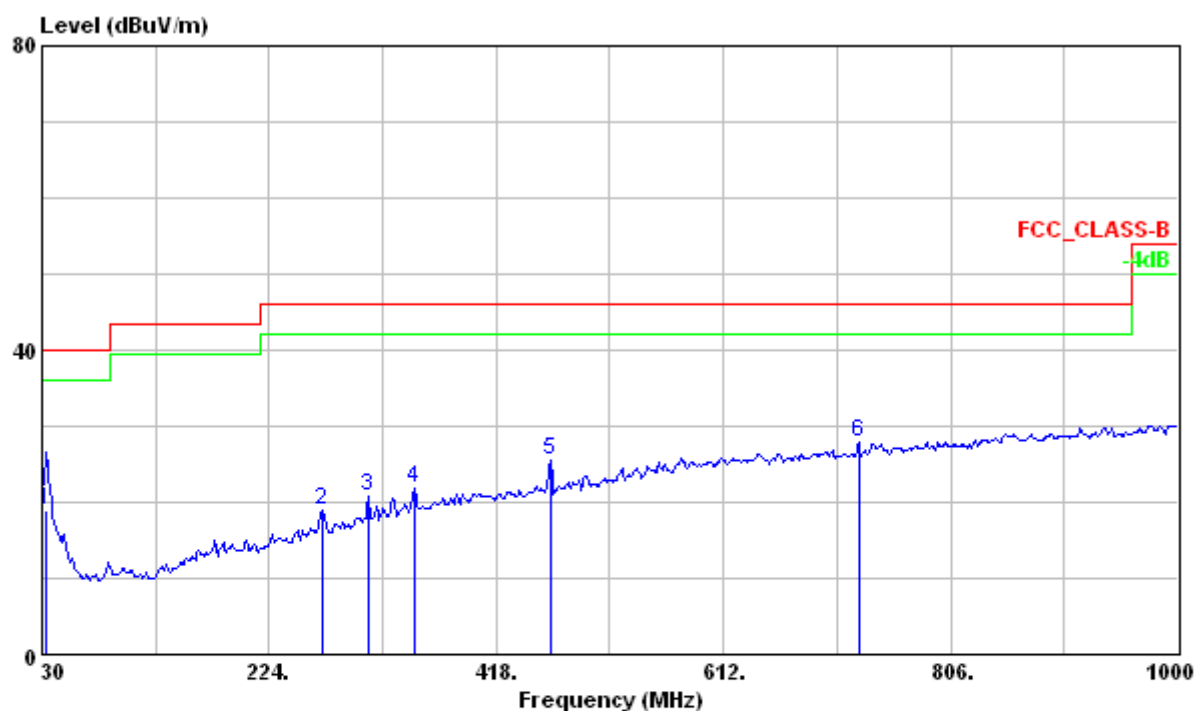


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.880	18.93	-10.72	29.65	40.00	-21.07	100	330	VERTICAL	QP
2	269.590	18.91	-13.30	32.21	46.00	-27.09	---	---	VERTICAL	Peak
3	308.390	20.92	-11.89	32.81	46.00	-25.08	---	---	VERTICAL	Peak
4	348.160	21.81	-10.49	32.30	46.00	-24.19	---	---	VERTICAL	Peak
5	464.560	25.43	-7.90	33.33	46.00	-20.57	---	---	VERTICAL	Peak
6 B	727.430	28.00	-2.86	30.86	46.00	-18.00	---	---	VERTICAL	Peak

## Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.
3. Q.P is abbreviation of quasi-peak.

**Test Mode** : 2478MHz, Continuous Transmitting  
**Test Distance** : 3m **Tester** : Liu  
**Polarization** : Horizontal **Frequency Range** : 30MHz~1000MHz

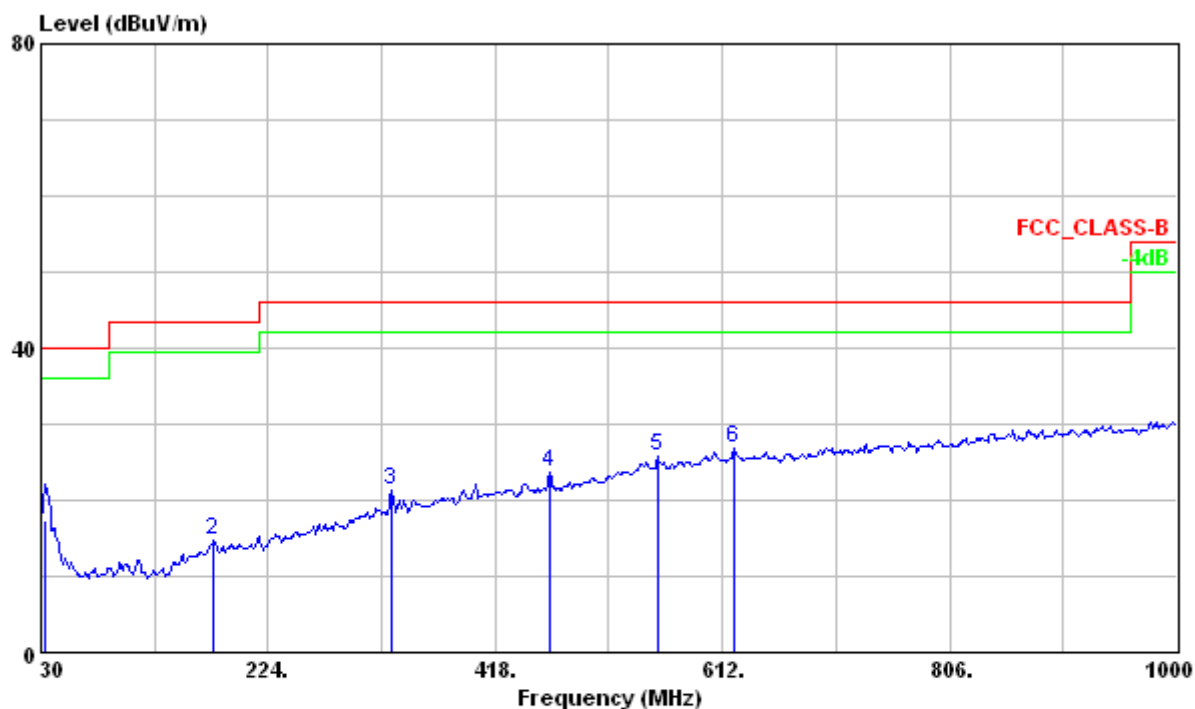


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	33.880	17.48	-10.72	28.20	40.00	-22.52	100	23	HORIZONTAL	QP
2	177.440	14.81	-16.09	30.90	43.50	-28.69	---	---	HORIZONTAL	Peak
3	328.760	21.41	-11.18	32.59	46.00	-24.59	---	---	HORIZONTAL	Peak
4	464.560	23.72	-7.90	31.62	46.00	-22.28	---	---	HORIZONTAL	Peak
5	556.710	25.88	-5.37	31.25	46.00	-20.12	---	---	HORIZONTAL	Peak
6	622.670	26.97	-4.46	31.43	46.00	-19.03	---	---	HORIZONTAL	Peak

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.
3. Q.P is abbreviation of quasi-peak.

## Above 1000MHz

Test Mode : 2402MHz, Continuous transmitting  
 Test Distance : 3m Tester : Liu  
 Polarization : Vertical Frequency Range : 1GHz ~ 25GHz

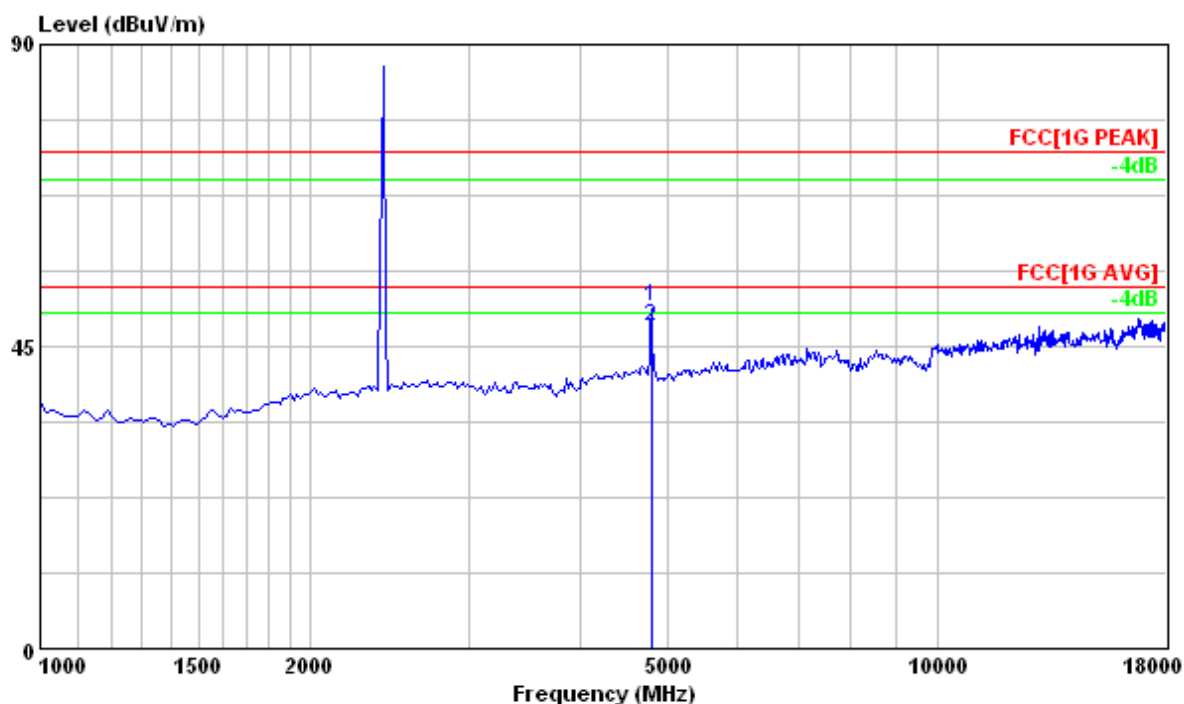


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	4804.075	50.95	-32.89	83.84	74.00	-23.05	116	105	VERTICAL	Peak
2 ③	4804.075	47.96	-32.89	80.85	54.00	-6.04	116	105	VERTICAL	Average

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

**Test Mode** : 2402MHz, Continuous transmitting  
**Test Distance** : 3m **Tester** : Liu  
**Polarization** : Horizontal **Frequency Range** : 1GHz ~ 25GHz

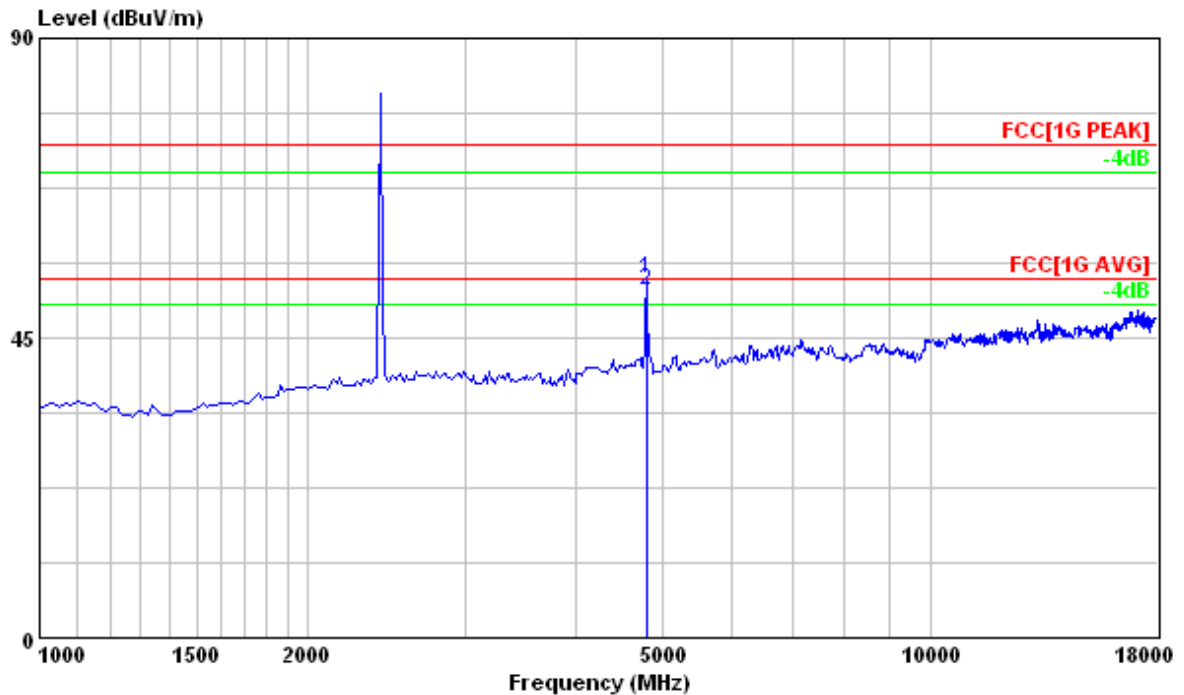


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	4804.050	53.97	-32.89	86.86	74.00	-20.03	131	107	HORIZONTAL	Peak
2	4804.050	51.99	-32.89	84.88	54.00	-2.01	131	107	HORIZONTAL	Average

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Mode : 2456MHz, Continuous transmitting  
Test Distance : 3m Tester : Liu  
Polarization : Vertical Frequency Range : 1GHz ~ 25GHz

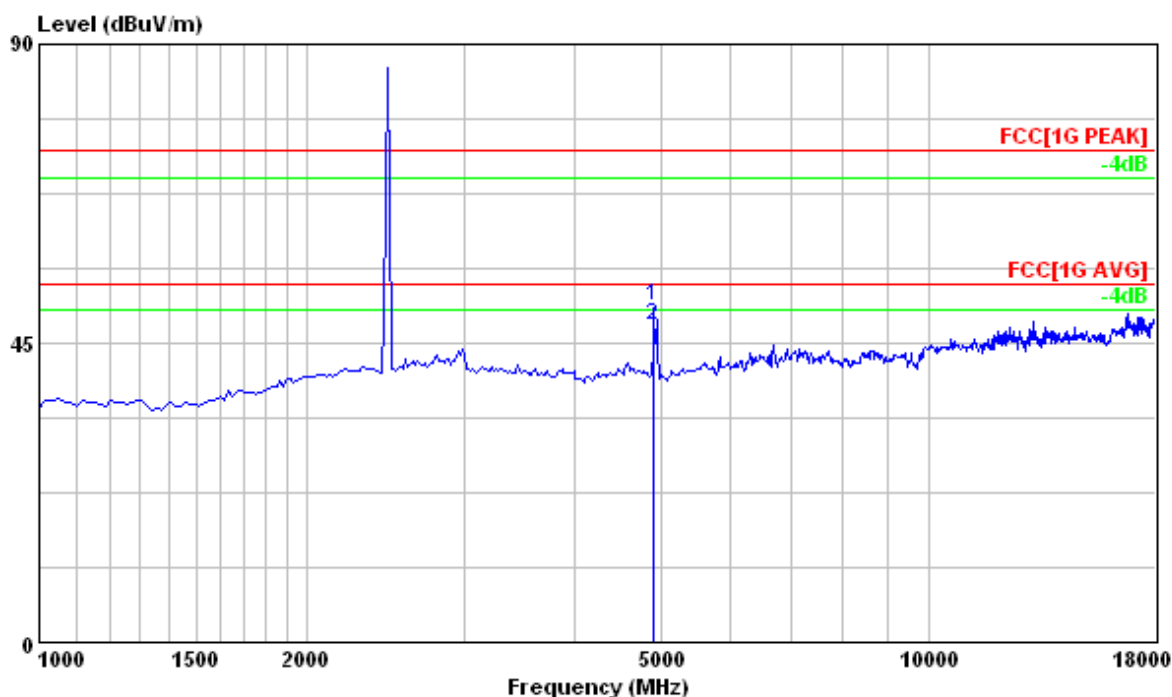


	Freq	Level	Factor	Read Level	Limit	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	4912.065	50.57	-32.91	83.48	74.00	-23.43	129	85	VERTICAL	Peak
2	4912.065	47.77	-32.91	80.68	54.00	-6.23	129	85	VERTICAL	Average

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Mode : 2456MHz, Continuous transmitting  
Test Distance : 3m Tester : Liu  
Polarization : Horizontal Frequency Range : 1GHz ~ 25GHz

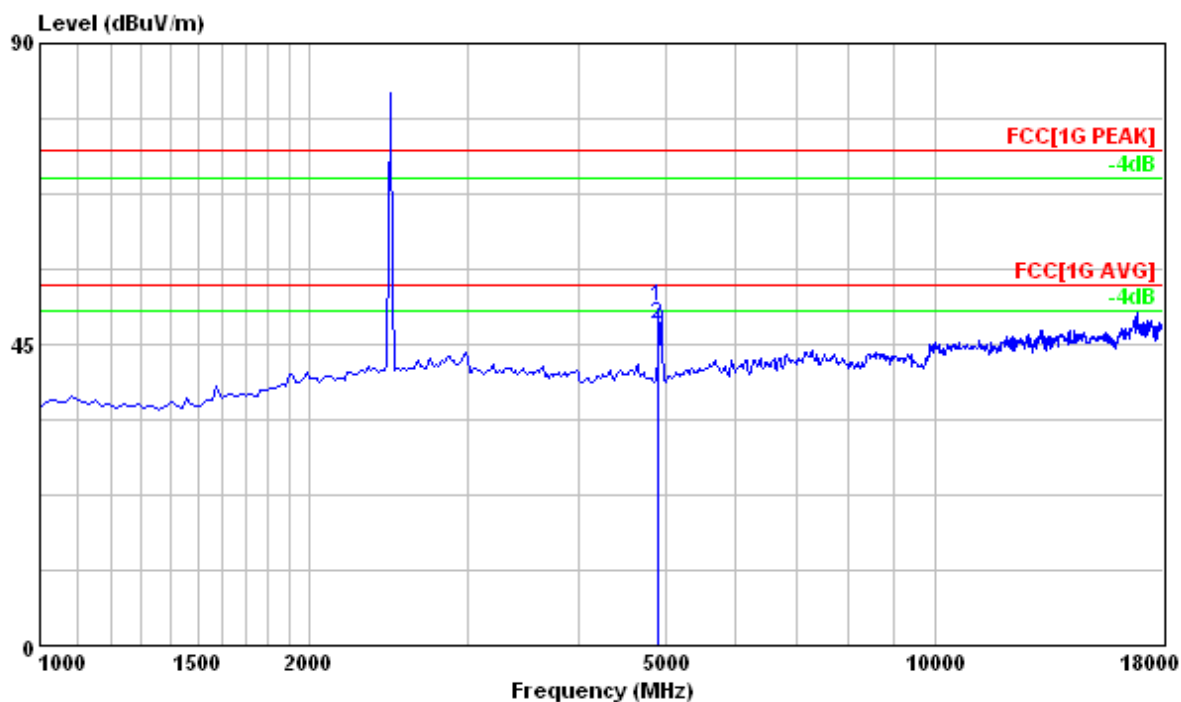

	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	4912.125	50.74	-32.91	83.65	74.00	-23.26	218	125	HORIZONTAL	Peak
2 @	4912.125	48.01	-32.91	80.92	54.00	-5.99	218	125	HORIZONTAL	Average


Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.



Test Mode : 2478MHz, Continuous transmitting  
 Test Distance : 3m Tester : Liu  
 Polarization : Vertical Frequency Range : 1GHz ~ 25GHz

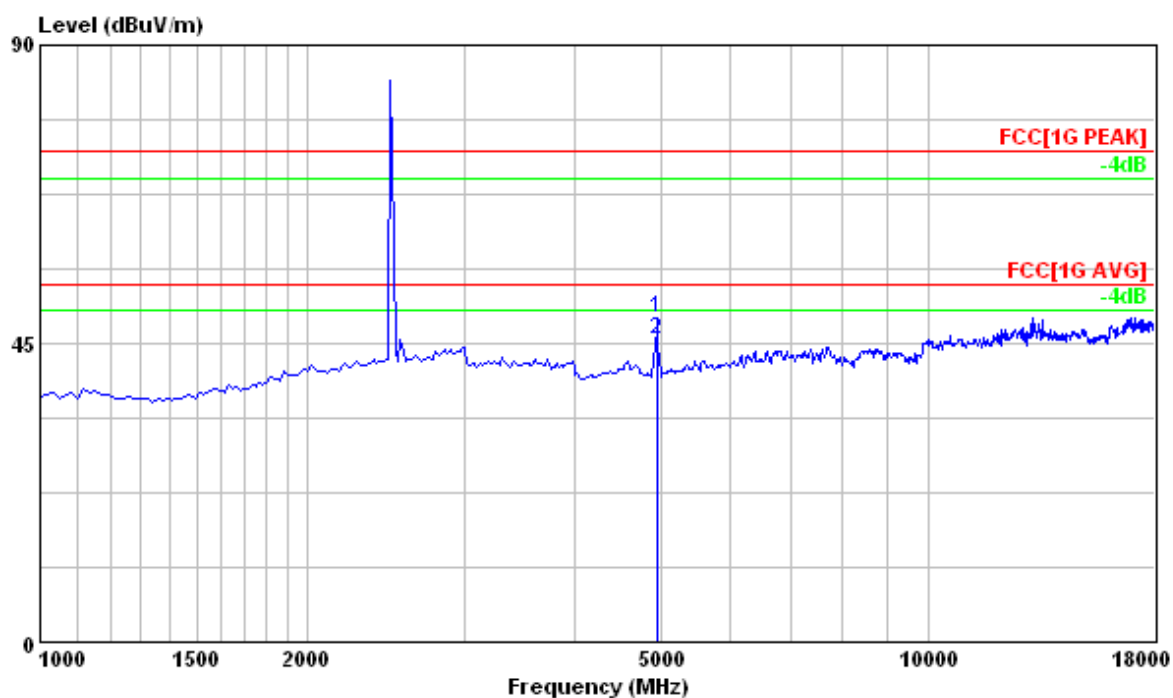


	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	4955.947	48.87	-32.91	81.78	74.00	-25.13	185	360	VERTICAL	Peak
2	4955.947	45.58	-32.91	78.49	54.00	-8.42	185	360	VERTICAL	Average

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

Test Mode : 2478MHz, Continuous transmitting  
Test Distance : 3m Tester : Liu  
Polarization : Horizontal Frequency Range : 1GHz ~ 25GHz

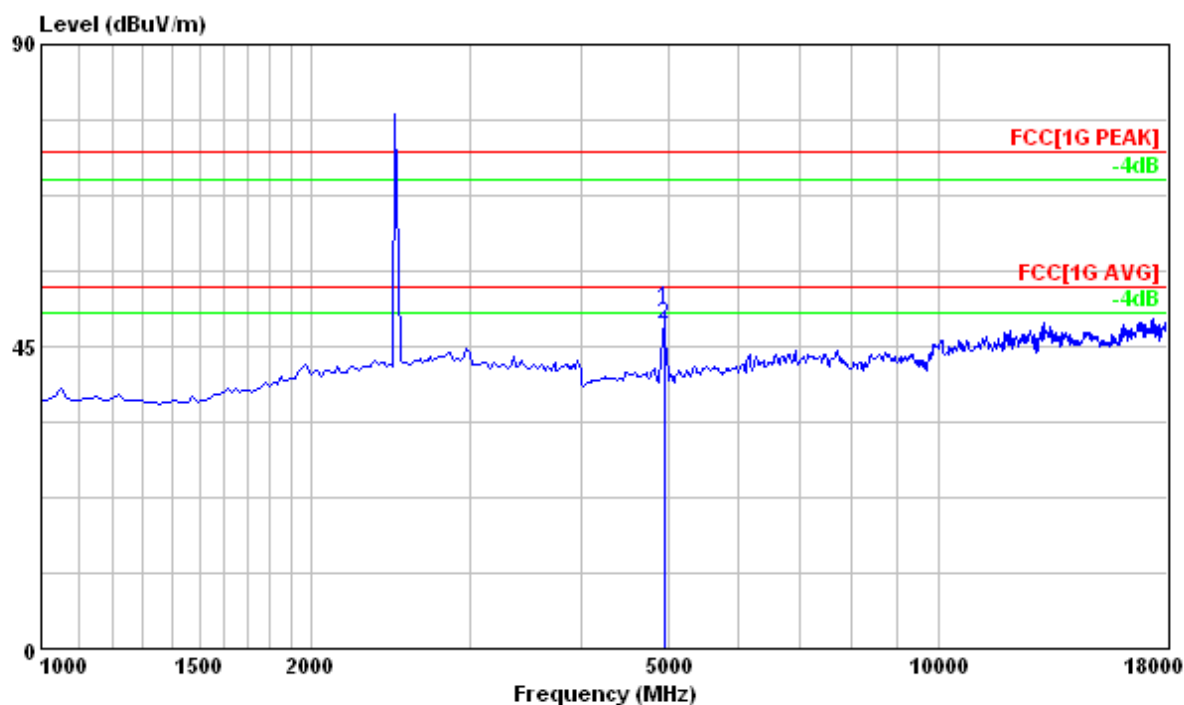

	Freq	Level	Factor	Read Level	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dB/m	dBuV	dBuV/m	dB	cm	deg		
1	4955.935	50.59	-32.91	83.50	74.00	-23.41	119	55	HORIZONTAL	Peak
2	4955.935	48.33	-32.91	81.24	54.00	-5.67	119	55	HORIZONTAL	Average

Note:

1. Emission Level = reading value + correction factor.
2. Correction factor = cable loss + antenna factor – gain of pre-amplifier.

No signal can be detected from 18GHz to 25GHz, so the graphs are omitted above 18GHz.

## **Attachment 1**

### **Photographs of the Test Configurations**

**Radiated Emission Measurement**

**Transmitter**

**X-AXIS**



**Y-AXIS**



**Z-AXIS**



## **Attachment 2**

### **External Photographs of EUT**

**Test Sample**





**Series Sample**







## **Attachment 3**

### **Internal Photographs of EUT**

