

FCC 47 CFR PART 15 SUBPART C

Product Type : Blank Slate Tablet

Applicant : Microlink Communications Inc.

Address : No. 49, Sec. 4, Jhongyang Rd., Tucheng City, Taipei County
236, Taiwan (R.O.C.)

Trade Name : MOGO

Model Number : ID8-BS1000

Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2010
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4-2009

Application Purpose: Original

Recive Date : Jul. 24, 2011

Issue Date : Dec. 16, 2011

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Nov. 02, 2011	Initial Issue	
01	Nov. 21, 2011	Re-test CE, RE and Bandedge with new adapter	Linda Su
02	Nov. 23, 2011	Add note below EUT description	Linda Su
03	Dec. 16, 2011	Revise Radiated Interference test data	Linda Su

Verification of Compliance

Issued Date: 12/16/2011

Product Type : Blank Slate Tablet

Applicant : Microlink Communications Inc.

Address : No. 49, Sec. 4, Jhongyang Rd., Tucheng City, Taipei
County 236, Taiwan (R.O.C.)

Trade Name : MOGO

Model Number : ID8-BS1000

FCC ID : ZUJ-MTP1122

EUT Rated Voltage : DC 5V, 2.0A

Test Voltage : 120 Vac / 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2010
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4-2009


Test Result : Complied

Application Purpose : Original


Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +86-3-2710188 / Fax : +86-3-2710190
Taiwan Accreditation Foundation accreditation number:
1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .
The test results of this report relate only to the tested sample identified in this report.

Approved By : 

(Manager)

Reviewed By : 

(Testing Engineer)

(Fly Lu)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology.....	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software.....	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment.....	9
4	Conducted Emission Measurement.....	10
4.1.	Limit	10
4.2.	Test Instruments	10
4.3.	Test Setup.....	10
4.4.	Test Procedure	11
4.5.	Test Result.....	12
5	Radiated Interference Measurement.....	16
5.1.	Limit	16
5.2.	Test Instruments	16
5.3.	Setup	17
5.4.	Test Procedure	18
5.5.	Test Result.....	20
6	Maximum Conducted Output Power Measurement.....	28
6.1.	Limit	28
6.2.	Test Setup.....	28
6.3.	Test Instruments	28
6.4.	Test Procedure	28
6.5.	Test Result.....	29
7	6dB RF Bandwidth Measurement	30
7.1.	Limit	30
7.2.	Test Setup.....	30
7.3.	Test Instruments	30
7.4.	Test Procedure	30
7.5.	Test Result.....	31
7.6.	Test Graphs	32

8	Maximum Power Density Measurement	35
8.1.	Limit	35
8.2.	Test Setup	35
8.3.	Test Instruments	35
8.4.	Test Procedure	35
8.5.	Test Result	36
8.6.	Test Graphs	37
9	Out of Band Conducted Emissions Measurement	40
9.1.	Limit	40
9.2.	Test Setup	40
9.3.	Test Instruments	40
9.4.	Test Procedure	40
9.5.	Test Graphs	41
10	Band Edges Measurement	44
10.1.	Limit	44
10.2.	Test Setup	44
10.3.	Test Instruments	44
10.4.	Test Procedure	45
10.5.	Test Result	46
11	99 % Occupied Bandwidth Measurement	58
11.1.	Limit	58
11.2.	Test Setup	58
11.3.	Test Instruments	58
11.4.	Test Procedure	58
11.5.	Test Result	59
11.6.	Test Graphs	60
12	Antenna Measurement	63
12.1.	Limit	63
12.2.	Antenna Connector Construction	63

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.24 dB.

Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as ± 3.072 dB.

2 EUT Description

Product	:	Blank Slate Tablet
Trade Name	:	MOGO
Model No.	:	ID8-BS1000
Applicant	:	Microlink Communications Inc. No. 49, Sec. 4, Jhongyang Rd., Tucheng City, Taipei County 236, Taiwan (R.O.C.)
Manufacturer	:	FUGANG ELECTRIC (KUNSHAN) CO., LTD No.6, Zheng Wei Road, Jin Xi Town, Kun Shan City, Jiang Su Province, China
FCC ID	:	ZUJ-MTP1122
Frequency Range	:	2412 ~ 2462 MHz
Modulation Type	:	IEEE 802.11b:DSSS IEEE 802.11g:DSSS, OFDM draft 802.11n Standard-20MHz channel mode: OFDM
Antenna Type	:	Chip Antenna
Antenna Gain	:	0.58 dBi
RF Output Power	:	IEEE 802.11b: 0.084 W / 19.26 dBm IEEE 802.11g: 0.265 W / 24.23 dBm draft 802.11n Standard-20MHz: 0.262 W / 24.18 dBm
Component		
Power Adapter	:	Sunny Computer Technology Co., Ltd., SYS1448-1005-W2 I/P: 100-240VAC, 50-60Hz, 0.5A O/P: 5VDC, 2.0A Cable out: Shielded, 1.4m

Note:

1. This device is a Blank Slate Tablet included a 2.4GHz Wi-Fi function, a Bluetooth function and a 3G function.
2. These tests results on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regards to the frequency band operation; the highest rate that was included the lowest, middle and highest frequency of channel were selected to perform the test, them shown on this report.
4. This device is a composite device in accordance with Part 15 regulations.
 - The function for 2.4GHz Bluetooth was measured and made a test report that the report number is 1110FR19-02.
 - The function for normal operation was measured and made a test report that the report number is 1110FE15-02 under Declaration of Conformity.
5. 3G module was certified under FCC ID: ZUJ-MTP1121.

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: IEEE 802.11b Link Mode
Mode 4: IEEE 802.11g Link Mode
Mode 5: draft 802.11n Standard-20MHz Link Mode
Mode 6: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:


Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with MCS0 were chosen for full testing.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to AP.
4.	EUT run test program.

3.3. Configuration of Test System Details

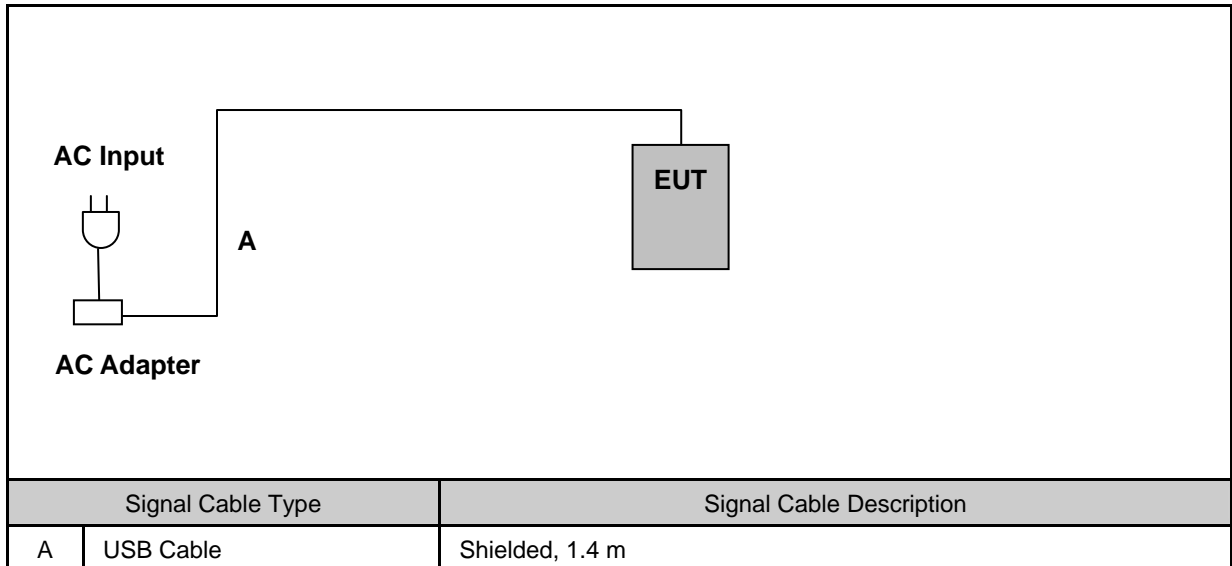

Devices Description				
Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	-----	-----	-----	-----

3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/30/2011	(1)
LISN	R&S	ENV216	101040	03/04/2011	(1)
LISN	R&S	ENV216	101041	03/04/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.3. Test Setup

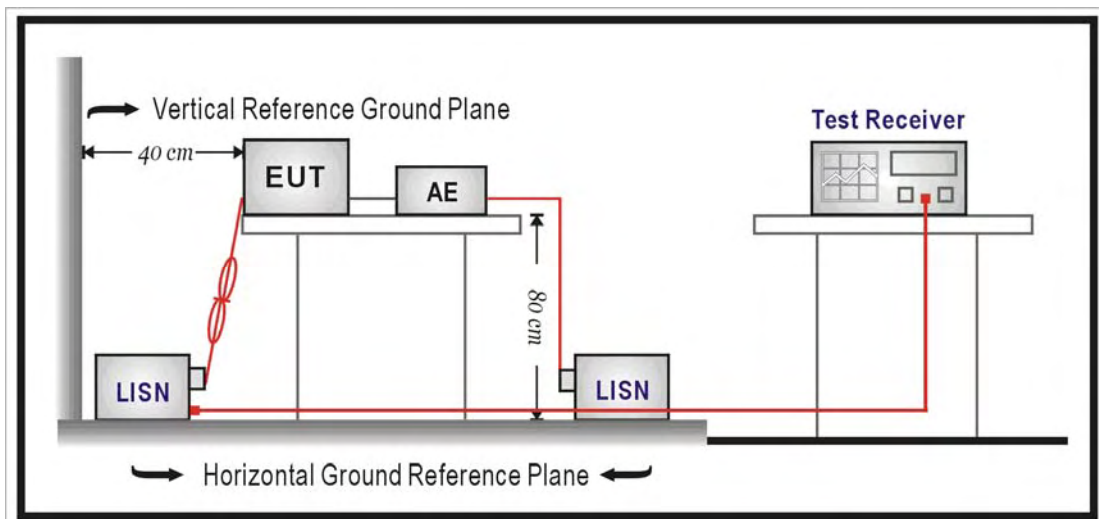

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	11/14/2011
		Test By:	Fly Lu
Description:			

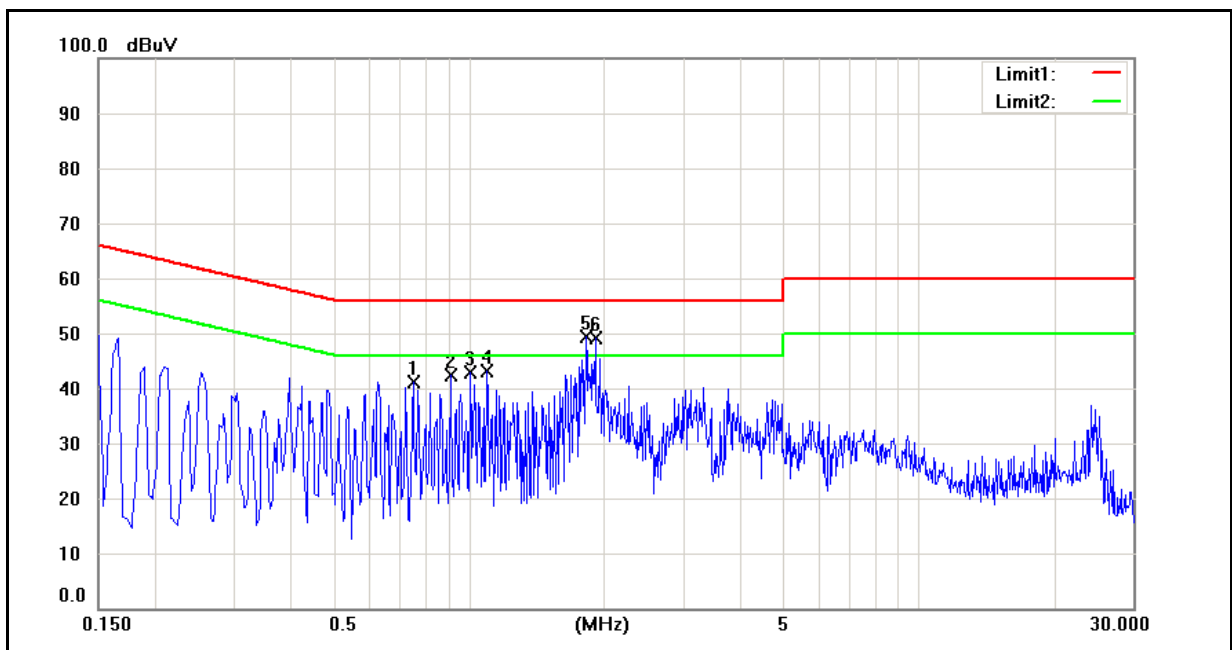


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.7540	29.70	21.12	9.83	39.53	30.95	56.00	46.00	-16.47	-15.05	Pass
2	0.9100	27.49	12.27	9.77	37.26	22.04	56.00	46.00	-18.74	-23.96	Pass
3	1.0060	27.30	12.29	9.73	37.03	22.02	56.00	46.00	-18.97	-23.98	Pass
4	1.0980	27.34	12.16	9.72	37.06	21.88	56.00	46.00	-18.94	-24.12	Pass
5	1.8220	34.16	19.93	9.68	43.84	29.61	56.00	46.00	-12.16	-16.39	Pass
6	1.9140	35.27	19.70	9.68	44.95	29.38	56.00	46.00	-11.05	-16.62	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	11/14/2011
		Test By:	Fly Lu
Description:			

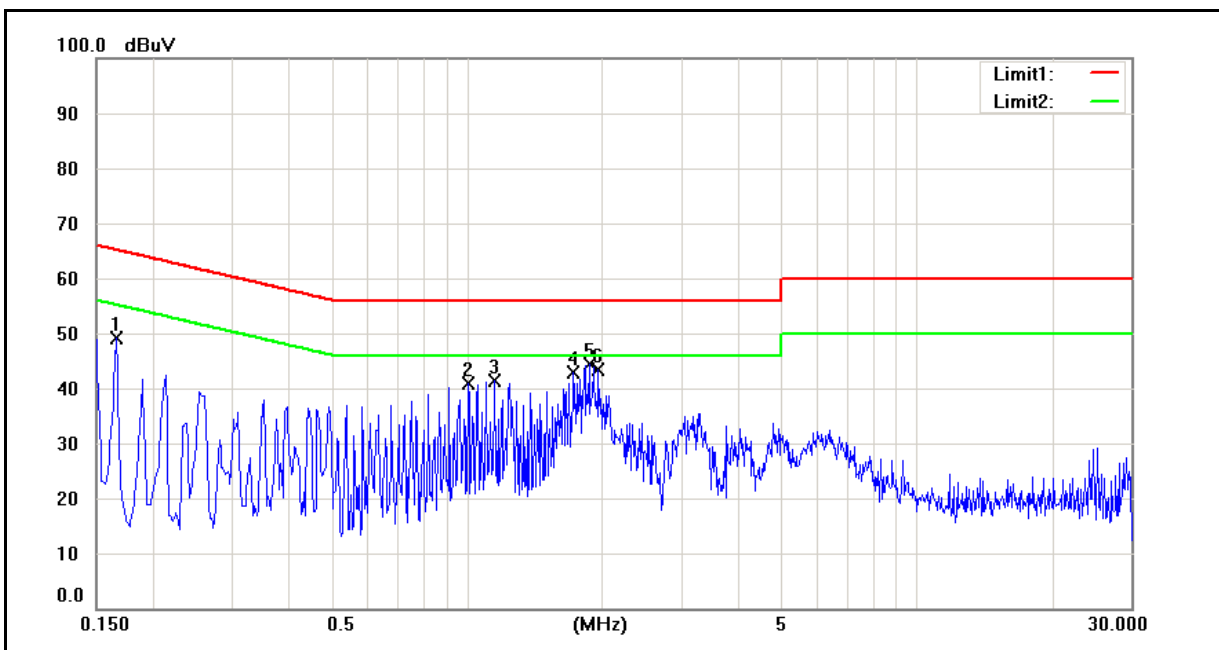


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	30.74	7.45	10.15	40.89	17.60	65.16	55.16	-24.27	-37.56	Pass
2	1.0100	25.95	10.36	9.80	35.75	20.16	56.00	46.00	-20.25	-25.84	Pass
3	1.1540	25.54	10.91	9.78	35.32	20.69	56.00	46.00	-20.68	-25.31	Pass
4	1.7340	27.30	14.67	9.75	37.05	24.42	56.00	46.00	-18.95	-21.58	Pass
5	1.8700	30.73	18.87	9.74	40.47	28.61	56.00	46.00	-15.53	-17.39	Pass
6	1.9660	28.18	15.75	9.74	37.92	25.49	56.00	46.00	-18.08	-20.51	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/14/2011
		Test By:	Fly Lu
Description:			

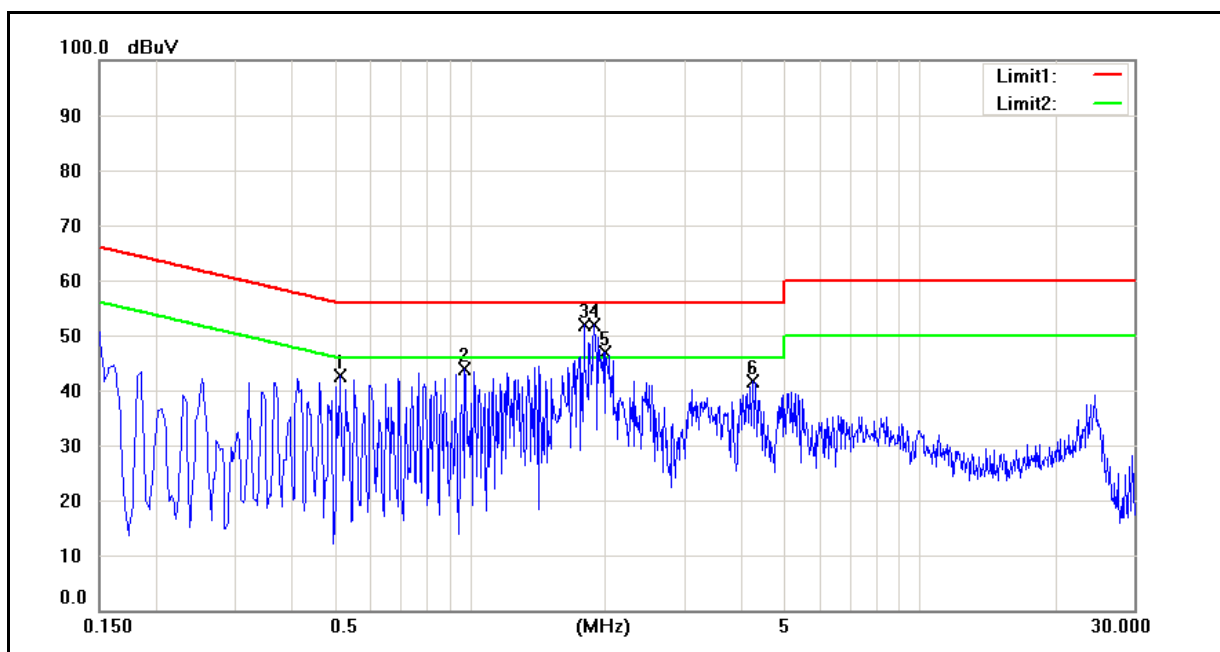

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.5140	28.85	11.69	9.92	38.77	21.61	56.00	46.00	-17.23	-24.39	Pass
2	0.9780	29.07	12.46	9.74	38.81	22.20	56.00	46.00	-17.19	-23.80	Pass
3	1.7980	35.18	20.53	9.68	44.86	30.21	56.00	46.00	-11.14	-15.79	Pass
4	1.8900	37.77	21.96	9.68	47.45	31.64	56.00	46.00	-8.55	-14.36	Pass
5	2.0060	32.77	19.38	9.68	42.45	29.06	56.00	46.00	-13.55	-16.94	Pass
6	4.2540	26.85	9.10	9.81	36.66	18.91	56.00	46.00	-19.34	-27.09	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/14/2011
		Test By:	Fly Lu
Description:			

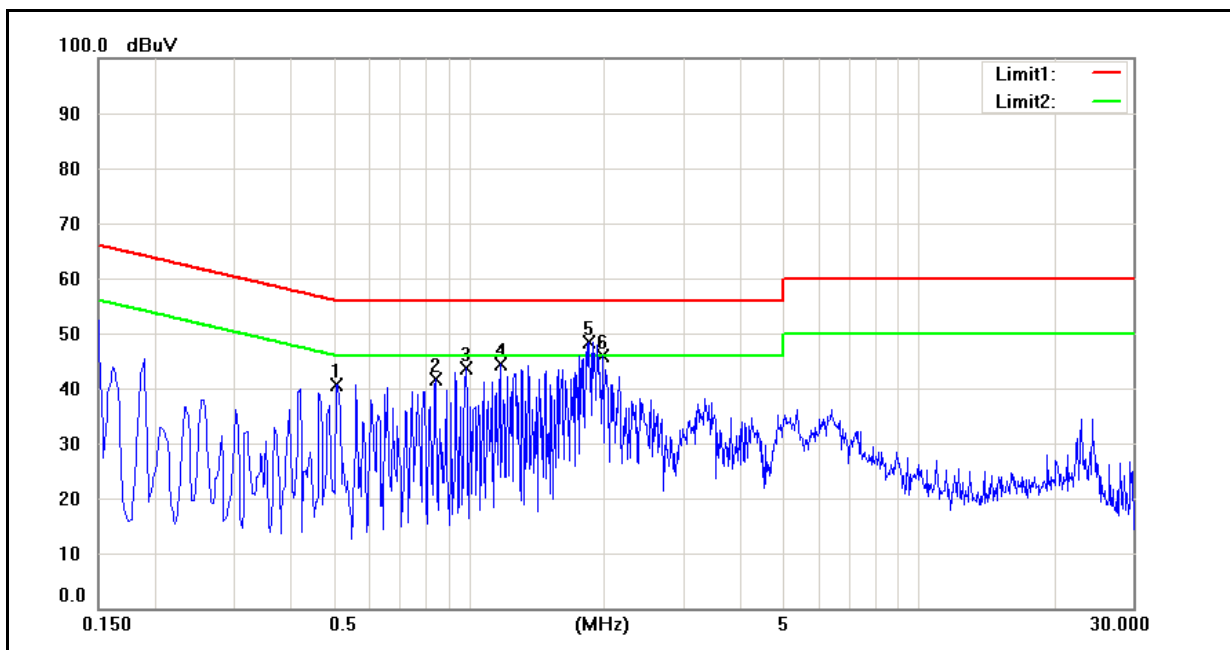

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.5100	25.62	8.29	10.01	35.63	18.30	56.00	46.00	-20.37	-27.70	Pass
2	0.8460	28.11	9.74	9.86	37.97	19.60	56.00	46.00	-18.03	-26.40	Pass
3	0.9860	28.72	9.84	9.81	38.53	19.65	56.00	46.00	-17.47	-26.35	Pass
4	1.1740	29.94	10.88	9.78	39.72	20.66	56.00	46.00	-16.28	-25.34	Pass
5	1.8500	35.60	20.66	9.74	45.34	30.40	56.00	46.00	-10.66	-15.60	Pass
6	1.9860	32.07	19.76	9.74	41.81	29.50	56.00	46.00	-14.19	-16.50	Pass

5 Radiated Interference Measurement

5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	06/16/2011	(1)
Amplifier	Mini-Circuits	ZKL-1R5+	N/A	05/30/2011	(1)
Amplifier	Mini-Circuits	ZVA-213-S+	N/A	05/30/2011	(1)
RF Pre-selector	Agilent	N9039A	MY46520255	05/16/2011	(1)
Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00128055	08/24/2011	(1)
Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	SB AC VULB	9168-419	05/10/2011	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2009	(3)
Test Site	ATL	TE09	TE09	05/13/2011	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


NOTE: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

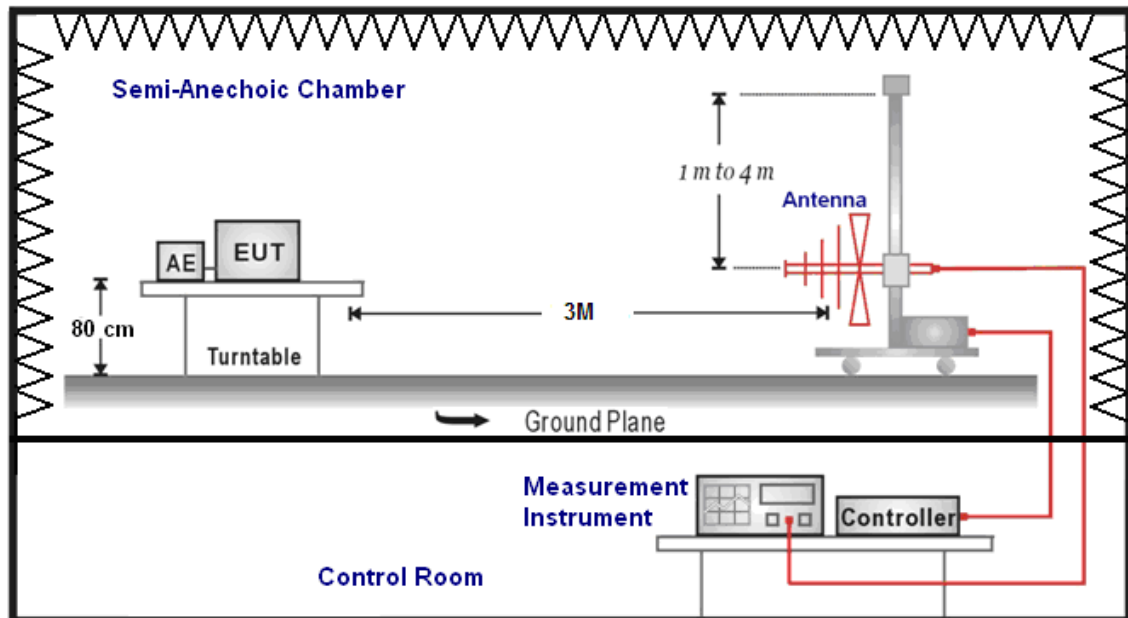

Above 1GHz

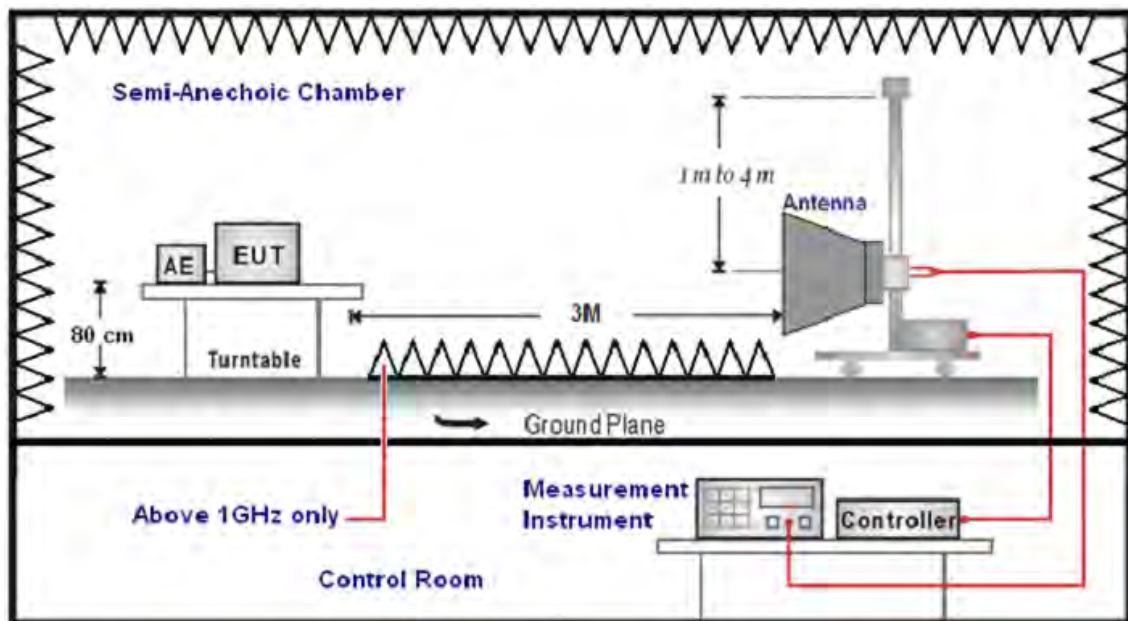

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis (dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

5.5. Test Result

9kHz ~ 30MHz

Standard:	FCC Part 15C	Test Distance:	1m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/15/2011
Ant.Polar.:	Horizontal	Test By:	Fly Lu

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7.1170	-16.32	15.76	-0.56	79.30	-79.86	QP
2	10.3856	-10.80	13.99	3.19	73.69	-70.50	QP
3	11.8254	-12.07	13.72	1.65	71.22	-69.57	QP
4	17.7332	-15.81	13.76	-2.05	61.07	-63.12	QP
5	20.9126	-13.44	13.80	0.36	55.61	-55.25	QP
6	25.1710	-15.62	11.90	-3.72	48.29	-52.01	QP

Note: Spurious Radiated Emissions measurements starting at 9 kHz at least below or at the crystal frequency.

Standard:	FCC Part 15C	Test Distance:	1m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/15/2011
Ant.Polar.:	Vertical	Test By:	Fly Lu

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1.4186	5.75	15.00	20.75	84.65	-63.90	QP
2	5.9172	-8.41	15.40	6.99	81.37	-74.38	QP
3	12.4550	-6.11	13.60	7.49	70.14	-62.65	QP
4	18.5134	-9.59	13.92	4.33	59.73	-55.40	QP
5	22.6822	-14.61	12.98	-1.63	52.57	-54.20	QP
6	28.5900	-5.80	11.84	6.04	42.42	-36.38	QP

Note: Spurious Radiated Emissions measurements starting at 9 kHz at least below or at the crystal frequency.

30MHz ~ 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/15/2011
Ant.Polar.:	Horizontal	Test By:	Fly Lu

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	239.5200	62.50	-25.21	37.29	46.00	-8.71	QP
2	319.0600	62.21	-22.61	39.60	46.00	-6.40	QP
3	431.5800	60.17	-19.46	40.71	46.00	-5.29	QP
4	749.7400	52.35	-13.02	39.33	46.00	-6.67	QP
5	791.4500	53.09	-12.76	40.33	46.00	-5.67	QP
6	959.2600	47.22	-10.74	36.48	46.00	-9.52	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/15/2011
Ant.Polar.:	Vertical	Test By:	Fly Lu

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	239.5200	57.83	-25.21	32.62	46.00	-13.38	QP
2	319.0600	56.46	-22.61	33.85	46.00	-12.15	QP
3	407.3300	58.80	-20.35	38.45	46.00	-7.55	QP
4	455.8300	60.27	-18.71	41.56	46.00	-4.44	QP
5	647.8900	53.28	-15.06	38.22	46.00	-7.78	QP
6	959.2600	50.90	-10.74	40.16	46.00	-5.84	QP

Above 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ID8-BS1000		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		11/15/2011	
Frequency:		2412MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	75.21	-23.52	51.69	74.00	-22.31	peak	H
1595.000	75.68	-22.35	53.33	74.00	-20.67	peak	H
1595.000	58.35	-22.35	36.00	54.00	-18.00	AVG	H
4824.000	67.39	-12.80	54.59	74.00	-19.41	peak	H
4824.000	65.67	-12.80	52.87	54.00	-1.13	AVG	H
2071.000	68.89	-19.23	49.66	74.00	-24.34	peak	V
4824.000	65.42	-12.80	52.62	74.00	-21.38	peak	V
4824.000	64.11	-12.80	51.31	54.00	-2.69	AVG	V
7655.500	57.48	-8.01	49.47	74.00	-24.53	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ID8-BS1000		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		11/15/2011	
Frequency:		2437MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	75.73	-22.35	53.38	74.00	-20.62	peak	H
1595.000	58.55	-22.35	36.20	54.00	-17.80	AVG	H
4874.000	65.48	-12.76	52.72	74.00	-21.28	peak	H
4874.000	63.84	-12.76	51.08	54.00	-2.92	AVG	H
7375.000	57.66	-8.30	49.36	74.00	-24.64	peak	H
1204.000	77.68	-23.52	54.16	74.00	-19.84	peak	V
1204.000	57.79	-23.52	34.27	54.00	-19.73	AVG	V
4874.000	66.52	-12.76	53.76	74.00	-20.24	peak	V
4874.000	63.44	-12.76	50.68	54.00	-3.32	AVG	V
7706.500	57.60	-7.95	49.65	74.00	-24.35	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ID8-BS1000		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		11/15/2011	
Frequency:		2462MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	77.02	-23.52	53.50	74.00	-20.50	peak	H
1204.000	57.85	-23.52	34.33	74.00	-39.67	peak	H
1595.000	77.43	-22.35	55.08	74.00	-18.92	peak	H
1595.000	59.75	-22.35	37.40	54.00	-16.60	AVG	H
4924.000	65.96	-12.70	53.26	74.00	-20.74	peak	H
4924.000	63.91	-12.70	51.21	54.00	-2.79	AVG	H
1595.000	74.93	-22.35	52.58	74.00	-21.42	peak	V
1595.000	57.47	-22.35	35.12	54.00	-18.88	AVG	V
4924.000	67.71	-12.70	55.01	74.00	-18.99	peak	V
4924.000	66.54	-12.70	53.84	54.00	-0.16	AVG	V
7936.000	57.18	-7.71	49.47	74.00	-24.53	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	ID8-BS1000			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	11/15/2011		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	77.90	-22.35	55.55	74.00	-18.45	peak	H
1595.000	58.64	-22.35	36.29	74.00	-37.71	peak	H
4824.000	63.25	-12.80	50.45	74.00	-23.55	peak	H
7477.000	58.15	-8.20	49.95	74.00	-24.05	peak	H
1595.000	75.30	-22.35	52.95	74.00	-21.05	peak	V
1595.000	57.52	-22.35	35.17	54.00	-18.83	AVG	V
4824.000	62.27	-12.80	49.47	74.00	-24.53	peak	V
7247.500	58.35	-8.45	49.90	74.00	-24.10	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	ID8-BS1000			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	11/15/2011		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	75.51	-22.35	53.16	74.00	-20.84	peak	H
1595.000	57.17	-22.35	34.82	54.00	-19.18	AVG	H
4874.000	63.79	-12.76	51.03	74.00	-22.97	peak	H
7528.000	57.34	-8.14	49.20	74.00	-24.80	peak	H
1595.000	76.74	-22.35	54.39	74.00	-19.61	peak	V
1595.000	56.55	-22.35	34.20	54.00	-19.80	AVG	V
4874.000	63.04	-12.76	50.28	74.00	-23.72	peak	V
7655.500	57.00	-8.01	48.99	74.00	-25.01	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ID8-BS1000		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 4		Date:		11/15/2011	
Frequency:		2462MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	77.06	-22.35	54.71	74.00	-19.29	peak	H
1595.000	59.35	-22.35	37.00	54.00	-17.00	AVG	H
4924.000	62.64	-12.70	49.94	74.00	-24.06	peak	H
7451.500	57.17	-8.22	48.95	74.00	-25.05	peak	H
1595.000	76.28	-22.35	53.93	74.00	-20.07	peak	V
1595.000	58.56	-22.35	36.21	54.00	-17.79	AVG	V
4924.000	65.21	-12.70	52.51	74.00	-21.49	peak	V
7910.500	57.14	-7.73	49.41	74.00	-24.59	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ID8-BS1000		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 5		Date:		11/15/2011	
Frequency:		2412MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	77.03	-22.35	54.68	74.00	-19.32	peak	H
1595.000	57.36	-22.35	35.01	54.00	-18.99	AVG	H
4824.000	61.73	-12.80	48.93	74.00	-25.07	peak	H
7222.000	57.70	-8.47	49.23	74.00	-24.77	peak	H
1595.000	74.06	-22.35	51.71	74.00	-22.29	peak	V
4824.000	62.73	-12.80	49.93	74.00	-24.07	peak	V
7655.500	57.52	-8.01	49.51	74.00	-24.49	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		ID8-BS1000		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 5		Date:		11/15/2011	
Frequency:		2437MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	76.02	-22.35	53.67	74.00	-20.33	peak	H
1595.000	59.16	-22.35	36.81	54.00	-17.19	AVG	H
4874.000	62.71	-12.76	49.95	74.00	-24.05	peak	H
7502.500	57.87	-8.17	49.70	74.00	-24.30	peak	H
1612.000	75.18	-22.22	52.96	74.00	-21.04	peak	V
1612.000	56.34	-22.22	34.12	54.00	-19.88	AVG	V
4874.000	63.72	-12.76	50.96	74.00	-23.04	peak	V
7375.000	56.92	-8.30	48.62	74.00	-25.38	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	ID8-BS1000			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	11/15/2011		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	75.55	-22.35	53.20	74.00	-20.80	peak	H
1595.000	58.32	-22.35	35.97	54.00	-18.03	AVG	H
4924.000	62.87	-12.70	50.17	74.00	-23.83	peak	H
7145.500	58.13	-8.55	49.58	74.00	-24.42	peak	H
2071.000	69.90	-19.23	50.67	74.00	-23.33	peak	V
4924.000	63.31	-12.70	50.61	74.00	-23.39	peak	V
7502.500	57.24	-8.17	49.07	74.00	-24.93	peak	V


Standard:	FCC Part 15C				Test Distance:	3m		
Test item:	Radiated Emission				Power:	AC 120V/60Hz		
Model Number:	ID8-BS1000				Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 6				Date:	11/15/2011		
Modulation:	IEEE 802.11b				Test By:	Fly Lu		
Frequency:	2437MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3397.000	61.92	-16.25	45.67	74.00	54.00	-28.33	peak	H
4697.500	58.16	-12.94	45.22	74.00	54.00	-28.78	peak	H
7732.000	57.82	-7.92	49.90	74.00	54.00	-24.10	peak	H
3244.000	63.22	-16.42	46.80	74.00	54.00	-27.20	peak	V
4927.000	59.31	-12.70	46.61	74.00	54.00	-27.39	peak	V
6584.500	58.60	-9.25	49.35	74.00	54.00	-24.65	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

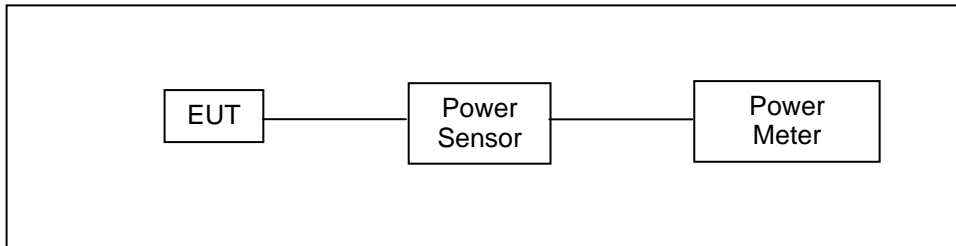

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	07/19/2010	(2)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/19/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	ID8-BS1000			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 3: IEEE 802.11b Link Mode			
Date of Test	07/24/2011		Test Site	TE02
Frequency (MHz)	Data Rate	Peak Power		Limit (dBm)
		(dBm)	(W)	
2412	1	18.58	0.072	< 30
2437		19.26	0.084	< 30
2462		18.97	0.079	< 30
2412	11	18.60	0.072	< 30
2437		19.01	0.080	< 30
2462		18.93	0.078	< 30

Model Number	ID8-BS1000			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 4: IEEE 802.11g Link Mode			
Date of Test	07/24/2011		Test Site	TE02
Frequency (MHz)	Data Rate	Peak Power		Limit (dBm)
		(dBm)	(W)	
2412	6	24.01	0.252	< 30
2437		24.23	0.265	< 30
2462		23.93	0.247	< 30
2412	54	23.01	0.200	< 30
2437		23.43	0.220	< 30
2462		23.15	0.207	< 30


Model Number	ID8-BS1000			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode			
Date of Test	07/24/2011		Test Site	TE02
Frequency (MHz)	Data Rate	Peak Power		Limit (dBm)
		(dBm)	(W)	
2412	MCS0	23.60	0.229	< 30
2437		24.18	0.262	< 30
2462		23.75	0.237	< 30
2412	MCS7	22.70	0.186	< 30
2437		23.00	0.200	< 30
2462		22.72	0.187	< 30

7 6dB RF Bandwidth Measurement

7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

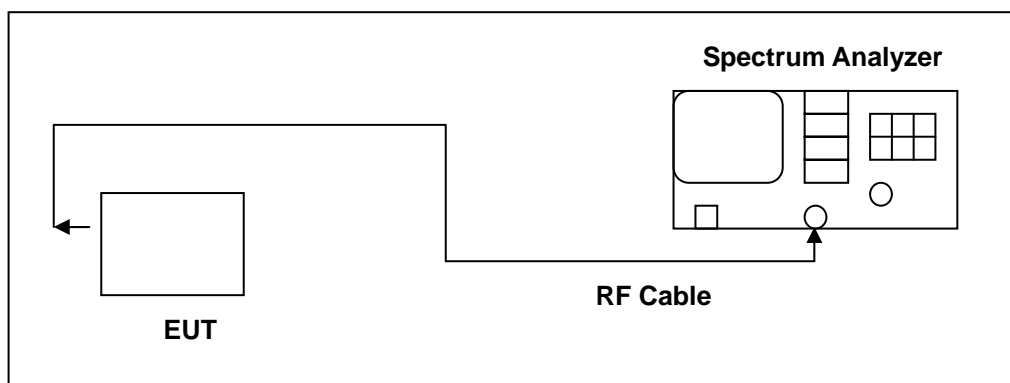

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)




7.5. Test Result

Model Number	ID8-BS1000		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	10080	> 500	
2437	10000	> 500	
2462	10080	> 500	

Model Number	ID8-BS1000		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	08/08/2011	Test Site	TE06
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	16500	> 500	
2437	16500	> 500	
2462	16500	> 500	


Model Number	ID8-BS1000		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	17500	> 500	
2437	17670	> 500	
2462	17580	> 500	

7.6. Test Graphs

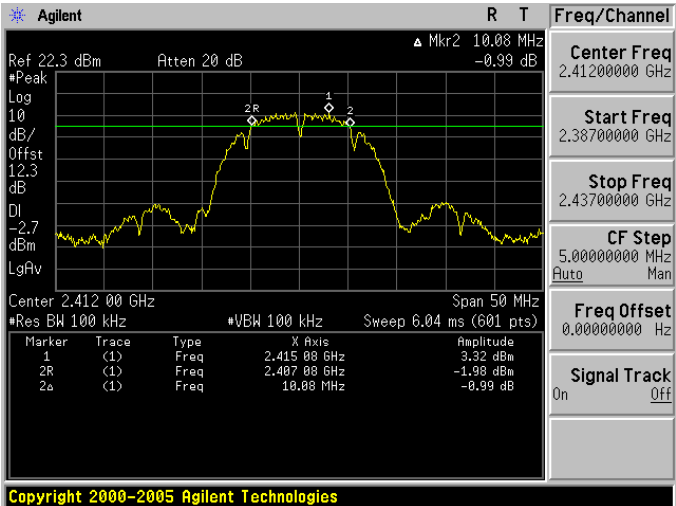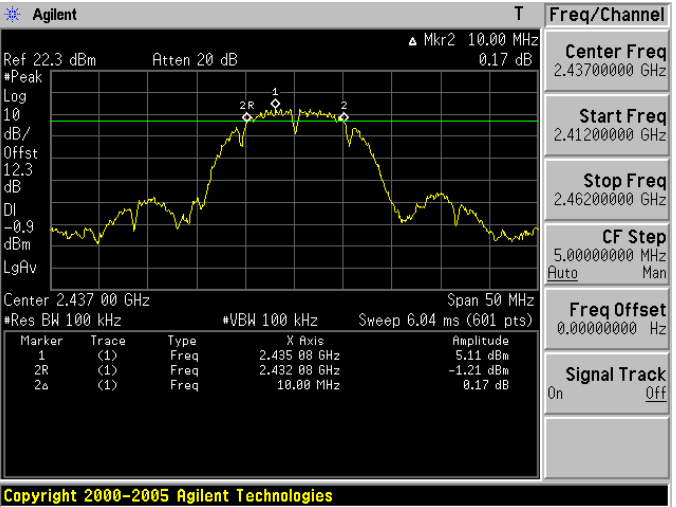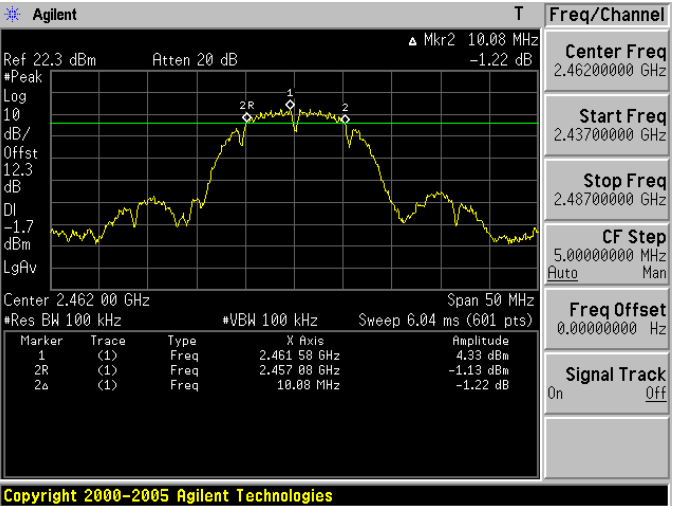
Mode 3: IEEE 802.11b Link Mode	
2412	 <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 4: IEEE 802.11g Link Mode


2412

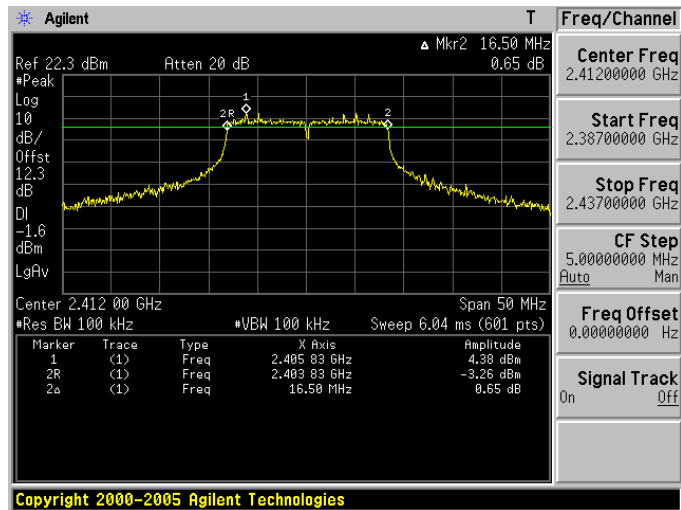

2437

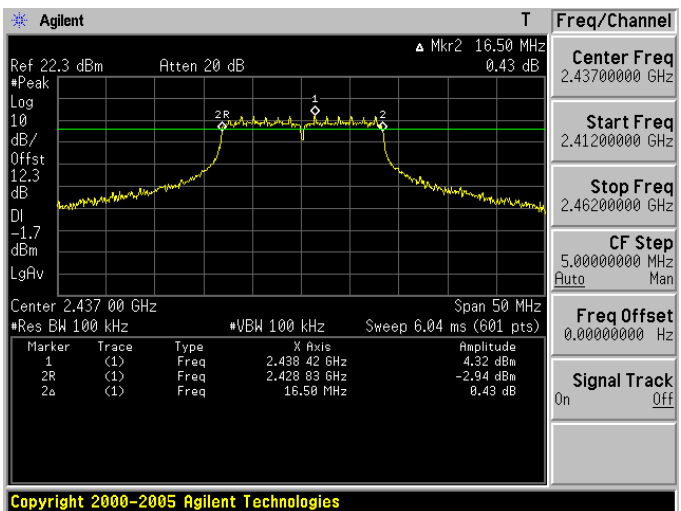


2462

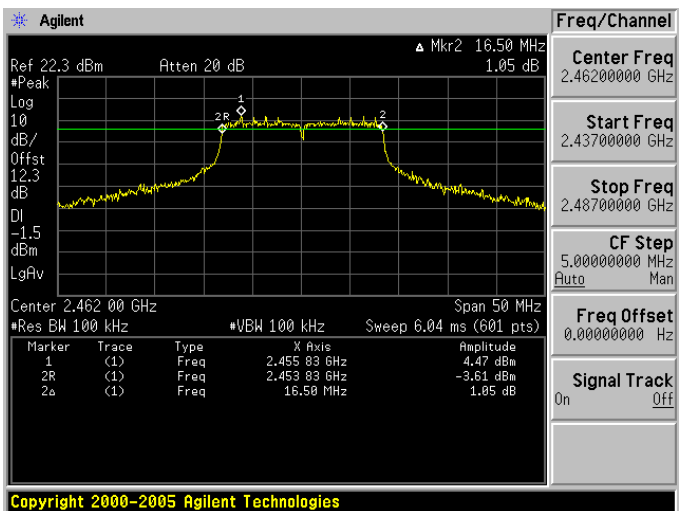


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

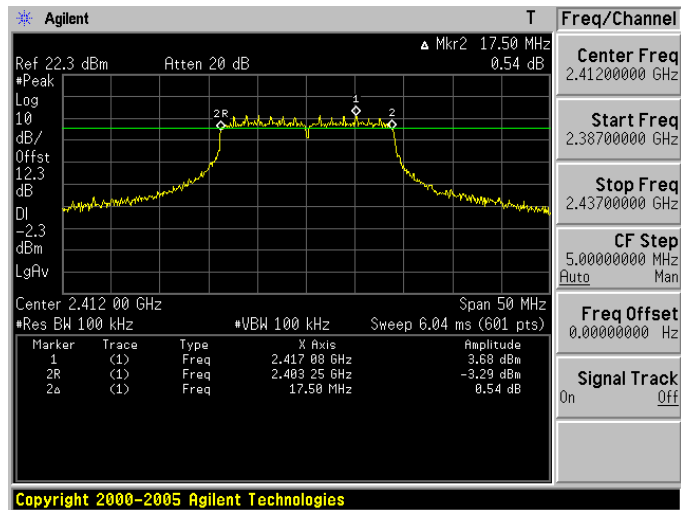

2437

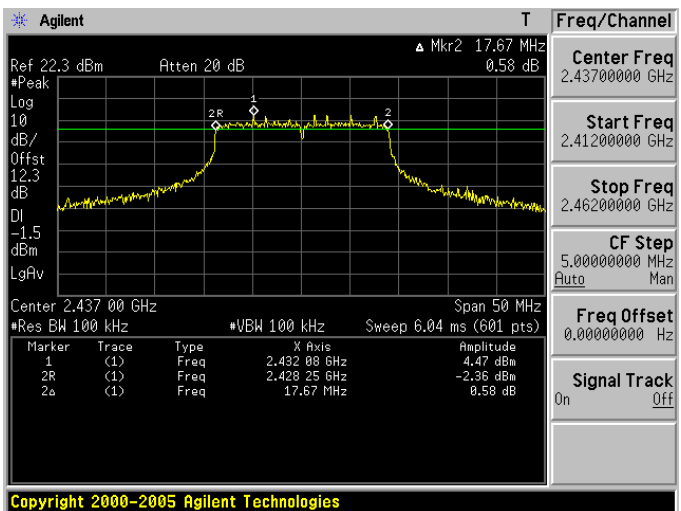

2462

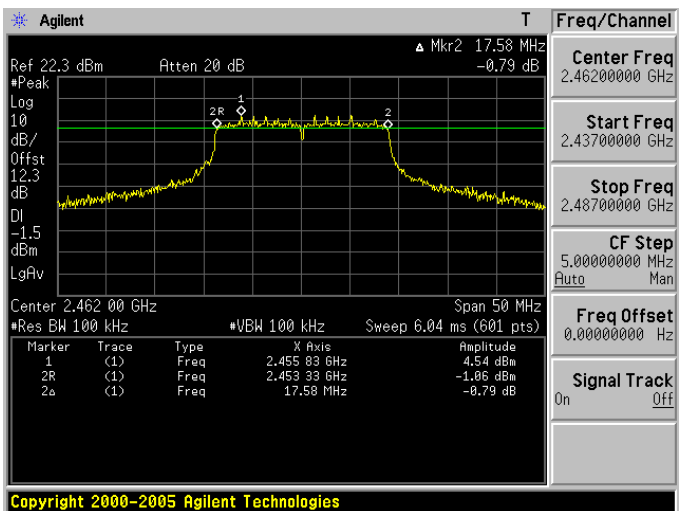


8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

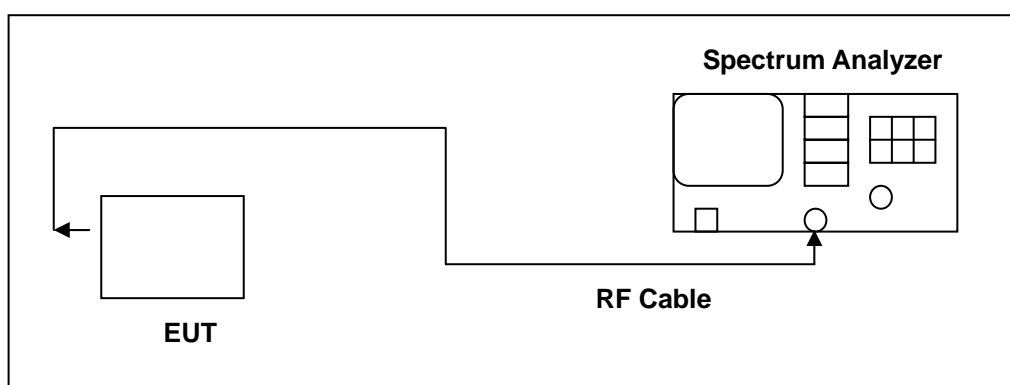

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.




8.5. Test Result

Model Number	ID8-BS1000		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-10.02	< 8	
2437	-9.80	< 8	
2462	-9.60	< 8	

Model Number	ID8-BS1000		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-9.39	< 8	
2437	-9.36	< 8	
2462	-8.67	< 8	


Model Number	ID8-BS1000		
Test Item	Maximum Power Density		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-9.53	< 8	
2437	-10.93	< 8	
2462	-10.40	< 8	

8.6. Test Graphs

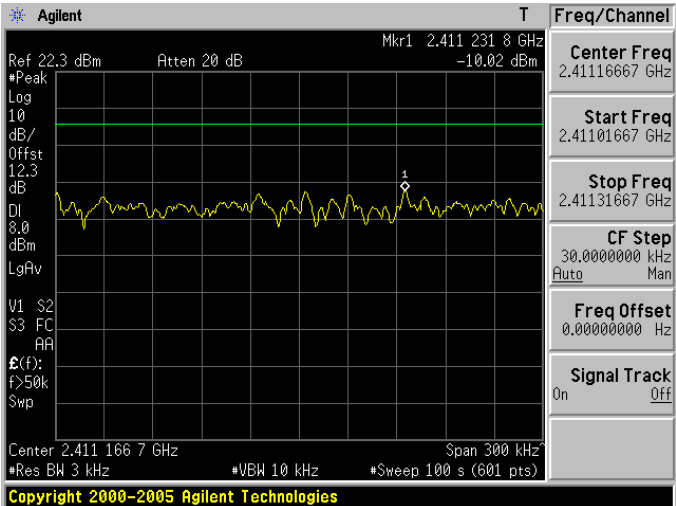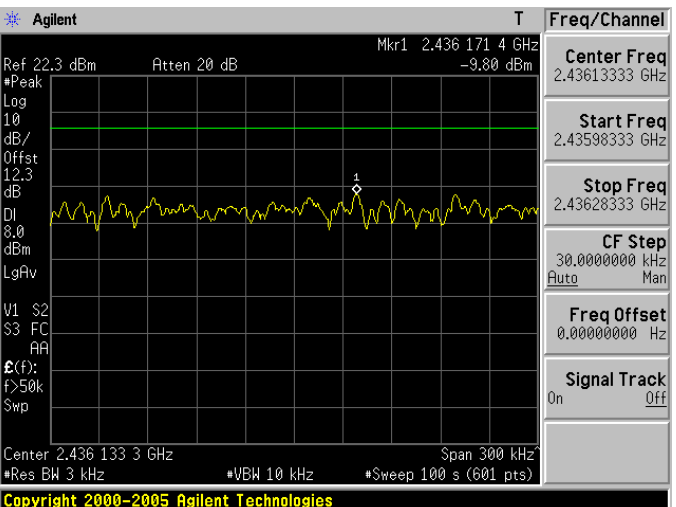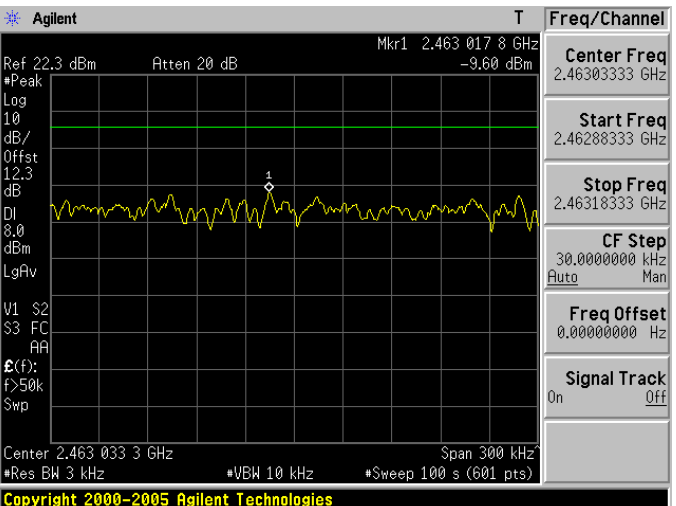
Mode 3: IEEE 802.11b Link Mode	
2412	 <p>Agilent T Freq/Channel</p> <p>Ref 22.3 dBm Atten 20 dB Mkr1 2.411 231 8 GHz -10.02 dBm</p> <p>Center Freq 2.411 166 7 GHz</p> <p>Start Freq 2.411 016 67 GHz</p> <p>Stop Freq 2.411 316 67 GHz</p> <p>CF Step 30.000 000 kHz Auto Man</p> <p>Freq Offset 0.000 000 0 Hz</p> <p>Signal Track On Off</p> <p>Center 2.411 166 7 GHz Span 300 kHz</p> <p>Res BW 3 kHz VBW 10 kHz Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel</p> <p>Ref 22.3 dBm Atten 20 dB Mkr1 2.436 171 4 GHz -9.80 dBm</p> <p>Center Freq 2.436 133 3 GHz</p> <p>Start Freq 2.435 983 33 GHz</p> <p>Stop Freq 2.436 283 33 GHz</p> <p>CF Step 30.000 000 kHz Auto Man</p> <p>Freq Offset 0.000 000 0 Hz</p> <p>Signal Track On Off</p> <p>Center 2.436 133 3 GHz Span 300 kHz</p> <p>Res BW 3 kHz VBW 10 kHz Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel</p> <p>Ref 22.3 dBm Atten 20 dB Mkr1 2.463 017 8 GHz -9.60 dBm</p> <p>Center Freq 2.463 033 3 GHz</p> <p>Start Freq 2.462 883 33 GHz</p> <p>Stop Freq 2.463 183 33 GHz</p> <p>CF Step 30.000 000 kHz Auto Man</p> <p>Freq Offset 0.000 000 0 Hz</p> <p>Signal Track On Off</p> <p>Center 2.463 033 3 GHz Span 300 kHz</p> <p>Res BW 3 kHz VBW 10 kHz Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 4: IEEE 802.11g Link Mode


2412

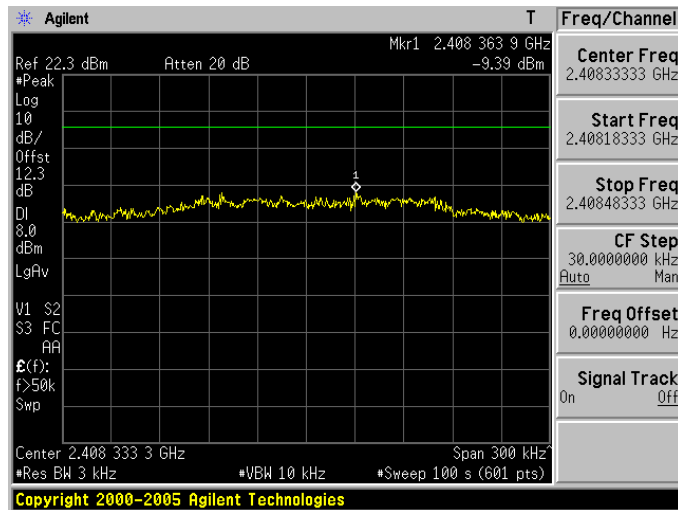

2437

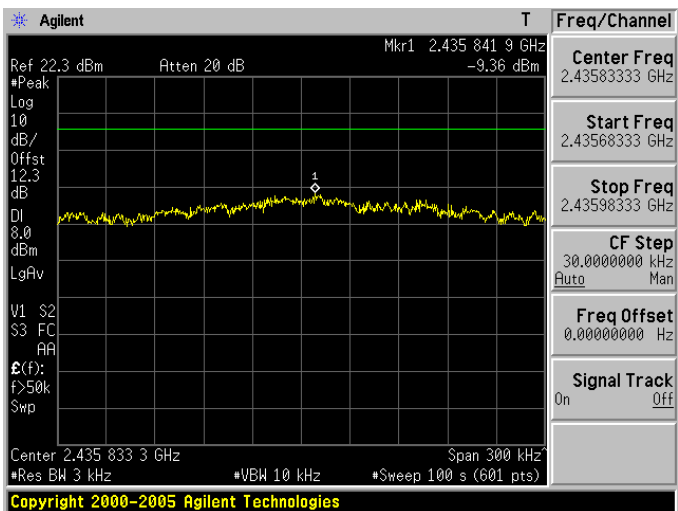


2462

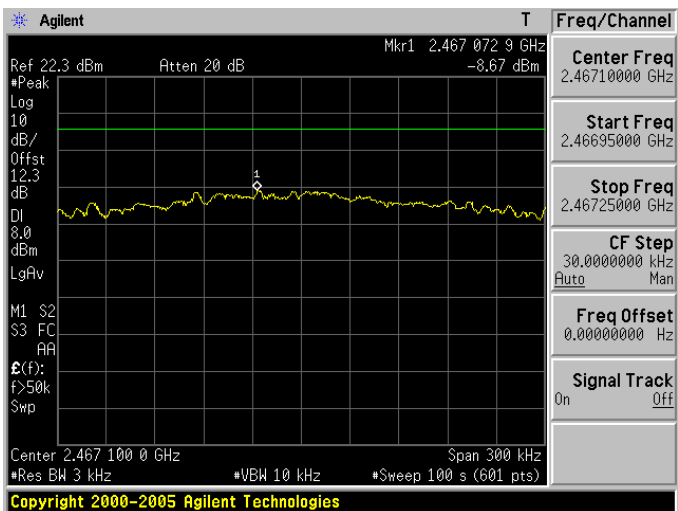


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

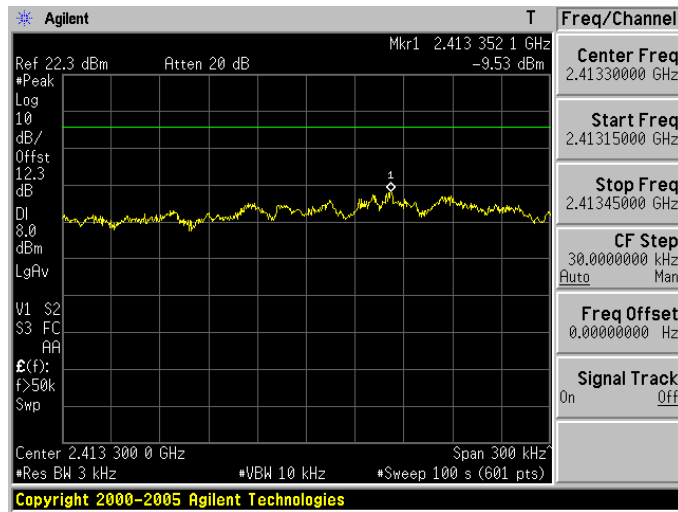

2437

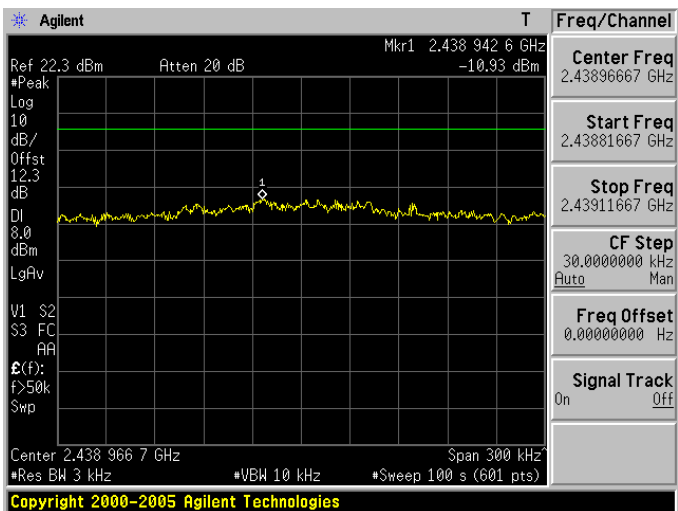

2462

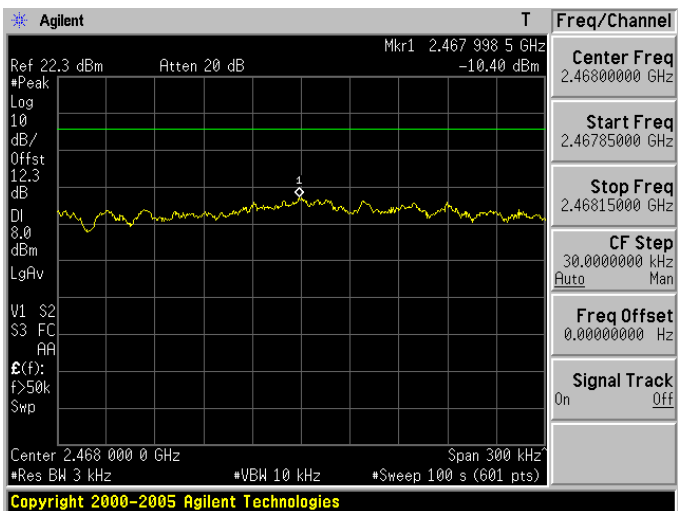


9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

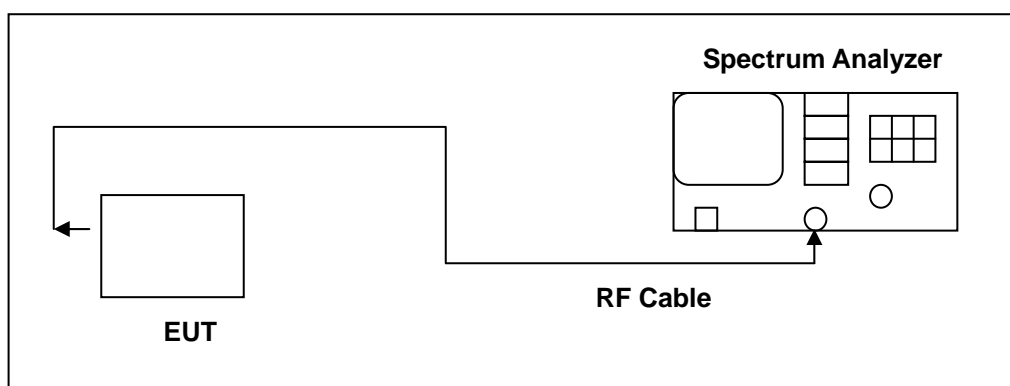

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.


All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6, 11)

9.5. Test Graphs


Mode 3: IEEE 802.11b Link Mode	
2412	<p>Agilent R T</p> <p>Ref 20.7 dBm Atten 20 dB Mkr1 2.41 GHz 2.241 dBm</p> <p>Peak Log 10 dB/Offset 10.7 dB DI -17.8 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz Stop 26.5 GHz</p> <p>#Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 13.2650000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.5000000 GHz</p> <p>CF Step 2.64700000 GHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent R T</p> <p>Ref 20.7 dBm Atten 20 dB Mkr1 2.44 GHz 2.982 dBm</p> <p>Peak Log 10 dB/Offset 10.7 dB DI -17.0 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz Stop 26.5 GHz</p> <p>#Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 13.2650000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.5000000 GHz</p> <p>CF Step 2.64700000 GHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent R T</p> <p>Ref 20.7 dBm Atten 20 dB Mkr1 2.46 GHz 4.104 dBm</p> <p>Peak Log 10 dB/Offset 10.7 dB DI -15.9 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz Stop 26.5 GHz</p> <p>#Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 13.2650000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.5000000 GHz</p> <p>CF Step 2.64700000 GHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11g Link Mode


2412

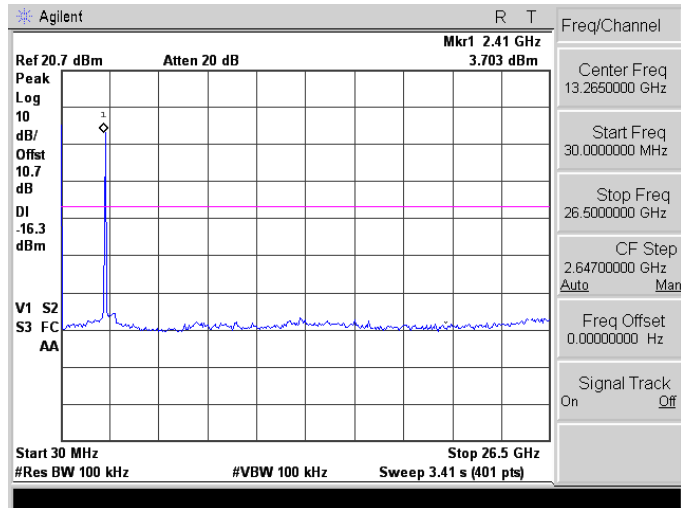

2437

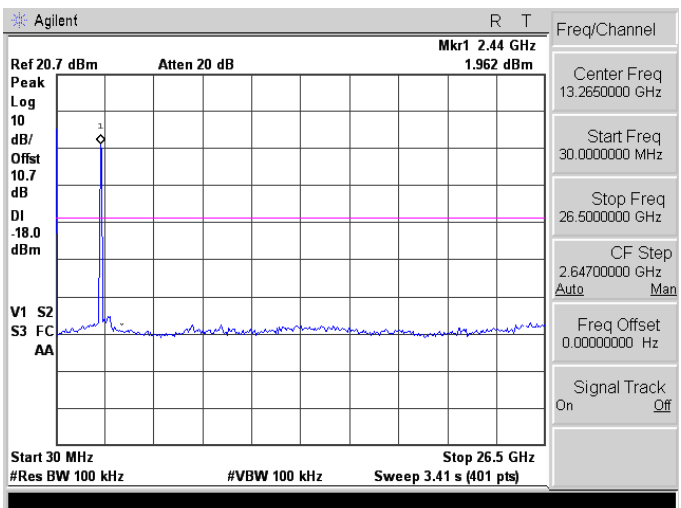


2462

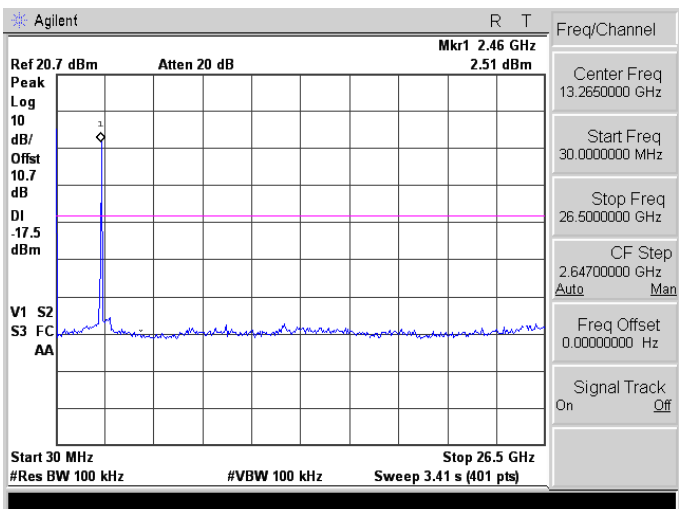


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

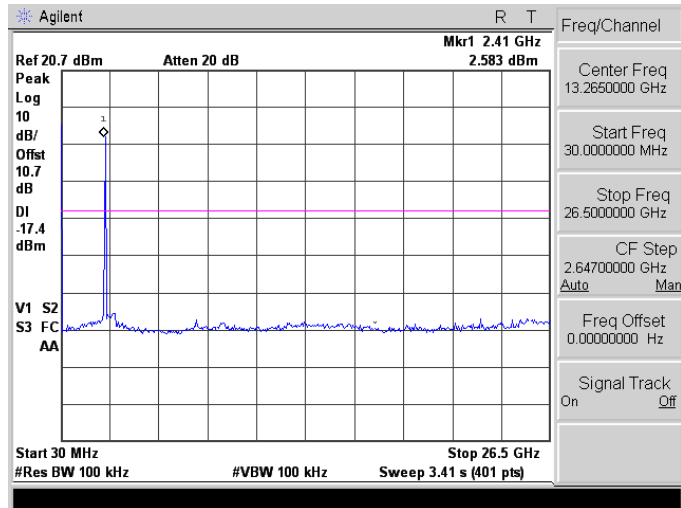

2437

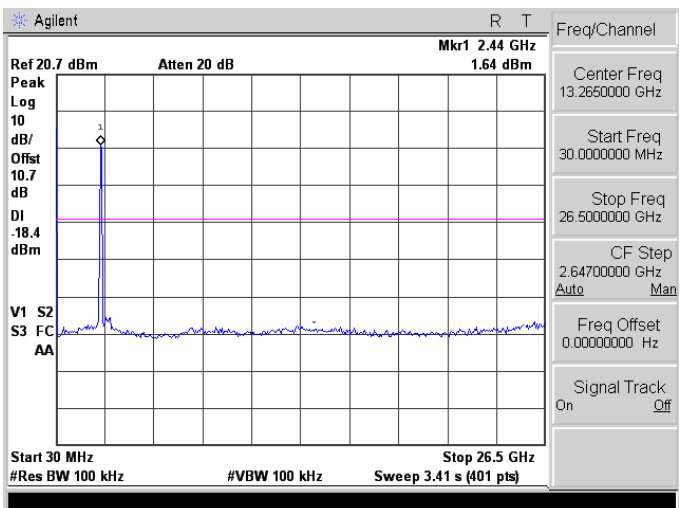

2462

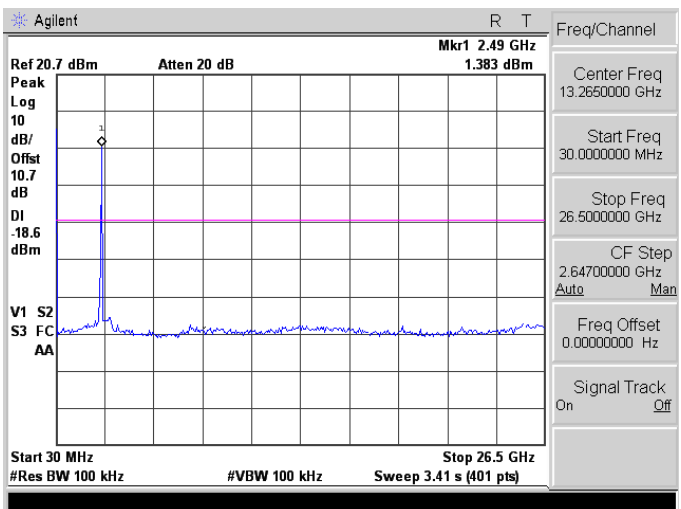


10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

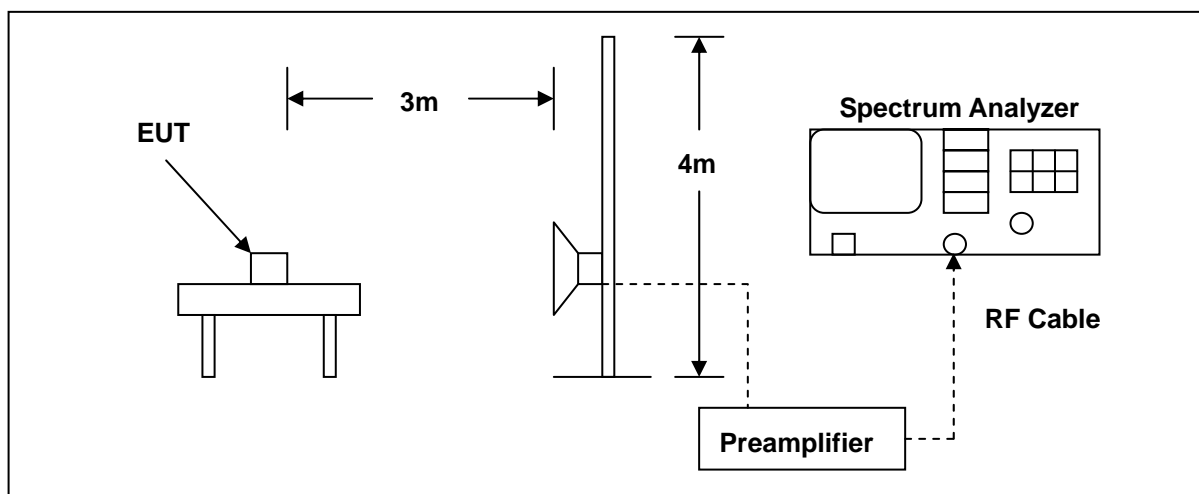

10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/29/2011	(1)
Test Site	ATL	TE01	888001	12/24/2010	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


10.5.Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	11/15/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

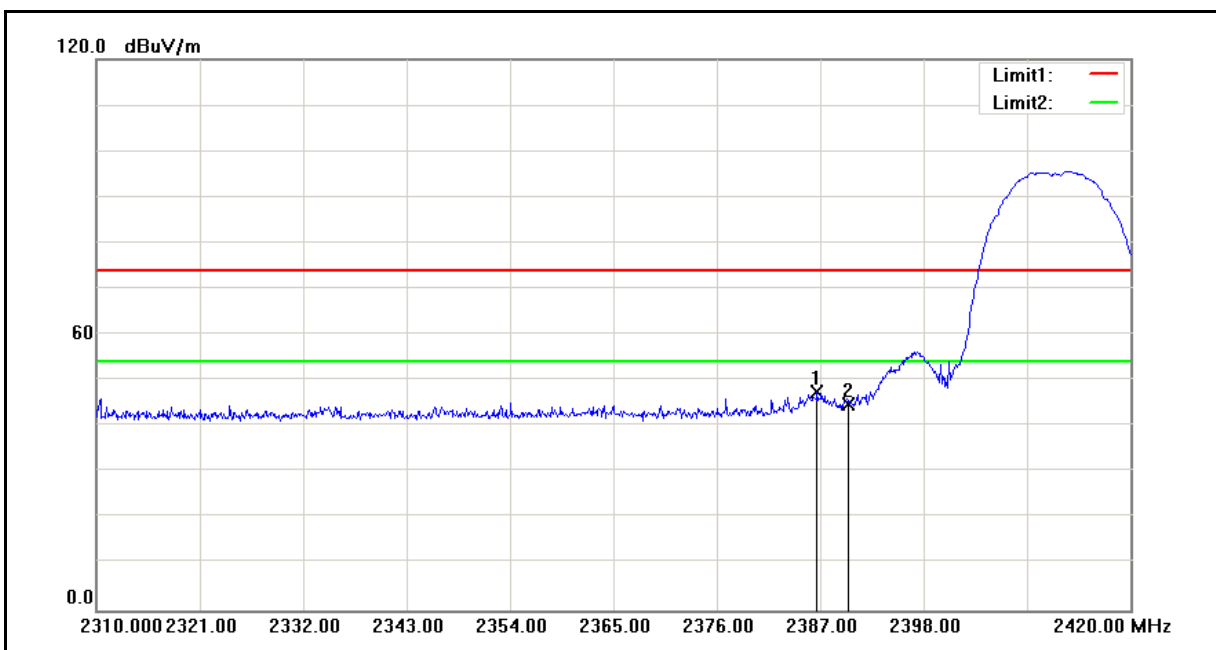


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.670	65.97	-18.42	47.55	74.00	-26.45	peak
2	2390.000	63.38	-18.41	44.97	74.00	-29.03	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	11/15/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

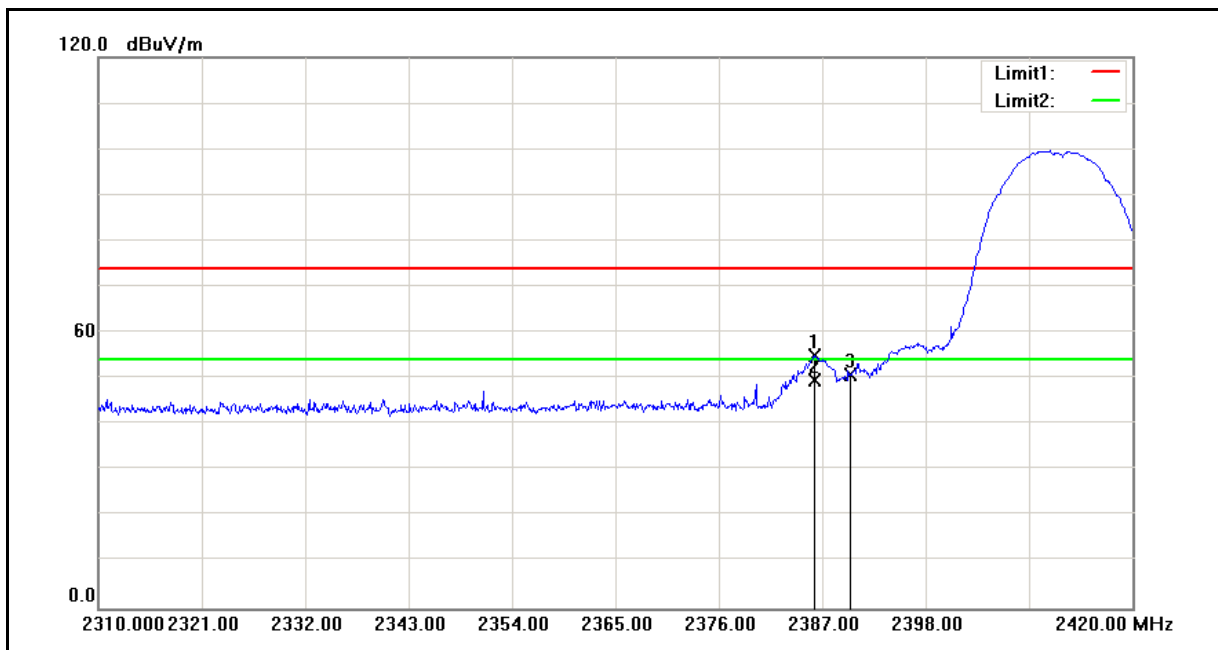


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.120	73.59	-18.42	55.17	74.00	-18.83	peak
2	2386.120	68.13	-18.42	49.71	54.00	-4.29	AVG
3	2390.000	69.31	-18.41	50.90	74.00	-23.10	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	11/15/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

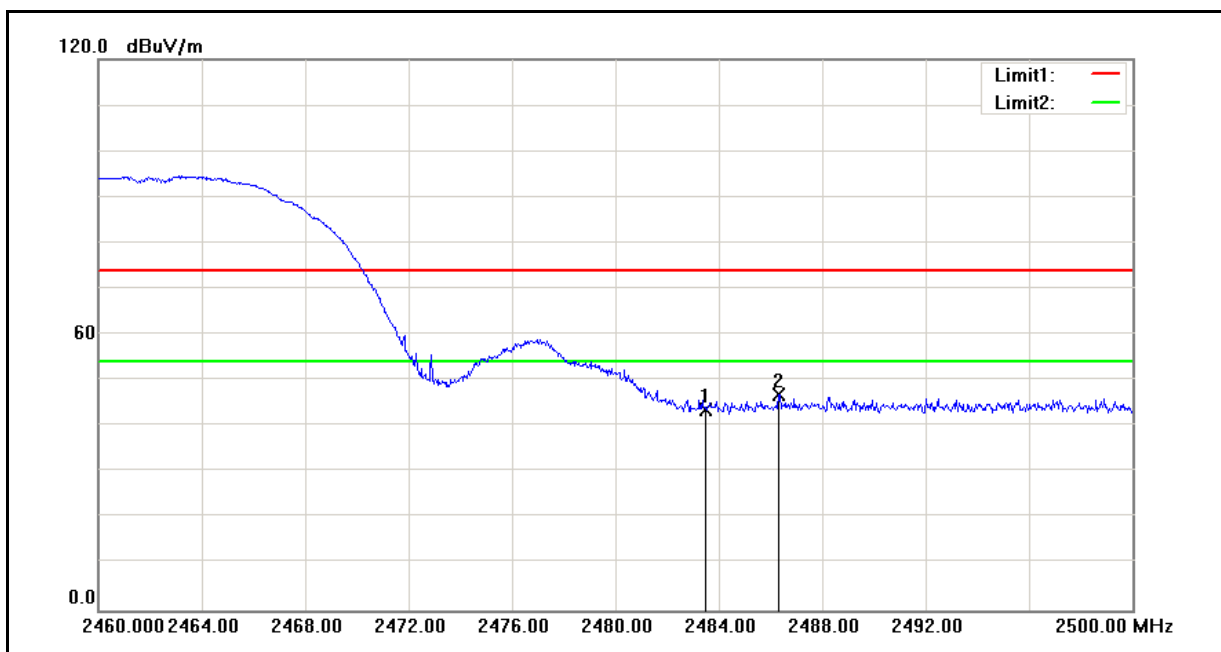


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.75	-18.17	43.58	74.00	-30.42	peak
2	2486.320	65.14	-18.17	46.97	74.00	-27.03	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	11/15/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

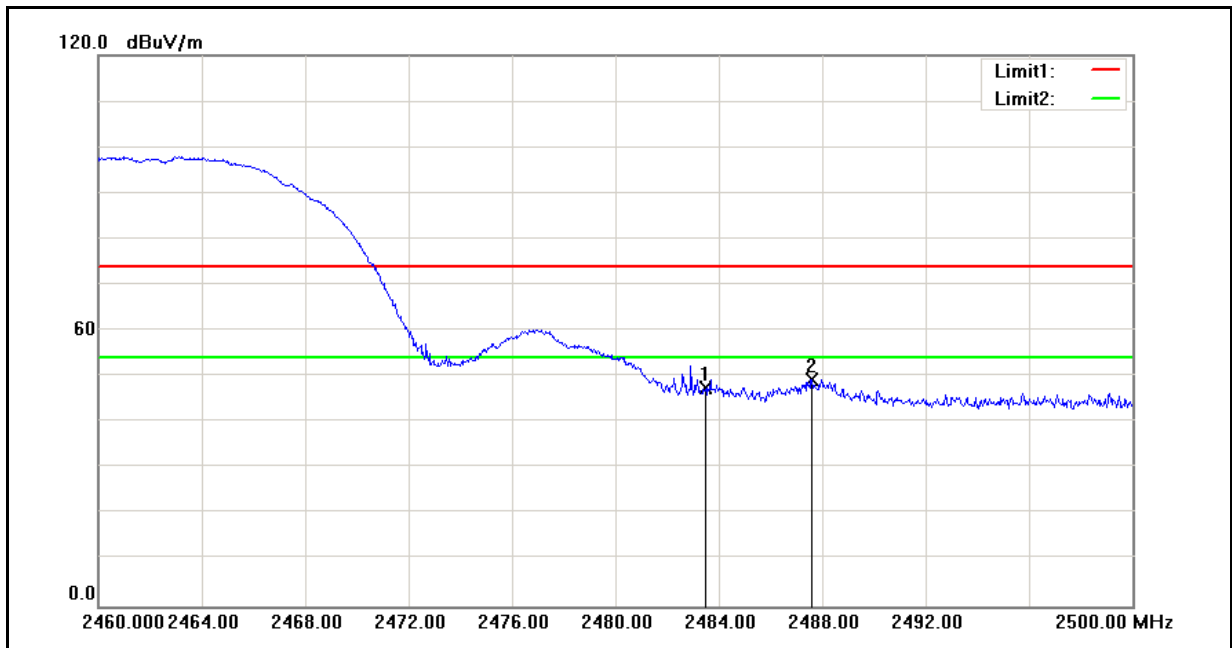


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	65.69	-18.17	47.52	74.00	-26.48	peak
2	2487.600	67.64	-18.16	49.48	74.00	-24.52	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	11/15/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

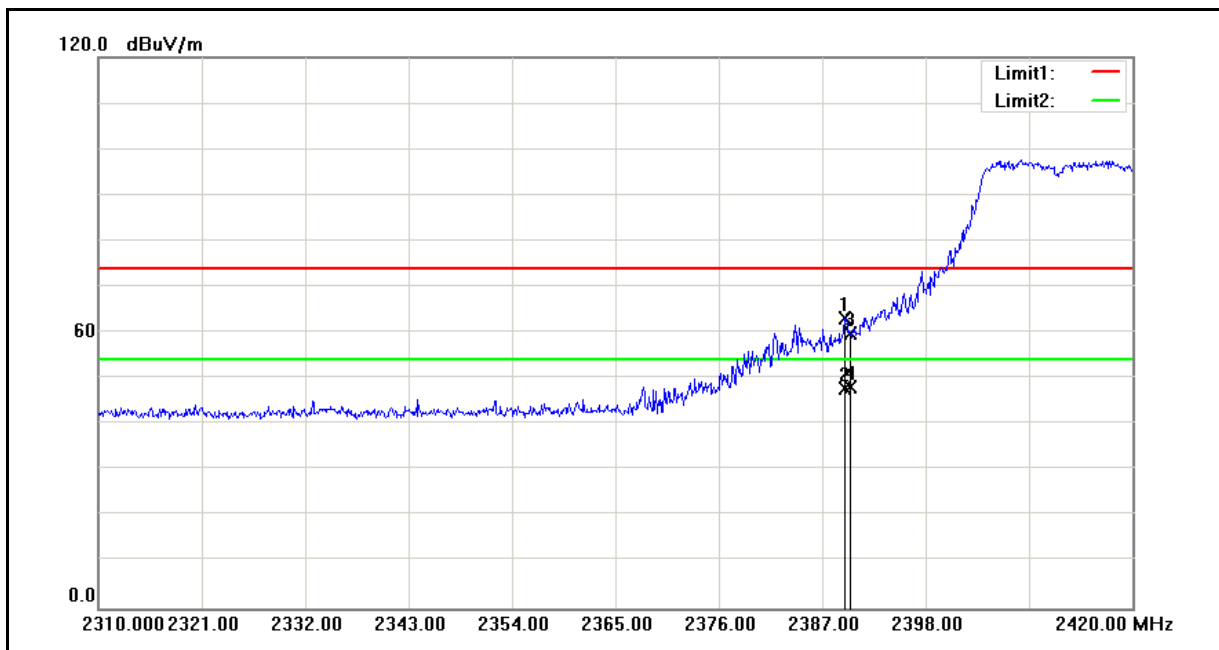


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	81.57	-18.41	63.16	74.00	-10.84	peak
2	2389.420	66.31	-18.41	47.90	54.00	-6.10	AVG
3	2390.000	78.14	-18.41	59.73	74.00	-14.27	peak
4	2390.000	66.69	-18.41	48.28	54.00	-5.72	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	11/15/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

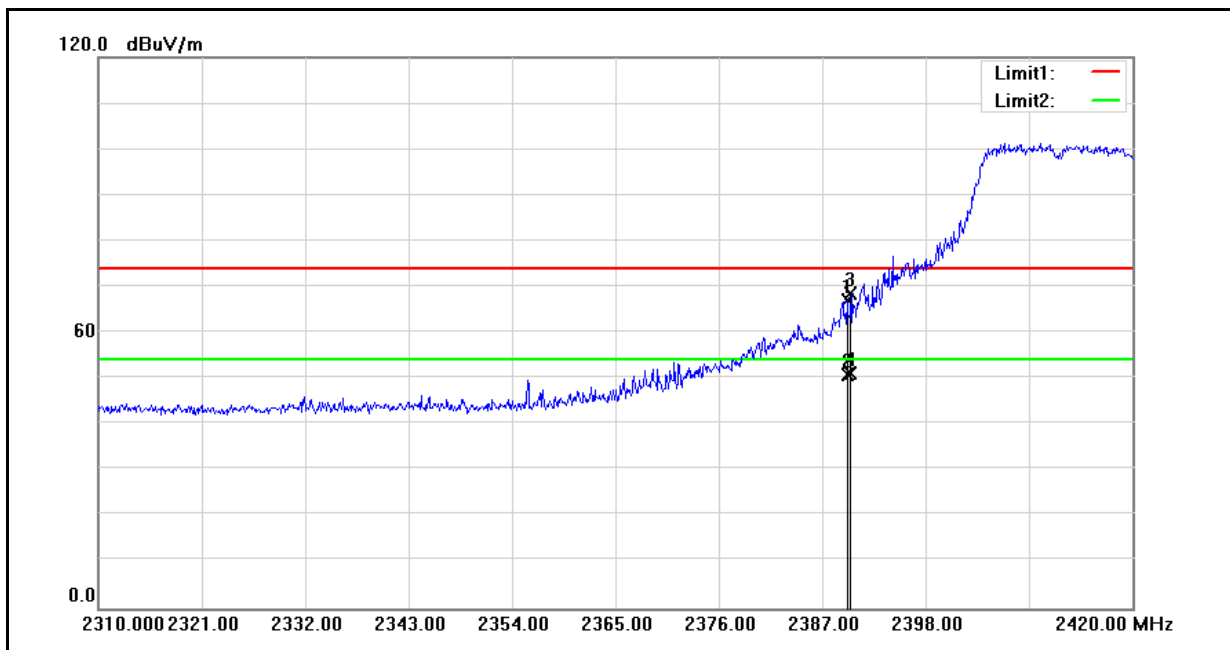


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.640	85.58	-18.41	67.17	74.00	-6.83	peak
2	2389.640	69.16	-18.41	50.75	54.00	-3.25	AVG
3	2390.000	87.10	-18.41	68.69	74.00	-5.31	peak
4	2390.000	69.55	-18.41	51.14	54.00	-2.86	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	11/15/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

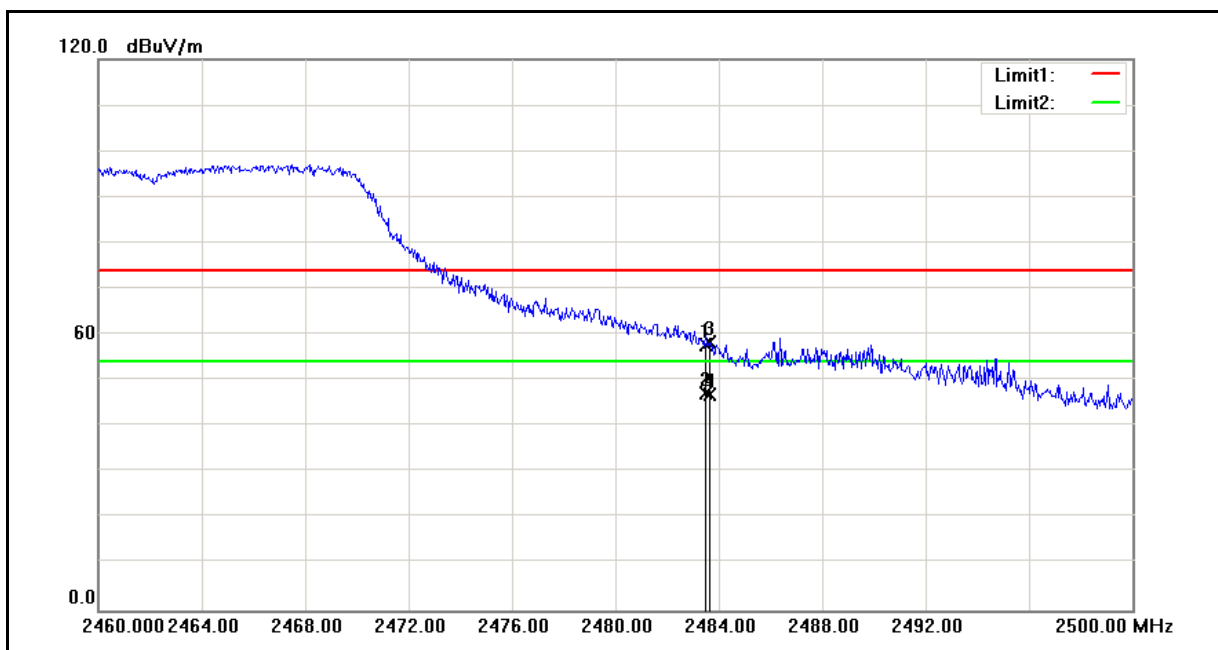


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	75.86	-18.17	57.69	74.00	-16.31	peak
2	2483.500	65.33	-18.17	47.16	54.00	-6.84	AVG
3	2483.640	76.59	-18.17	58.42	74.00	-15.58	peak
4	2483.640	65.14	-18.17	46.97	54.00	-7.03	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	11/15/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

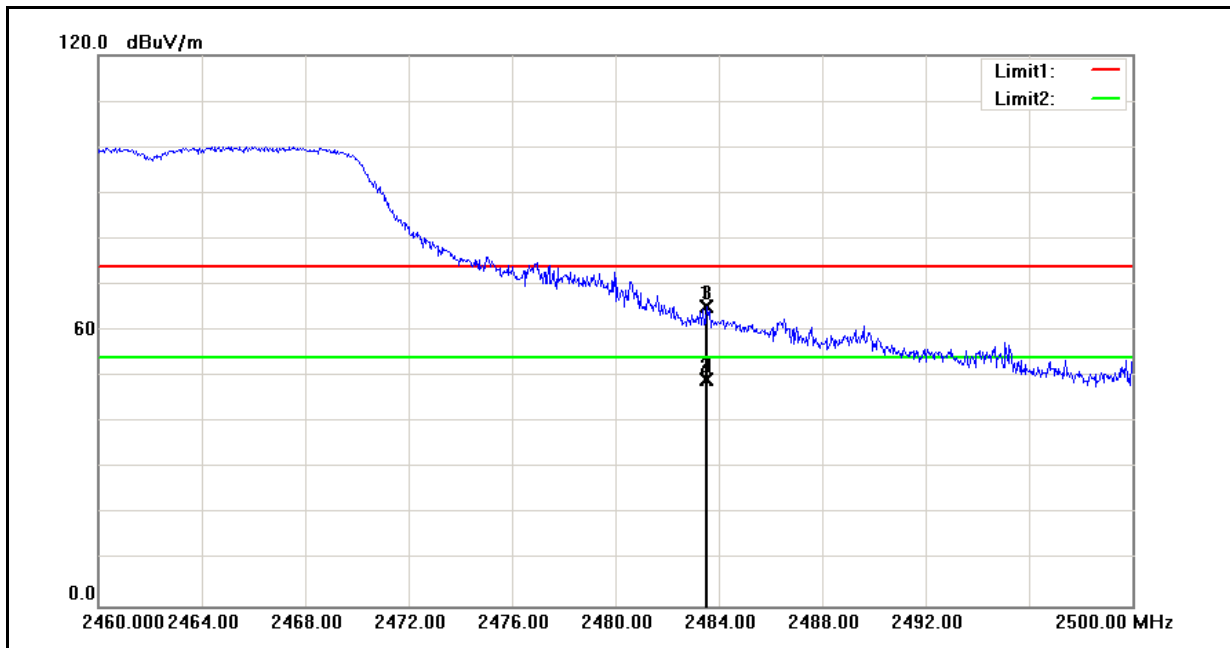


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	83.51	-18.17	65.34	74.00	-8.66	peak
2	2483.500	67.52	-18.17	49.35	54.00	-4.65	AVG
3	2483.520	83.51	-18.17	65.34	74.00	-8.66	peak
4	2483.520	67.51	-18.17	49.34	54.00	-4.66	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	11/15/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

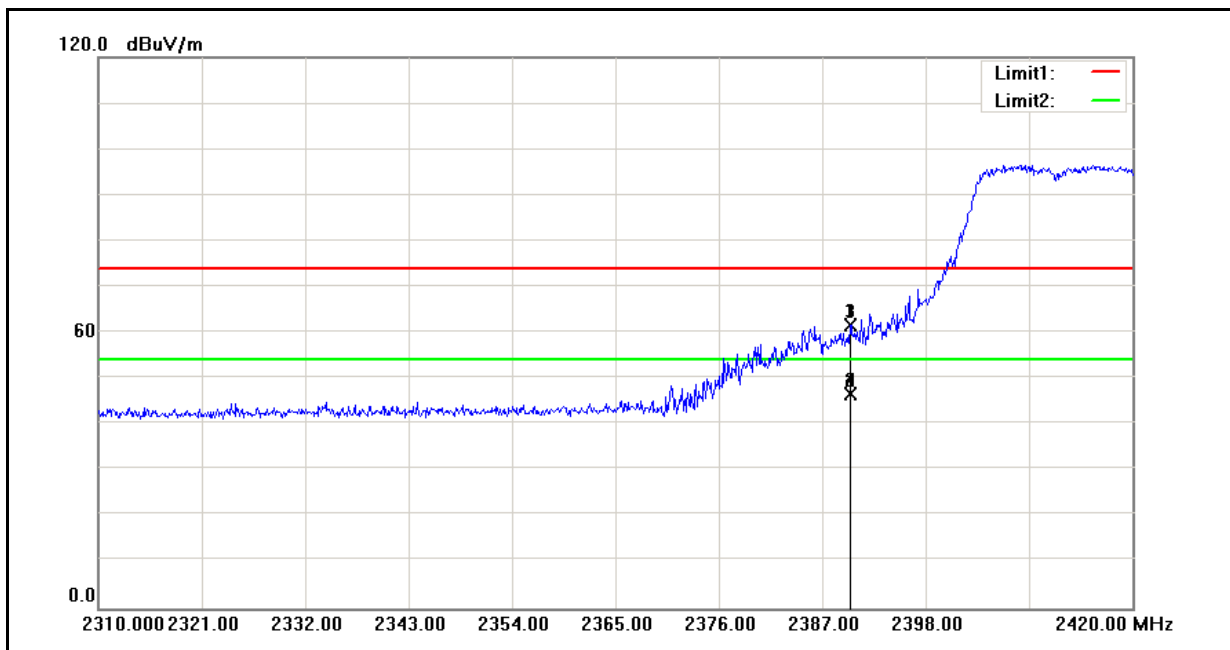


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.970	80.17	-18.41	61.76	74.00	-12.24	peak
2	2389.970	65.09	-18.41	46.68	54.00	-7.32	AVG
3	2390.000	80.02	-18.41	61.61	74.00	-12.39	peak
4	2390.000	65.21	-18.41	46.80	54.00	-7.20	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	11/15/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

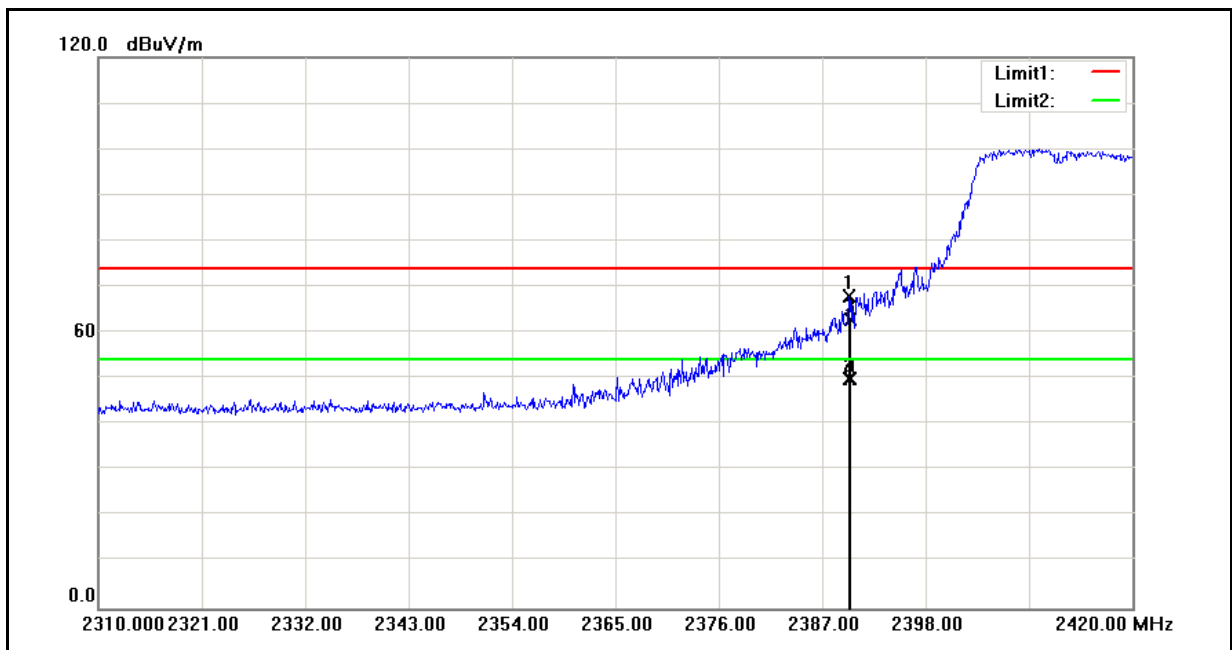


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.860	86.37	-18.41	67.96	74.00	-6.04	peak
2	2389.860	68.33	-18.41	49.92	54.00	-4.08	AVG
3	2390.000	81.36	-18.41	62.95	74.00	-11.05	peak
4	2390.000	68.46	-18.41	50.05	54.00	-3.95	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	11/15/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

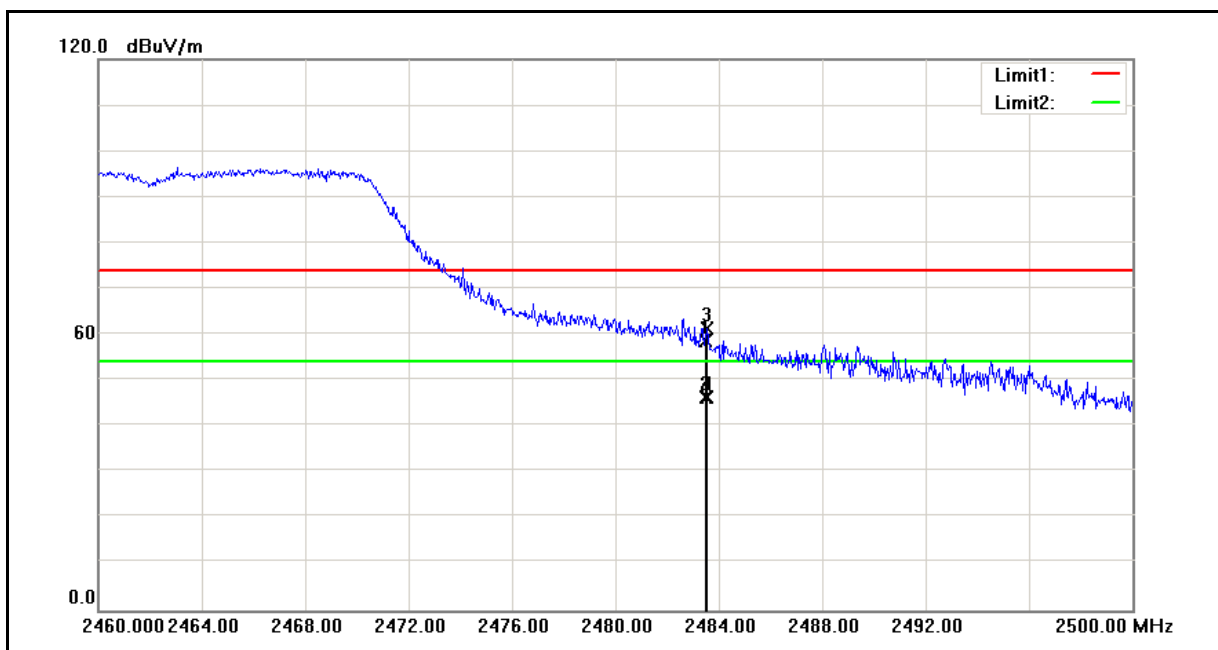

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	76.88	-18.17	58.71	74.00	-15.29	peak
2	2483.500	64.60	-18.17	46.43	54.00	-7.57	AVG
3	2483.560	79.62	-18.17	61.45	74.00	-12.55	peak
4	2483.560	64.58	-18.17	46.41	54.00	-7.59	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	ID8-BS1000	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	11/15/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

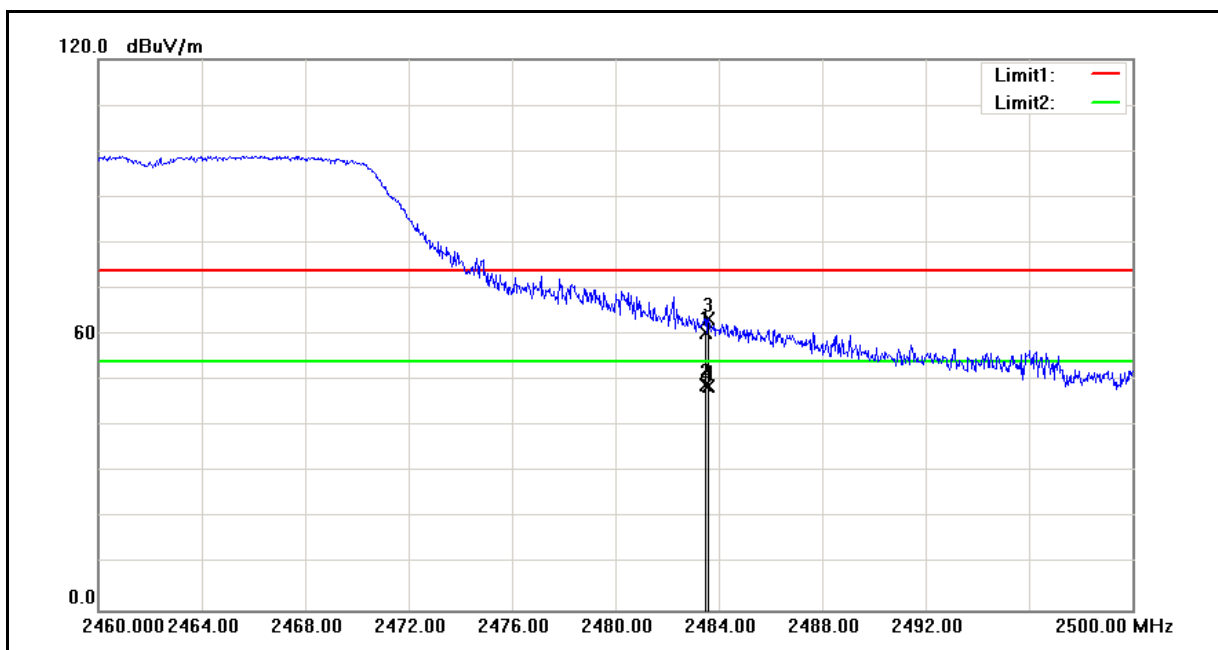


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	78.69	-18.17	60.52	74.00	-13.48	peak
2	2483.500	67.12	-18.17	48.95	54.00	-5.05	AVG
3	2483.600	81.52	-18.17	63.35	74.00	-10.65	peak
4	2483.600	66.97	-18.17	48.80	54.00	-5.20	AVG

11 99 % Occupied Bandwidth Measurement

11.1.Limit

N/A

11.2.Test Setup

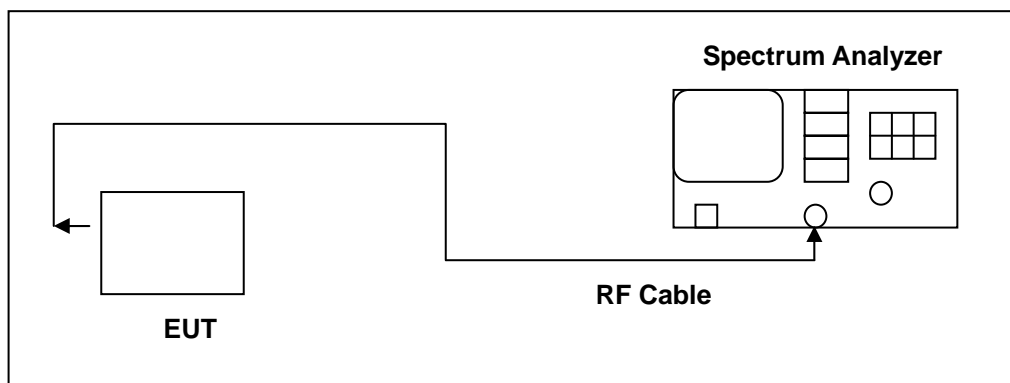

11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

11.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.




11.5.Test Result

Model Number	ID8-BS1000		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (kHz)	
2412	13.7350	-----	
2437	13.7716	-----	
2462	13.7812	-----	

Model Number	ID8-BS1000		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (kHz)	
2412	16.7698	-----	
2437	16.7606	-----	
2462	16.8705	-----	


Model Number	ID8-BS1000		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/08/2011	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (kHz)	
2412	17.9446	-----	
2437	18.0032	-----	
2462	18.0293	-----	

11.6.Test Graphs

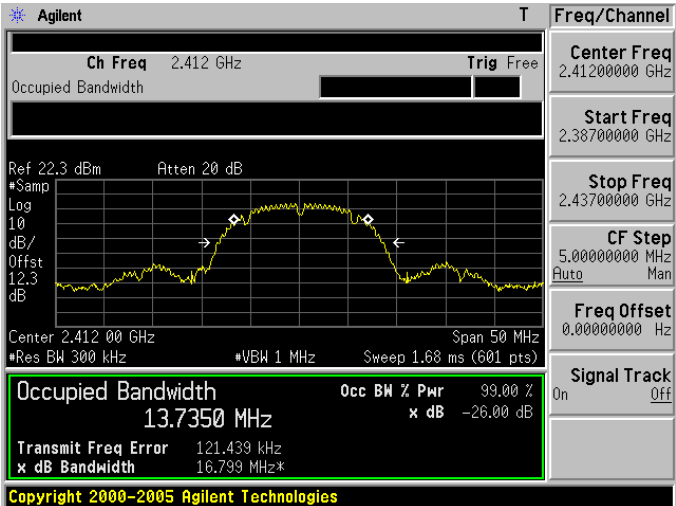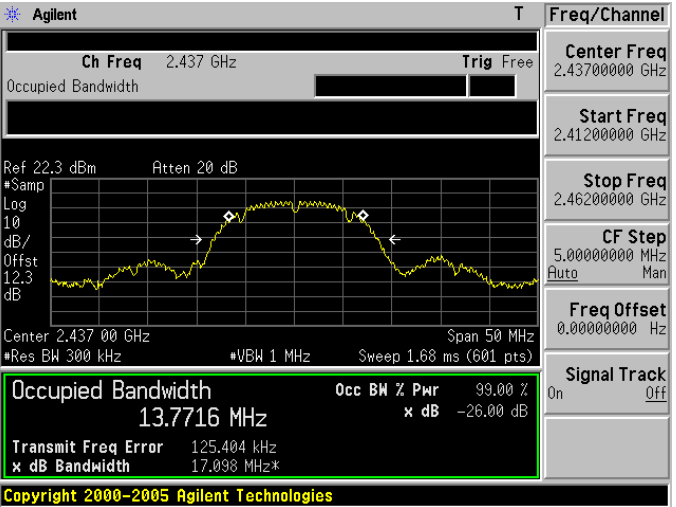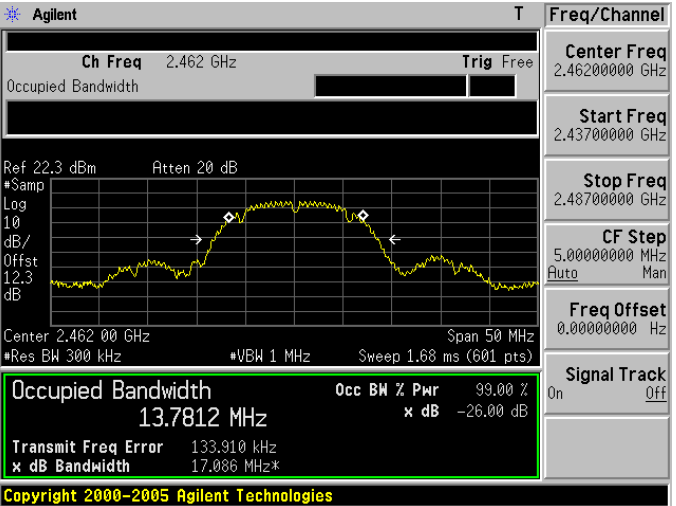
Mode 3: IEEE 802.11b Link Mode	
2412	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 22.3 dBm Atten 20 dB</p> <p>Log 10 dB/Offst 12.3 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 13.7350 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 121.439 kHz x dB Bandwidth 16.799 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 22.3 dBm Atten 20 dB</p> <p>Log 10 dB/Offst 12.3 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 13.7716 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 125.404 kHz x dB Bandwidth 17.098 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 22.3 dBm Atten 20 dB</p> <p>Log 10 dB/Offst 12.3 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 13.7812 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 133.910 kHz x dB Bandwidth 17.086 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 4: IEEE 802.11g Link Mode


2412

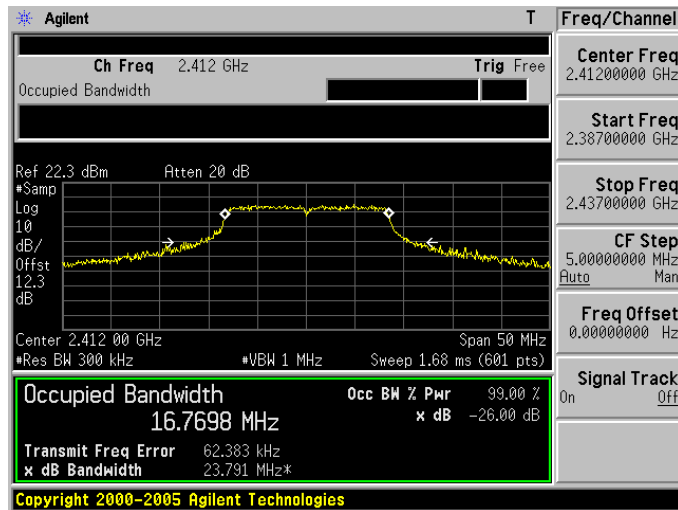

2437

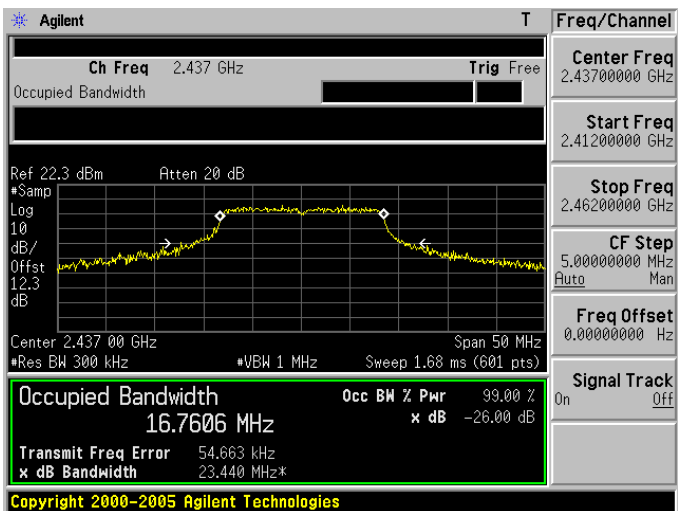


2462

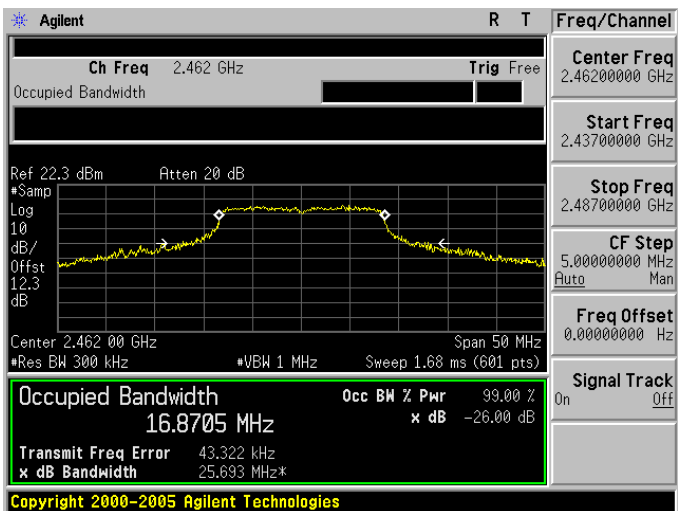


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

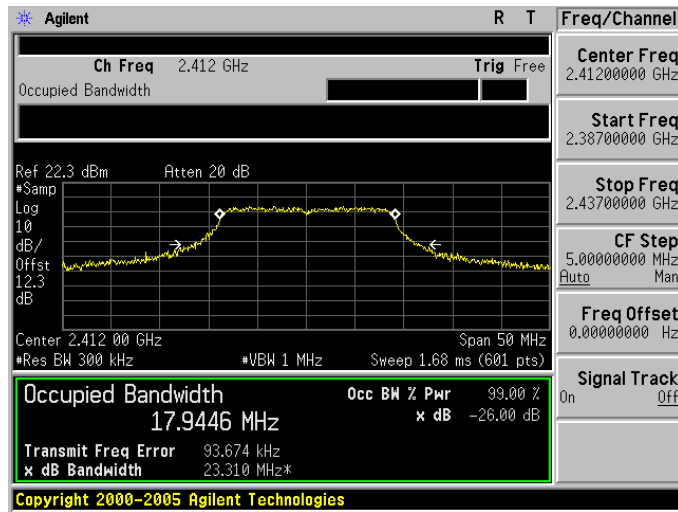

2437

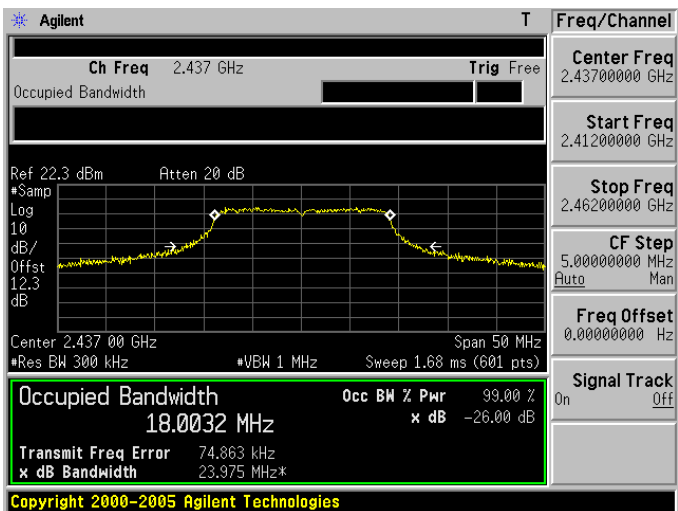

2462

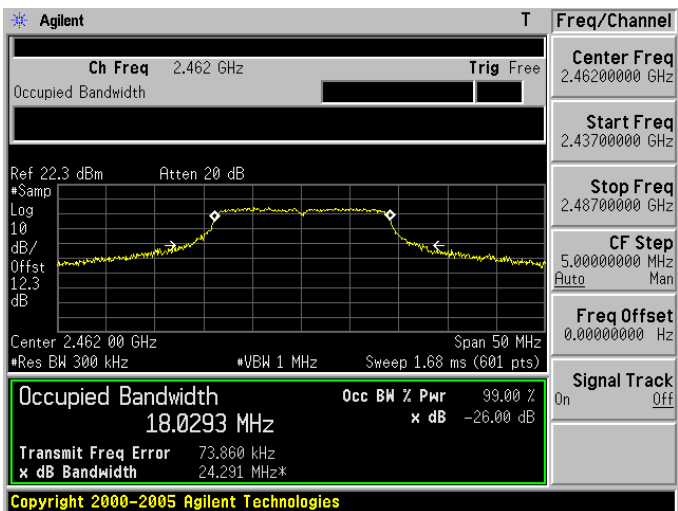

12 Antenna Measurement

12.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2.Antenna Connector Construction

The antenna used in this product is **Chip antenna**. And the maximum Gain of this antenna is only **0.58 dBi**.