

DEBUG

STATUS


CH1  
\_SEC

CH1  
\_PRI

AUX  
RX2

AUX  
RX1



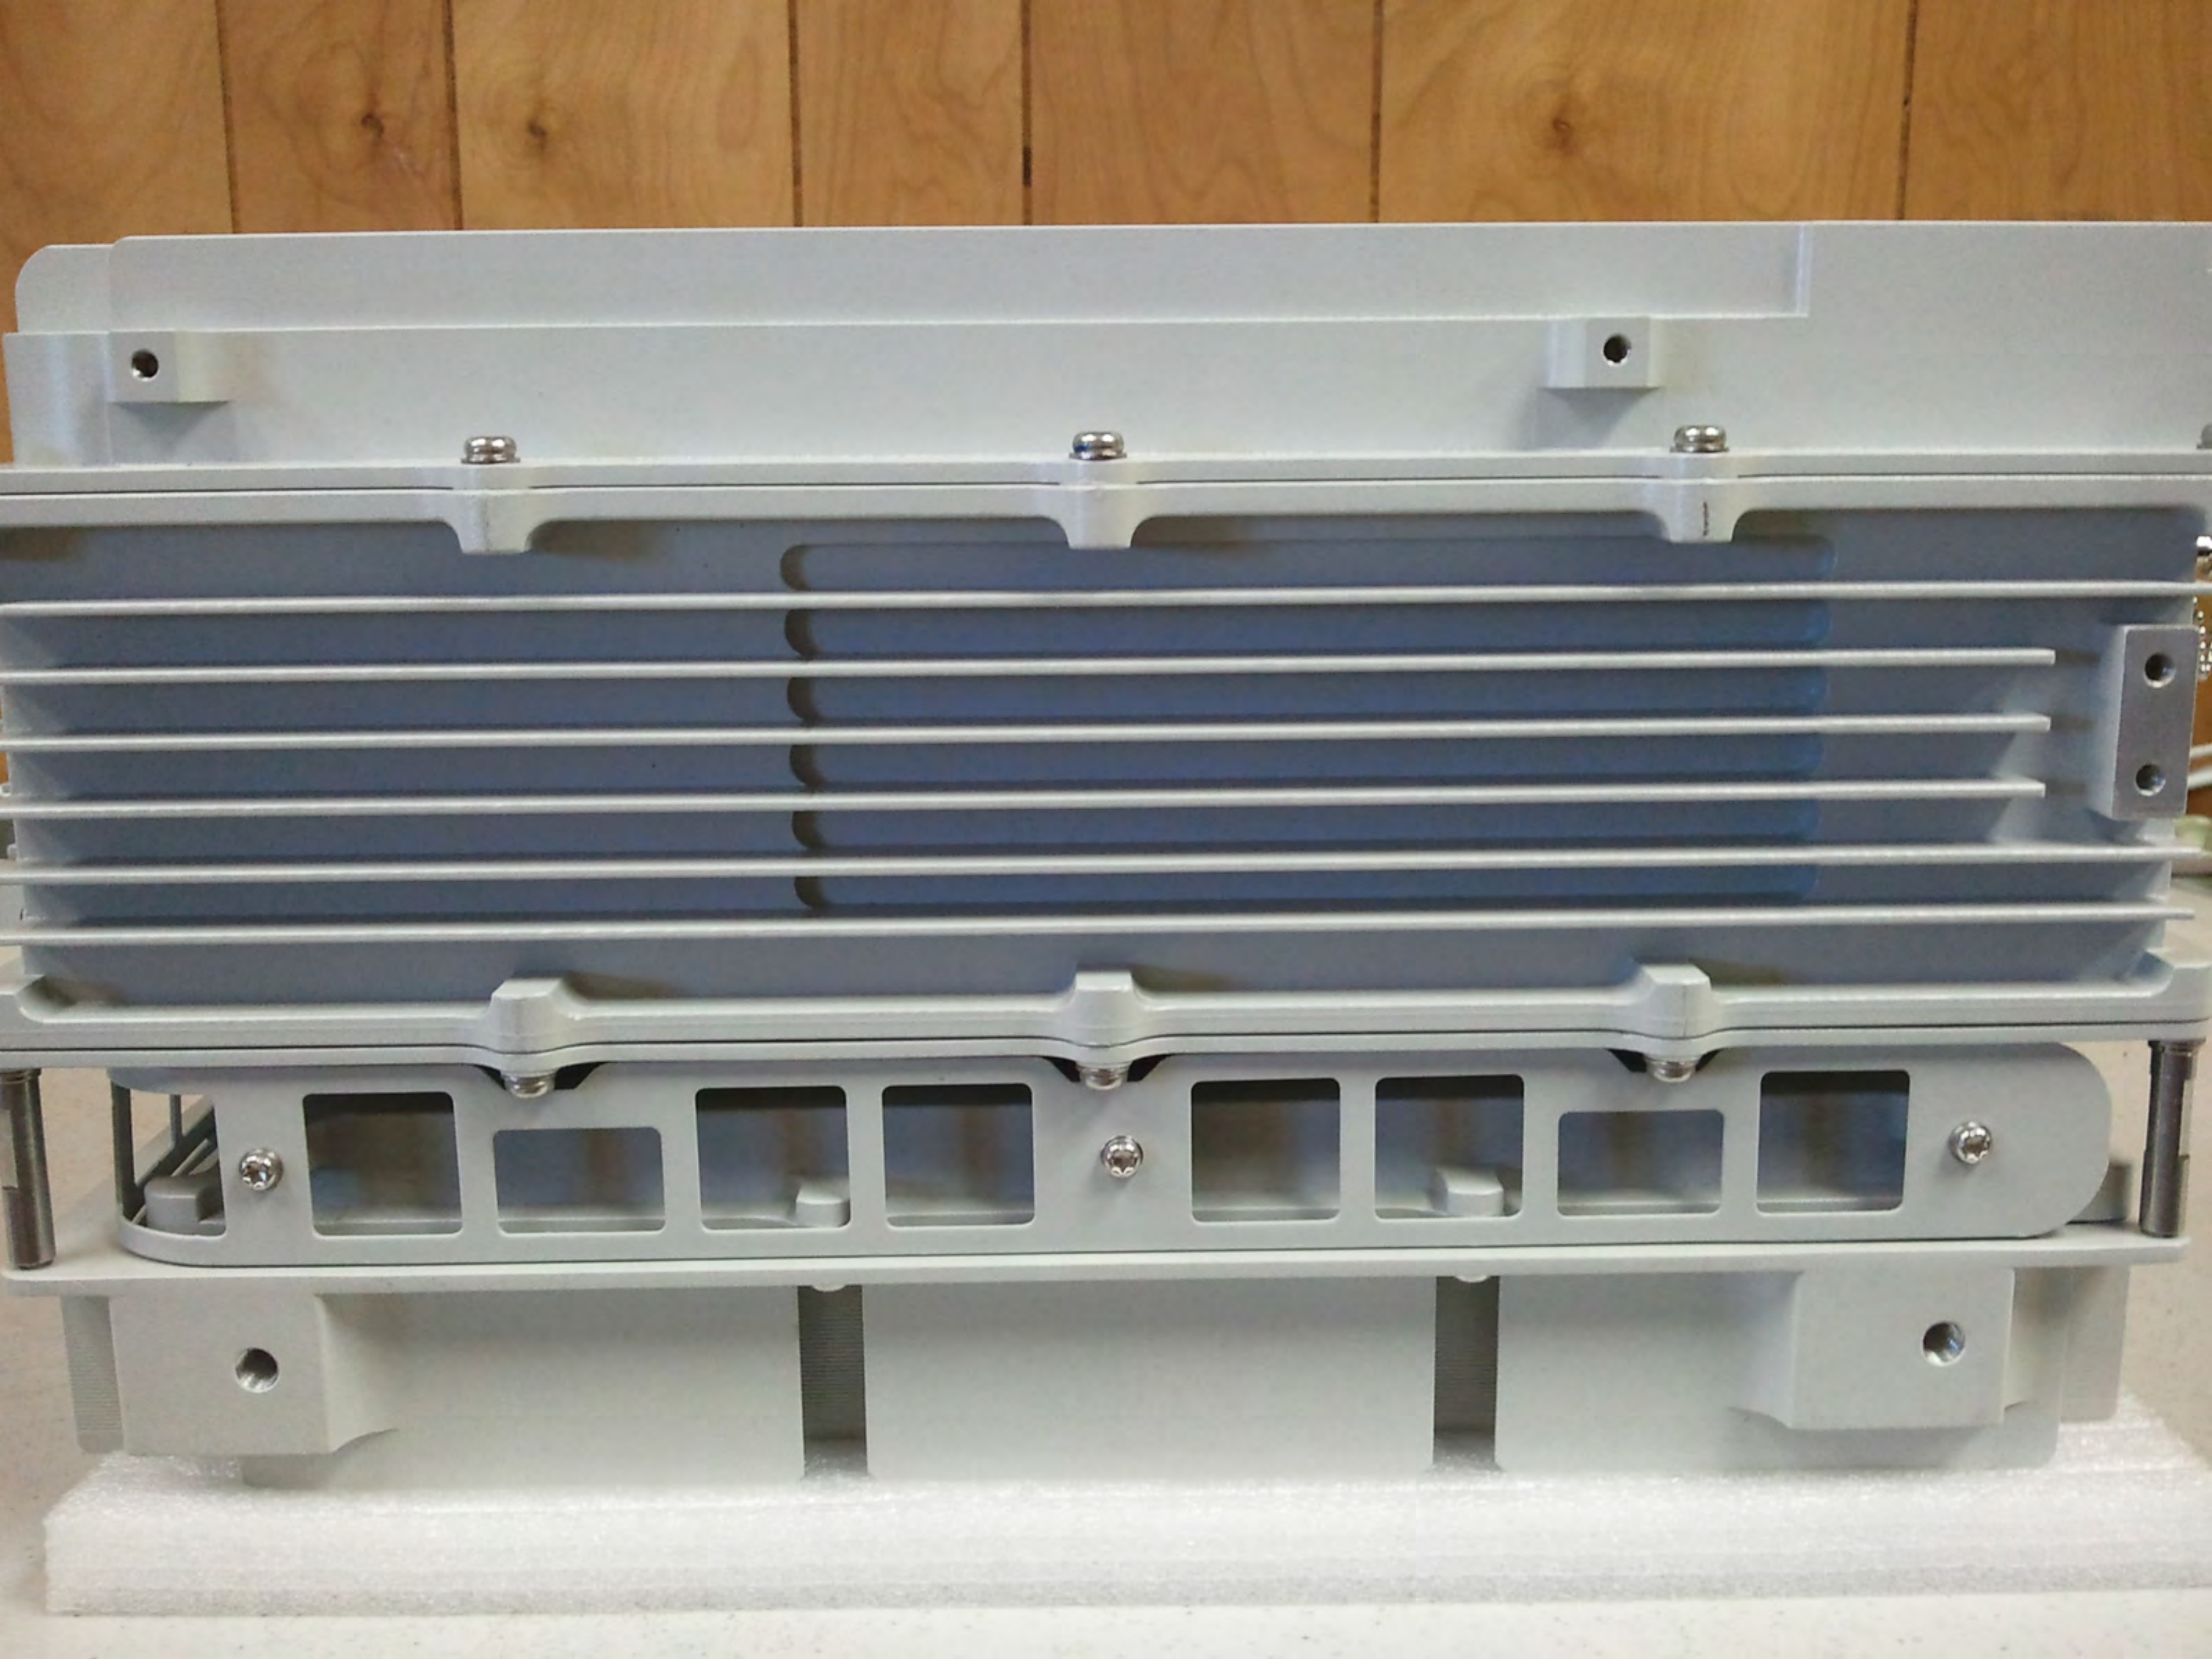



Fasten the Torque:  
12.0 kgf·cm  
Please refer to the  
Installation Manual

RRH2x50-800, KS24829L1  
SN L8ALLU-J2111900014  
CC 049144415  
WDMAU00ARA  
VER U3 P1.0

TX MON TX MON

ALD


ALM

WATER  
PROOF

-48V IN





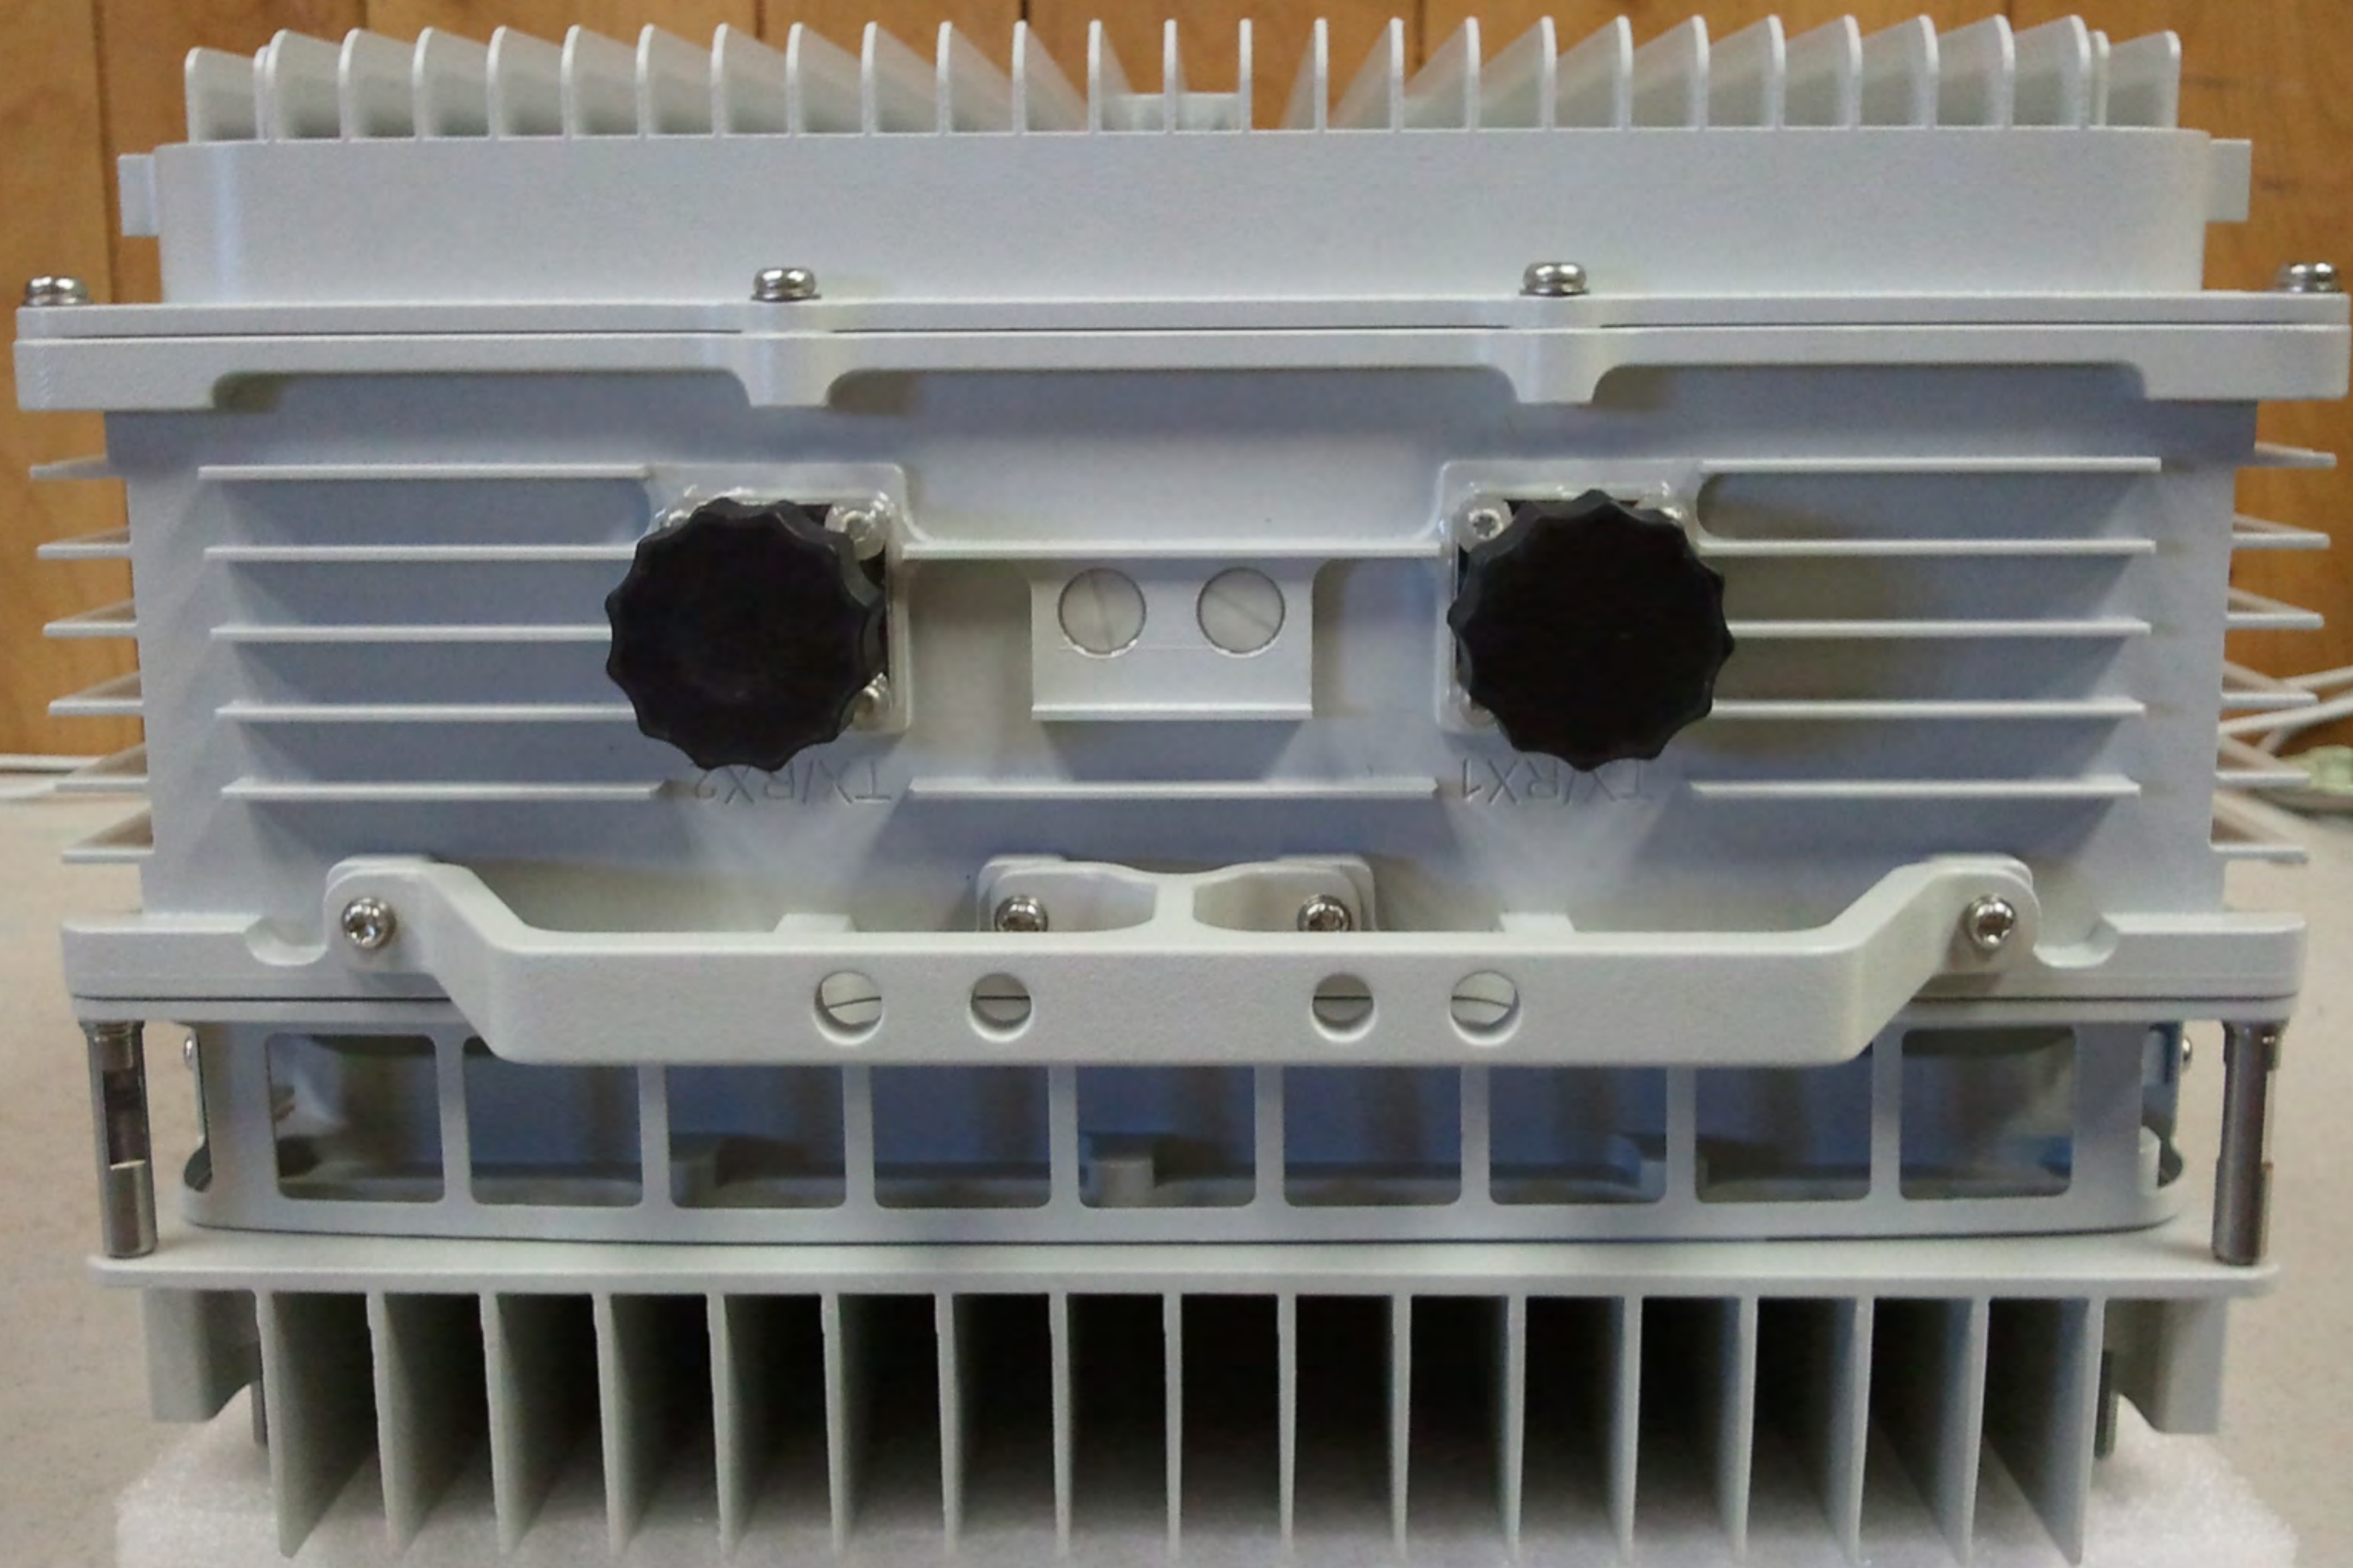













Fasten the Torque:  
12.0 kgf·cm  
Please refer to the  
Installation Manual

TX-1000  
RH2x60-800 KS24829  
W3CAU000ARA  
VER U3 P1.0

WATER  
PROOF

-48V IN