



# FCC RF Test Report

**APPLICANT** : BYD Precision Manufacture Co.,Ltd.  
**EQUIPMENT** : Trident  
**BRAND NAME** : iRobot  
**MODEL NAME** : AXC-Y1  
**FCC ID** : ZW9AXCY1  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Sep. 29, 2017 and testing was completed on Dec. 07, 2017. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

---

Approved by: James Huang / Manager



***Sporton International (Kunshan) Inc.***  
***No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335***  
***China***



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT .....	6
1.6 Testing Location .....	7
1.7 Applicable Standards.....	7
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
2.1 Carrier Frequency and Channel .....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement .....	14
3.4 Conducted Band Edges and Spurious Emission Measurement .....	16
3.5 Radiated Band Edges and Spurious Emission Measurement .....	26
3.6 Antenna Requirements.....	30
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>31</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>32</b>
<b>APPENDIX A. CONDUCTED TEST RESULTS</b>	
<b>APPENDIX B. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX C. DUTY CYCLE PLOTS</b>	
<b>APPENDIX D. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR792901B	Rev. 01	Initial issue of report	Jan. 17, 2018

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.03 dB at 67.830 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	-
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**BYD Precision Manufacture Co.,Ltd.**

No.3001, Bao He Road, Baolong Industry Zone, Longgang, Shenzhen, Guangdong Province, P.R.China

## 1.2 Manufacturer

**Huizhou BYD Electronic Co.,Ltd.**

Xiangshui River, Economic Development Zone, Daya Bay, Huizhou, Guangdong Province, P.R.China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Trident
Brand Name	iRobot
Model Name	AXC-Y1
FCC ID	ZW9AXCY1
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40/ Bluetooth v4.0 LE /Bluetooth v4.2 LE
HW Version	Trident B2
SW Version	Trident_00.00.25_20171223
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to antenna</b>	802.11b : 18.89 dBm (0.0774 W) 802.11g : 20.95 dBm (0.1245 W) 802.11n HT20 : 20.37 dBm (0.1089 W)
<b>99% Occupied Bandwidth</b>	802.11b : 12.44MHz 802.11g : 18.58MHz 802.11n HT20 : 19.28MHz
<b>Antenna Type / Gain</b>	Please see Remark 1
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

**Remark:**

- The antenna provided to the EUT, please refer to the following table:

Antenna No.	Brand	Model	Gain(dBi)	Antenna Type	Frequency range (GHz to GHz)	Cable length (mm)
1(External)	Laird	MAF94109	3.2	PCB dipole antenna	2.4-2.483.5	100
1(External)	Laird	MAF94109	2.7	PCB dipole antenna	5.15-5.25	100
1(External)	Laird	MAF94109	3.1	PCB dipole antenna	5.25-5.35	100
1(External)	Laird	MAF94109	2.7	PCB dipole antenna	5.47-5.725	100
1(External)	Laird	MAF94109	2.6	PCB dipole antenna	5.725-5.85	100

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

<b>Test Site</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Test Firm Registration No.</b>
	TH01-KS	03CH03-KS	630927

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-




## 2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

## 2.3 Connection Diagram of Test System

<WLAN Tx Mode>

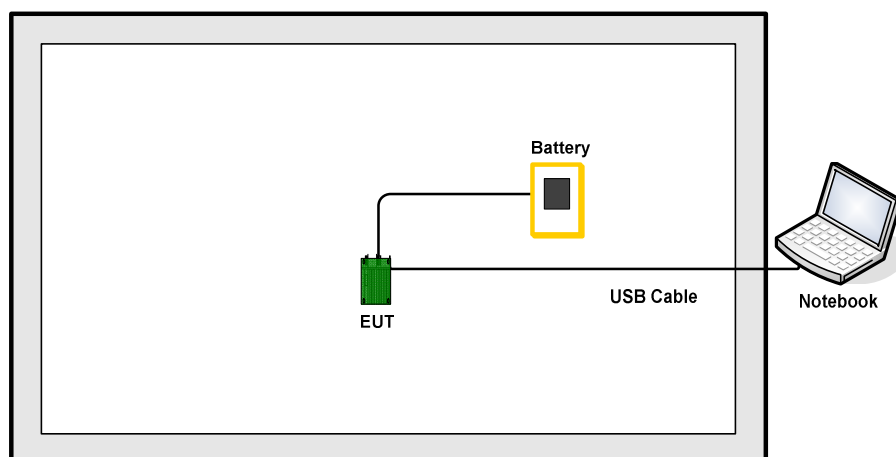

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Battery	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Dell	Latitude3440	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	USB Cable	N/A	N/A	N/A	Unshielded, 1.2m	N/A



## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup

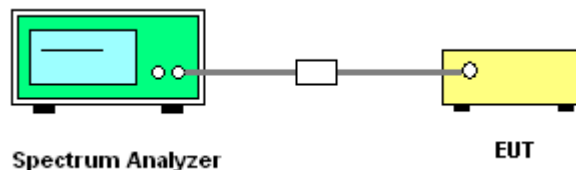



### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

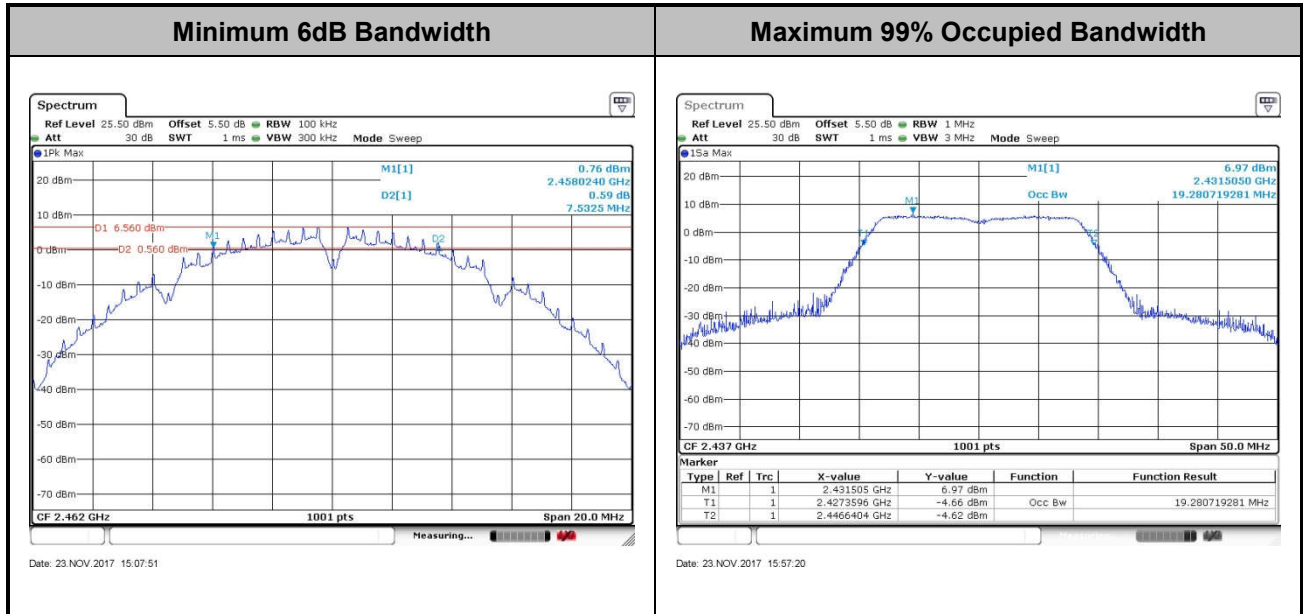

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

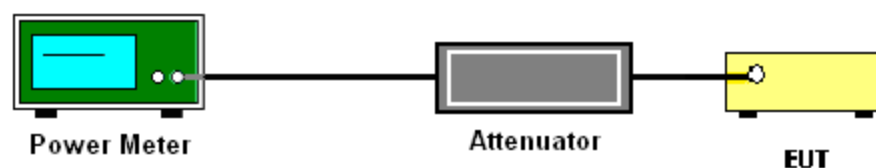

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

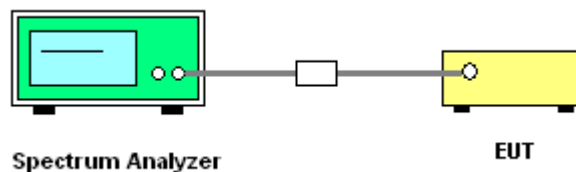

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

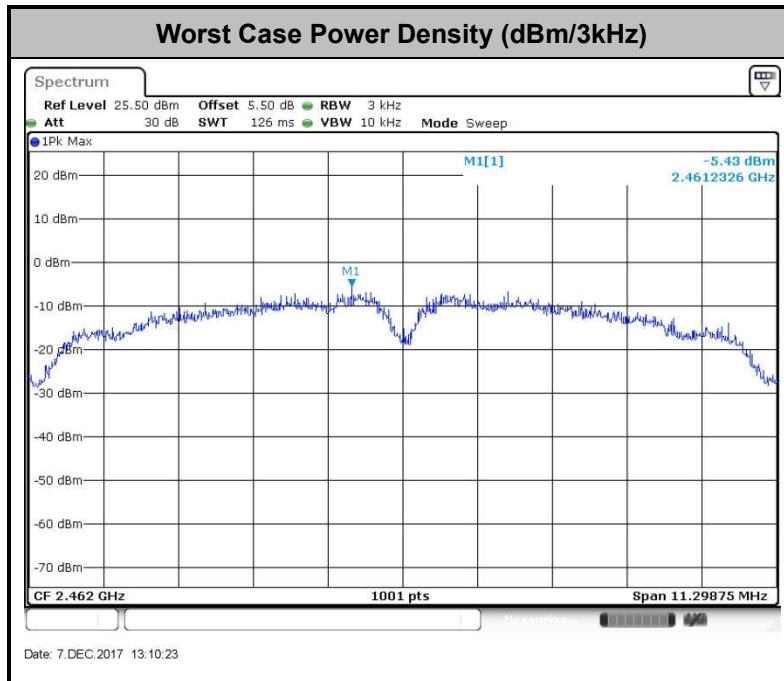

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup

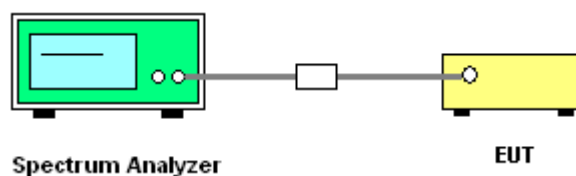









## 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

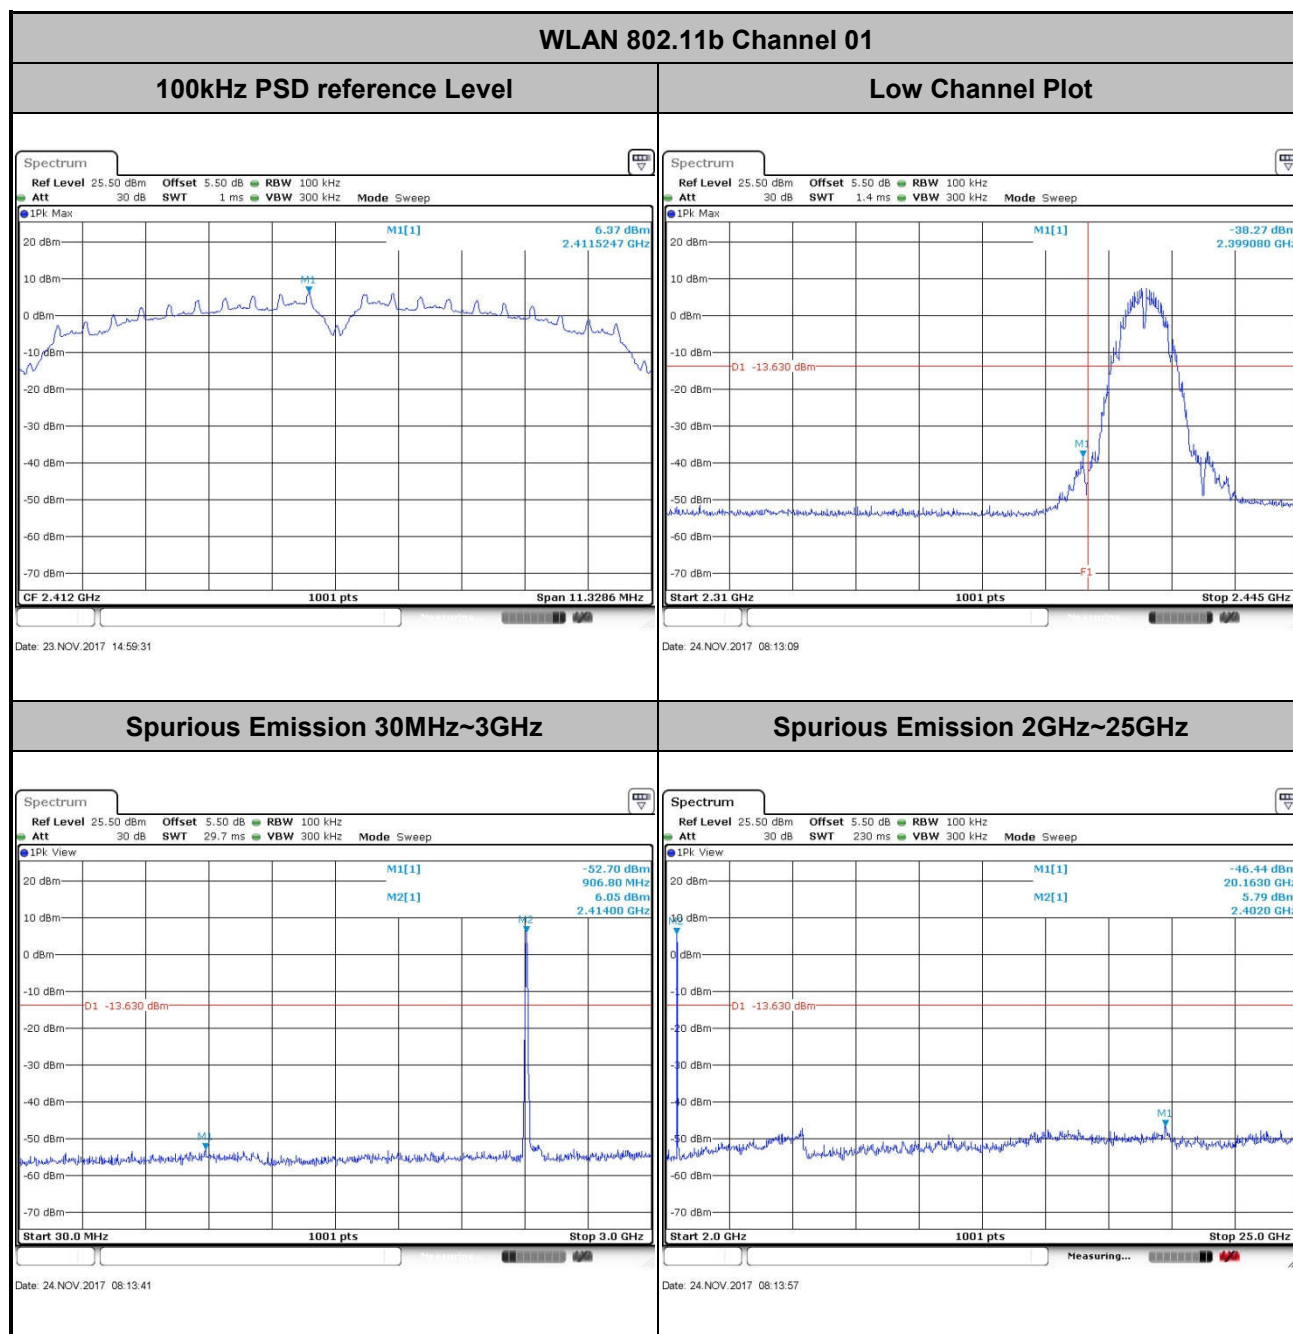







Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

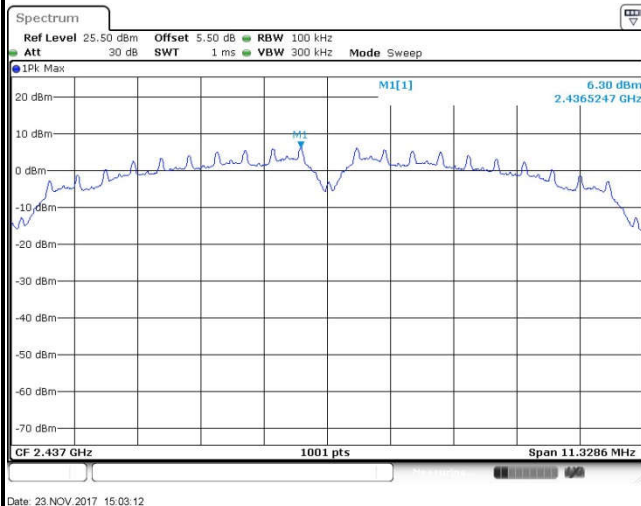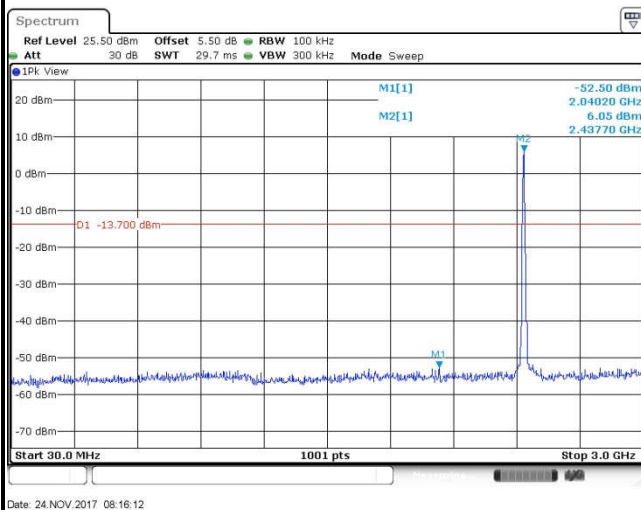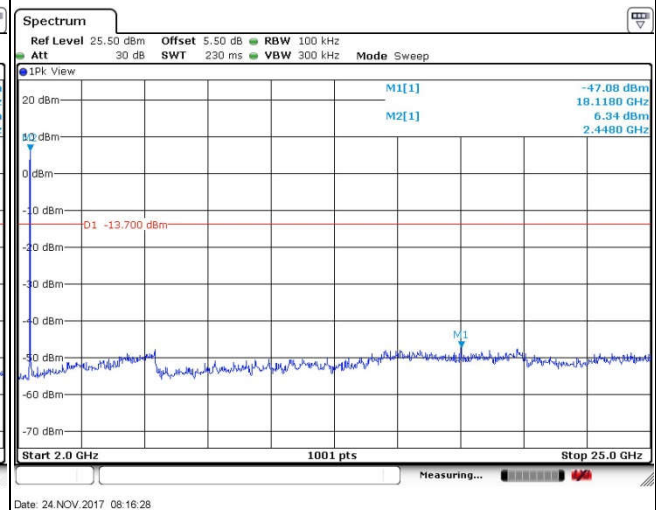**WLAN 802.11b Channel 06****100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

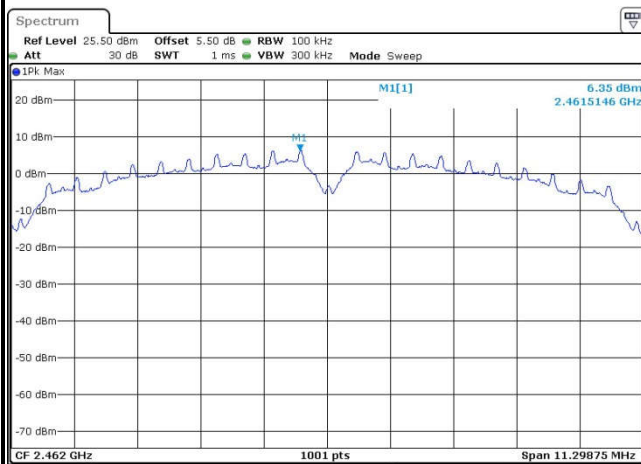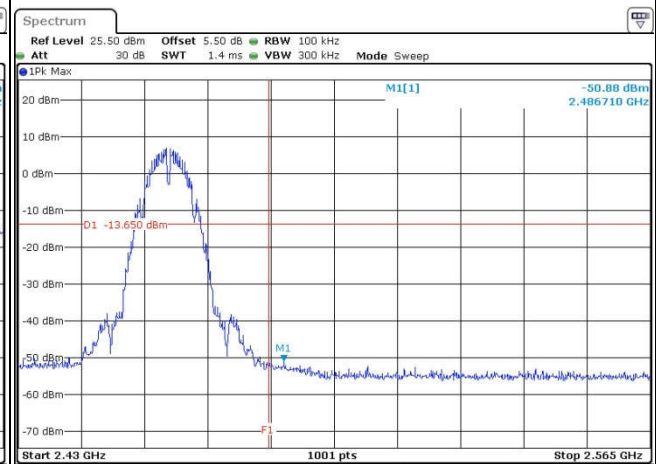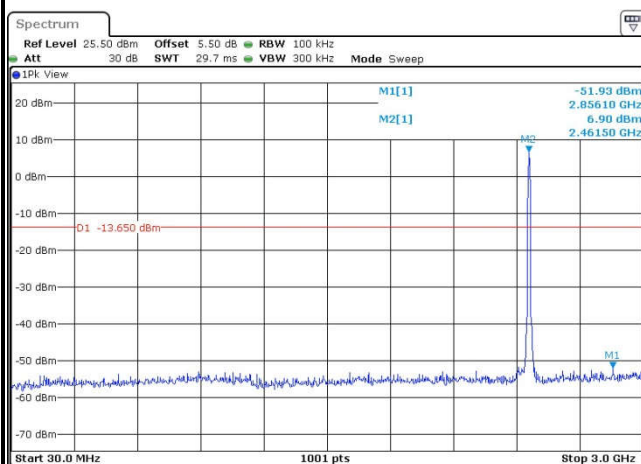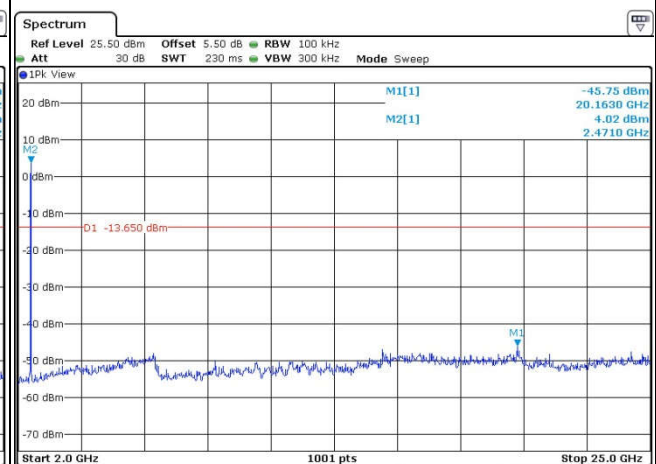
**WLAN 802.11b Channel 11****100kHz PSD reference Level****High Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

## WLAN 802.11g Channel 01


## 100kHz PSD reference Level

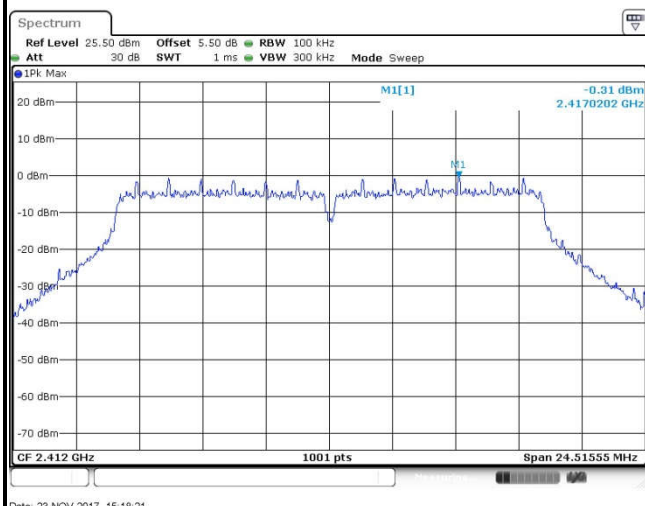


## Low Channel Plot

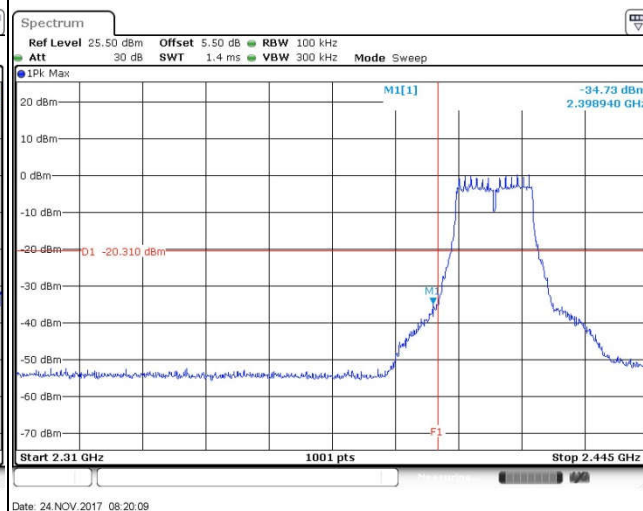

## Spurious Emission 30MHz~3GHz

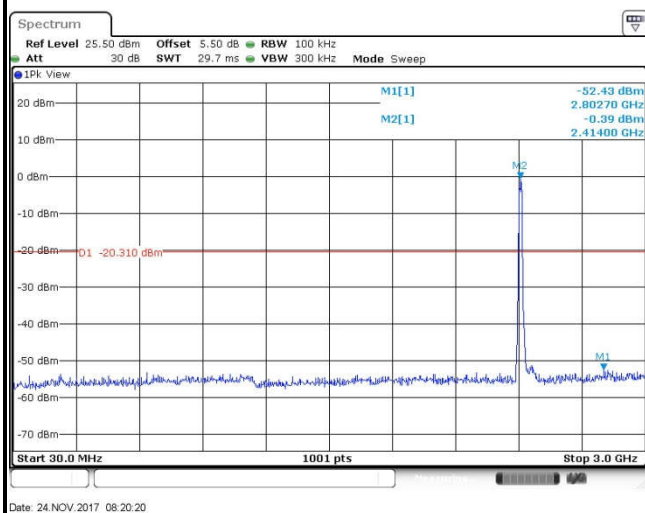

## Spurious Emission 2GHz~25GHz

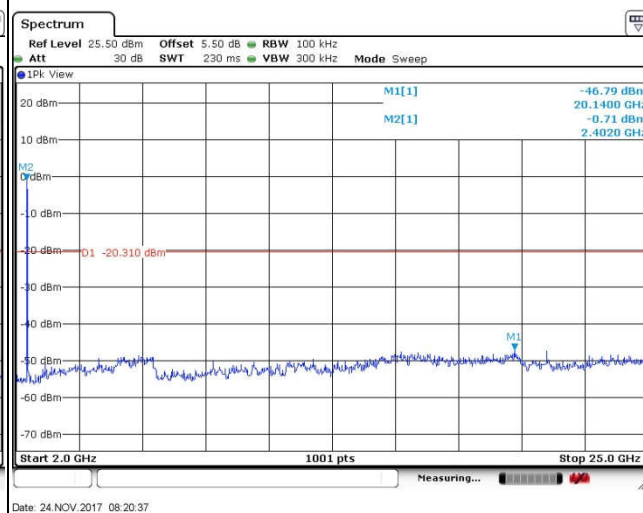





Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

## WLAN 802.11g Channel 06


## 100kHz PSD reference Level

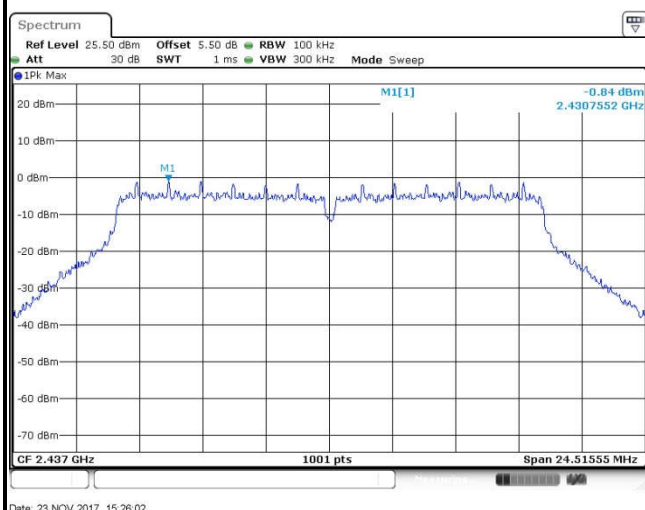

## Spurious Emission 30MHz~3GHz

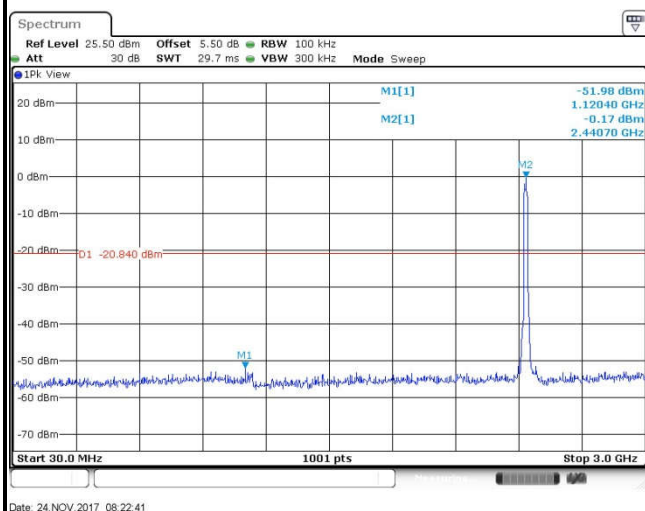

## Spurious Emission 2GHz~25GHz

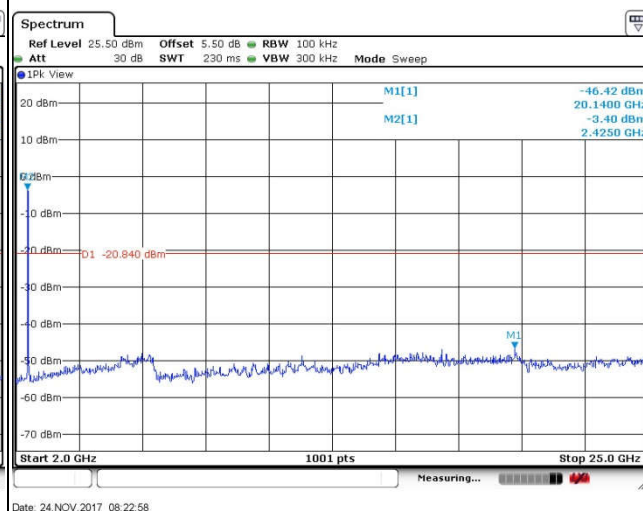




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


## WLAN 802.11g Channel 11

## 100kHz PSD reference Level

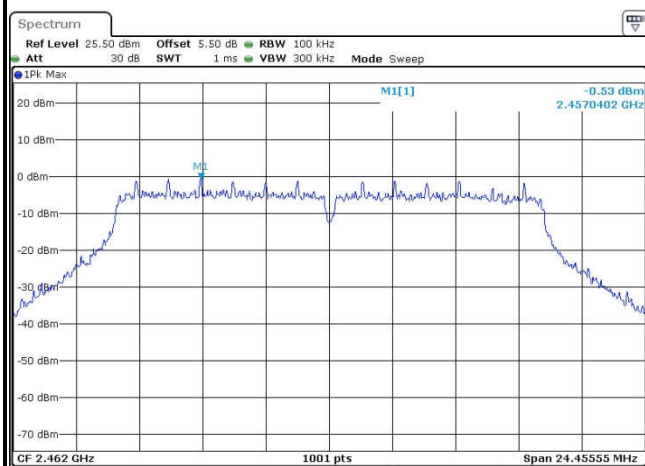


Date: 23.NOV.2017 15:32:49

## High Channel Plot

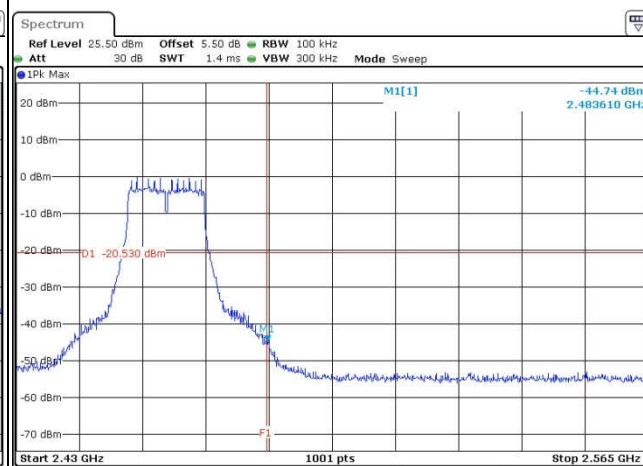


Date: 24.NOV.2017 08:23:52

## Spurious Emission 30MHz~3GHz

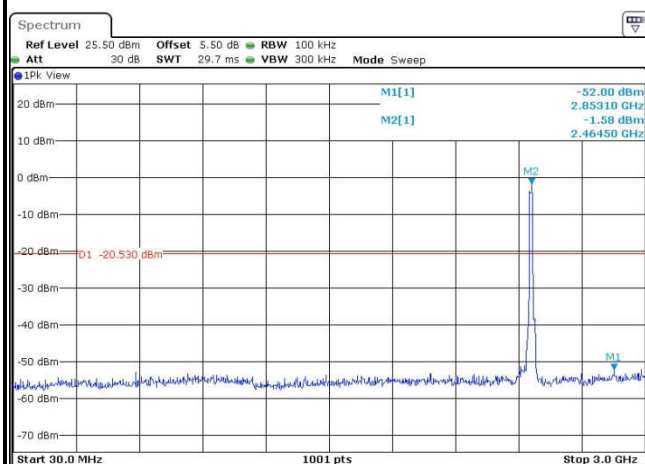

Date: 24.NOV.2017 08:24:27

## Spurious Emission 2GHz~25GHz

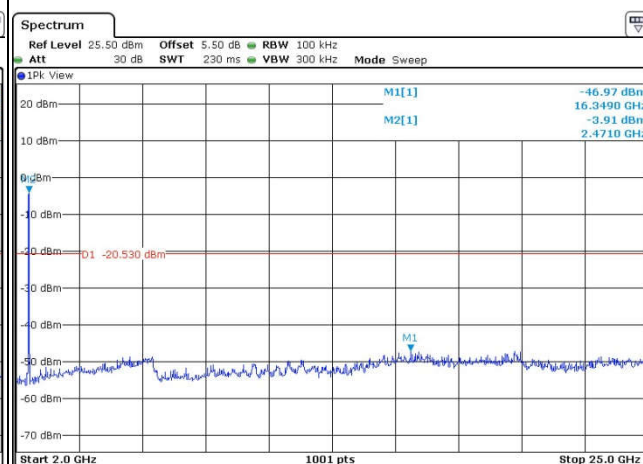


Date: 24.NOV.2017 08:24:43




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

## WLAN 802.11n HT20 Channel 01


## 100kHz PSD reference Level

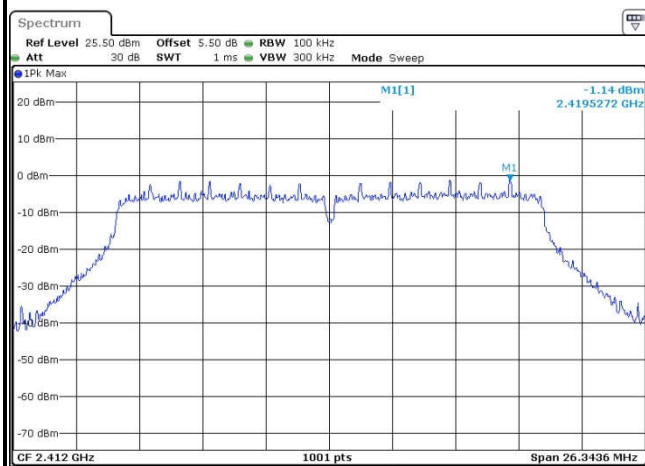


## Low Channel Plot

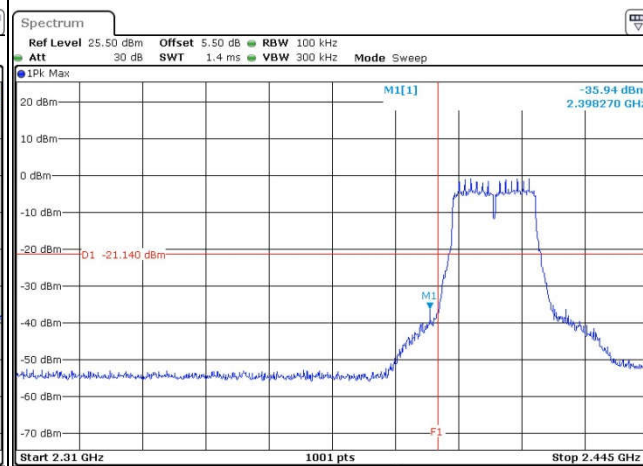

## Spurious Emission 30MHz~3GHz

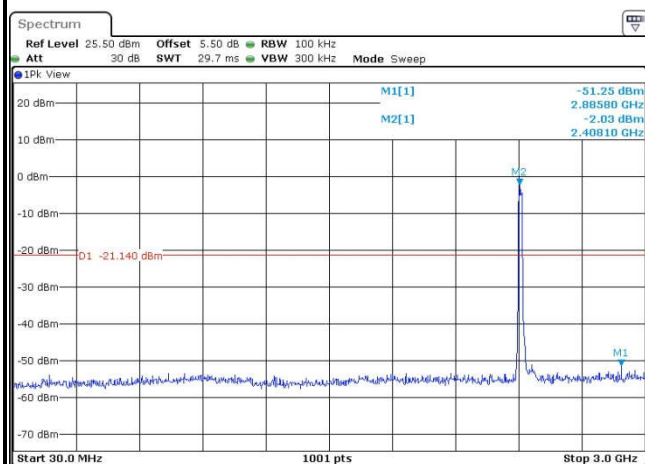

## Spurious Emission 2GHz~25GHz

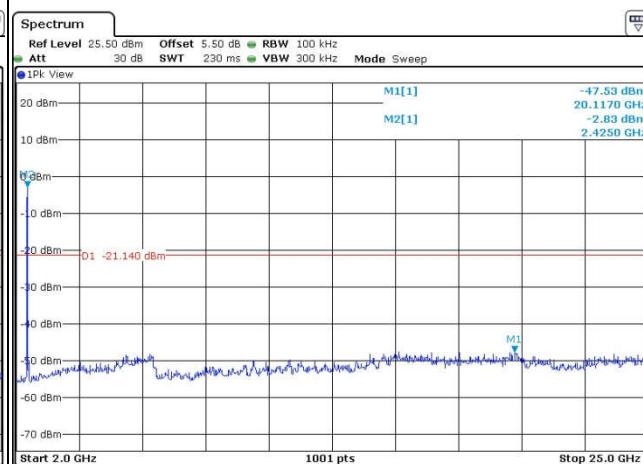





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

## WLAN 802.11n HT20 Channel 06


## 100kHz PSD reference Level

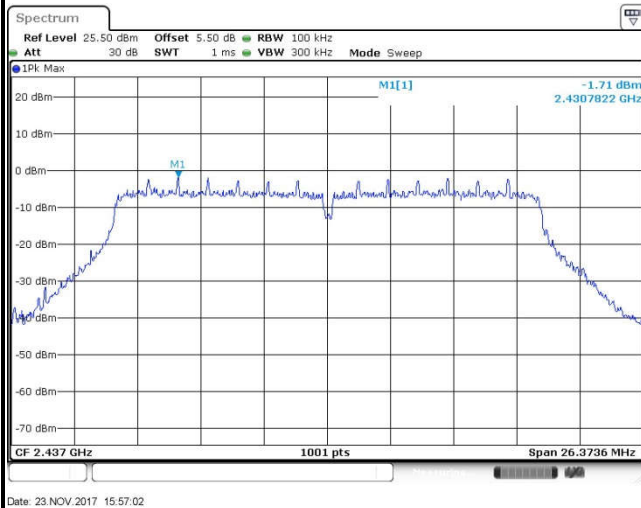

## Spurious Emission 30MHz~3GHz

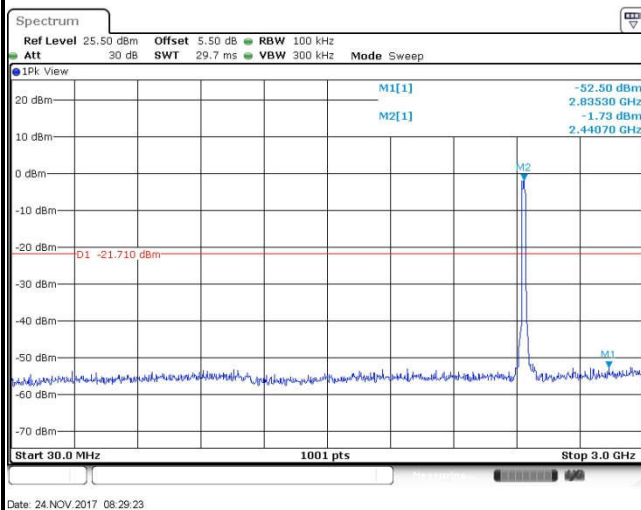

## Spurious Emission 2GHz~25GHz

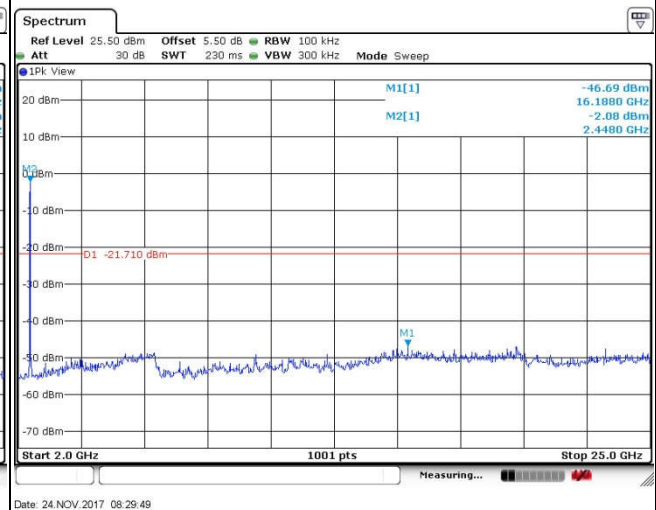






Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


## WLAN 802.11n HT20 Channel 11

## 100kHz PSD reference Level

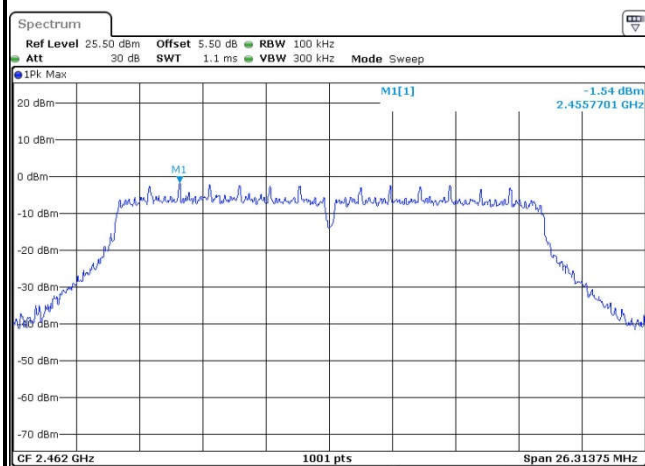


Date: 23.NOV.2017 16:04:30

## High Channel Plot

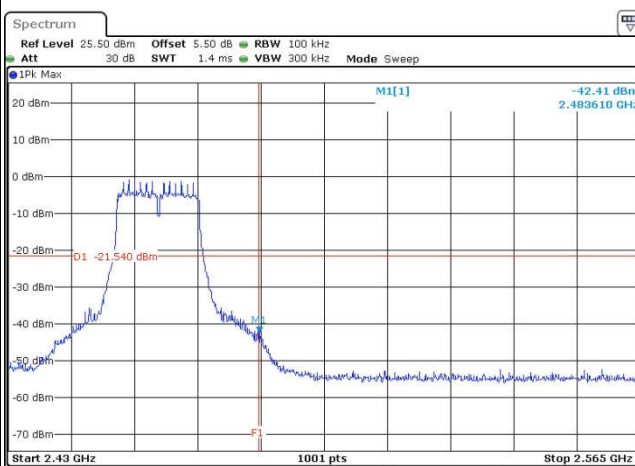


Date: 24.NOV.2017 14:45:11

## Spurious Emission 30MHz~3GHz

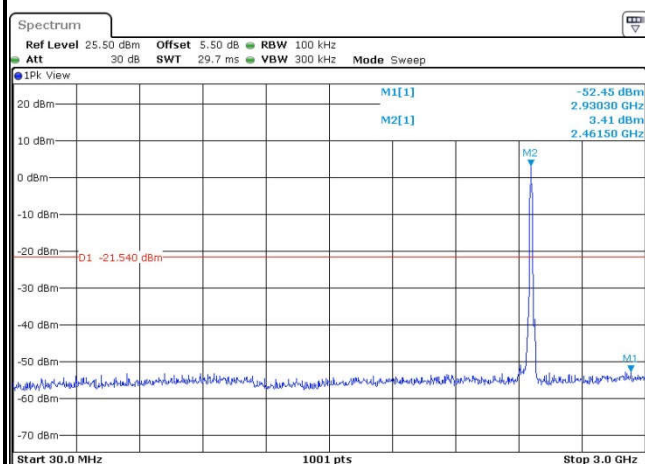

Date: 24.NOV.2017 08:31:44

## Spurious Emission 2GHz~25GHz

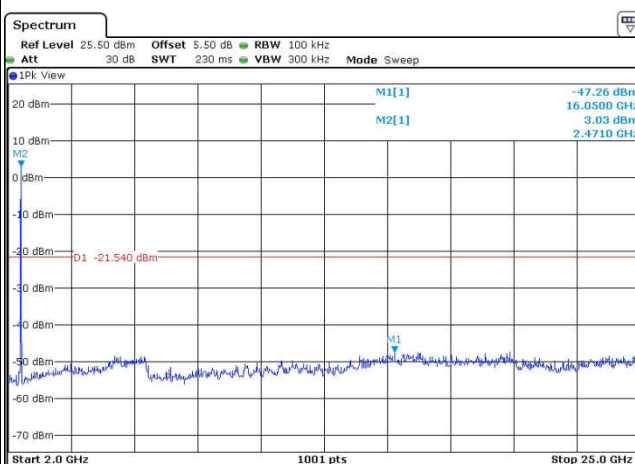

Date: 24.NOV.2017 08:32:00

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

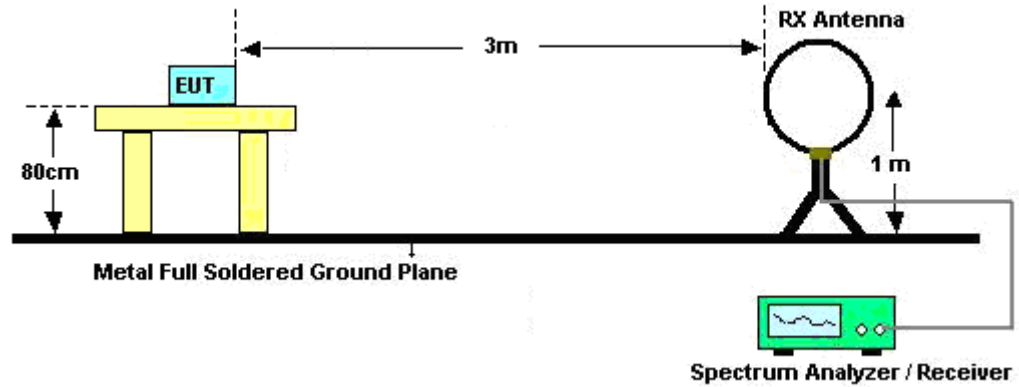

For radiated emissions from 30MHz to 1GHz

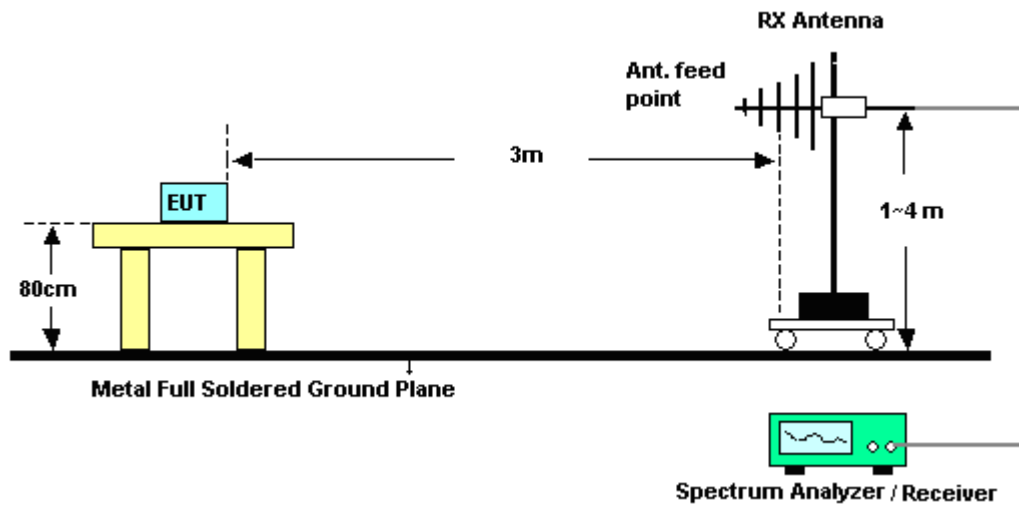

For radiated emissions above 1GHz

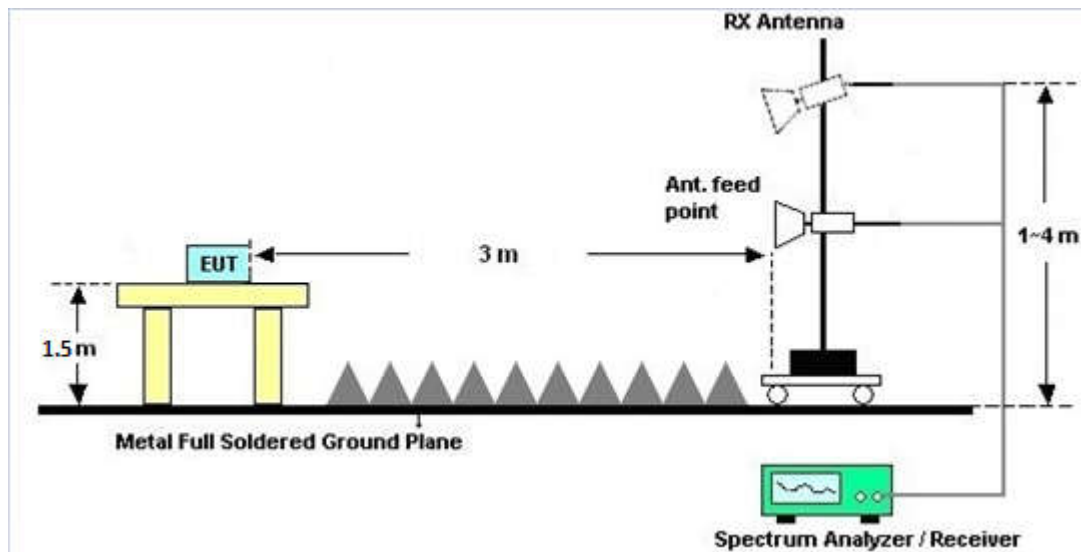

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Duty Cycle

Please refer to Appendix C.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.6.2 Antenna Anti-Replacement Construction**

Non-standard antenna connector is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Nov. 23, 2017~ Dec. 07, 2017	Aug. 07, 2018	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Nov. 23, 2017~ Dec. 07, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Nov. 23, 2017~ Dec. 07, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz; Max 30dBm	Oct. 19, 2017	Dec. 08, 2017	Oct. 18, 2018	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44GHz	Apr. 18, 2017	Dec. 08, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2017	Dec. 08, 2017	Oct. 21, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Dec. 08, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-135 6	1GHz~18GHz	Apr. 22, 2017	Dec. 08, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Feb. 15, 2017	Dec. 08, 2017	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32 dB	Apr. 18, 2017	Dec. 08, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35- HG	1887435	18GHz~40GHz	Oct. 12, 2017	Dec. 08, 2017	Oct. 11, 2018	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1GHz~18GHz	Apr. 18, 2017	Dec. 08, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Oct. 12, 2017	Dec. 08, 2017	Oct. 11, 2018	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Dec. 08, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 08, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 08, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6dB
--	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
--	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.7dB
--	-------





## **Appendix A. Conducted Test Results**

Report Number : **FR792901B**

**A1 - DTS Part**

Test Engineer:	Silent Hai	Temperature:	21~23	°C
Test Date:	2017/11/23~2017/12/07	Relative Humidity:	41~43	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.44	7.55	0.50	Pass
11b	1Mbps	1	6	2437	12.39	7.55	0.50	Pass
11b	1Mbps	1	11	2462	12.44	7.53	0.50	Pass
11g	6Mbps	1	1	2412	18.43	16.34	0.50	Pass
11g	6Mbps	1	6	2437	18.58	16.34	0.50	Pass
11g	6Mbps	1	11	2462	18.43	16.30	0.50	Pass
HT20	MCS0	1	1	2412	19.28	17.56	0.50	Pass
HT20	MCS0	1	6	2437	19.28	17.58	0.50	Pass
HT20	MCS0	1	11	2462	19.13	17.54	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	18.89	30.00	3.20	22.09	36.00	Pass
11b	1Mbps	1	6	2437	18.53	30.00	3.20	21.73	36.00	Pass
11b	1Mbps	1	11	2462	18.75	30.00	3.20	21.95	36.00	Pass
11g	6Mbps	1	1	2412	20.95	30.00	3.20	24.15	36.00	Pass
11g	6Mbps	1	6	2437	20.85	30.00	3.20	24.05	36.00	Pass
11g	6Mbps	1	11	2462	20.55	30.00	3.20	23.75	36.00	Pass
HT20	MCS0	1	1	2412	20.37	30.00	3.20	23.57	36.00	Pass
HT20	MCS0	1	6	2437	20.17	30.00	3.20	23.37	36.00	Pass
HT20	MCS0	1	11	2462	20.33	30.00	3.20	23.53	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.11	15.86
11b	1Mbps	1	6	2437	0.11	15.46
11b	1Mbps	1	11	2462	0.11	15.82
11g	6Mbps	1	1	2412	0.58	12.07
11g	6Mbps	1	6	2437	0.58	11.67
11g	6Mbps	1	11	2462	0.58	11.87
HT20	MCS0	1	1	2412	0.64	11.10
HT20	MCS0	1	6	2437	0.64	10.69
HT20	MCS0	1	11	2462	0.64	10.93

**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.34	3.20	8.00	Pass
11b	1Mbps	1	6	2437	-6.53	3.20	8.00	Pass
11b	1Mbps	1	11	2462	-5.43	3.20	8.00	Pass
11g	6Mbps	1	1	2412	-12.12	3.20	8.00	Pass
11g	6Mbps	1	6	2437	-13.37	3.20	8.00	Pass
11g	6Mbps	1	11	2462	-13.37	3.20	8.00	Pass
HT20	MCS0	1	1	2412	-13.63	3.20	8.00	Pass
HT20	MCS0	1	6	2437	-14.13	3.20	8.00	Pass
HT20	MCS0	1	11	2462	-14.18	3.20	8.00	Pass



## Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2372.27	52.33	-21.67	74	55.76	25.67	7.55	36.65	392	333	P	H
		2389.95	41.22	-12.78	54	44.47	25.8	7.59	36.64	392	333	A	H
	*	2412	103.9	-	-	107.09	25.83	7.62	36.64	392	333	P	H
	*	2414	100.88	-	-	104.07	25.83	7.62	36.64	392	333	A	H
		2327.16	51.49	-22.51	74	55.44	25.29	7.44	36.68	400	66	P	V
		2389.95	41.23	-12.77	54	44.48	25.8	7.59	36.64	400	66	A	V
	*	2412	103.25	-	-	106.44	25.83	7.62	36.64	400	66	P	V
	*	2414	99.97	-	-	103.16	25.83	7.62	36.64	400	66	A	V
802.11b CH 06 2437MHz		2386.18	52.17	-21.83	74	55.43	25.8	7.59	36.65	335	332	P	H
		2389.69	41.31	-12.69	54	44.57	25.8	7.59	36.65	335	332	A	H
	*	2438	103.13	-	-	106.22	25.89	7.67	36.65	335	332	P	H
	*	2436	99.76	-	-	102.91	25.86	7.64	36.65	335	332	A	H
		2483.8	53.42	-20.58	74	56.44	25.94	7.72	36.68	335	332	P	H
		2483.86	42.45	-11.55	54	45.47	25.94	7.72	36.68	335	332	A	H
		2384.36	52.07	-21.93	74	55.5	25.67	7.55	36.65	377	66	P	V
		2389.69	41.24	-12.76	54	44.5	25.8	7.59	36.65	377	66	A	V
	*	2438	103.29	-	-	106.38	25.89	7.67	36.65	377	66	P	V
	*	2438	99.94	-	-	103.03	25.89	7.67	36.65	377	66	A	V
		2484.4	53.05	-20.95	74	56.07	25.94	7.72	36.68	377	66	P	V
		2484.28	42.14	-11.86	54	45.16	25.94	7.72	36.68	377	66	A	V



<b>802.11b CH 11 2462MHz</b>	*	2462	102.81	-	-	105.88	25.91	7.69	36.67	297	347	P	H
	*	2462	99.54	-	-	102.61	25.91	7.69	36.67	297	347	A	H
		2487.7	52.91	-21.09	74	55.88	25.97	7.74	36.68	297	347	P	H
		2483.74	42.78	-11.22	54	45.8	25.94	7.72	36.68	297	347	A	H
	*	2462	103.41	-	-	106.48	25.91	7.69	36.67	373	80	P	V
	*	2462	100.12	-	-	103.19	25.91	7.69	36.67	373	80	A	V
		2484.94	52.81	-21.19	74	55.83	25.94	7.72	36.68	373	80	P	V
		2483.51	42.51	-11.49	54	45.53	25.94	7.72	36.68	373	80	A	V
<b>Remark</b>	<ol style="list-style-type: none"><li>1. No other spurious found.</li><li>2. All results are PASS against Peak and Average limit line.</li></ol>												





## 2.4GHz 2400~2483.5MHz

## WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	34.3	-39.7	74	56.65	30.68	11.5	64.53	100	360	P	H
		4824	32.99	-41.01	74	55.34	30.68	11.5	64.53	100	0	P	V
802.11b CH 06 2437MHz		4872	35.05	-38.95	74	57.24	30.85	11.56	64.6	100	360	P	H
		7308	39.24	-34.76	74	55.46	34.81	13.98	65.01	100	360	P	H
		4872	35.14	-38.86	74	57.33	30.85	11.56	64.6	100	0	P	V
		7308	37.46	-36.54	74	53.68	34.81	13.98	65.01	100	0	P	V
802.11b CH 11 2462MHz		4926	33.73	-40.27	74	55.77	31.02	11.62	64.68	100	360	P	H
		7386	39.62	-34.38	74	55.67	35.03	13.97	65.05	100	360	P	H
		4926	33.04	-40.96	74	55.08	31.02	11.62	64.68	100	0	P	V
		7386	38.63	-35.37	74	54.68	35.03	13.97	65.05	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		2385.53	51.89	-22.11	74	55.15	25.8	7.59	36.65	268	204	P	H
		2389.82	41.94	-12.06	54	45.19	25.8	7.59	36.64	268	204	A	H
	*	2416	102.33	-	-	105.53	25.83	7.62	36.65	268	204	P	H
	*	2416	94.24	-	-	97.44	25.83	7.62	36.65	268	204	A	H
		2389.95	52.12	-21.88	74	55.37	25.8	7.59	36.64	391	69	P	V
		2389.3	41.96	-12.04	54	45.22	25.8	7.59	36.65	391	69	A	V
	*	2418	102.49	-	-	105.69	25.83	7.62	36.65	391	69	P	V
	*	2416	94.39	-	-	97.59	25.83	7.62	36.65	391	69	A	V
802.11g CH 06 2437MHz		2367.07	51.76	-22.24	74	55.34	25.55	7.52	36.65	340	43	P	H
		2388	41.54	-12.46	54	44.8	25.8	7.59	36.65	340	43	A	H
	*	2442	100.91	-	-	104.02	25.89	7.67	36.67	340	43	P	H
	*	2444	92.92	-	-	96.03	25.89	7.67	36.67	340	43	A	H
		2484.34	53.38	-20.62	74	56.4	25.94	7.72	36.68	340	43	P	H
		2489.62	43.76	-10.24	54	46.73	25.97	7.74	36.68	340	43	A	H
		2377.73	52.28	-21.72	74	55.71	25.67	7.55	36.65	378	75	P	V
		2389.43	41.58	-12.42	54	44.84	25.8	7.59	36.65	378	75	A	V
	*	2442	100.82	-	-	103.93	25.89	7.67	36.67	378	75	P	V
	*	2442	93.07	-	-	96.18	25.89	7.67	36.67	378	75	A	V
		2489.5	53.38	-20.62	74	56.35	25.97	7.74	36.68	378	75	P	V
		2489.44	43.34	-10.66	54	46.31	25.97	7.74	36.68	378	75	A	V



<b>802.11g CH 11 2462MHz</b>	*	2456	101.28	-	-	104.35	25.91	7.69	36.67	379	48	P	H
	*	2456	93.37	-	-	96.44	25.91	7.69	36.67	379	48	A	H
		2483.62	63.18	-10.82	74	66.2	25.94	7.72	36.68	379	48	P	H
	!	2483.51	48.21	-5.79	54	51.23	25.94	7.72	36.68	379	48	A	H
	*	2458	101.35	-	-	104.42	25.91	7.69	36.67	373	65	P	V
	*	2458	93.58	-	-	96.65	25.91	7.69	36.67	373	65	A	V
		2483.56	61.77	-12.23	74	64.79	25.94	7.72	36.68	373	65	P	V
		2483.56	46.83	-7.17	54	49.85	25.94	7.72	36.68	373	65	A	V
<b>Remark</b>	<ol style="list-style-type: none"><li>1. No other spurious found.</li><li>2. All results are PASS against Peak and Average limit line.</li></ol>												



## 2.4GHz 2400~2483.5MHz

## WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	33.65	-40.35	74	56	30.68	11.5	64.53	100	360	P	H
		4824	33.91	-40.09	74	56.26	30.68	11.5	64.53	100	0	P	V
802.11g CH 06 2437MHz		4872	36.42	-37.58	74	58.61	30.85	11.56	64.6	300	360	P	H
		7308	40.35	-33.65	74	56.57	34.81	13.98	65.01	300	360	P	H
		4872	35.26	-38.74	74	57.45	30.85	11.56	64.6	100	0	P	V
		7308	38.92	-35.08	74	55.14	34.81	13.98	65.01	100	0	P	V
802.11g CH 11 2462MHz		4926	33.25	-40.75	74	55.29	31.02	11.62	64.68	100	360	P	H
		7386	38.55	-35.45	74	54.6	35.03	13.97	65.05	100	360	P	H
		4926	32.71	-41.29	74	54.75	31.02	11.62	64.68	100	0	P	V
		7386	38.51	-35.49	74	54.56	35.03	13.97	65.05	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		2376.17	52.35	-21.65	74	55.78	25.67	7.55	36.65	400	340	P	H
		2389.82	42.14	-11.86	54	45.39	25.8	7.59	36.64	400	340	A	H
	*	2418	103.2	-	-	106.4	25.83	7.62	36.65	400	340	P	H
	*	2416	94.56	-	-	97.76	25.83	7.62	36.65	400	340	A	H
		2387.22	52.49	-21.51	74	55.75	25.8	7.59	36.65	294	15	P	V
		2383.71	41.49	-12.51	54	44.92	25.67	7.55	36.65	294	15	A	V
	*	2416	96.04	-	-	99.24	25.83	7.62	36.65	294	15	P	V
	*	2416	88.22	-	-	91.42	25.83	7.62	36.65	294	15	A	V
802.11n HT20 CH 06 2437MHz		2386.18	51.77	-22.23	74	55.03	25.8	7.59	36.65	335	343	P	H
		2389.43	41.53	-12.47	54	44.79	25.8	7.59	36.65	335	343	A	H
	*	2444	100.63	-	-	103.74	25.89	7.67	36.67	335	343	P	H
	*	2444	93.01	-	-	96.12	25.89	7.67	36.67	335	343	A	H
		2488.72	53.57	-20.43	74	56.54	25.97	7.74	36.68	335	343	P	H
		2488.48	43.68	-10.32	54	46.65	25.97	7.74	36.68	335	343	A	H
		2346.14	51.93	-22.07	74	55.7	25.42	7.48	36.67	379	14	P	V
		2379.81	41.58	-12.42	54	45.01	25.67	7.55	36.65	379	14	A	V
	*	2432	95.32	-	-	98.47	25.86	7.64	36.65	379	14	P	V
	*	2444	87.03	-	-	90.14	25.89	7.67	36.67	379	14	A	V
		2487.28	52.54	-21.46	74	55.56	25.94	7.72	36.68	379	14	P	V
		2488.54	42.04	-11.96	54	45.01	25.97	7.74	36.68	379	14	A	V



<b>802.11n</b>  <b>HT20</b>  <b>CH 11</b>  <b>2462MHz</b>	*	2458	101.18	-	-	104.25	25.91	7.69	36.67	380	14	P	H
	*	2458	93.41	-	-	96.48	25.91	7.69	36.67	380	14	A	H
		2483.56	62.79	-11.21	74	65.81	25.94	7.72	36.68	380	14	P	H
		2483.51	47.63	-6.37	54	50.65	25.94	7.72	36.68	380	14	A	H
	*	2458	95.95	-	-	99.02	25.91	7.69	36.67	372	40	P	V
	*	2458	88.3	-	-	91.37	25.91	7.69	36.67	372	40	A	V
		2483.8	57.85	-16.15	74	60.87	25.94	7.72	36.68	372	40	P	V
		2483.68	43.73	-10.27	54	46.75	25.94	7.72	36.68	372	40	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	33.51	-40.49	74	55.86	30.68	11.5	64.53	100	360	P	H
		4824	32.95	-41.05	74	55.3	30.68	11.5	64.53	100	0	P	V
802.11n HT20 CH 06 2437MHz		4872	34.31	-39.69	74	56.5	30.85	11.56	64.6	100	0	P	H
		7308	38.76	-35.24	74	54.98	34.81	13.98	65.01	100	0	P	H
		4872	33.36	-40.64	74	55.55	30.85	11.56	64.6	100	360	P	V
		7308	39.4	-34.6	74	55.62	34.81	13.98	65.01	100	360	P	V
802.11n HT20 CH 11 2462MHz		4926	34.26	-39.74	74	56.3	31.02	11.62	64.68	100	360	P	H
		7386	39.3	-34.7	74	55.35	35.03	13.97	65.05	100	360	P	H
		4926	32.99	-41.01	74	55.03	31.02	11.62	64.68	100	0	P	V
		7386	39.73	-34.27	74	55.78	35.03	13.97	65.05	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## 2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11g LF		30	25.31	-14.69	40	29.75	27.2	0.65	32.29	-	-	P	H
		69.77	22.61	-17.39	40	39.86	13.7	1.23	32.18	-	-	P	H
		224	31.36	-14.64	46	44.91	16.43	2.2	32.18	-	-	P	H
		288.02	23.5	-22.5	46	34.51	18.55	2.51	32.07	-	-	P	H
		556.71	28.42	-17.58	46	31.87	24.76	3.54	31.75	-	-	P	H
		800.18	32.42	-13.58	46	31.82	27.9	4.27	31.57	150	20	P	H
	!	67.83	34.97	-5.03	40	52.43	13.54	1.21	32.21	100	20	P	V
		93.05	23.26	-20.24	43.5	36.04	18.1	1.37	32.25	-	-	P	V
		323.91	27.07	-18.93	46	36.14	20.13	2.88	32.08	-	-	P	V
		448.07	26.24	-19.76	46	29.6	25.41	3.17	31.94	-	-	P	V
		556.71	28.73	-17.27	46	32.18	24.76	3.54	31.75	-	-	P	V
		944.71	31.69	-14.31	46	29.02	29.38	4.66	31.37	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>not under 6dB</b>
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**




## Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	97.59	8.232	0.121	300Hz
802.11g	87.44	1.362	0.734	1KHz
802.11n HT20	86.27	1.275	0.784	1KHz




## 802.11b

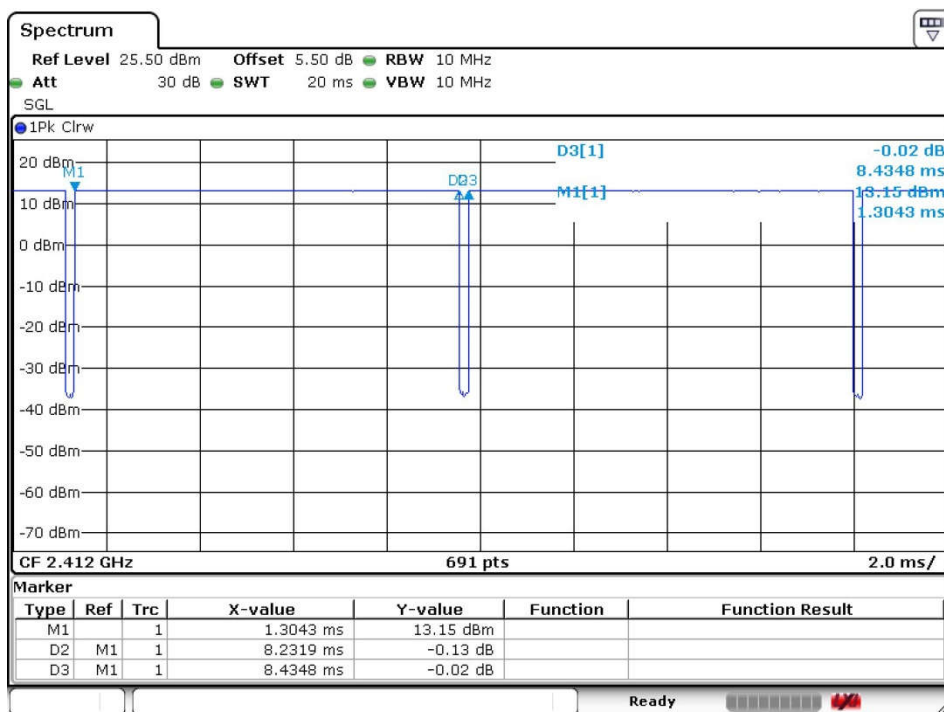



802.11g

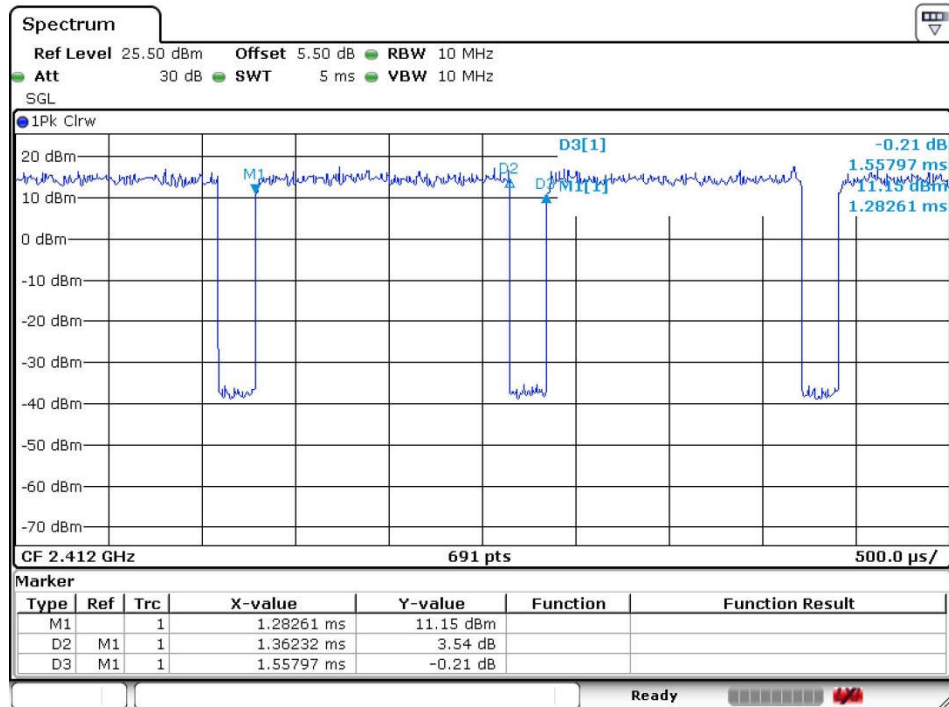



## 802.11n HT20

