


Date: 9.JAN.2014 17:08:51


## 16QAM (RB Size 1, RB Offset 0)



Date: 9.JAN.2014 17:09:47


Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 325 of 485



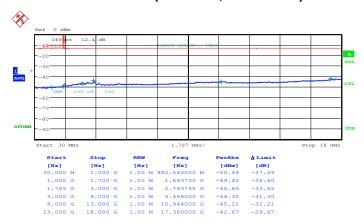


Date: 9.JAN.2014 17:11:33


## 16QAM (RB Size 1, RB Offset 0)

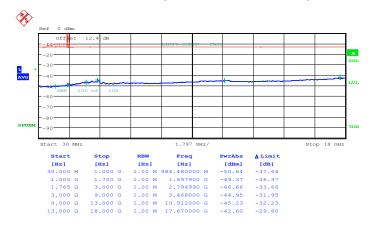

Date: 9.JAN.2014 17:12:28


Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 326 of 485



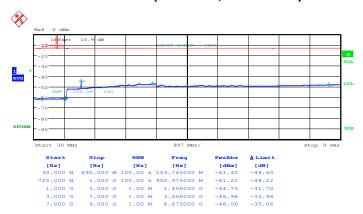


Date: 9.JAN.2014 10:46:46


## 16QAM (RB Size 1, RB Offset 0)

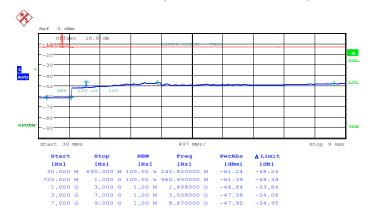

Date: 9.JAN.2014 10:47:42


: FG372301-01B Report No. Report Version : Rev. 02 Page Number : 327 of 485



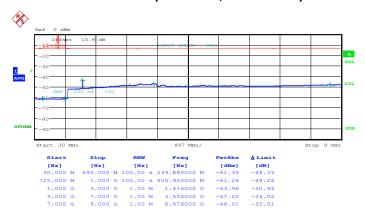


Date: 9.JAN.2014 10:49:28


## 16QAM (RB Size 1, RB Offset 0)

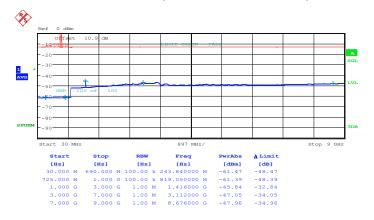

Date: 9.JAN.2014 10:50:23


: FG372301-01B Report No. Report Version : Rev. 02 Page Number : 328 of 485



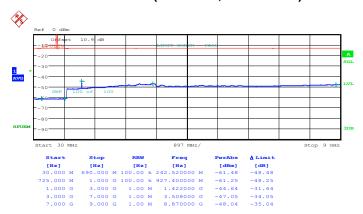


Date: 9.JAN.2014 10:54:59


## 16QAM (RB Size 1, RB Offset 0)

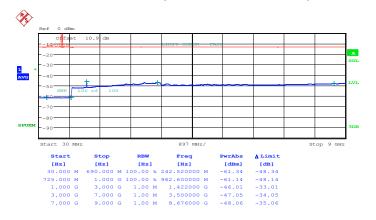

Date: 9.JAN.2014 10:55:55


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 329 of 485
Report Template No.: BU5-FGLTE Version 1.0



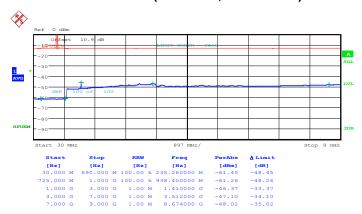


Date: 9.JAN.2014 11:00:35


## 16QAM (RB Size 1, RB Offset 0)

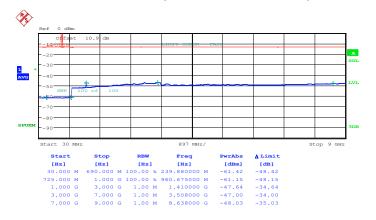

Date: 9.JAN.2014 11:01:30


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 330 of 485
Report Template No.: BU5-FGLTE Version 1.0



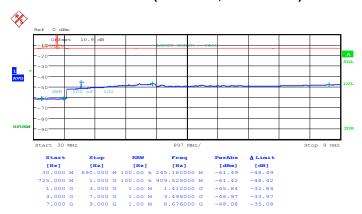


Date: 9.JAN.2014 11:03:16


## 16QAM (RB Size 1, RB Offset 0)

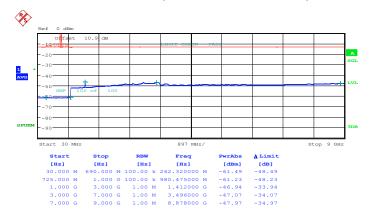

Date: 9.JAN.2014 11:04:12


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 331 of 485
Report Template No.: BU5-FGLTE Version 1.0



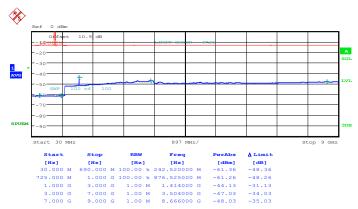


Date: 9.JAN.2014 11:08:48


## 16QAM (RB Size 1, RB Offset 0)

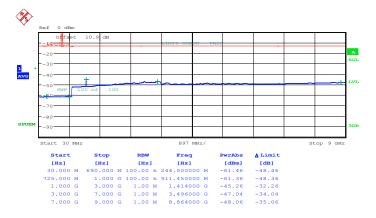

Date: 9.JAN.2014 11:09:43


: FG372301-01B Report No. Report Version : Rev. 02 Page Number : 332 of 485



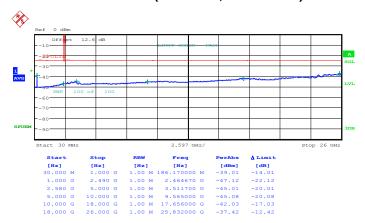


Date: 8.JAN.2014 15:06:24


## 16QAM (RB Size 1, RB Offset 0)

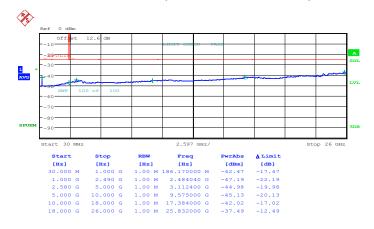

Date: 8.JAN.2014 15:07:29


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 333 of 485
Report Template No.: BU5-FGLTE Version 1.0



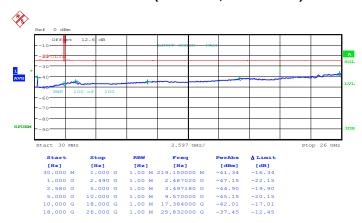


Date: 8.JAN.2014 15:09:47


## 16QAM (RB Size 1, RB Offset 0)

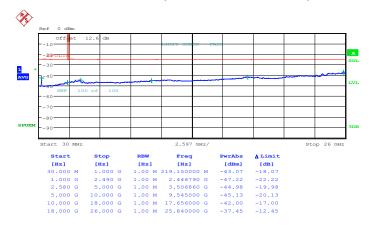

Date: 8.JAN.2014 15:08:41


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 334 of 485
Report Template No.: BU5-FGLTE Version 1.0



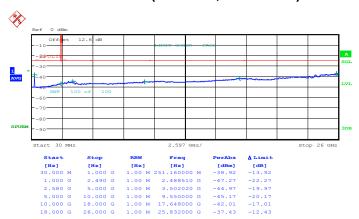


Date: 8.JAN.2014 15:10:55


## 16QAM (RB Size 1, RB Offset 0)

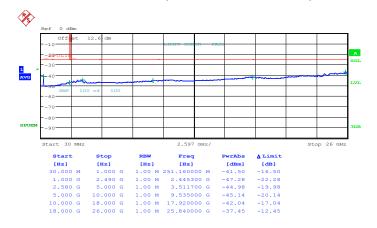

Date: 8.JAN.2014 15:11:58


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 335 of 485
Report Template No.: BU5-FGLTE Version 1.0



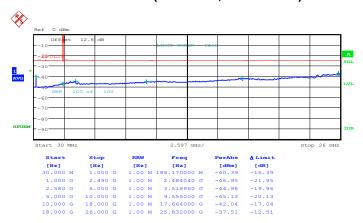


Date: 8.JAN.2014 15:16:06


## 16QAM (RB Size 1, RB Offset 0)

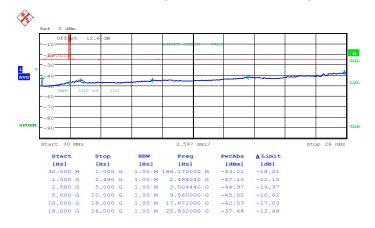

Date: 8.JAN.2014 15:14:41


Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 336 of 485



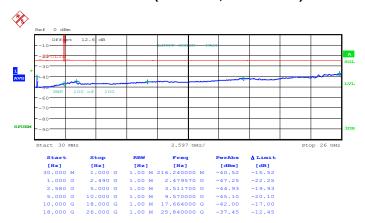


Date: 8.JAN.2014 15:17:16


## 16QAM (RB Size 1, RB Offset 0)

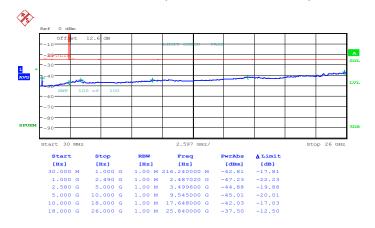

Date: 8.JAN.2014 15:18:26


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 337 of 485
Report Template No.: BU5-FGLTE Version 1.0



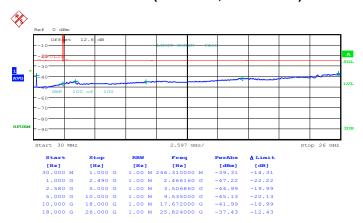


Date: 8.JAN.2014 15:20:58


## 16QAM (RB Size 1, RB Offset 0)

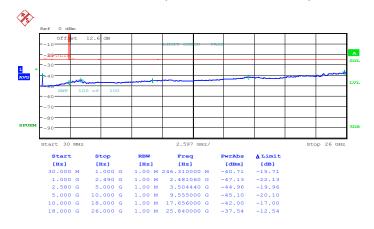

Date: 8.JAN.2014 15:19:33


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 338 of 485
Report Template No.: BU5-FGLTE Version 1.0



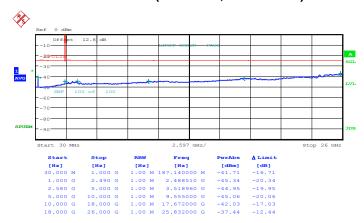


Date: 8.JAN.2014 15:22:21


## 16QAM (RB Size 1, RB Offset 0)

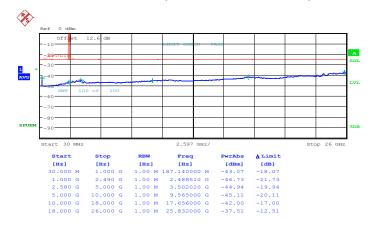

Date: 8.JAN.2014 15:23:28


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 339 of 485
Report Template No.: BU5-FGLTE Version 1.0



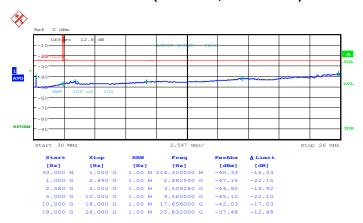


Date: 8.JAN.2014 15:25:42


## 16QAM (RB Size 1, RB Offset 0)

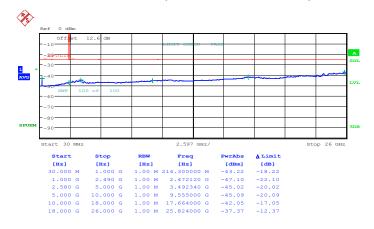

Date: 8.JAN.2014 15:24:37


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 340 of 485
Report Template No.: BU5-FGLTE Version 1.0



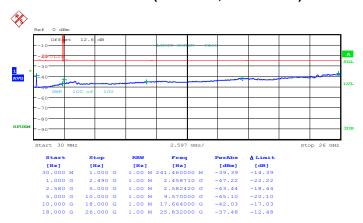


Date: 8.JAN.2014 15:26:46


## 16QAM (RB Size 1, RB Offset 0)

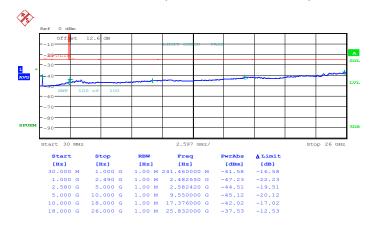

Date: 8.JAN.2014 15:27:58


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 341 of 485
Report Template No.: BU5-FGLTE Version 1.0



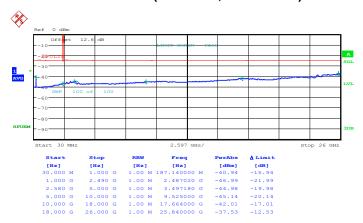


Date: 8.JAN.2014 15:30:54


## 16QAM (RB Size 1, RB Offset 0)

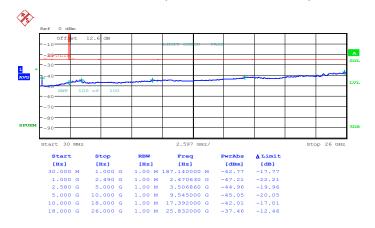

Date: 8.JAN.2014 15:29:23

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 342 of 485
Report Template No.: BU5-FGLTE Version 1.0



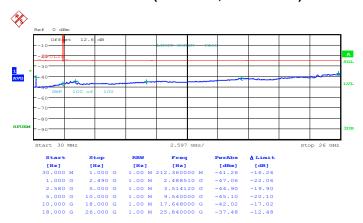


Date: 8.JAN.2014 15:32:03


## 16QAM (RB Size 1, RB Offset 0)



Date: 8.JAN.2014 15:33:10


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 343 of 485
Report Template No.: BU5-FGLTE Version 1.0



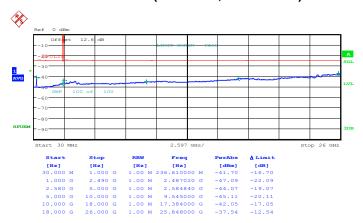

Date: 8.JAN.2014 15:35:21

## 16QAM (RB Size 1, RB Offset 0)

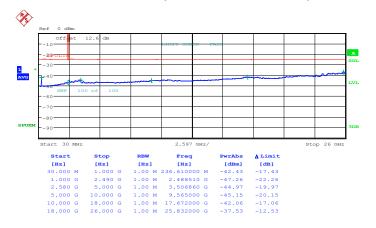

Date: 8.JAN.2014 15:34:15

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 344 of 485
Report Template No.: BU5-FGLTE Version 1.0

# 3.7 Radiated Spurious Emission Measurement

#### 3.7.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

## 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.7.3 Test Procedures

- The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

```
= P(W) - [43 + 10log(P)] (dB)
```

= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)

= -13dBm.

For Band 7


The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 345 of 485
Report Template No.: BU5-FGLTE Version 1.0

# 3.7.4 Test Setup

#### For radiated emissions from 30MHz to 1GHz

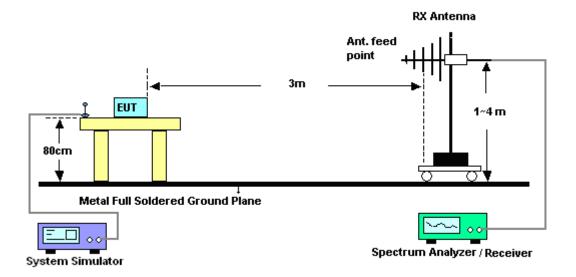

#### For radiated emissions above 1GHz

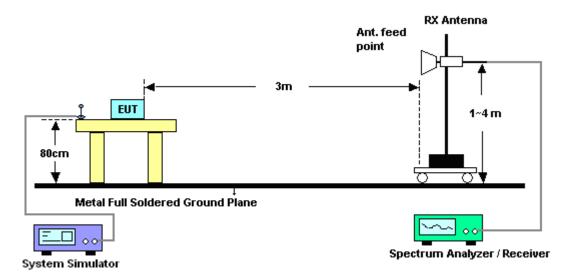

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 346 of 485
Report Template No.: BU5-FGLTE Version 1.0

## 3.7.5 Test Result of Field Strength of Spurious Radiated


#### <Low Channel>



Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 347 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

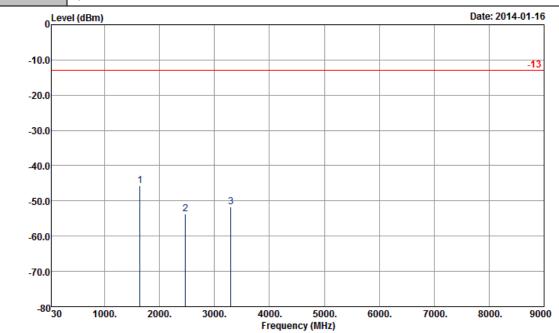

Site

: 03CH07-HY : -13 HF-EIRP(080306) VERTICAL Condition


Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1648	-45.61	-13	-32.61	-56.96	-49.5	1.61	5.50	V	Pass
2472	-53.75	-13	-40.75	-67.32	-57.9	2.09	6.24	V	Pass
3296	-51.59	-13	-38.59	-67.08	-56.6	3.08	8.09	V	Pass

Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 348 of 485

#### <Middle Channel>

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

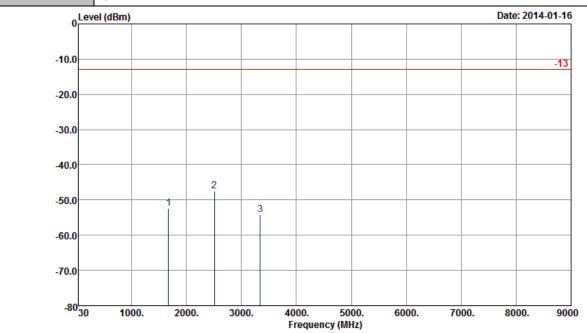

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1672	-52.33	-13	-39.33	-61.55	-56.2	1.62	5.49	Н	Pass
2507	-47.38	-13	-34.38	-60.66	-51.5	2.1	6.22	Н	Pass
3343	-54.16	-13	-41.16	-68.73	-59.2	3.03	8.07	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 349 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

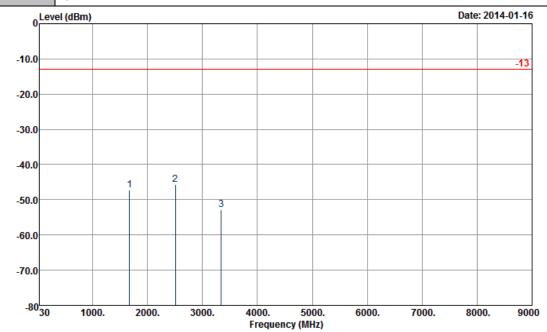

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1672	-47.23	-13	-34.23	-58.48	-51.1	1.62	5.49	V	Pass
2507	-45.68	-13	-32.68	-59.56	-49.8	2.1	6.22	V	Pass
3343	-52.76	-13	-39.76	-68.37	-57.8	3.03	8.07	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 350 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

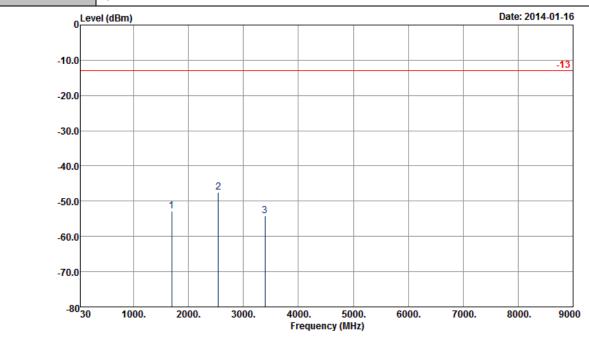

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1695	-52.81	-13	-39.81	-61.96	-56.7	1.58	5.47	Н	Pass
2543	-47.52	-13	-34.52	-60.99	-51.8	2.03	6.31	Н	Pass
3390	-54.18	-13	-41.18	-68.41	-60.1	2.31	8.23	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 351 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

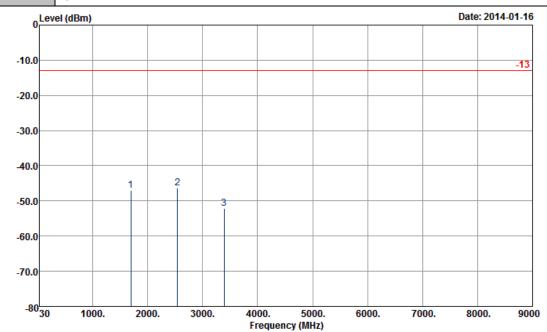

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


ı	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
ı				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
I	1695	-46.91	-13	-33.91	-58.39	-50.8	1.58	5.47	V	Pass
ı	2543	-46.32	-13	-33.32	-60.5	-50.6	2.03	6.31	V	Pass
L	3390	-52.08	-13	-39.08	-67.99	-58	2.31	8.23	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 352 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Low Channel>

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

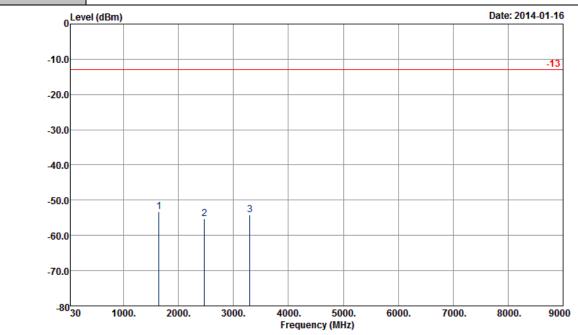

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1648	-53.21	-13	-40.21	-62.08	-57.1	1.6	5.49	Н	Pass
2472	-55.22	-13	-42.22	-68.58	-59.4	2.08	6.26	Н	Pass
3296	-54.18	-13	-41.18	-68.62	-59.2	3.09	8.11	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 353 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

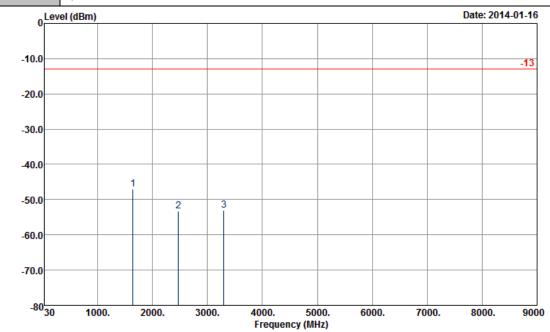


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


I	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
I				Limit	Reading	Power	loss	Gain		
l	(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1648	-47.01	-13	-34.01	-58.46	-50.9	1.6	5.49	V	Pass
	2472	-53.32	-13	-40.32	-67.21	-57.5	2.08	6.26	V	Pass
l	3296	-52.98	-13	-39.98	-69.16	-58	3.09	8.11	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 354 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Middle Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

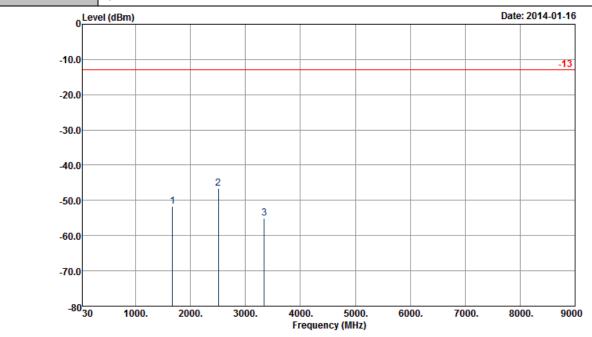

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) HORIZONTAL

Freque	ncy ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz	z) (dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1670	51.73	-13	-38.73	-60.74	-55.6	1.62	5.49	Н	Pass
250	-46.68	-13	-33.68	-59.93	-50.8	2.1	6.22	Н	Pass
3340	55.06	-13	-42.06	-69.2	-60.1	3.03	8.07	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 355 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

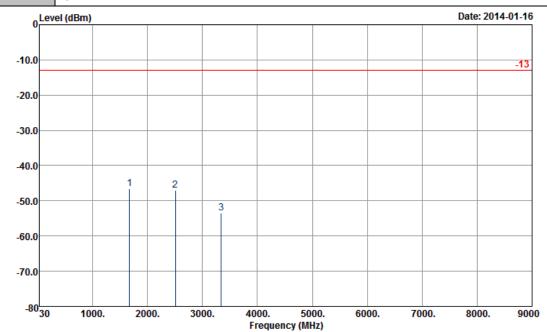


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


I	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
I				Limit	Reading	Power	loss	Gain		
l	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1670	-46.53	-13	-33.53	-57.88	-50.4	1.62	5.49	V	Pass
	2505	-47.08	-13	-34.08	-60.68	-51.2	2.1	6.22	V	Pass
	3340	-53.56	-13	-40.56	-69.12	-58.6	3.03	8.07	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 356 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

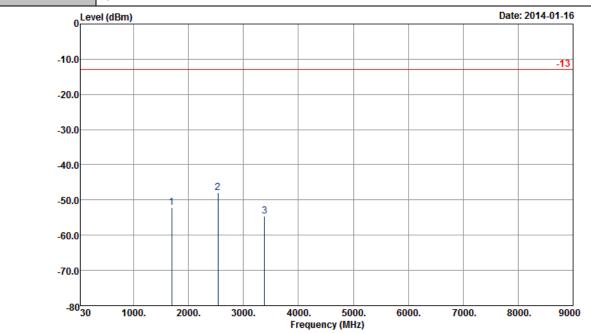

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1692	-52.21	-13	-39.21	-61.15	-56.1	1.56	5.45	Н	Pass
2538	-47.84	-13	-34.84	-61.26	-52.1	2.02	6.28	Н	Pass
3384	-54.60	-13	-41.60	-68.95	-60.5	2.29	8.19	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 357 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

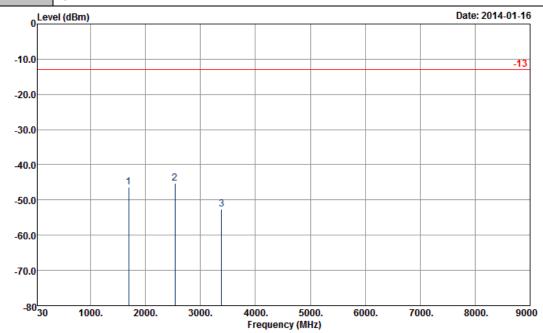

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) VERTICAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1692	-46.41	-13	-33.41	-57.73	-50.3	1.56	5.45	V	Pass
2538	-45.14	-13	-32.14	-58.96	-49.4	2.02	6.28	V	Pass
3384	-52.70	-13	-39.70	-68.47	-58.6	2.29	8.19	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 358 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <Low Channel>

Band :	LTE Band 5	Temperature :	21~24°C					
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%					
Test Engineer :	Stan Hsieh	Polarization :	Horizontal					
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.							

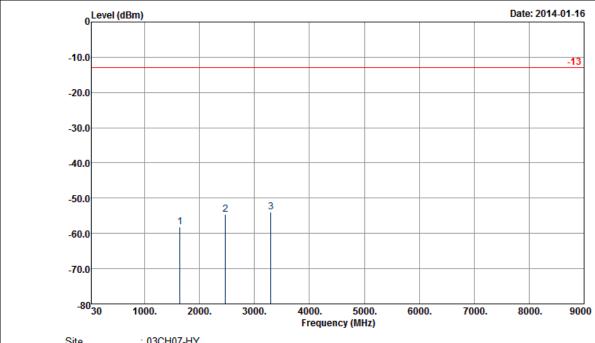


Site	е	: 03CH07-HY
Cor	ndition	: -13 HF-EIRP(080306) HORIZONTAL

F	requency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1648	-58.20	-13	-45.20	-66.92	-62.1	1.61	5.51	Н	Pass
	2472	-54.54	-13	-41.54	-67.8	-58.7	2.1	6.26	Н	Pass
	3296	-53.90	-13	-40.90	-68.08	-58.9	3.12	8.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 359 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

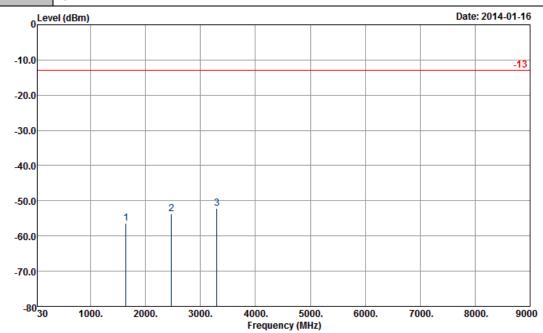

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
ı				Limit	Reading	Power	loss	Gain		
ı	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
ı	1648	-56.40	-13	-43.40	-67.55	-60.3	1.61	5.51	V	Pass
ı	2472	-53.64	-13	-40.64	-67.48	-57.8	2.1	6.26	V	Pass
ı	3296	-52.20	-13	-39.20	-68.2	-57.2	3.12	8.12	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 360 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Middle Channel>

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

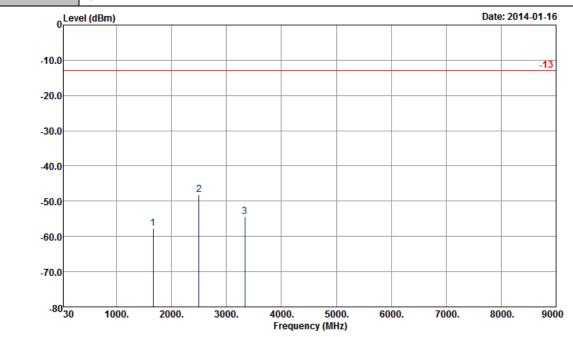


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1668	-57.73	-13	-44.73	-67.02	-61.6	1.62	5.49	Н	Pass
2502	-48.08	-13	-35.08	-61.98	-52.2	2.1	6.22	Н	Pass
3336	-54.46	-13	-41.46	-68.73	-59.5	3.03	8.07	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 361 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

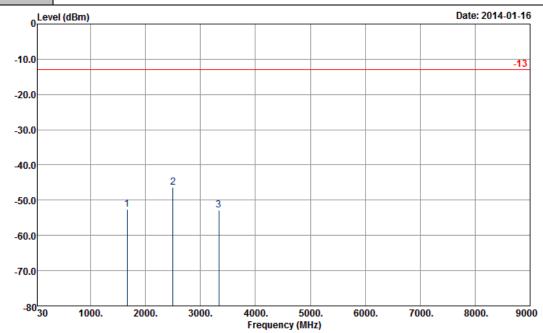


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
ı				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
I	1668	-52.53	-13	-39.53	-63.84	-56.4	1.62	5.49	V	Pass
	2502	-46.38	-13	-33.38	-60.56	-50.5	2.1	6.22	V	Pass
L	3336	-52.86	-13	-39.86	-68.91	-57.9	3.03	8.07	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 362 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

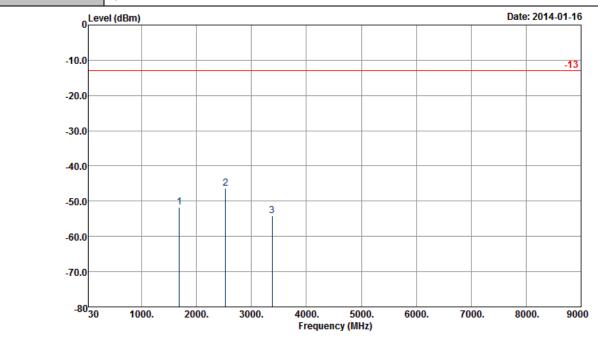


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1688	-51.80	-13	-38.80	-60.9	-55.7	1.54	5.44	Н	Pass
2532	-46.24	-13	-33.24	-59.83	-50.5	2.01	6.27	Н	Pass
3376	-54.10	-13	-41.10	-68.44	-60.1	2.18	8.18	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 363 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

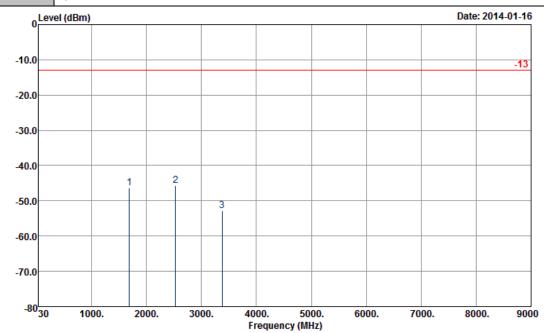


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


F	requency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1688	-46.30	-13	-33.30	-57.66	-50.2	1.54	5.44	V	1688
	2532	-45.74	-13	-32.74	-59.79	-50	2.01	6.27	V	2532
	3376	-52.80	-13	-39.80	-68.61	-58.8	2.18	8.18	V	3376

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 364 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

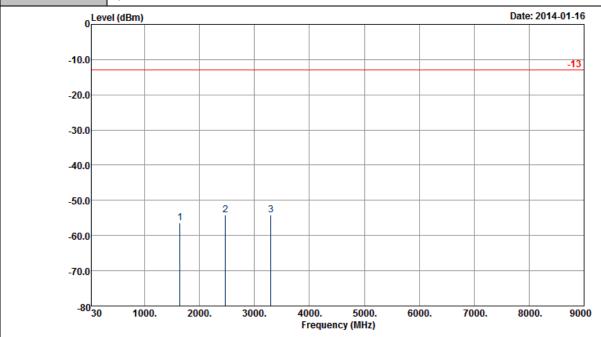


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1648	-56.45	-13	-43.45	-65.75	-60.4	1.63	5.58	Н	Pass
2472	-54.10	-13	-41.10	-67.27	-58.2	2.21	6.31	Н	Pass
3296	-54.07	-13	-41.07	-68.47	-59.1	3.1	8.13	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 365 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical
		-	_

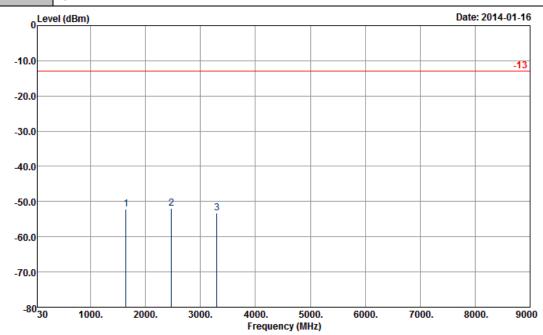

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
ı				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
I	1648	-52.05	-13	-39.05	-62.83	-56	1.63	5.58	V	Pass
	2472	-52.00	-13	-39.00	-66.16	-56.1	2.21	6.31	V	Pass
	3296	-53.27	-13	-40.27	-68.84	-58.3	3.1	8.13	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 366 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

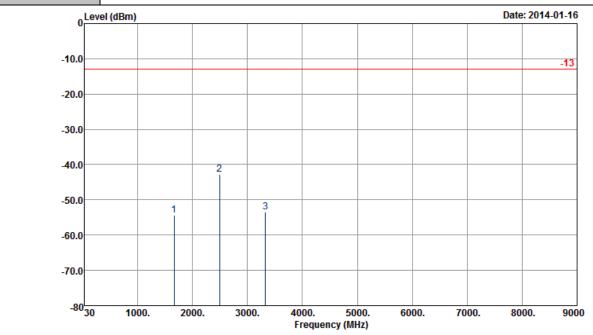


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequer	ncy ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz	) (dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1663	-54.33	-13	-41.33	-63.47	-58.2	1.62	5.49	Н	Pass
2494	-42.78	-13	-29.78	-56.18	-46.9	2.1	6.22	Н	Pass
3326	-53.56	-13	-40.56	-68.18	-58.6	3.03	8.07	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 367 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

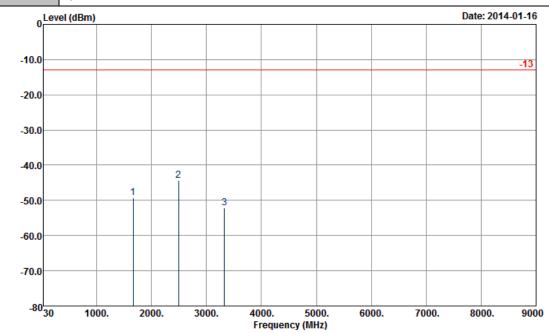

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL

ı	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1663	-49.33	-13	-36.33	-61.02	-53.2	1.62	5.49	V	Pass
	2494	-44.28	-13	-31.28	-58.15	-48.4	2.1	6.22	V	Pass
	3326	-52.16	-13	-39.16	-68.23	-57.2	3.03	8.07	V	Pass


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 368 of 485

Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 5	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

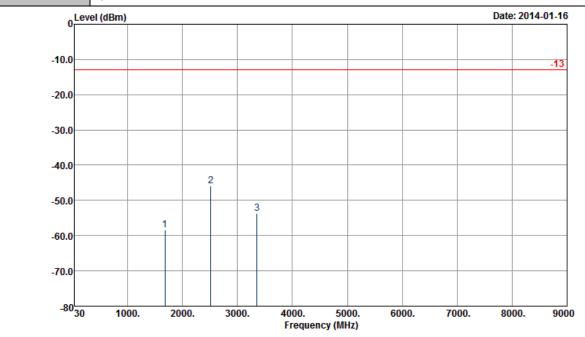


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1678	-58.30	-13	-45.30	-67.48	-62.2	1.52	5.42	Н	Pass
2517	-45.94	-13	-32.94	-59.65	-50.2	1.99	6.25	Н	Pass
3356	-53.80	-13	-40.80	-68.13	-59.8	2.14	8.14	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 369 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band:	LTE Band 5	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

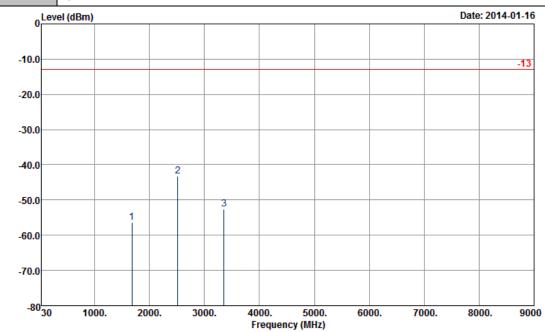


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
ı				Limit	Reading	Power	loss	Gain		
ı	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
ı	1678	-56.30	-13	-43.30	-67.53	-60.2	1.52	5.42	V	Pass
ı	2517	-43.34	-13	-30.34	-57.57	-47.6	1.99	6.25	V	Pass
ı	3356	-52.60	-13	-39.60	-68.57	-58.6	2.14	8.14	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 370 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

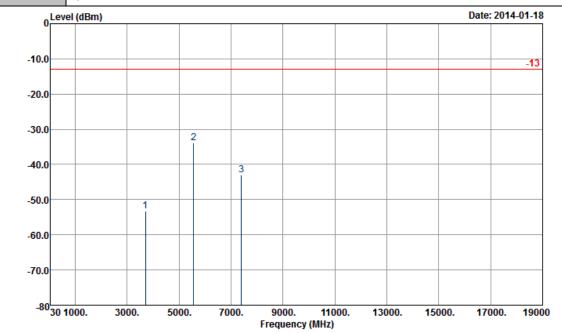


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-53.24	-13	-40.24	-68.74	-59.5	2.48	8.74	Н	Pass
5550	-33.81	-13	-20.81	-54.44	-41.5	2.96	10.65	Н	Pass
7400	-43.07	-13	-30.07	-69.94	-51.7	3.48	12.11	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 371 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

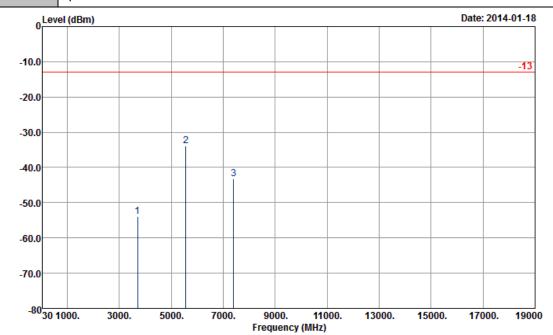

Site : 03CH07-HY

: -13 HF-EIRP(080306) VERTICAL Condition

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-53.94	-13	-40.94	-70.08	-60.2	2.48	8.74	V	Pass
5550	-33.81	-13	-20.81	-54.4	-41.5	2.96	10.65	V	Pass
7400	-43.27	-13	-30.27	-69.93	-51.9	3.48	12.11	V	Pass


Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 372 of 485

Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

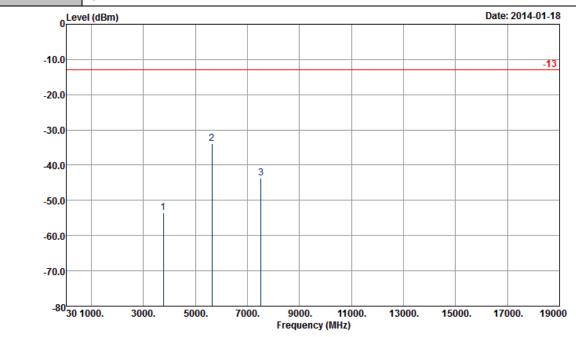


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3759	-53.50	-13	-40.50	-68.2	-59.8	2.51	8.81	Н	Pass
5638	-33.79	-13	-20.79	-55.27	-41.5	2.99	10.70	Н	Pass
7517	-43.57	-13	-30.57	-70.28	-52.1	3.59	12.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 373 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

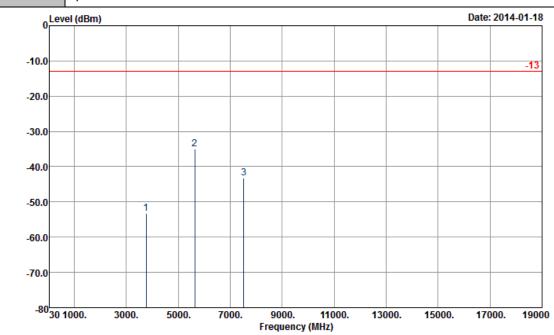

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3759	-53.20	-13	-40.20	-69.18	-59.5	2.51	8.81	V	Pass
5638	-35.09	-13	-22.09	-55.72	-42.8	2.99	10.70	V	Pass
7517	-43.17	-13	-30.17	-70.25	-51.7	3.59	12.12	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 374 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

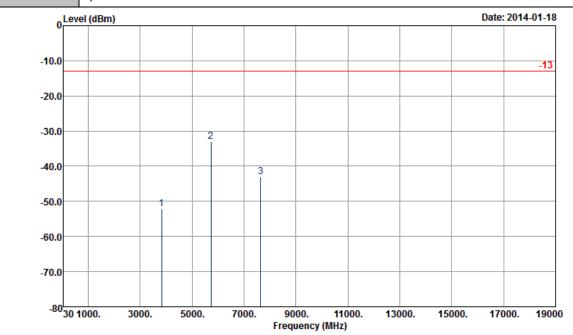


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3817	-52.24	-13	-39.24	-68.13	-58.5	2.61	8.87	Н	Pass
5726	-33.00	-13	-20.00	-54.95	-40.8	3.09	10.89	Н	Pass
7634	-43.00	-13	-30.00	-69.21	-51.5	3.68	12.18	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 375 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

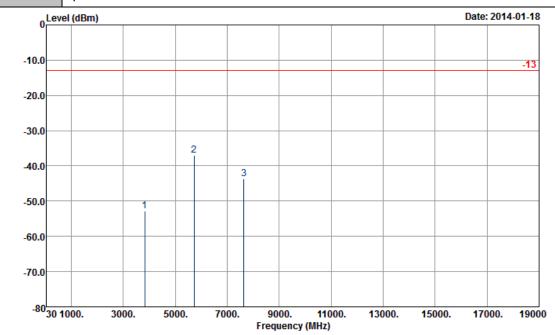

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3817	-52.74	-13	-39.74	-69.22	-59	2.61	8.87	V	Pass
5726	-37.10	-13	-24.10	-58.73	-44.9	3.09	10.89	V	Pass
7634	-43.60	-13	-30.60	-69.67	-52.1	3.68	12.18	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 376 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Low Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

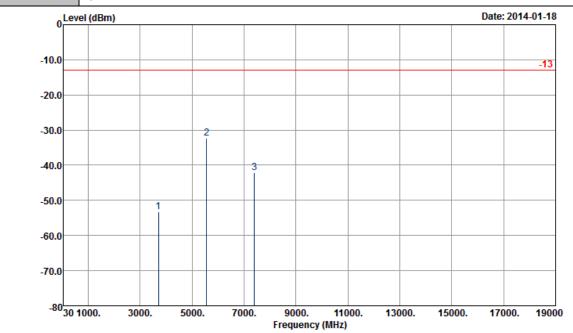


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-53.34	-13	-40.34	-69.16	-59.6	2.47	8.73	Н	Pass
5550	-32.35	-13	-19.35	-52.7	-40.1	2.93	10.68	Н	Pass
7400	-42.08	-13	-29.08	-70.08	-50.8	3.42	12.14	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 377 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

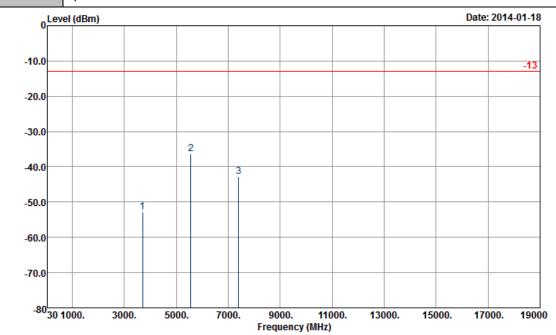

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-52.84	-13	-39.84	-69.89	-59.1	2.47	8.73	V	Pass
5550	-36.35	-13	-23.35	-56.56	-44.1	2.93	10.68	V	Pass
7400	-42.78	-13	-29.78	-69.68	-51.5	3.42	12.14	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 378 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

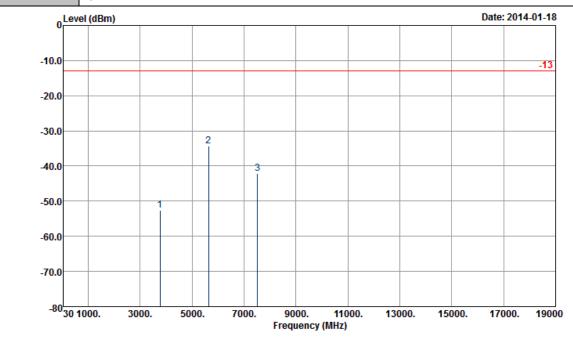


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3757	-52.60	-13	-39.60	-68.05	-58.9	2.51	8.81	Н	Pass
5636	-34.39	-13	-21.39	-55.35	-42.1	2.99	10.70	Н	Pass
7514	-42.17	-13	-29.17	-69.99	-50.7	3.59	12.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 379 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

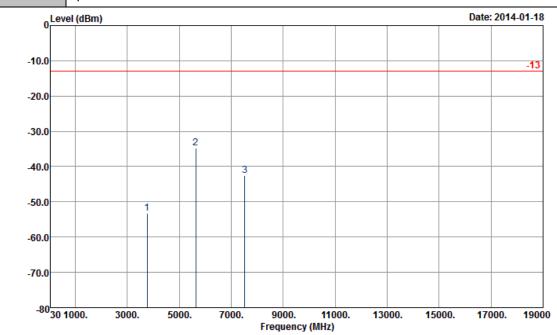


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3757	-53.30	-13	-40.30	-69.51	-59.6	2.51	8.81	V	Pass
5636	-34.79	-13	-21.79	-55.97	-42.5	2.99	10.70	V	Pass
7514	-42.67	-13	-29.67	-69.85	-51.2	3.59	12.12	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 380 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

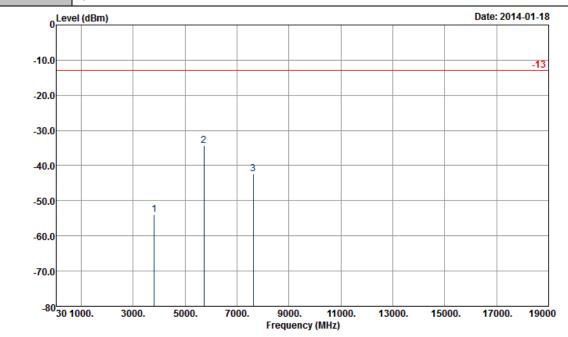


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3814	-53.87	-13	-40.87	-68.7	-60.1	2.64	8.87	Н	Pass
5721	-34.36	-13	-21.36	-55.91	-42.1	3.08	10.82	Н	Pass
7628	-42.41	-13	-29.41	-69.05	-50.9	3.64	12.13	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 381 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

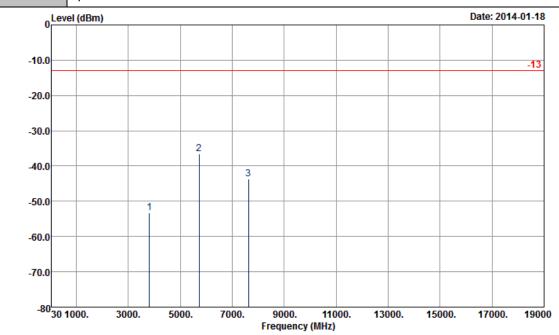

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3814	-53.27	-13	-40.27	-69.02	-59.5	2.64	8.87	V	Pass
5721	-36.56	-13	-23.56	-57.89	-44.3	3.08	10.82	V	Pass
7628	-43.61	-13	-30.61	-69.99	-52.1	3.64	12.13	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 382 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Low Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

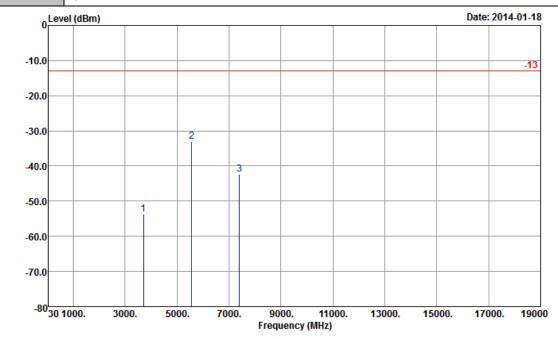


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-53.77	-13	-40.77	-68.98	-60.1	2.46	8.79	Н	Pass
5550	-33.03	-13	-20.03	-54	-40.9	2.9	10.77	Н	Pass
7400	-42.38	-13	-29.38	-69.84	-51.2	3.42	12.24	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 383 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

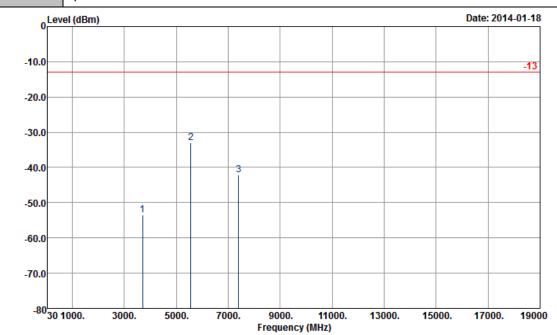

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-53.47	-13	-40.47	-70.23	-59.8	2.46	8.79	V	Pass
5550	-32.93	-13	-19.93	-53.42	-40.8	2.9	10.77	V	Pass
7400	-42.08	-13	-29.08	-69.54	-50.9	3.42	12.24	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 384 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

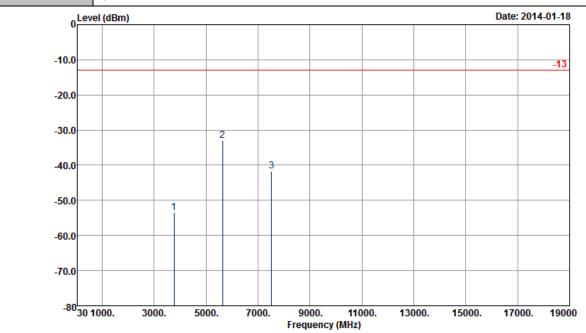


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3755	-53.50	-13	-40.50	-68.62	-59.8	2.51	8.81	Н	Pass
5633	-33.09	-13	-20.09	-54.34	-40.8	2.99	10.70	Н	Pass
7510	-41.67	-13	-28.67	-69.24	-50.2	3.59	12.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 385 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

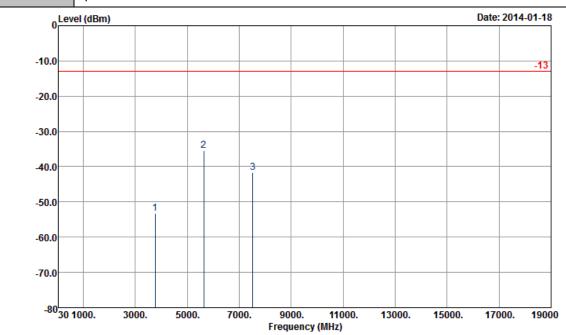

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3755	-53.20	-13	-40.20	-69.95	-59.5	2.51	8.81	V	Pass
5633	-35.39	-13	-22.39	-55.59	-43.1	2.99	10.70	V	Pass
7510	-41.57	-13	-28.57	-69	-50.1	3.59	12.12	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 386 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

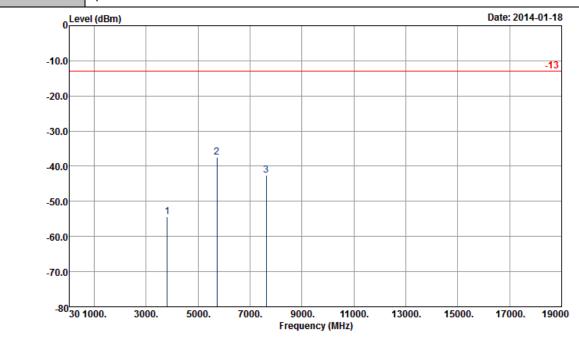


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3810	-54.35	-13	-41.35	-69.81	-60.69	2.59	8.93	Н	Pass
5716	-37.46	-13	-24.46	-58.57	-45.36	3.08	10.98	Н	Pass
7620	-42.59	-13	-29.59	-69.24	-51.12	3.64	12.17	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 387 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

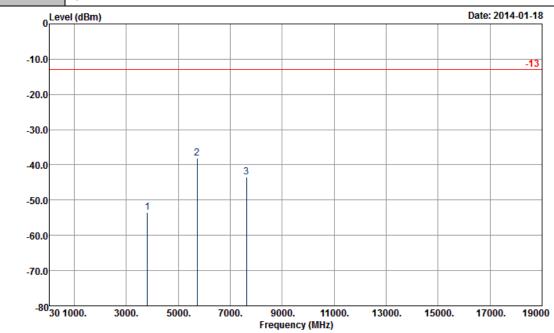

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3812	-53.52	-13	-40.52	-69.85	-59.86	2.59	8.93	V	Pass
5716	-38.06	-13	-25.06	-58.82	-45.96	3.08	10.98	V	Pass
7620	-43.48	-13	-30.48	-69.89	-52.01	3.64	12.17	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 388 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Low Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

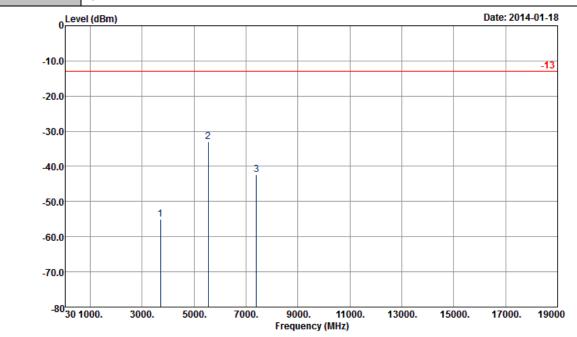


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-55.06	-13	-42.06	-70.15	-61.48	2.47	8.89	Н	Pass
5548	-32.90	-13	-19.90	-53.27	-40.76	2.93	10.79	Н	Pass
7396	-42.38	-13	-29.38	-69.73	-51.19	3.45	12.26	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 389 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

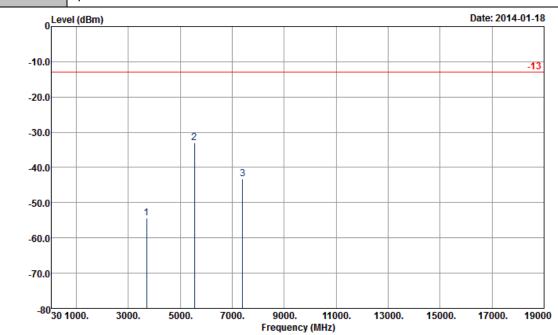

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-54.58	-13	-41.58	-70.7	-61	2.47	8.89	V	Pass
5548	-32.96	-13	-19.96	-53.27	-40.82	2.93	10.79	V	Pass
7396	-43.20	-13	-30.20	-70.02	-52.01	3.45	12.26	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 390 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

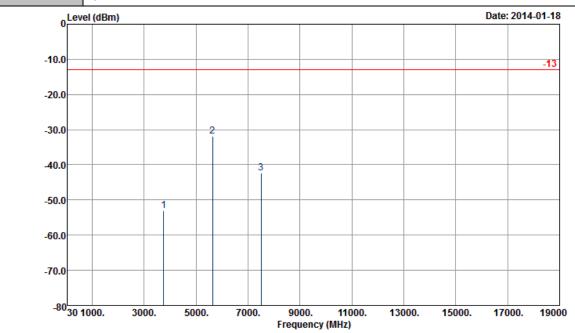


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3749	-53.05	-13	-40.05	-68.42	-59.35	2.51	8.81	Н	Pass
5625	-31.91	-13	-18.91	-52.68	-39.62	2.99	10.70	Н	Pass
7501	-42.24	-13	-29.24	-69.93	-50.77	3.59	12.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 391 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

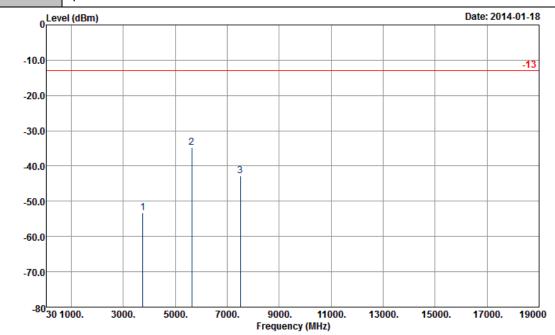

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3749	-53.23	-13	-40.23	-69.76	-59.53	2.51	8.81	V	Pass
5625	-34.76	-13	-21.76	-55.44	-42.47	2.99	10.70	V	Pass
7501	-42.78	-13	-29.78	-70.17	-51.31	3.59	12.12	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 392 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

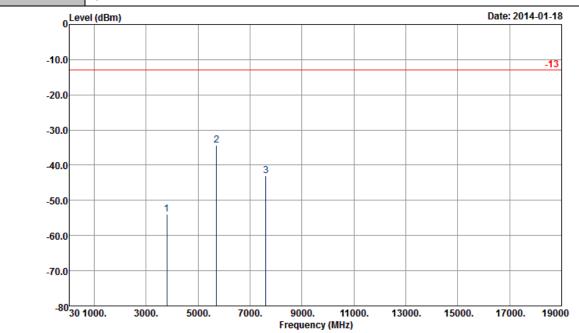


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3798	-53.85	-13	-40.85	-69.53	-60.21	2.52	8.88	Н	Pass
5702	-34.23	-13	-21.23	-55.26	-41.89	3.09	10.75	Н	Pass
7606	-43.09	-13	-30.09	-69.63	-51.73	3.65	12.29	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 393 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

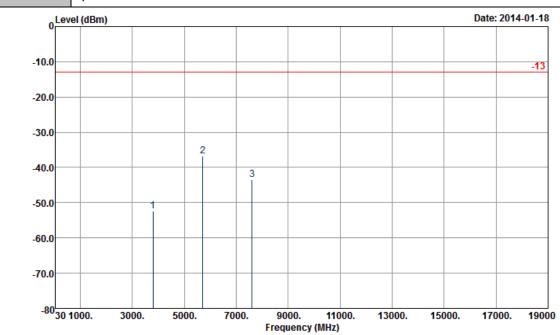

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3798	-52.38	-13	-39.38	-68.95	-58.74	2.52	8.88	V	Pass
5702	-36.78	-13	-23.78	-57.74	-44.44	3.09	10.75	V	Pass
7606	-43.49	-13	-30.49	-69.86	-52.13	3.65	12.29	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 394 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Low Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

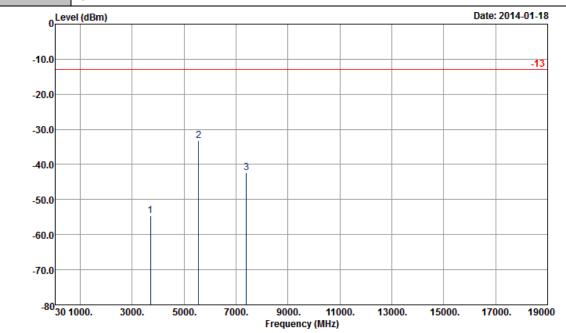


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-54.52	-13	-41.52	-69.6	-60.87	2.49	8.84	Н	Pass
5555	-33.16	-13	-20.16	-53.58	-41.01	3.01	10.86	Н	Pass
7403	-42.28	-13	-29.28	-69.76	-51.25	3.38	12.35	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 395 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

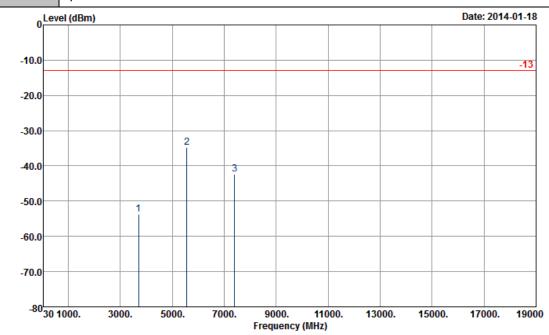

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-53.70	-13	-40.70	-69.85	-60.05	2.49	8.84	V	Pass
5555	-34.78	-13	-21.78	-55.09	-42.63	3.01	10.86	V	Pass
7403	-42.25	-13	-29.25	-69.25	-51.22	3.38	12.35	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 396 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

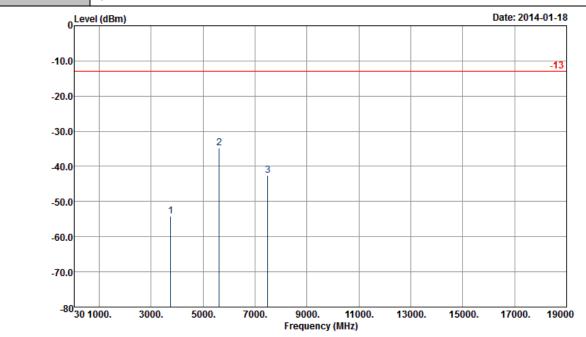


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3742	-54.09	-13	-41.09	-69.45	-60.39	2.51	8.81	Н	Pass
5618	-34.87	-13	-21.87	-55.56	-42.58	2.99	10.70	Н	Pass
7494	-42.47	-13	-29.47	-69.9	-51	3.59	12.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 397 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

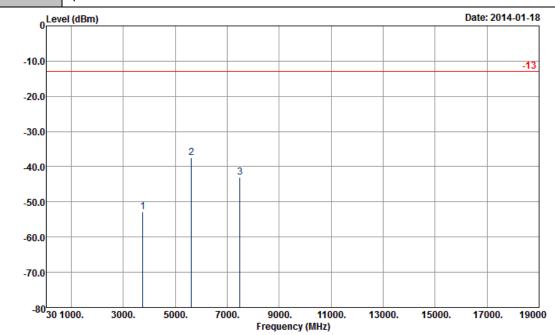

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3742	-52.92	-13	-39.92	-69.23	-59.22	2.51	8.81	V	Pass
5618	-37.43	-13	-24.43	-58.03	-45.14	2.99	10.70	V	Pass
7494	-42.94	-13	-29.94	-70.28	-51.47	3.59	12.12	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 398 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Spurious emissions within 30-10th harmonic were found more than 20dB below limit line. Remark:

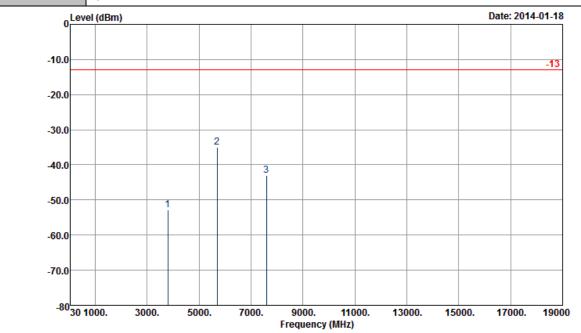


Site Condition : 03CH07-HY

: -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3791	-52.81	-13	-39.81	-68.36	-59.12	2.52	8.83	Н	Pass
5688	-35.03	-13	-22.03	-56.03	-42.76	3.03	10.76	Н	Pass
7585	-42.90	-13	-29.90	-69.84	-51.45	3.61	12.16	Н	Pass

Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 399 of 485 Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

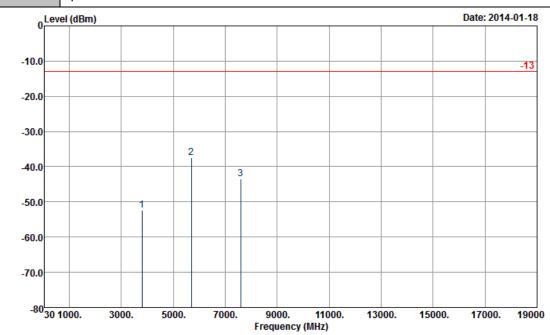

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3791	-52.35	-13	-39.35	-68.76	-58.66	2.52	8.83	V	Pass
5688	-37.43	-13	-24.43	-58.12	-45.16	3.03	10.76	V	Pass
7585	-43.45	-13	-30.45	-69.84	-52	3.61	12.16	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 400 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Low Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

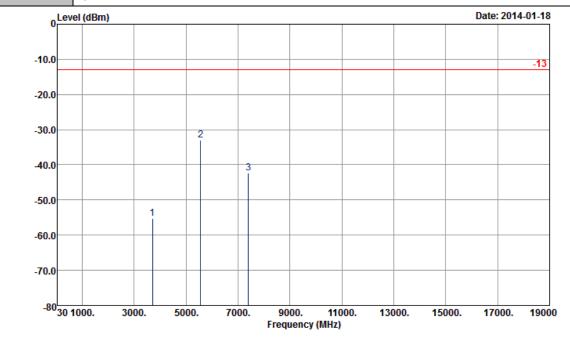


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-55.27	-13	-42.27	-70.49	-61.65	2.51	8.89	Н	Pass
5555	-33.00	-13	-20.00	-53.45	-40.86	3.03	10.89	Н	Pass
7403	-42.32	-13	-29.32	-69.63	-51.46	3.24	12.38	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 401 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

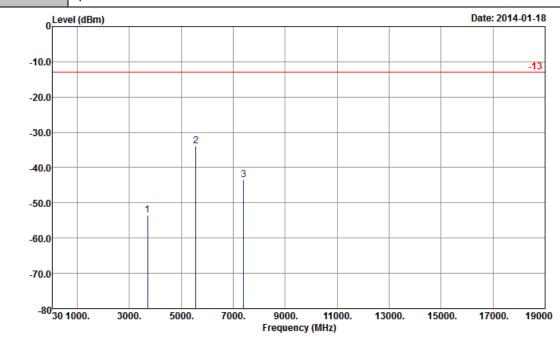

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3700	-53.49	-13	-40.49	-69.74	-59.87	2.51	8.89	V	Pass
5555	-33.92	-13	-20.92	-54.25	-41.78	3.03	10.89	V	Pass
7403	-43.40	-13	-30.40	-70.33	-52.54	3.24	12.38	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 402 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

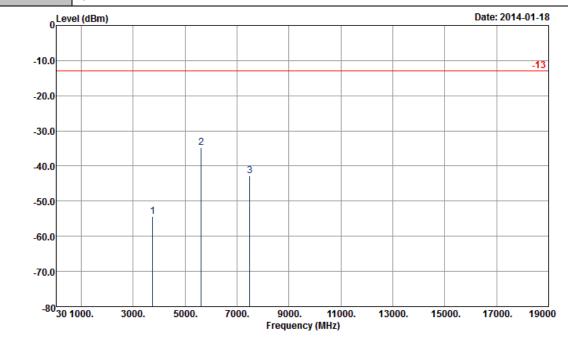


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3742	-54.38	-13	-41.38	-69.67	-60.68	2.51	8.81	Н	Pass
5611	-34.72	-13	-21.72	-55.43	-42.43	2.99	10.70	Н	Pass
7480	-42.68	-13	-29.68	-70.15	-51.21	3.59	12.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 403 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

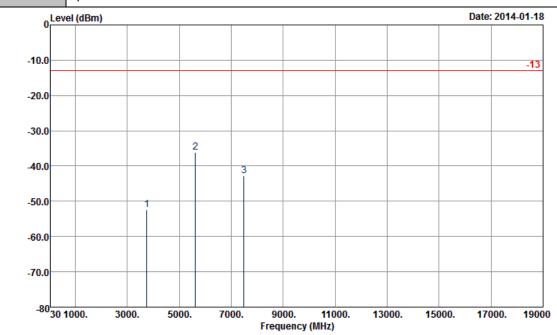


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3742	-52.41	-13	-39.41	-68.76	-58.71	2.51	8.81	V	Pass
5611	-36.12	-13	-23.12	-56.6	-43.83	2.99	10.70	V	Pass
7480	-42.76	-13	-29.76	-70.01	-51.29	3.59	12.12	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 404 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

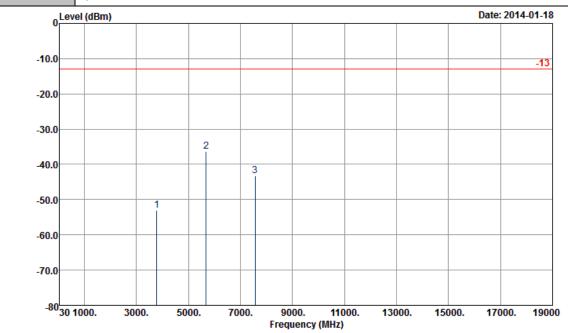


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	y EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3784	-53.01	-13	-40.01	-68.57	-59.39	2.52	8.90	Н	Pass
5674	-36.25	-13	-23.25	-57.14	-44	3.01	10.76	Н	Pass
7564	-43.23	-13	-30.23	-70.22	-51.76	3.62	12.15	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 405 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 2	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

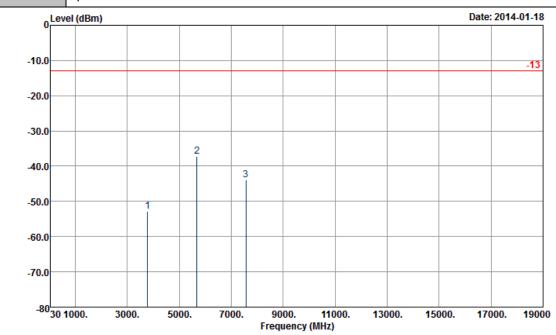

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) VERTICAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3784	-52.76	-13	-39.76	-69.12	-59.14	2.52	8.90	V	Pass
5674	-37.17	-13	-24.17	-57.85	-44.92	3.01	10.76	V	Pass
7564	-43.80	-13	-30.80	-70.64	-52.33	3.62	12.15	V	Pass


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 406 of 485

Report Template No.: BU5-FGLTE Version 1.0

### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

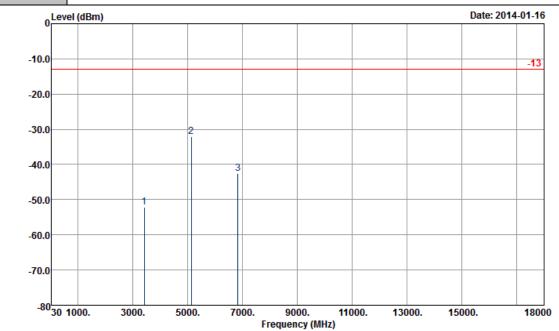


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-52.16	-13	-39.16	-66.39	-56.03	4.41	8.28	Н	Pass
5132	-31.98	-13	-18.98	-49.98	-36.55	5.28	9.85	Н	Pass
6840	-42.48	-13	-29.48	-68.61	-47.71	6.01	11.24	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 407 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

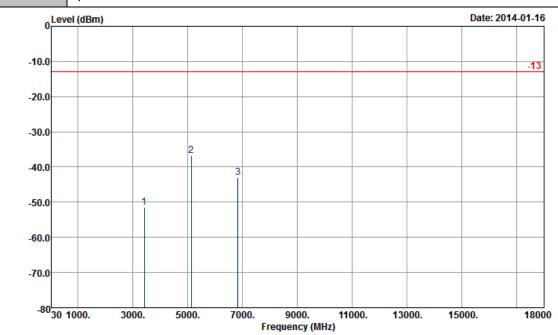


Site

: 03CH07-HY : -13 HF-EIRP(080306) VERTICAL Condition


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-51.58	-13	-38.58	-66.92	-55.45	4.41	8.28	V	Pass
5132	-36.71	-13	-23.71	-54.72	-41.28	5.28	9.85	V	Pass
6840	-43.05	-13	-30.05	-68.57	-48.28	6.01	11.24	V	Pass

Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 408 of 485 Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

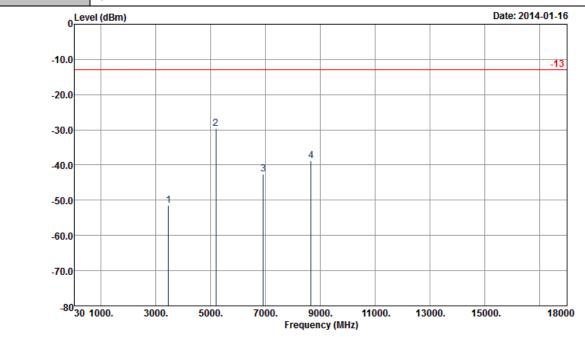


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3464	-51.38	-13	-38.38	-66.17	-55.21	4.48	8.31	Н	Pass
5196	-29.55	-13	-16.55	-48.27	-34.19	5.332	9.98	Н	Pass
6928	-42.49	-13	-29.49	-68.63	-47.73	6.1	11.34	Н	Pass
8660	-38.72	-13	-25.72	-64.5	-43.64	8.25	13.17	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 409 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

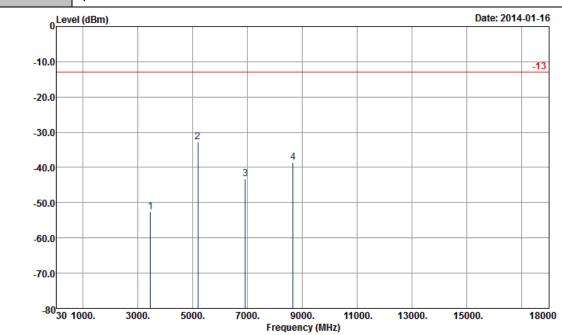

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3464	-52.68	-13	-39.68	-67.58	-56.51	4.48	8.31	V	Pass
5196	-32.69	-13	-19.69	-51.82	-37.33	5.332	9.98	V	Pass
6928	-43.13	-13	-30.13	-68.57	-48.37	6.1	11.34	V	Pass
8660	-38.66	-13	-25.66	-64.19	-43.58	8.25	13.17	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 410 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

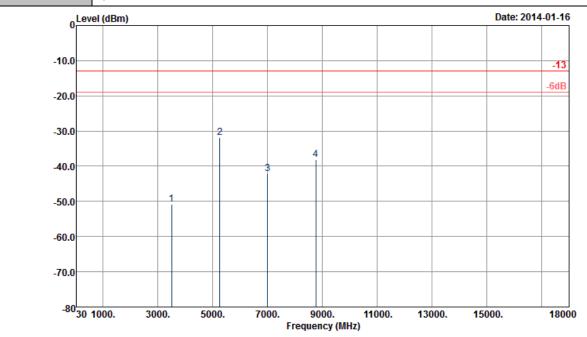


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3508	-50.82	-13	-37.82	-65.23	-55.09	4.14	8.41	Н	Pass
5260	-31.81	-13	-18.81	-50.83	-36.76	5.12	10.07	Н	Pass
7012	-42.15	-13	-29.15	-69.5	-47.44	6.13	11.42	Н	Pass
8768	-38.13	-13	-25.13	-64.49	-43.23	8.05	13.15	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 411 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

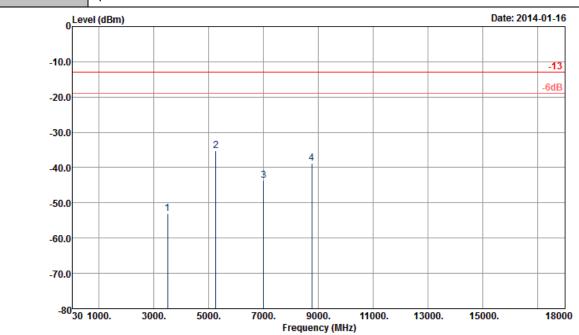

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3508	-52.97	-13	-39.97	-67.72	-57.24	4.14	8.41	V	Pass
5260	-35.18	-13	-22.18	-54.34	-40.13	5.12	10.07	V	Pass
7013	-43.77	-13	-30.77	-68.9	-49.06	6.13	11.42	V	Pass
8768	-38.84	-13	-25.84	-64.3	-43.94	8.05	13.15	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 412 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Low Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

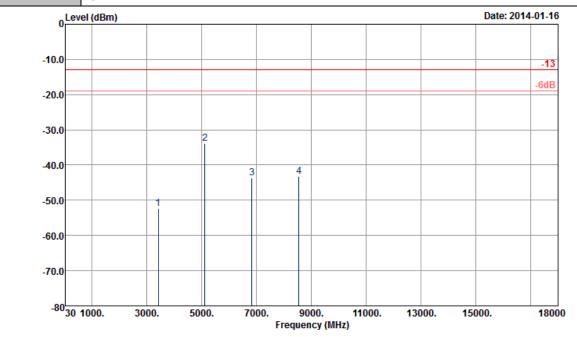


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-52.39	-13	-39.39	-67.03	-56.27	4.43	8.31	Н	Pass
5128	-33.77	-13	-20.77	-51.81	-38.34	5.31	9.88	Н	Pass
6836	-43.60	-13	-30.60	-68.94	-48.93	6.02	11.35	Н	Pass
8551	-43.31	-13	-30.31	-69.03	-48.29	8.13	13.11	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 413 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

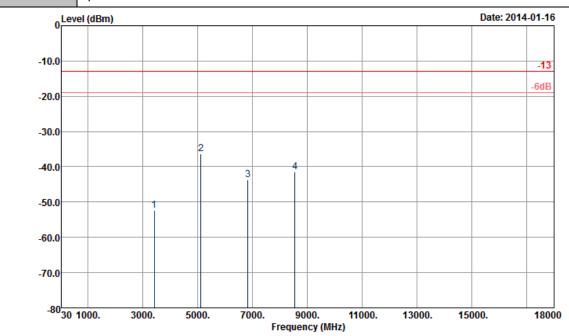

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


F	requency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	3420	-52.45	-13	-39.45	-67.96	-56.33	4.43	8.31	V	Pass
	5128	-36.31	-13	-23.31	-55.1	-40.88	5.31	9.88	V	Pass
	6836	-43.73	-13	-30.73	-68.42	-49.06	6.02	11.35	V	Pass
	8551	-41.36	-13	-28.36	-66.8	-46.34	8.13	13.11	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 414 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

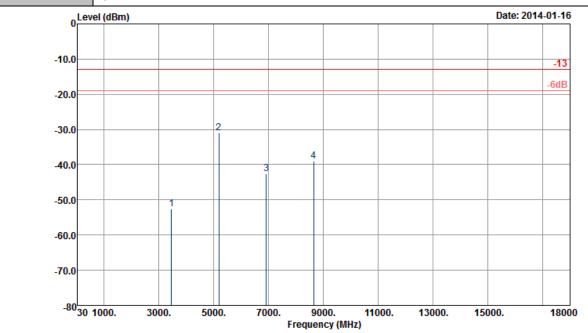


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3462	-52.63	-13	-39.63	-66.89	-56.46	4.48	8.31	Н	Pass
5191	-30.99	-13	-17.99	-48.92	-35.63	5.332	9.98	Н	Pass
6920	-42.48	-13	-29.48	-68.61	-47.72	6.1	11.34	Н	Pass
8656	-39.07	-13	-26.07	-65.07	-43.99	8.25	13.17	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 415 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

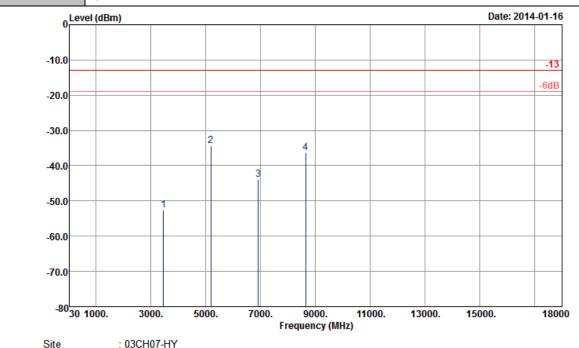

**EIRP** S.G. **TX Antenna Polarization Frequency** Limit Over **SPA TX Cable** Result Limit Reading **Power** loss Gain (dB) (dBm) (dBm) (dBm) (dBm) (dB) (dBi) (H/V) (MHz) 3462 -52.50 -13 -39.50 -67.63 -56.33 4.48 8.31 ٧ Pass -34.35 5191 -13 -21.35 -53.23 -38.99 5.332 9.98 ٧ Pass 6920 -43.89 -13 -30.89 -68.87 -49.13 6.1 11.34 ٧ Pass 8656 -36.41 -13 -23.41 -61.75 -41.33 8.25 13.17 ٧ Pass

: -13 HF-EIRP(080306) VERTICAL


Condition

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 416 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

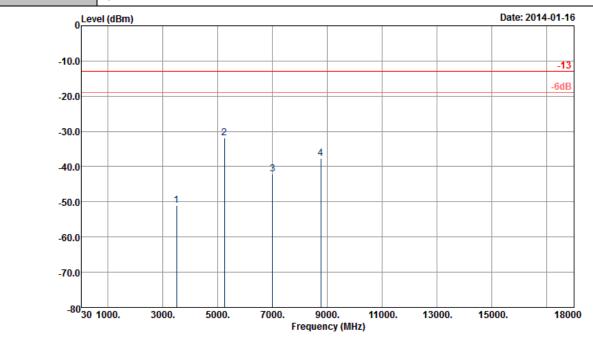


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3504	-51.02	-13	-38.02	-65.59	-55.29	4.14	8.41	Н	Pass
5254	-31.94	-13	-18.94	-51.8	-36.89	5.12	10.07	Н	Pass
7004	-42.02	-13	-29.02	-69.22	-47.31	6.13	11.42	Н	Pass
8761	-37.56	-13	-24.56	-63.41	-42.66	8.05	13.15	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 417 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	3MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

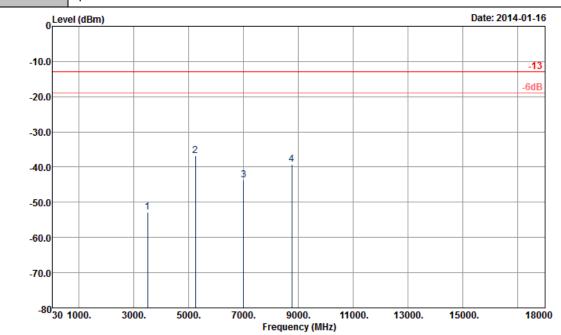


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


F	requency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	3504	-52.81	-13	-39.81	-67.88	-57.08	4.14	8.41	V	Pass
	5254	-36.71	-13	-23.71	-55.81	-41.66	5.12	10.07	V	Pass
	7004	-43.62	-13	-30.62	-69.27	-48.91	6.13	11.42	V	Pass
	8761	-39.29	-13	-26.29	-64.73	-44.39	8.05	13.15	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 418 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

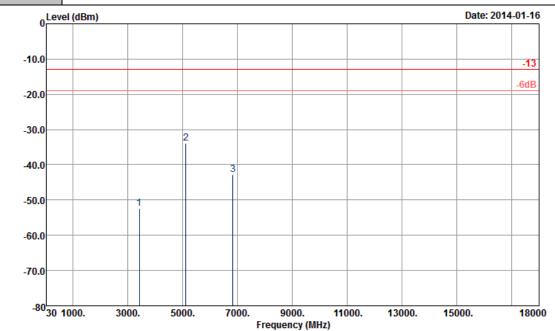


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-52.46	-13	-39.46	-67.05	-56.29	4.48	8.31	Н	Pass
5128	-33.92	-13	-20.92	-52.35	-38.56	5.332	9.98	Н	Pass
6836	-42.89	-13	-29.89	-68.47	-48.13	6.1	11.34	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 419 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

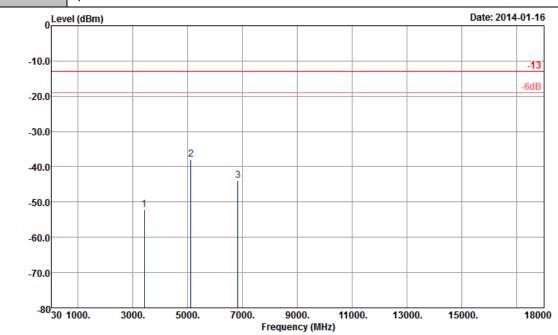

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-52.04	-13	-39.04	-67.8	-55.87	4.48	8.31	V	Pass
5128	-37.92	-13	-24.92	-55.84	-42.56	5.332	9.98	V	Pass
6836	-43.82	-13	-30.82	-68.66	-49.06	6.1	11.34	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 420 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

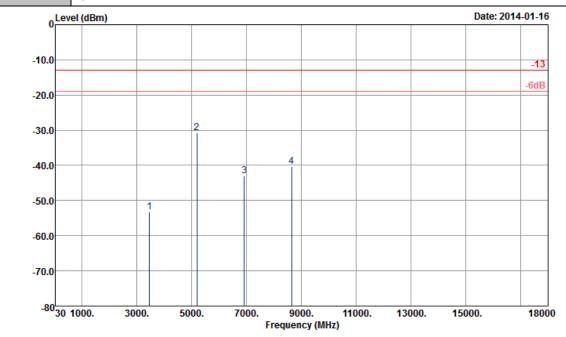


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3462	-53.20	-13	-40.20	-67.84	-57.03	4.48	8.31	Н	Pass
5191	-30.65	-13	-17.65	-49.01	-35.29	5.332	9.98	Н	Pass
6920	-42.98	-13	-29.98	-69.12	-48.22	6.1	11.34	Н	Pass
8649	-40.37	-13	-27.37	-66.86	-45.29	8.25	13.17	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 421 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

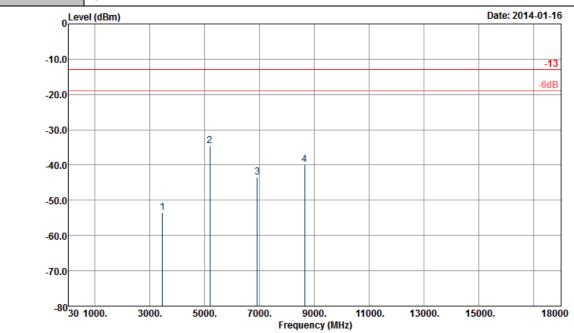

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3462	-53.38	-13	-40.38	-68.62	-57.21	4.48	8.31	V	Pass
5191	-34.65	-13	-21.65	-53.37	-39.29	5.332	9.98	V	Pass
6920	-43.48	-13	-30.48	-69.09	-48.72	6.1	11.34	V	Pass
8649	-39.79	-13	-26.79	-64.77	-44.71	8.25	13.17	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 422 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

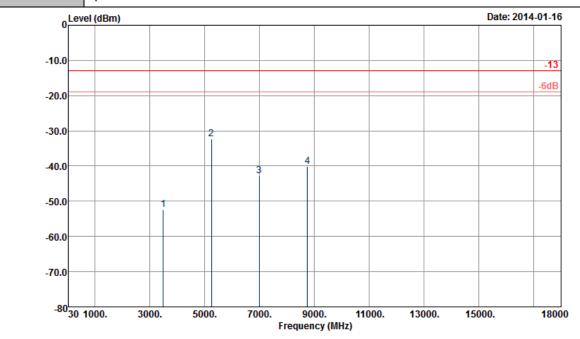


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3497	-52.47	-13	-39.47	-66.69	-56.74	4.16	8.43	Н	Pass
5247	-32.26	-13	-19.26	-51.34	-37.22	5.13	10.09	Н	Pass
6997	-42.72	-13	-29.72	-69.22	-48	6.15	11.43	Н	Pass
8754	-40.02	-13	-27.02	-65.78	-45.08	8.09	13.15	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 423 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

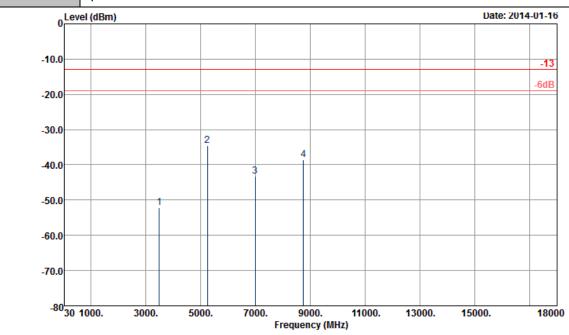

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3497	-52.25	-13	-39.25	-67.86	-56.52	4.16	8.43	V	Pass
5247	-34.62	-13	-21.62	-53.67	-39.58	5.13	10.09	V	Pass
6997	-43.16	-13	-30.16	-68.8	-48.44	6.15	11.43	V	Pass
8754	-38.65	-13	-25.65	-64	-43.71	8.09	13.15	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 424 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Low Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

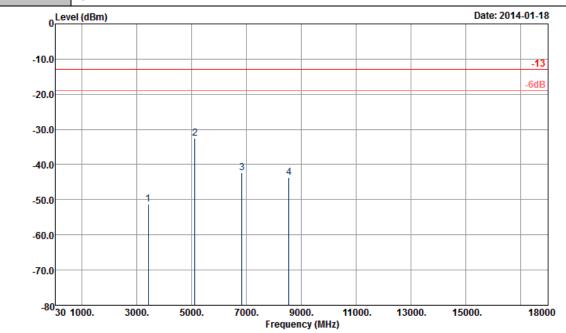


: 03CH07-HY

Site Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-51.27	-13	-38.27	-65.9	-55.09	4.51	8.33	Н	Pass
5128	-32.57	-13	-19.57	-50.49	-37.24	5.36	10.03	Н	Pass
6836	-42.28	-13	-29.28	-67.68	-47.51	6.13	11.36	Н	Pass
8551	-43.77	-13	-30.77	-68.52	-48.67	8.29	13.19	Н	Pass

Report No. : FG372301-01B : Rev. 02 Report Version Page Number : 425 of 485 Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

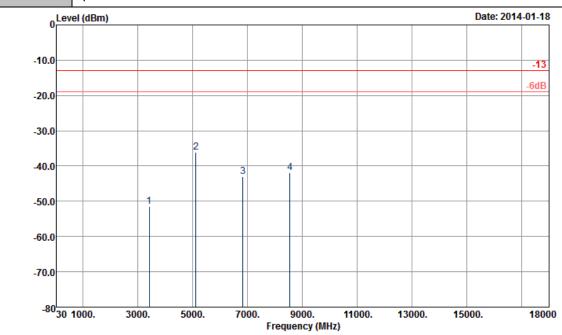

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Free	quency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
(1	VIHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3	3420	-51.47	-13	-38.47	-67.47	-55.29	4.51	8.33	V	Pass
5	5128	-36.04	-13	-23.04	-54.79	-40.71	5.36	10.03	V	Pass
6	8836	-42.96	-13	-29.96	-68.3	-48.19	6.13	11.36	V	Pass
8	3551	-41.89	-13	-28.89	-66.9	-46.79	8.29	13.19	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 426 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

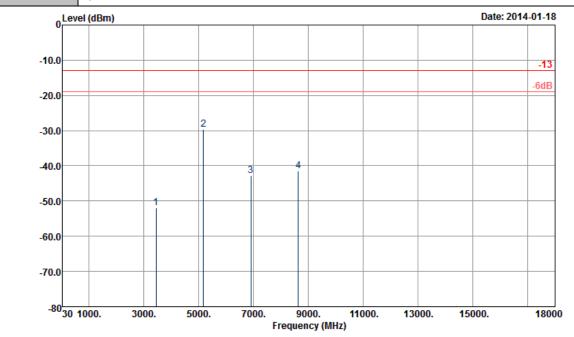

: 03CH07-HY Site


: -13 HF-EIRP(080306) HORIZONTAL Condition

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3455	-51.88	-13	-38.88	-66.11	-55.71	4.48	8.31	Н	Pass
5184	-29.63	-13	-16.63	-48.06	-34.27	5.332	9.98	Н	Pass
6913	-42.73	-13	-29.73	-68.37	-47.97	6.1	11.34	Н	Pass
8642	-41.49	-13	-28.49	-66.8	-46.41	8.25	13.17	Н	Pass

Report No. : FG372301-01B : Rev. 02 Report Version Page Number : 427 of 485

Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

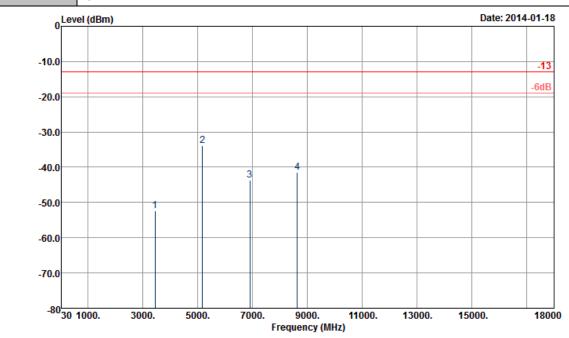

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3456	-52.26	-13	-39.26	-67.72	-56.09	4.48	8.31	V	Pass
5184	-33.78	-13	-20.78	-52.21	-38.42	5.332	9.98	V	Pass
6913	-43.73	-13	-30.73	-69.08	-48.97	6.1	11.34	V	Pass
8642	-41.37	-13	-28.37	-66.28	-46.29	8.25	13.17	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 428 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <High Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

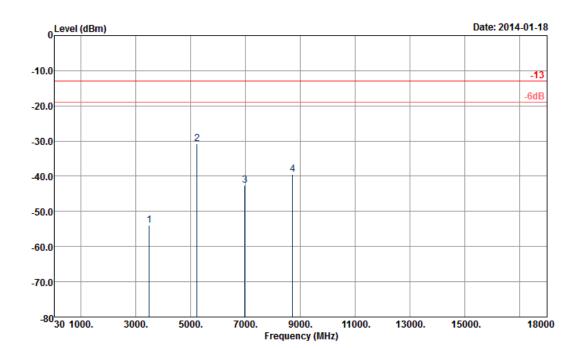


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3490	-53.87	-13	-40.87	-67.95	-58.06	4.2	8.39	Н	Pass
5233	-30.69	-13	-17.69	-49.53	-35.57	5.17	10.05	Н	Pass
6976	-42.51	-13	-29.51	-68.8	-47.71	6.2	11.40	Н	Pass
8726	-39.37	-13	-26.37	-64.88	-44.38	8.11	13.12	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 429 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

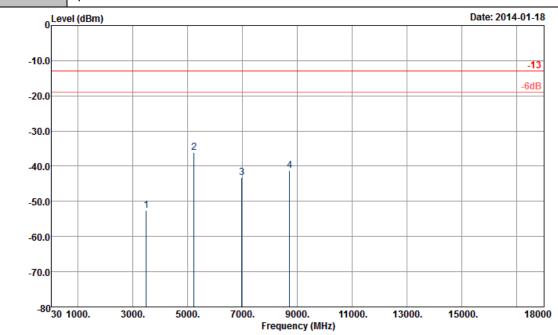

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL

Frequenc	cy EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3490	-52.50	-13	-39.50	-67.85	-56.69	4.2	8.39	V	Pass
5233	-36.20	-13	-23.20	-55.25	-41.08	5.17	10.05	V	Pass
6976	-43.17	-13	-30.17	-68.99	-48.37	6.2	11.40	V	Pass
8726	-41.21	-13	-28.21	-66.6	-46.22	8.11	13.12	V	Pass


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 430 of 485

Report Template No.: BU5-FGLTE Version 1.0

## <Low Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

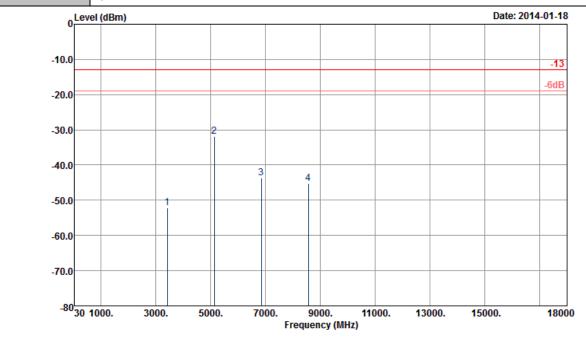


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-52.10	-13	-39.10	-66.92	-55.87	4.59	8.36	Н	Pass
5135	-31.77	-13	-18.77	-50.25	-36.41	5.41	10.05	Н	Pass
6850	-43.73	-13	-30.73	-68.9	-48.97	6.15	11.39	Н	Pass
8558	-45.18	-13	-32.18	-70.73	-50.06	8.36	13.24	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 431 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

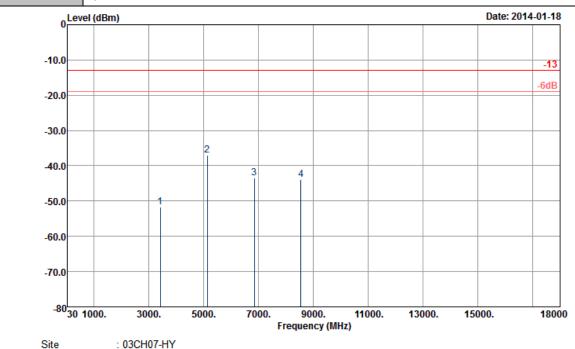

**EIRP** S.G. **TX Antenna Polarization Frequency** Limit Over **SPA TX Cable** Result Limit Reading **Power** Gain loss (dB) (dBm) (dBm) (dBm) (dBm) (dB) (dBi) (H/V) (MHz) 3420 -51.67 -13 -38.67 -66.81 -55.44 4.59 8.36 ٧ Pass 5135 -36.93 -13 -23.93 -54.78 -41.57 5.41 10.05 ٧ Pass 6850 -43.42 -13 -30.42 -68.94 -48.66 6.15 11.39 ٧ Pass

-48.71

8.36

13.24

٧

Pass

: -13 HF-EIRP(080306) VERTICAL

-30.83

-68.2

Condition

-43.83

-13


8551

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 432 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

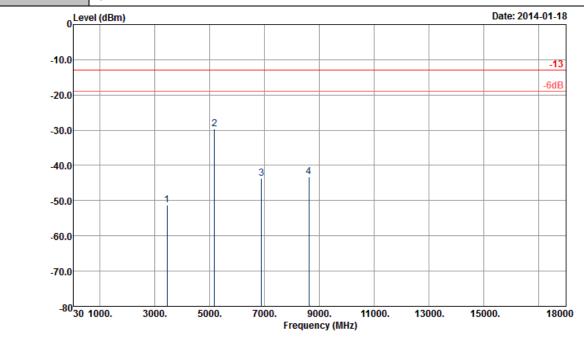


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3448	-51.36	-13	-38.36	-65.93	-55.19	4.48	8.31	Н	Pass
5177	-29.55	-13	-16.55	-48.63	-34.19	5.332	9.98	Н	Pass
6899	-43.59	-13	-30.59	-69.12	-48.83	6.1	11.34	Н	Pass
8628	-43.17	-13	-30.17	-68.85	-48.09	8.25	13.17	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 433 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

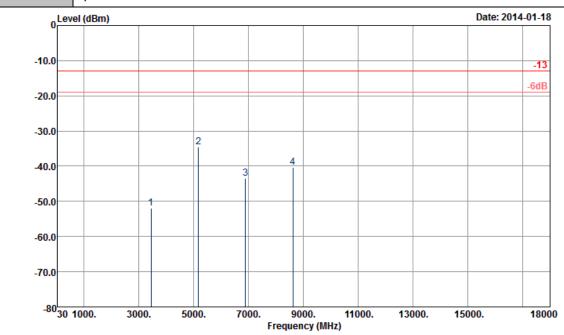

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	/ EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3448	-52.01	-13	-39.01	-68.04	-55.84	4.48	8.31	V	Pass
5177	-34.43	-13	-21.43	-53.71	-39.07	5.332	9.98	V	Pass
6899	-43.47	-13	-30.47	-69	-48.71	6.1	11.34	V	Pass
8628	-40.31	-13	-27.31	-65.57	-45.23	8.25	13.17	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 434 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

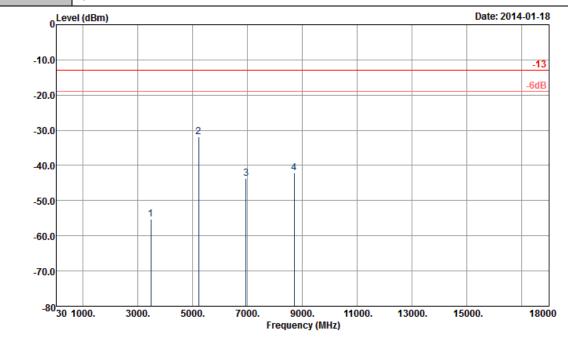


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3476	-55.23	-13	-42.23	-69.37	-59.37	4.24	8.38	Н	Pass
5219	-31.87	-13	-18.87	-50.29	-36.74	5.18	10.05	Н	Pass
6955	-43.69	-13	-30.69	-69.31	-48.88	6.19	11.38	Н	Pass
8705	-42.07	-13	-29.07	-67.76	-47.06	8.1	13.09	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 435 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

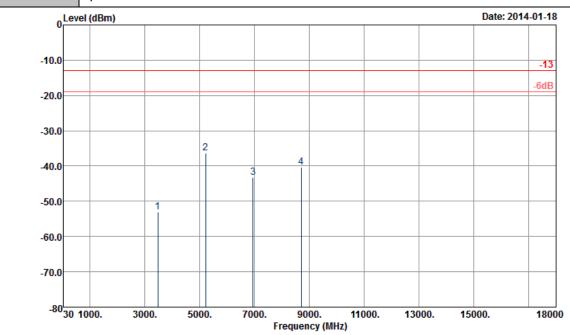

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3476	-52.95	-13	-39.95	-68.53	-57.09	4.24	8.38	V	Pass
5219	-36.42	-13	-23.42	-55.58	-41.29	5.18	10.05	V	Pass
6955	-43.20	-13	-30.20	-69.22	-48.39	6.19	11.38	V	Pass
8705	-40.29	-13	-27.29	-65.54	-45.28	8.1	13.09	V	Pass


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 436 of 485

Report Template No.: BU5-FGLTE Version 1.0

## <Low Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

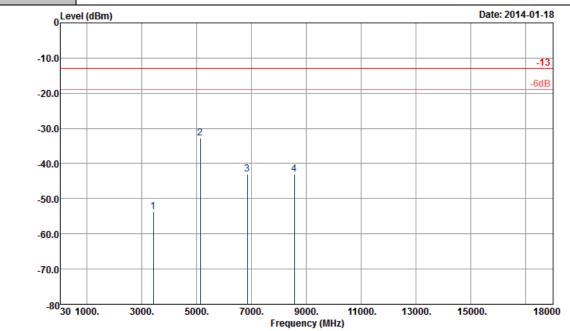


Site Condition : 03CH07-HY

: -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-53.61	-13	-40.61	-67.39	-57.39	4.62	8.40	Н	Pass
5135	-32.83	-13	-19.83	-51.03	-37.46	5.45	10.08	Н	Pass
6850	-42.93	-13	-29.93	-69.29	-48.17	6.18	11.42	Н	Pass
8558	-43.04	-13	-30.04	-69.44	-47.91	8.39	13.26	Н	Pass

Report No. : FG372301-01B : Rev. 02 Report Version Page Number : 437 of 485 Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

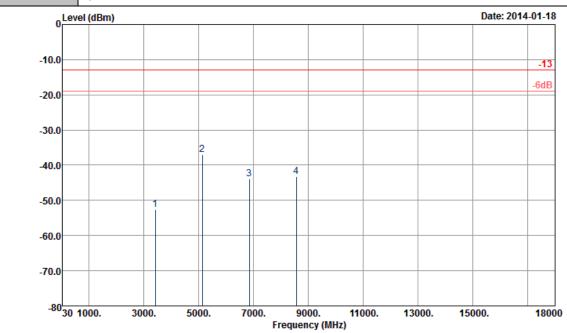

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3420	-52.66	-13	-39.66	-68.65	-56.44	4.62	8.40	V	Pass
5135	-36.95	-13	-23.95	-55.48	-41.58	5.45	10.08	V	Pass
6850	-43.90	-13	-30.90	-68.78	-49.14	6.18	11.42	V	Pass
8558	-43.19	-13	-30.19	-68.32	-48.06	8.39	13.26	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 438 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

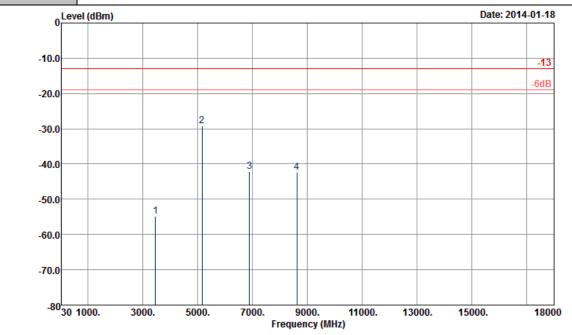


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3469	-54.88	-13	-41.88	-68.6	-58.71	4.48	8.31	Н	Pass
5170	-29.25	-13	-16.25	-48.56	-33.89	5.332	9.98	Н	Pass
6892	-42.22	-13	-29.22	-68.74	-47.46	6.1	11.34	Н	Pass
8621	-42.35	-13	-29.35	-68.16	-47.27	8.25	13.17	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 439 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

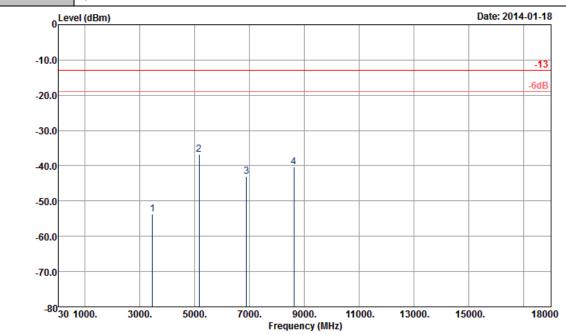

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


ı	Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	3469	-53.79	-13	-40.79	-68.6	-57.62	4.48	8.31	V	Pass
	5170	-36.73	-13	-23.73	-54.88	-41.37	5.332	9.98	V	Pass
	6892	-43.10	-13	-30.10	-68.48	-48.34	6.1	11.34	V	Pass
	8621	-40.41	-13	-27.41	-66.17	-45.33	8.25	13.17	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 440 of 485
Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

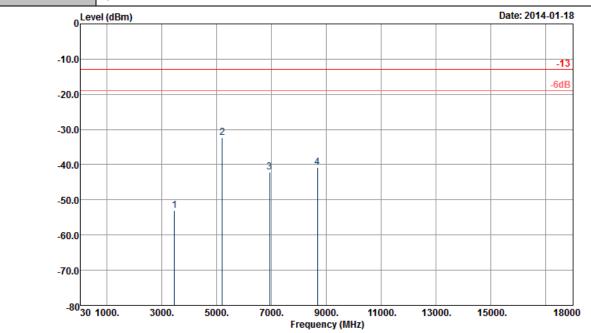


Site Condition : 03CH07-HY

: -13 HF-EIRP(080306) HORIZONTAL

Fre	equency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
(	MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	3469	-53.04	-13	-40.04	-67.86	-57.13	4.28	8.37	Н	Pass
	5205	-32.33	-13	-19.33	-51.2	-37.14	5.22	10.03	Н	Pass
	6941	-42.16	-13	-29.16	-68.8	-47.29	6.23	11.36	Н	Pass
	8677	-40.68	-13	-27.68	-66.37	-45.61	8.15	13.08	Н	Pass

Report No. : FG372301-01B : Rev. 02 Report Version Page Number : 441 of 485 Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 4	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

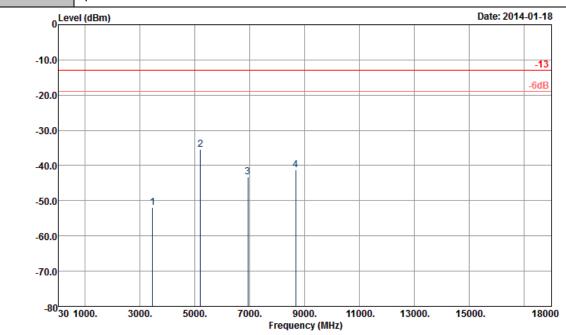


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
3469	-52.00	-13	-39.00	-67.59	-56.09	4.28	8.37	V	Pass
5205	-35.46	-13	-22.46	-53.95	-40.27	5.22	10.03	V	Pass
6941	-43.14	-13	-30.14	-68.9	-48.27	6.23	11.36	V	Pass
8677	-41.29	-13	-28.29	-67.22	-46.22	8.15	13.08	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 442 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

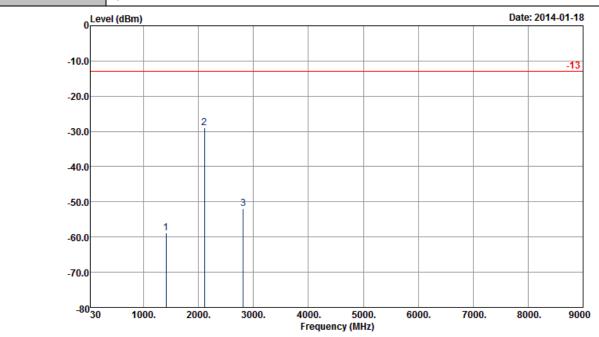


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Fre	equency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
(	MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1408	-58.78	-13	-45.78	-66.3	-62.87	1.51	5.60	Н	Pass
	2112	-28.99	-13	-15.99	-39.81	-33.17	1.82	6.00	Н	Pass
	2816	-51.93	-13	-38.93	-65.38	-56.71	2.2	6.98	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 443 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

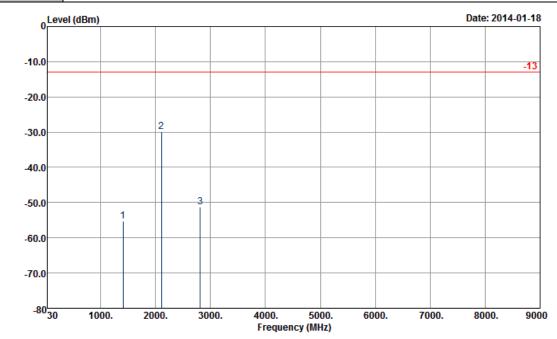

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1408	-55.17	-13	-42.17	-66.25	-59.26	1.51	5.60	V	Pass
2112	-29.95	-13	-16.95	-42.27	-34.13	1.82	6.00	V	Pass
2816	-51.30	-13	-38.30	-66.29	-56.08	2.2	6.98	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 444 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

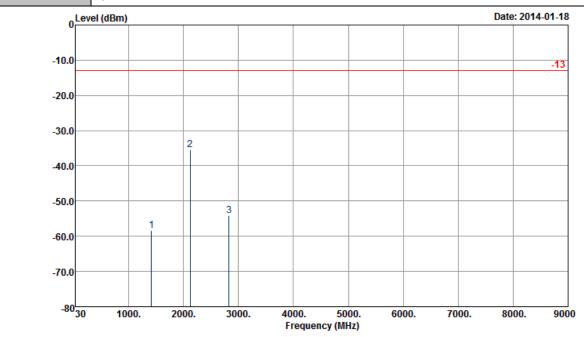

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1415	-58.42	-13	-45.42	-65.76	-62.5	1.53	5.61	Н	Pass
2123	-35.53	-13	-22.53	-46.85	-39.7	1.85	6.02	Н	Pass
2830	-54.04	-13	-41.04	-66.92	-58.8	2.24	7.00	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 445 of 485

Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

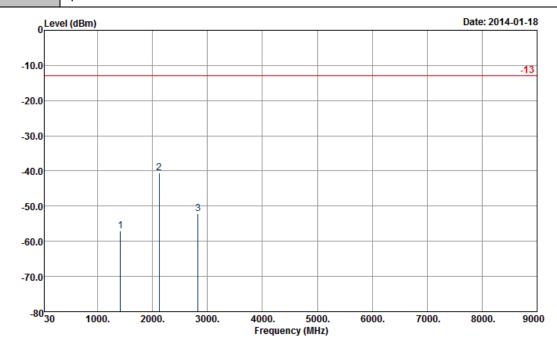

Site

: 03CH07-HY : -13 HF-EIRP(080306) VERTICAL Condition


ı	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
ı				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1415	-57.12	-13	-44.12	-66.95	-61.2	1.53	5.61	V	Pass
	2123	-40.63	-13	-27.63	-54.08	-44.8	1.85	6.02	V	Pass
	2830	-52.14	-13	-39.14	-66.74	-56.9	2.24	7.00	V	Pass

Report No. : FG372301-01B : Rev. 02 Report Version Page Number : 446 of 485 Report Template No.: BU5-FGLTE Version 1.0

# <High Channel>

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

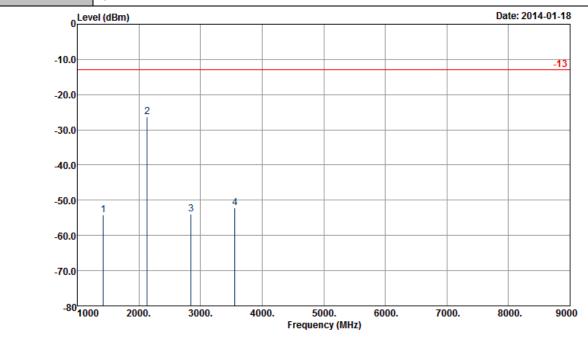


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1424	-54.18	-13	-41.18	-69.09	-58.28	1.54	5.64	Н	Pass
2136	-26.34	-13	-13.34	-38.03	-30.55	1.87	6.08	Н	Pass
2848	-53.86	-13	-40.86	-66.46	-58.71	2.26	7.11	Н	Pass
3560	-52.13	-13	-39.13	-66.71	-57.96	2.48	8.31	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 447 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

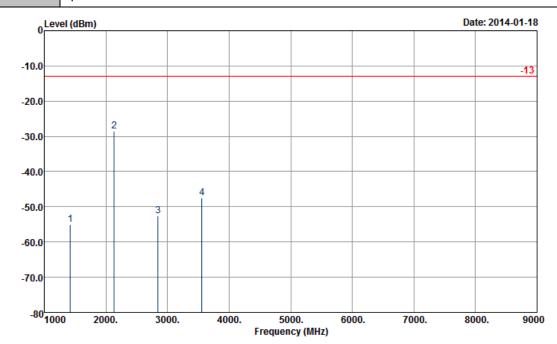

Site : 03CH07-HY


Condition : -13 HF-EIRP(080306) VERTICAL

Frequ	iency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
( M	Hz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
14	24	-54.99	-13	-41.99	-64.35	-59.09	1.54	5.64	V	Pass
21	36	-28.50	-13	-15.50	-41.91	-32.71	1.87	6.08	V	Pass
28	48	-52.48	-13	-39.48	-67.43	-57.33	2.26	7.11	V	Pass
35	60	-47.54	-13	-34.54	-63.12	-53.37	2.48	8.31	V	Pass


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 448 of 485

Report Template No.: BU5-FGLTE Version 1.0

#### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

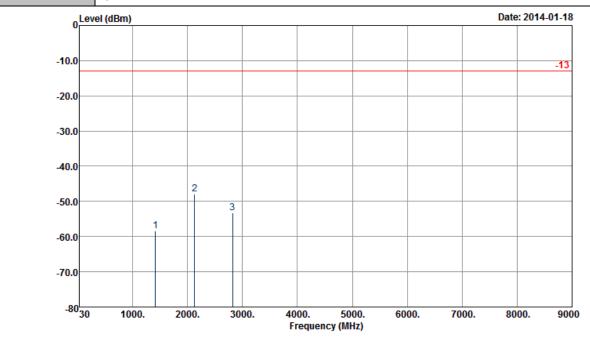


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1416	-58.36	-13	-45.36	-66.49	-62.45	1.52	5.61	Н	Pass
2128	-47.82	-13	-34.82	-59.11	-52.01	1.83	6.02	Н	Pass
2824	-53.23	-13	-40.23	-66.66	-58	2.24	7.01	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 449 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

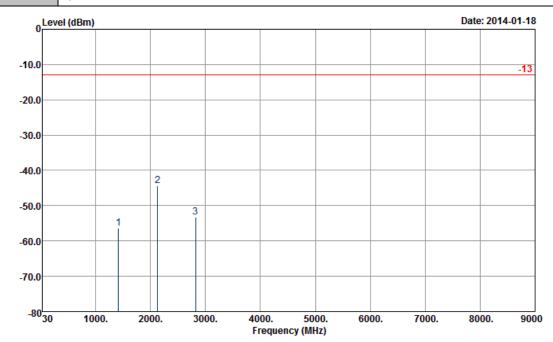

Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1416	-56.48	-13	-43.48	-66.78	-60.58	1.51	5.61	V	Pass
2128	-44.42	-13	-31.42	-57.42	-48.62	1.82	6.02	V	Pass
2824	-53.34	-13	-40.34	-68.37	-58.15	2.2	7.01	V	Pass


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 450 of 485

Report Template No.: BU5-FGLTE Version 1.0

### <Middle Channel>

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

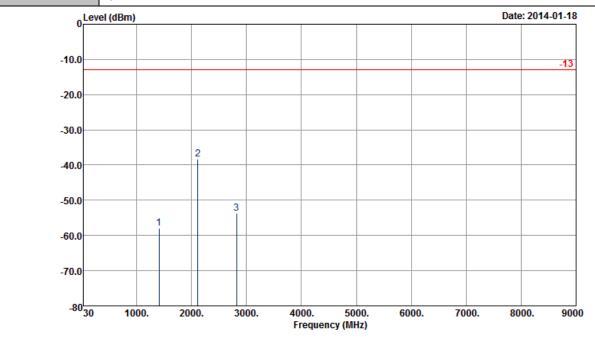


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Ì	Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
I				Limit	Reading	Power	loss	Gain		
l	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	1410	-58.02	-13	-45.02	-65.48	-62.1	1.53	5.61	Н	Pass
	2115	-38.33	-13	-25.33	-50.03	-42.5	1.85	6.02	Н	Pass
	2820	-53.74	-13	-40.74	-66.82	-58.5	2.24	7.00	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 451 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

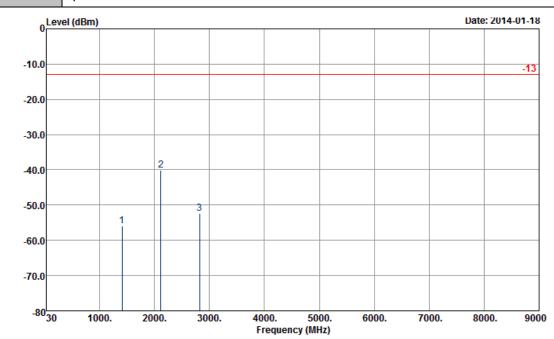


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) VERTICAL


Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1410	-56.02	-13	-43.02	-66.08	-60.1	1.53	5.61	V	Pass
2115	-40.03	-13	-27.03	-53.86	-44.2	1.85	6.02	V	Pass
2820	-52.34	-13	-39.34	-67.24	-57.1	2.24	7.00	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 452 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

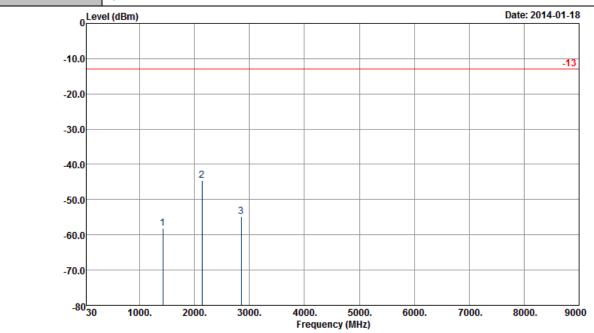


Site : 03CH07-HY

Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1424	-58.26	-13	-45.26	-66.38	-62.36	1.53	5.63	Н	Pass
2136	-44.58	-13	-31.58	-55.85	-48.78	1.88	6.08	Н	Pass
2848	-54.79	-13	-41.79	-68.24	-59.63	2.27	7.11	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 453 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 17	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

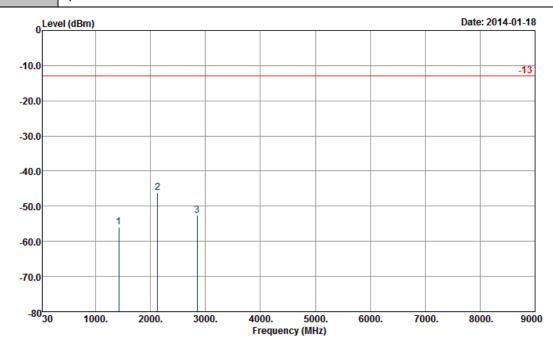

Site

: 03CH07-HY : -13 HF-EIRP(080306) VERTICAL Condition

Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
1424	-55.91	-13	-42.91	-66.3	-60.01	1.53	5.63	V	Pass
2128	-46.17	-13	-33.17	-59.27	-50.37	1.88	6.08	V	Pass
2848	-52.70	-13	-39.70	-67.97	-57.54	2.27	7.11	V	Pass


Report No. : FG372301-01B : Rev. 02 Report Version Page Number : 454 of 485

Report Template No.: BU5-FGLTE Version 1.0

## <Low Channel>

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

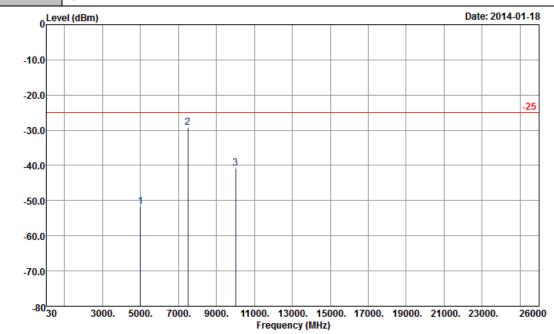


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

F	requency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	4998	-51.73	-25	-26.73	-69.59	-55.29	6.78	10.34	Н	Pass
	7500	-29.24	-25	-4.24	-55.83	-32.28	9.22	12.26	Н	Pass
	10002	-40.67	-25	-15.67	-69.39	-45.01	8.51	12.85	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 455 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

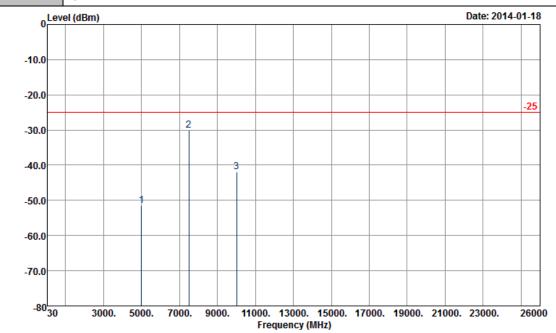

Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
4998	-51.56	-25	-26.56	-69.53	-55.12	6.78	10.34	V	Pass
7500	-30.17	-25	-5.17	-56.66	-33.21	9.22	12.26	V	Pass
10002	-41.97	-25	-16.97	-69.71	-46.31	8.51	12.85	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 456 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

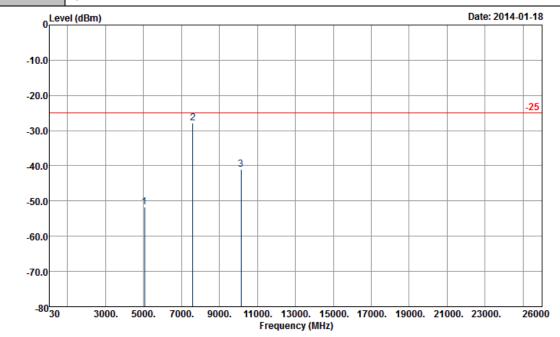


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5064	-51.72	-25	-26.72	-69.91	-55.21	6.83	10.32	Н	Pass
7596	-27.75	-25	-2.75	-54.49	-28.64	9.31	10.20	Н	Pass
10128	-41.07	-25	-16.07	-69.99	-45.13	8.62	12.68	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 457 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

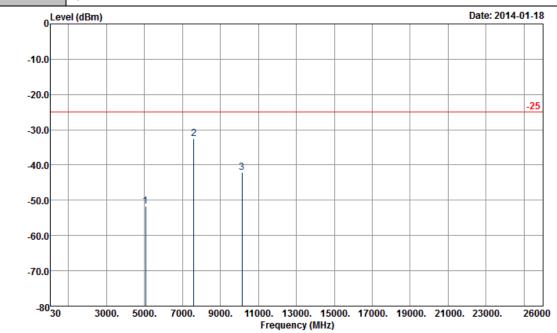

Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5064	-51.65	-25	-26.65	-69.95	-55.14	6.83	10.32	V	Pass
7596	-32.62	-25	-7.62	-59.17	-33.51	9.31	10.20	V	Pass
10128	-42.12	-25	-17.12	-69.97	-46.18	8.62	12.68	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 458 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <High Channel>

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

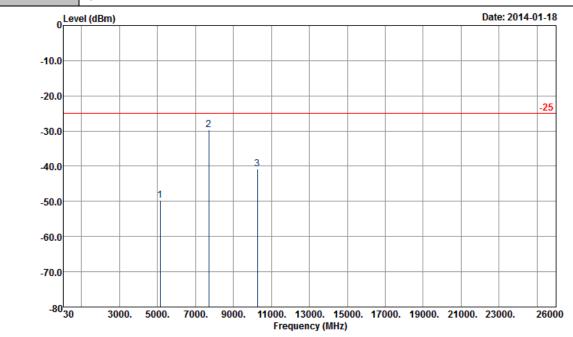


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5130	-49.73	-25	-24.73	-68.22	-53.26	6.9	10.43	Н	Pass
7698	-29.59	-25	-4.59	-55.6	-32.52	9.39	12.32	Н	Pass
10266	-40.74	-25	-15.74	-69.62	-44.88	8.71	12.85	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 459 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	5MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

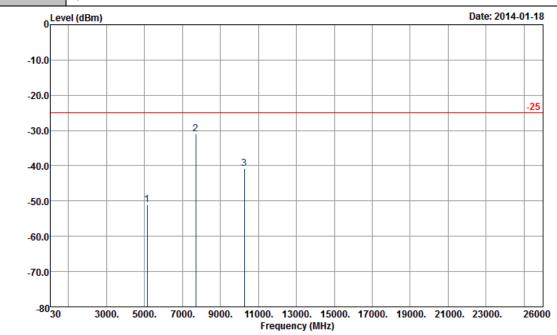

Site : 03CH07-HY


Condition : -25 HF-EIRP(080306) VERTICAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5130	-50.94	-25	-25.94	-69.29	-54.47	6.9	10.43	V	Pass
7698	-31.08	-25	-6.08	-56.88	-34.01	9.39	12.32	V	Pass
10266	-40.79	-25	-15.79	-68.73	-44.93	8.71	12.85	V	Pass


Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 460 of 485

Report Template No.: BU5-FGLTE Version 1.0

#### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

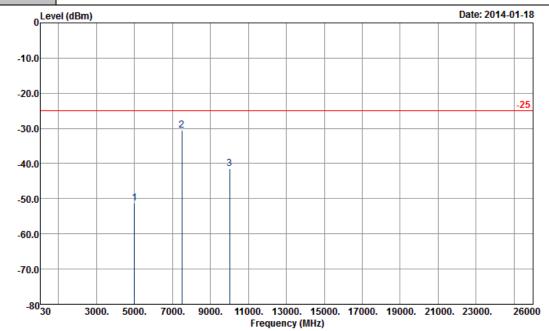


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
4998	-51.21	-25	-26.21	-69.07	-54.75	6.81	10.35	Н	Pass
7500	-30.50	-25	-5.50	-58.09	-33.48	9.26	12.24	Н	Pass
10002	-41.37	-25	-16.37	-70.07	-45.66	8.54	12.83	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 461 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

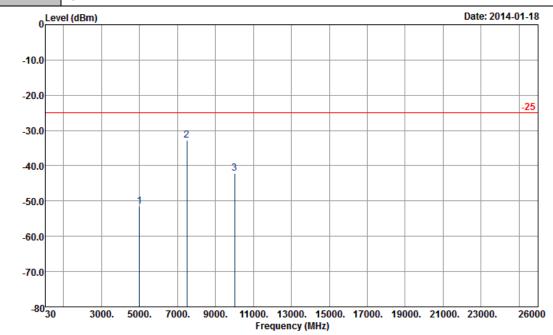

Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
4998	-51.46	-25	-26.46	-69.43	-55	6.81	10.35	V	Pass
7500	-32.66	-25	-7.66	-60.03	-35.64	9.26	12.24	V	Pass
10002	-42.13	-25	-17.13	-69.97	-46.42	8.54	12.83	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 462 of 485
Report Template No.: BU5-FGLTE Version 1.0

## <Middle Channel>

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

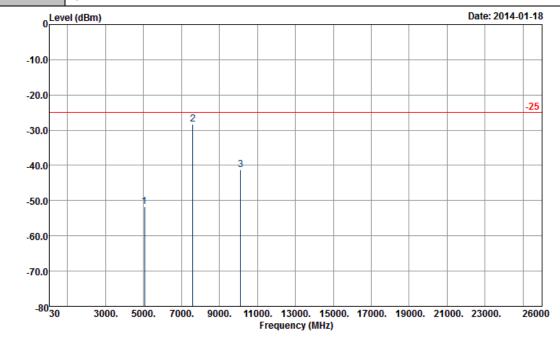


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5060	-51.66	-25	-26.66	-69.94	-55.15	6.83	10.32	Н	Pass
7592	-28.37	-25	-3.37	-55.18	-29.26	9.31	10.20	Н	Pass
10120	-41.30	-25	-16.30	-70.14	-45.36	8.62	12.68	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 463 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

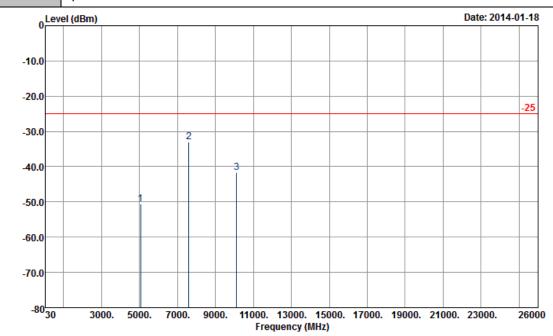

Site : 03CH07-HY


: -25 HF-EIRP(080306) VERTICAL Condition

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5060	-50.63	-25	-25.63	-68.9	-54.12	6.83	10.32	V	Pass
7592	-33.03	-25	-8.03	-59.54	-33.92	9.31	10.20	V	Pass
10120	-41.67	-25	-16.67	-69.69	-45.73	8.62	12.68	V	Pass


Report No. : FG372301-01B : Rev. 02 Report Version Page Number : 464 of 485

Report Template No.: BU5-FGLTE Version 1.0

## <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

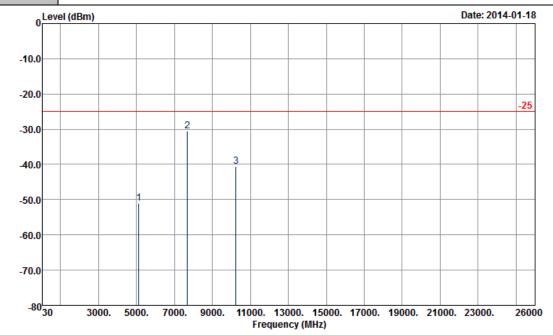


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

F	requency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
				Limit	Reading	Power	loss	Gain		
	(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
	5118	-50.98	-25	-25.98	-69.4	-54.52	6.88	10.42	Н	Pass
	7680	-30.47	-25	-5.47	-56.61	-33.41	9.37	12.31	Н	Pass
	10242	-40.47	-25	-15.47	-69.53	-44.66	8.64	12.83	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 465 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	10MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

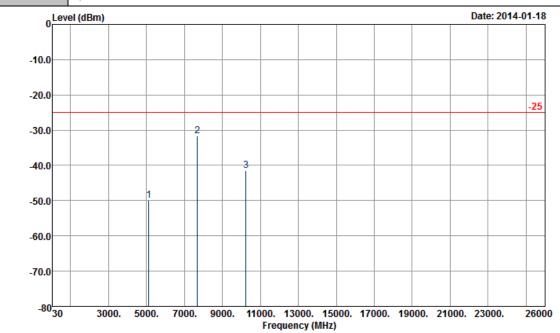

Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5118	-50.02	-25	-25.02	-68.52	-53.56	6.88	10.42	V	Pass
7680	-31.69	-25	-6.69	-57.55	-34.63	9.37	12.31	V	Pass
10242	-41.43	-25	-16.43	-69.51	-45.62	8.64	12.83	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 466 of 485
Report Template No.: BU5-FGLTE Version 1.0

### <Low Channel>

Band :	TE Band 7	Temperature :	21~24°C
Test Mode: 1	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer : S	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

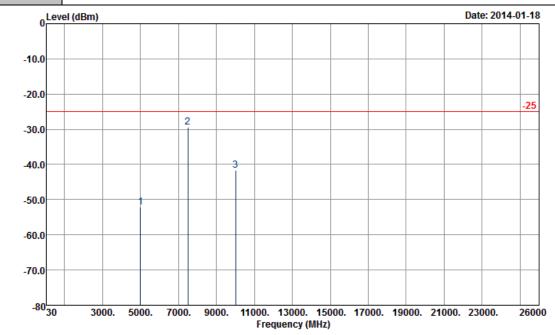


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
4998	-52.11	-25	-27.11	-69.93	-55.66	6.82	10.37	Н	Pass
7500	-29.43	-25	-4.43	-56.97	-32.42	9.27	12.26	Н	Pass
10002	-41.59	-25	-16.59	-70.22	-45.92	8.55	12.88	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 467 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

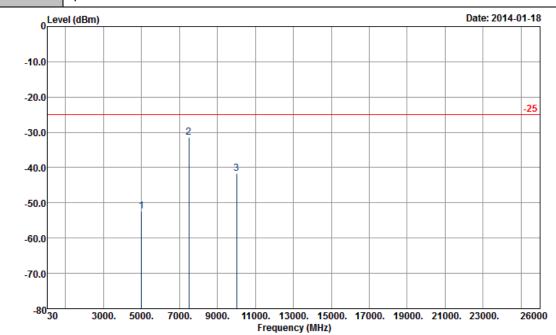


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
4998	-52.45	-25	-27.45	-70.45	-56	6.82	10.37	V	Pass
7500	-31.49	-25	-6.49	-58.88	-34.48	9.27	12.26	V	Pass
10002	-41.68	-25	-16.68	-69.45	-46.01	8.55	12.88	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 468 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Middle Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

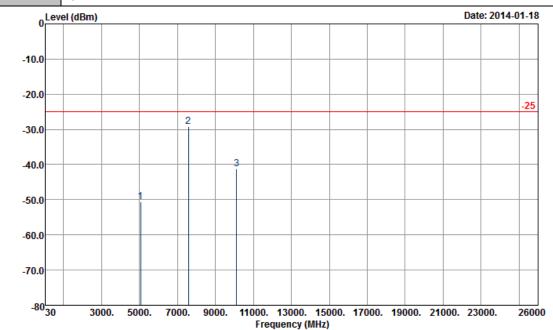


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
5058	-50.67	-25	-25.67	-68.93	-54.16	6.83	10.32	Н	Pass
7584	-29.12	-25	-4.12	-56.04	-30.01	9.31	10.20	Н	Pass
10110	-41.17	-25	-16.17	-70	-45.23	8.62	12.68	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 469 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

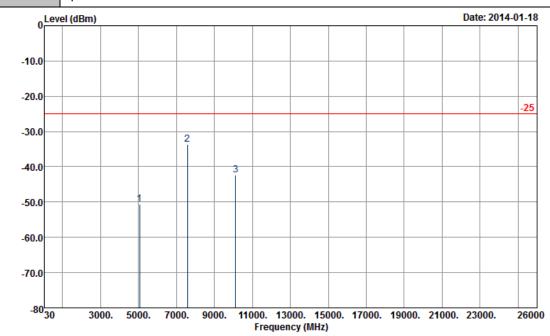


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5058	-50.62	-25	-25.62	-68.89	-54.11	6.83	10.32	V	Pass
7584	-33.57	-25	-8.57	-60.23	-34.46	9.31	10.20	V	Pass
10110	-42.30	-25	-17.30	-70.18	-46.36	8.62	12.68	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 470 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

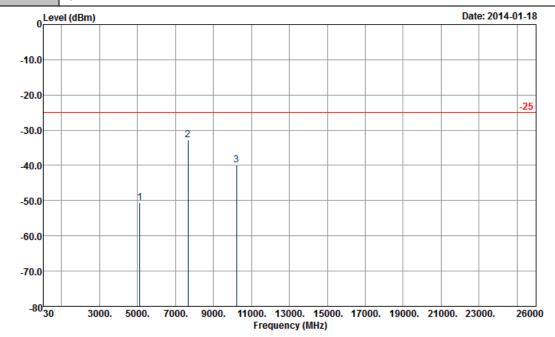


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5112	-50.58	-25	-25.58	-68.94	-54.12	6.87	10.41	Н	Pass
7668	-32.82	-25	-7.82	-59.19	-35.77	9.35	12.30	Н	Pass
10224	-39.94	-25	-14.94	-68.93	-44.13	8.63	12.82	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 471 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	15MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

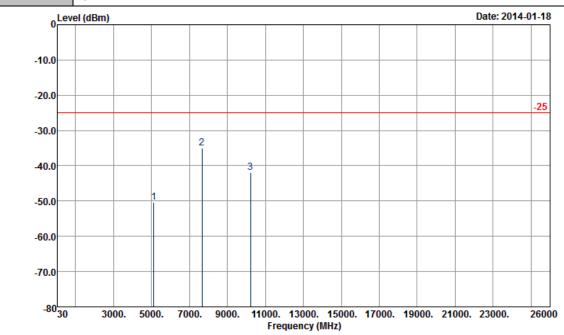


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5112	-50.32	-25	-25.32	-68.75	-53.86	6.87	10.41	V	Pass
7668	-34.94	-25	-9.94	-61.01	-37.89	9.35	12.30	V	Pass
10224	-41.82	-25	-16.82	-69.93	-46.01	8.63	12.82	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 472 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Low Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

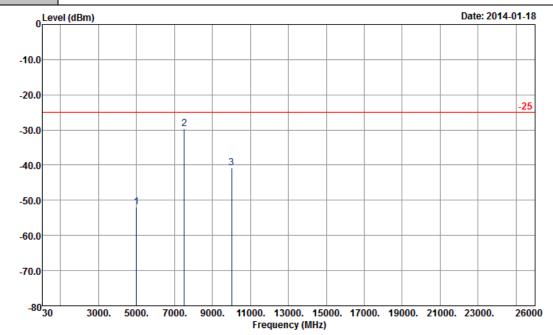


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5004	-51.89	-25	-26.89	-69.69	-55.44	6.83	10.38	Н	Pass
7506	-29.68	-25	-4.68	-56.91	-32.65	9.28	12.25	Н	Pass
10002	-40.77	-25	-15.77	-69.42	-45.12	8.54	12.89	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 473 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

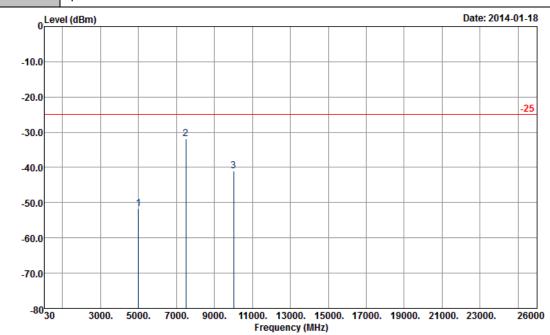

Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5004	-51.68	-25	-26.68	-69.74	-55.23	6.83	10.38	V	Pass
7500	-31.88	-25	-6.88	-59.04	-34.85	9.28	12.25	V	Pass
10002	-41.07	-25	-16.07	-68.9	-45.42	8.54	12.89	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 474 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <Middle Channel>

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal

Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

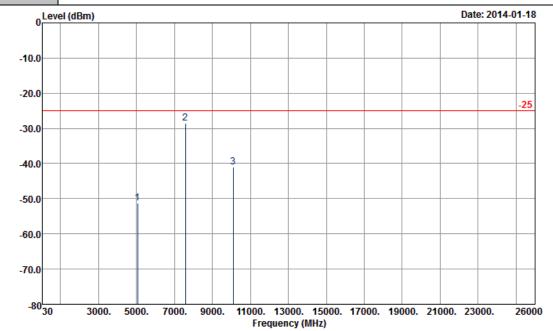


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5052	-51.30	-25	-26.30	-69.29	-54.79	6.83	10.32	Н	Pass
7578	-28.59	-25	-3.59	-55.52	-29.48	9.31	10.20	Н	Pass
10104	-41.11	-25	-16.11	-69.97	-45.17	8.62	12.68	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 475 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

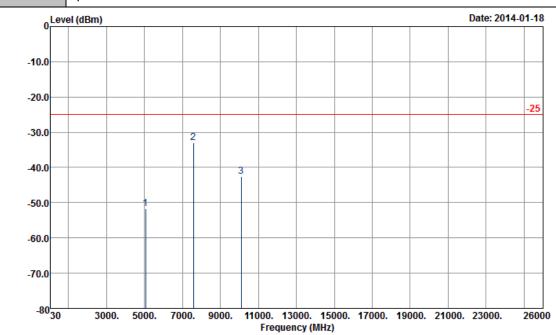


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL


Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5052	-51.72	-25	-26.72	-69.99	-55.21	6.83	10.32	V	Pass
7578	-33.00	-25	-8.00	-59.68	-33.89	9.31	10.20	V	Pass
10104	-42.47	-25	-17.47	-70.3	-46.53	8.62	12.68	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 476 of 485
Report Template No.: BU5-FGLTE Version 1.0

#### <High Channel>



Remark: Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.

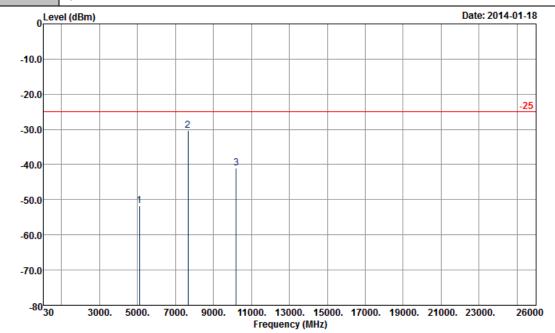


Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) HORIZONTAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5106	-51.59	-25	-26.59	-69.91	-56.13	5.84	10.38	Н	Pass
7656	-30.20	-25	-5.20	-56.41	-33.14	9.33	12.27	Н	Pass
10206	-41.06	-25	-16.06	-70.03	-45.26	8.6	12.80	Н	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 477 of 485
Report Template No.: BU5-FGLTE Version 1.0

Band :	LTE Band 7	Temperature :	21~24°C
Test Mode :	20MHz QPSK RB Size 1 Offset 0	Relative Humidity :	51~56%
Test Engineer :	Stan Hsieh	Polarization :	Vertical

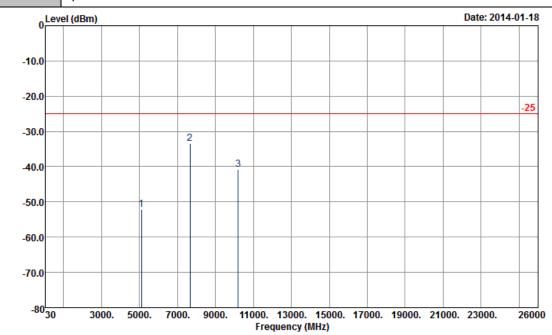

Site : 03CH07-HY

Condition : -25 HF-EIRP(080306) VERTICAL

Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
			Limit	Reading	Power	loss	Gain		
(MHz)	(dBm)	(dBm)	( dB )	(dBm)	(dBm)	( dB )	(dBi)	(H/V)	
5106	-52.15	-25	-27.15	-70.55	-56.69	5.84	10.38	V	Pass
7656	-33.48	-25	-8.48	-59.55	-36.42	9.33	12.27	V	Pass
10206	-40.80	-25	-15.80	-68.84	-45	8.6	12.80	V	Pass

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 478 of 485
Report Template No.: BU5-FGLTE Version 1.0

### 3.8 Frequency Stability Measurement

#### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.8.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.8.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 25±5° C and connected with the base station.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

#### 3.8.5 Test Setup

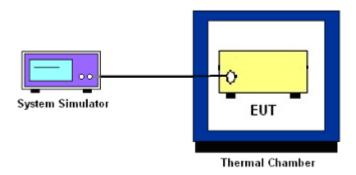

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 479 of 485
Report Template No.: BU5-FGLTE Version 1.0

## 3.8.6 Test Result of Temperature Variation

Band :	LTE Band 5 (QPSK)	Limit (ppm):	2.5
--------	-------------------	--------------	-----

	BW 10MHz	
Temperature (°C)	Deviation (ppm)	Result
50	0.0062	
40	0.0050	
30	0.0051	
20	0.0044	
10	0.0047	PASS
0	0.0055	
-10	0.0045	
-20	0.0049	
-30	0.0047	

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 480 of 485
Report Template No.: BU5-FGLTE Version 1.0

	BW 10MHz	
Temperature (°C)	Deviation (ppm)	Result
50	0.0045	
40	0.0040	
30	0.0036	
20	0.0033	
10	0.0037	PASS
0	0.0035	
-10	0.0044	
-20	0.0042	
-30	0.0049	

	BW 10MHz	
Temperature (°C)	Deviation (ppm)	Result
50	0.0037	
40	0.0029	
30	0.0027	
20	0.0039	
10	0.0038	PASS
0	0.0029	
-10	0.0042	
-20	0.0037	
-30	0.0039	

Report No. : FG372301-01B Report Version : Rev. 02 Page Number : 481 of 485

Report Template No.: BU5-FGLTE Version 1.0

Band: LTE Band 17 (QPSK)	Limit (ppm):	2.5
--------------------------	--------------	-----

	BW 10MHz	
Temperature (°C)	Deviation (ppm)	Result
50	0.0066	
40	0.0061	
30	0.0056	
20	0.0066	
10	0.0061	PASS
0	0.0062	
-10	0.0061	
-20	0.0056	
-30	0.0056	

Band :	LTE Band 7 (QPSK)	Limit (ppm):	2.5
--------	-------------------	--------------	-----

	BW 10MHz	
Temperature (°C)	Deviation (ppm)	Result
50	0.0056	
40	0.0050	
30	0.0052	
20	0.0058	
10	0.0060	PASS
0	0.0052	
-10	0.0047	
-20	0.0051	
-30	0.0053	

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 482 of 485
Report Template No.: BU5-FGLTE Version 1.0

### 3.8.7 Test Result of Voltage Variation

Band	Bandwidth	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
LTE Band 5	10M	4.35	0.0045		PASS
		Normal	0.0055	2.5	
		3.40	0.0054		
	10M	4.35	0.0040		PASS
LTE Band 2		Normal	0.0035	2.5	
		3.40	0.0036		
LTE Band 4	10M	4.35	0.0032		PASS
		Normal	0.0029	2.5	
		3.40	0.0035		
	10M	4.35	0.0054		PASS
LTE Band 17		Normal	0.0062	2.5	
		3.40	0.0058		
LTE Band 7	10M	4.35	0.0051		PASS
		Normal	0.0057	2.5	
		3.40	0.0056		

#### Remark:

- 1. Normal Voltage = 3.80V.
- 2. The manufacturer declared that the EUT could work properly between voltage  $3.40V \sim 4.35V$ .

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 483 of 485
Report Template No.: BU5-FGLTE Version 1.0

# 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Dec. 24, 2013~ Apr. 2, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 19, 2013	Dec. 24, 2013~ Apr. 2, 2014	Jul. 18, 2014	Conducted (TH02-HY)
LTE Base Station	Anritsu	MT8820C	6201074414	N/A	Dec. 11, 2012	Dec. 24, 2013~ Apr. 2, 2014	Dec. 10, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 20, 2013	Jan. 16, 2014~ Apr. 2, 2014	Nov. 19, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Jan. 16, 2014~ Apr. 2, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Jan. 16, 2014~ Apr. 2, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Jan. 16, 2014~ Apr. 2, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Preamplifier	SONOMA	310N	187231	9kHz~1GHz	May 15, 2013	Jan. 16, 2014~ Apr. 2, 2014	May 14, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jan. 16, 2014~ Apr. 2, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604	N/A	N/A	Jan. 16, 2014~ Apr. 2, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA91702 51	15GHz- 40GHz	Oct. 03, 2013	Jan. 16, 2014~ Apr. 2, 2014	Oct. 02, 2014	Radiation (03CH07-HY)

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 484 of 485
Report Template No.: BU5-FGLTE Version 1.0

# 5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	4.50
Confidence of 95% (U = 2Uc(y))	4.50

Report No. : FG372301-01B
Report Version : Rev. 02
Page Number : 485 of 485
Report Template No.: BU5-FGLTE Version 1.0