

TEST REPORT



For

Nexpro International Limitada

San Jose-Goicoechea, Guadalupe, Barrio Tournon, Frente Al Hotel Villas Tournon,

Oficinas Del Bufete Facio Y Canas, Costa Rica

FCC ID: ZYPES980

Report Type: Original Report	Product Type: Mobile Phone
Test Engineer: Ares Liu 	
Report Number: R1DG120710004-00B	
Report Date: 2012-07-23	
Ivan Cao 	
Reviewed By: EMC Engineer	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	7
FCC §15.247 (I) & §2.1093 – RF EXPOSURE.....	8
APPLICABLE STANDARD	8
RESULT: COMPLIANCE	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	28
APPLICABLE STANDARD	28

TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST EQUIPMENT LIST AND DETAILS.....	54
TEST DATA	54
FCC §15.247(d) - BAND EDGES TESTING	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST DATA	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Nexpro International Limitada*'s product, model number: *EVE* (FCC ID: *ZYPES980*) (the "EUT") in this report was a Mobile Phone, named as *EVE* by applicant, which was measured approximately: 11.0 cm (L) x 6.0cm (W) x 1.5cm (H), rated input voltage: DC 3.7V Lithium battery or DC 5.0V from adapter for charging.

Adapter Information:

MODEL NO: C325A50070

ADAPTADER AC/DC

INPUT: 100-240V, 50/60 Hz, 120mA

OUTPUT: 5V, 700mA.

Frequency Range:

GSM 850: 824-849 MHz (Tx), 869-894 MHz (Rx)

PCS 1900: 1850-1910 MHz (Tx), 1930-1990 MHz (Rx)

WCDMA Band II 1850-1910 MHz (Tx), 1930-1990 MHz (Rx)

WCDMA Band V 824-849 MHz (Tx), 869-894 MHz (Rx)

BT: 2400-2483.5 MHz

WIFI: 2412-2462 MHz

Modulation Mode: GMSK (Cellular/PCS); QPSK/BPSK (WCDMA)

DSSS, OFDM (Wifi)

GFSK, 8-DPSK, $\pi/4$ -DQPSK (Bluetooth)

Transmitter Output Power:

GSM/GPRS Cellular Band: 31.94 dBm (Conducted)

WCDMA Band V: 22.73 dBm (Conducted)

GSM/GPRS PCS Band: 29.52 dBm (Conducted)

WCDMA Band II: 22.82 dBm (Conducted)

BT: 7.09 dBm (Conducted)

Wi-Fi: 13.62 dBm (Conducted)

** All measurement and test data in this report was gathered from production sample serial number: 120710004 (Assigned by BACL, Shenzhen). The EUT was received on 2012-07-11.*

Objective

This report is prepared on behalf of *Nexpro International Limitada* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of EUT with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H&24E PCE submissions with FCC ID: ZYPES980.

FCC Part 15B JBP submissions with FCC ID: ZYPES980.

FCC Part 15C DTS submissions with FCC ID: ZYPES980 for WIFI.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is ± 4.0 dB

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which is provided by manufacturer.


Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
TESCOM	Bluetooth Tester	TC-3000B	3000B650083

Block Diagram of Test Setup

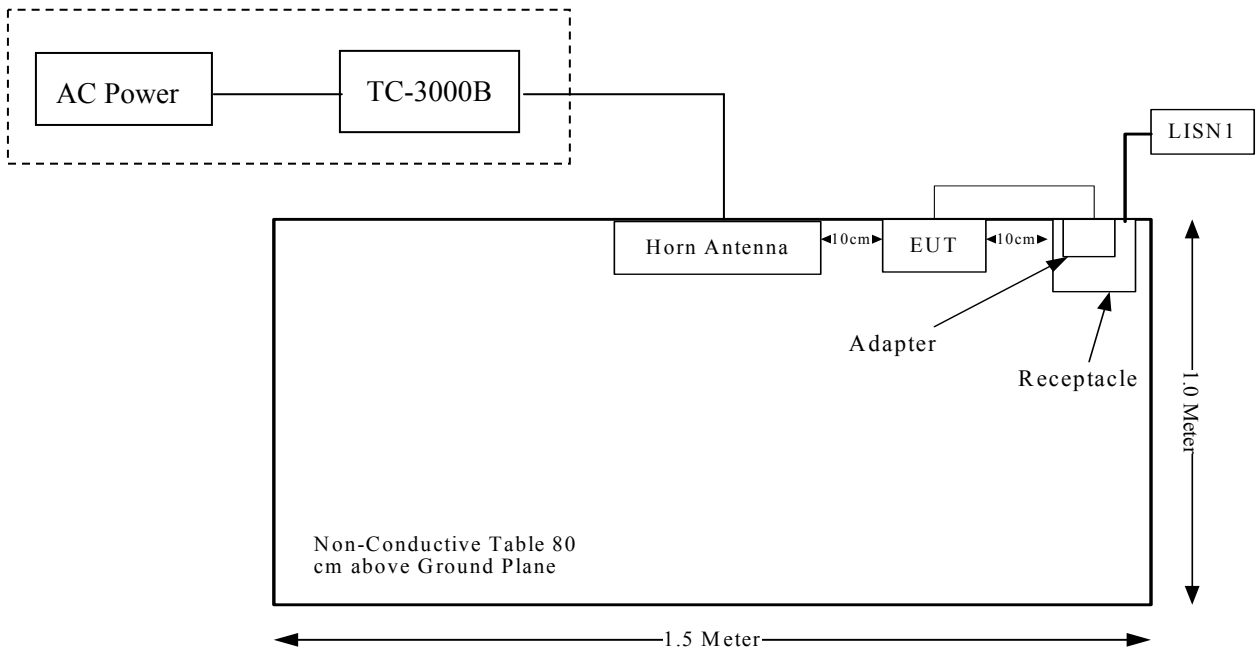

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 15.247 (i), § 2.1093	RF Exposure	Compliance
§ 15.203	Antenna Requirement	Compliance
§ 15.207 (a)	Conducted Emissions	Compliance
§ 15.205, § 15.209, § 15.247(d)	Radiated Emissions	Compliance
§ 15.247 (a)(1)	20 dB Bandwidth	Compliance
§ 15.247(a)(1)	Channel Separation Test	Compliance
§ 15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§ 15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§ 15.247(b)(1)	Peak Output Power Measurement	Compliance
§ 15.247(d)	Band Edges	Compliance

FCC §15.247 (I) & §2.1093 – RF EXPOSURE

Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: <u>Unlicensed only</u> <ul style="list-style-type: none"> when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas <u>Licensed & Unlicensed</u> <ul style="list-style-type: none"> when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: <u>Licensed & Unlicensed</u> antenna pairs with SAR to peak location separation ratio ≥ 0.3 ; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	<p><u>When there is no simultaneous transmission –</u></p> <ul style="list-style-type: none"> output ≤ 60 f: SAR not required output > 60 f: stand-alone SAR required <p><u>When there is simultaneous transmission –</u></p> <p><u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> output $\leq 2 \cdot P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <p><u>Otherwise stand-alone SAR is required</u></p> <p><u>When stand-alone SAR is required</u></p> <ul style="list-style-type: none"> test SAR on highest output channel for each wireless mode and exposure condition if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures 	
Jaw, Mouth and Nose	<p><u>Flat phantom SAR required</u></p> <ul style="list-style-type: none"> when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations 	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

- 1) Bluetooth can transmit simultaneously with GSM.
- 2) The distance between BT and GSM antenna is $5.6\text{ cm} > 5\text{ cm}$. The max output power of Bluetooth antenna is $(7.09\text{ dBm})\ 5.12\text{ mW} < 2P_{\text{Ref}}(24\text{ mW})$. According to KDB648474, stand-alone SAR is not required for BT antenna and simultaneous SAR evaluation is not required for Bluetooth and GSM antennas.
- 3) P_{Ref} is defined as the maximum conducted power available at the antenna according to source-based time-averaging requirements of Section 2.1093(d) (5).

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an internal PIFA antenna, which complied with 15.203, the maximum gain is 0dBi, please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Dongguan) is 2.4 dB(k=2, 95% level of confidence).

EUT Setup

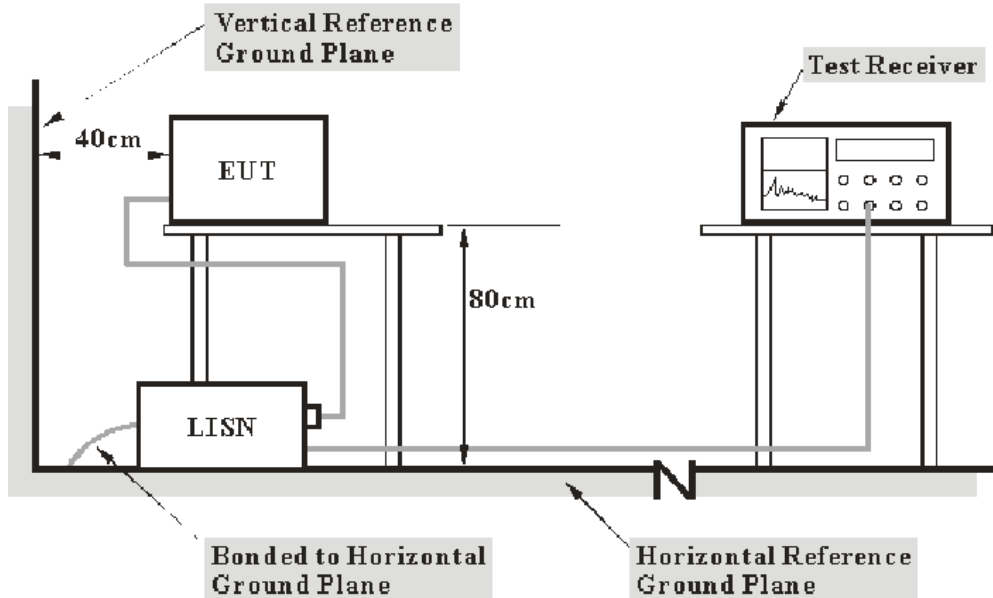

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF BW</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	101122	2011-11-17	2012-11-16
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-11-17	2012-11-16

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.61 dB at 0.755 MHz in the Neutral conducted mode


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* The testing was performed by Ares Liu on 2012-07-18.

Test Mode: Transmitting

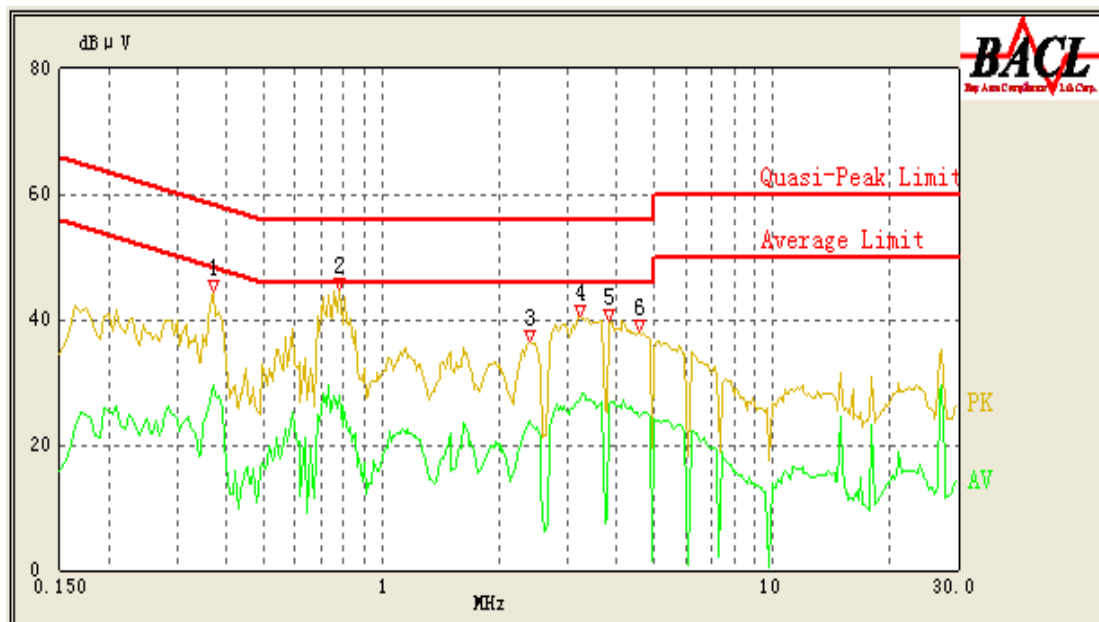120V, 60 Hz, Line:

Frequency (MHz)	Corrected Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK /QP/Ave.)
0.780	39.91	0.44	56.00	16.09	QP
0.780	27.90	0.44	46.00	18.10	Ave
3.215	27.31	0.49	46.00	18.69	Ave
3.835	26.16	0.50	46.00	19.84	Ave
0.370	29.58	0.42	49.71	20.13	Ave
0.370	39.15	0.42	59.71	20.56	QP
4.555	25.21	0.51	46.00	20.79	Ave
3.215	34.57	0.49	56.00	21.43	QP
3.835	34.20	0.50	56.00	21.80	QP
2.385	23.10	0.48	46.00	22.90	Ave
4.555	32.49	0.51	56.00	23.51	QP
2.385	31.02	0.48	56.00	24.98	QP

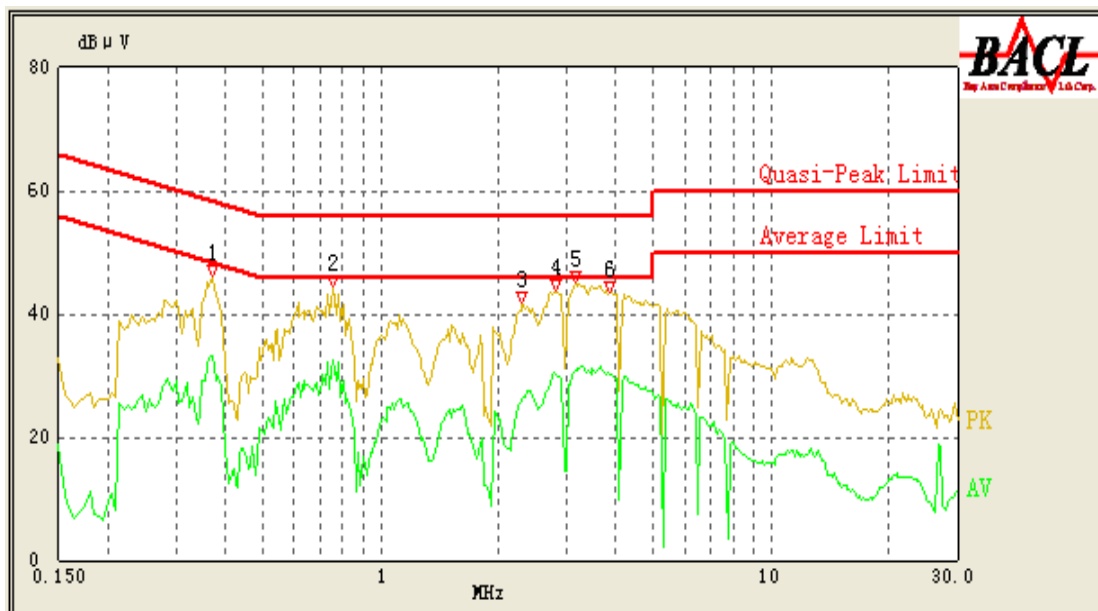120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK /QP/Ave.)
0.755	32.39	0.44	46.00	13.61	Ave
0.755	40.90	0.44	56.00	15.10	QP
3.115	30.34	0.49	46.00	15.66	Ave
3.880	30.23	0.50	46.00	15.77	Ave
2.810	30.04	0.49	46.00	15.96	Ave
0.370	33.19	0.42	49.71	16.52	Ave
3.150	38.48	0.49	56.00	17.52	QP
2.805	37.72	0.49	56.00	18.28	QP
3.855	37.07	0.50	56.00	18.93	QP
0.370	40.25	0.42	59.71	19.46	QP
2.305	26.17	0.48	46.00	19.83	Ave
2.305	34.84	0.48	56.00	21.16	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Dongguan) is 4.0 dB(k=2, 95% level of confidence).

EUT Setup

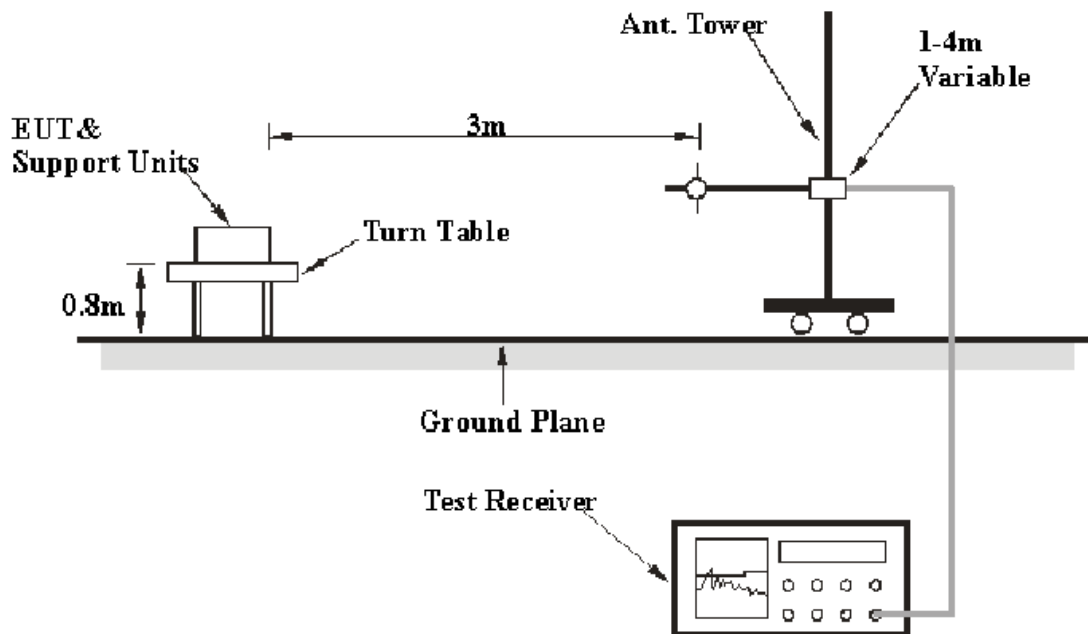

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video BW</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
DUCOMMUN Technologies	Pre-amp	ALN-09173030-01	991396-01	2011-11-24	2012-12-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2012-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ 26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

Transmitting (EDR- $\pi/4$ -DQPSK) Mode: 6.56 dB at 4804 MHz in the **Horizontal** polarization at low channel

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Ares Liu on 2012-07-10.

Test Mode: Transmitting (BDR- GFSK)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	72.56	AV	H	31.05	3.90	27.79	79.73	N/A	N/A
2402	94.7	PK	H	31.05	3.90	27.79	101.87	N/A	N/A
2402	70.6	AV	V	31.05	3.90	27.79	77.77	N/A	N/A
2402	89.04	PK	V	31.05	3.90	27.79	96.21	N/A	N/A
9608	22.64	AV	V	38.52	8.75	26.39	43.51	54.00	10.49
2390	36.33	AV	H	30.98	3.84	27.83	43.33	54.00	10.67
4804	31.21	AV	H	33.17	4.67	27.34	41.71	54.00	12.29
7206	21.42	AV	V	38.67	6.50	26.54	40.05	54.00	13.95
9608	38.92	PK	V	38.52	8.75	26.39	59.79	74.00	14.21
323.87	35.24	QP	H	14.60	2.16	21.58	30.42	46.00	15.58
7206	36.49	PK	V	38.67	6.50	26.54	55.12	74.00	18.88
2390	43.74	PK	H	30.98	3.84	27.83	50.74	74.00	23.26
4804	39.76	PK	H	33.17	4.67	27.34	50.26	74.00	23.74
3298.15	35.12	PK	V	31.38	4.60	27.30	43.79	74.00	30.21
Middle Channel: 2441 MHz									
2441	74.24	AV	H	31.27	3.99	27.69	81.81	N/A	N/A
2441	96.05	PK	H	31.27	3.99	27.69	103.62	N/A	N/A
2441	71.44	AV	V	31.27	3.99	27.69	79.01	N/A	N/A
2441	89.31	PK	V	31.27	3.99	27.69	96.88	N/A	N/A
612.3	36.15	QP	H	19.43	3.03	22.27	36.34	46.00	9.66
4882	32.43	AV	H	33.34	4.75	27.04	43.48	54.00	10.52
9764	21.98	AV	V	38.83	8.58	26.54	42.84	54.00	11.16
7323	21.19	AV	V	38.88	6.72	26.67	40.13	54.00	13.87
9764	38.26	PK	V	38.83	8.58	26.54	59.12	74.00	14.88
7323	36.74	PK	V	38.88	6.72	26.67	55.68	74.00	18.32
4882	40.58	PK	H	33.34	4.75	27.04	51.63	74.00	22.37
3481.02	19.43	AV	H	31.67	5.29	27.42	28.97	54.00	25.03
3481.02	33.67	PK	H	31.67	5.29	27.42	43.21	74.00	30.79
2635.1	35.12	PK	H	31.41	4.24	27.57	43.20	74.00	30.80
High Channel: 2480 MHz									
2480	74.93	AV	H	31.49	3.82	27.75	82.49	N/A	N/A
2480	96.45	PK	H	31.49	3.82	27.75	104.01	N/A	N/A
2480	71.75	AV	V	31.49	3.82	27.75	79.31	N/A	N/A
2480	90.01	PK	V	31.49	3.82	27.75	97.57	N/A	N/A
2483.5	37.58	AV	H	31.51	3.80	27.76	45.12	54.00	8.88
610.58	35.94	QP	H	19.45	3.04	22.27	36.15	46.00	9.85
9920	22.59	AV	V	39.14	8.41	26.70	43.44	54.00	10.56
9920	39.53	PK	V	39.14	8.41	26.70	60.38	74.00	13.62
4960	27.67	AV	V	33.51	4.70	27.26	38.62	54.00	15.38
6352.6	21.01	AV	V	35.58	5.69	26.16	36.11	54.00	17.89
6352.6	36.82	PK	V	35.58	5.69	26.16	51.92	74.00	22.08
2483.5	44.33	PK	H	31.51	3.80	27.76	51.87	74.00	22.13
4960	39.41	PK	V	33.51	4.70	27.26	50.36	74.00	23.64
2534.2	33.64	PK	H	31.55	3.83	27.91	41.11	74.00	32.89

Test Mode: Transmitting (EDR- π /4-DQPSK)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	41.21	AV	H	31.05	3.90	27.79	48.38	N/A	N/A
2402	92.01	PK	H	31.05	3.90	27.79	99.18	N/A	N/A
2402	37.66	AV	V	31.05	3.90	27.79	44.83	N/A	N/A
2402	88.84	PK	V	31.05	3.90	27.79	96.01	N/A	N/A
4804	36.94	AV	H	33.17	4.67	27.34	47.44	54.00	6.56
4804	53.46	PK	H	33.17	4.67	27.34	63.96	74.00	10.04
9608	22.75	AV	V	38.52	8.75	26.39	43.62	54.00	10.38
7206	21.63	AV	V	38.67	6.50	26.54	40.26	54.00	13.74
9608	39.03	PK	V	38.52	8.75	26.39	59.90	74.00	14.10
323.87	36.08	QP	H	14.60	2.16	21.58	31.26	46.00	14.74
7206	36.82	PK	V	38.67	6.50	26.54	55.45	74.00	18.55
2390	26.83	AV	H	30.98	3.84	27.83	33.83	54.00	20.17
2390	41.33	PK	H	30.98	3.84	27.83	48.33	74.00	25.67
3298.15	35.92	PK	V	31.38	4.60	27.30	44.59	74.00	29.41
Middle Channel: 2441 MHz									
2441	41.36	AV	H	31.27	3.99	27.69	48.93	N/A	N/A
2441	93.21	PK	H	31.27	3.99	27.69	100.78	N/A	N/A
2441	38.54	AV	V	31.27	3.99	27.69	46.11	N/A	N/A
2441	89.41	PK	V	31.27	3.99	27.69	96.98	N/A	N/A
4882	35.76	AV	H	33.34	4.75	27.04	46.81	54.00	7.19
612.3	37.38	QP	H	19.43	3.03	22.27	37.57	46.00	8.43
4882	52.66	PK	H	33.34	4.75	27.04	63.71	74.00	10.29
9764	21.82	AV	V	38.83	8.58	26.54	42.68	54.00	11.32
7323	21.35	AV	V	38.88	6.72	26.67	40.29	54.00	13.71
9764	37.94	PK	V	38.83	8.58	26.54	58.80	74.00	15.20
7323	36.68	PK	V	38.88	6.72	26.67	55.62	74.00	18.38
3481.02	19.38	AV	H	31.67	5.29	27.42	28.92	54.00	25.08
2635.1	36.88	PK	H	31.41	4.24	27.57	44.96	74.00	29.04
3481.02	34.82	PK	H	31.67	5.29	27.42	44.36	74.00	29.64
High Channel: 2480 MHz									
2480	42.83	AV	H	31.49	3.82	27.75	50.39	N/A	N/A
2480	95.43	PK	H	31.49	3.82	27.75	102.99	N/A	N/A
2480	39.86	AV	V	31.49	3.82	27.75	47.42	N/A	N/A
2480	91.84	PK	V	31.49	3.82	27.75	99.40	N/A	N/A
4960	34.98	AV	V	33.51	4.70	27.26	45.93	54.00	8.07
610.58	36.72	QP	H	19.45	3.04	22.27	36.93	46.00	9.07
9920	22.13	AV	V	39.14	8.41	26.70	42.98	54.00	11.02
4960	51.76	PK	V	33.51	4.70	27.26	62.71	74.00	11.29
9920	38.09	PK	V	39.14	8.41	26.70	58.94	74.00	15.06
6352.6	21.24	AV	V	35.58	5.69	26.16	36.34	54.00	17.66
2483.5	27.28	AV	H	31.51	3.80	27.76	34.82	54.00	19.18
6352.6	36.33	PK	V	35.58	5.69	26.16	51.43	74.00	22.57
2483.5	42.58	PK	H	31.51	3.80	27.76	50.12	74.00	23.88
2534.2	34.8	PK	H	31.55	3.83	27.91	42.27	74.00	31.73

Test Mode: Transmitting (EDR-8DPSK)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	40.55	AV	H	31.05	3.90	27.79	47.72	N/A	N/A
2402	91.38	PK	H	31.05	3.90	27.79	98.55	N/A	N/A
2402	42.24	AV	V	31.05	3.90	27.79	49.41	N/A	N/A
2402	92.4	PK	V	31.05	3.90	27.79	99.57	N/A	N/A
9608	21.18	AV	V	38.52	8.75	26.39	42.05	54.00	11.95
323.87	36.14	QP	H	14.60	2.16	21.58	31.32	46.00	14.68
7206	20.59	AV	V	38.67	6.50	26.54	39.22	54.00	14.78
9608	37.66	PK	V	38.52	8.75	26.39	58.53	74.00	15.47
7206	36.82	PK	V	38.67	6.50	26.54	55.45	74.00	18.55
4804	24.11	AV	H	33.17	4.67	27.34	34.61	54.00	19.39
2390	27.07	AV	V	30.98	3.84	27.83	34.07	54.00	19.93
4804	38.9	PK	H	33.17	4.67	27.34	49.40	74.00	24.60
2390	42.28	PK	V	30.98	3.84	27.83	49.28	74.00	24.72
3298.15	35.83	PK	V	31.38	4.60	27.30	44.50	74.00	29.50
Middle Channel: 2441 MHz									
2441	39.64	AV	H	31.27	3.99	27.69	47.21	N/A	N/A
2441	90.28	PK	H	31.27	3.99	27.69	97.85	N/A	N/A
2441	41.03	AV	V	31.27	3.99	27.69	48.60	N/A	N/A
2441	90.35	PK	V	31.27	3.99	27.69	97.92	N/A	N/A
612.3	37.08	QP	H	19.43	3.03	22.27	37.27	46.00	8.73
9764	22.49	AV	V	38.83	8.58	26.54	43.35	54.00	10.65
7323	21.54	AV	V	38.88	6.72	26.67	40.48	54.00	13.52
9764	39.33	PK	V	38.83	8.58	26.54	60.19	74.00	13.81
7323	37.89	PK	V	38.88	6.72	26.67	56.83	74.00	17.17
4882	25.31	AV	H	33.34	4.75	27.04	36.36	54.00	17.64
4882	39.42	PK	H	33.34	4.75	27.04	50.47	74.00	23.53
3481.02	19.46	AV	H	31.67	5.29	27.42	29.00	54.00	25.00
3481.02	34.95	PK	H	31.67	5.29	27.42	44.49	74.00	29.51
2635.1	35.94	PK	H	31.41	4.24	27.57	44.02	74.00	29.98
High Channel: 2480 MHz									
2480	42.36	AV	H	31.49	3.82	27.75	49.92	N/A	N/A
2480	93.68	PK	H	31.49	3.82	27.75	101.24	N/A	N/A
2480	44.86	AV	V	31.49	3.82	27.75	52.42	N/A	N/A
2480	95.97	PK	V	31.49	3.82	27.75	103.53	N/A	N/A
610.58	36.44	QP	H	19.45	3.04	22.27	36.65	46.00	9.35
9920	21.32	AV	V	39.14	8.41	26.70	42.17	54.00	11.83
9920	38.64	PK	V	39.14	8.41	26.70	59.49	74.00	14.51
2483.5	28.97	AV	H	31.51	3.80	27.76	36.51	54.00	17.49
6352.6	20.18	AV	V	35.58	5.69	26.16	35.28	54.00	18.72
4960	23.85	AV	V	33.51	4.70	27.26	34.80	54.00	19.20
2483.5	44.52	PK	H	31.51	3.80	27.76	52.06	74.00	21.94
6352.6	35.98	PK	V	35.58	5.69	26.16	51.08	74.00	22.92
4960	38.16	PK	V	33.51	4.70	27.26	49.11	74.00	24.89
2534.2	33.64	PK	H	31.55	3.83	27.91	41.11	74.00	32.89

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Ares Liu on 2012-07-17.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
<i>BDR Mode (GFSK)</i>	Low	2402	1.028	0.848	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.851	Pass
	Adjacent	2442			
	High	2480	1.000	0.851	Pass
	Adjacent	2479			
<i>EDR Mode ($\pi/4$-DQPSK)</i>	Low	2402	1.016	0.848	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.851	Pass
	Adjacent	2442			
	High	2480	1.004	0.851	Pass
	Adjacent	2479			
<i>EDR Mode (8DPSK)</i>	Low	2402	1.004	0.848	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.851	Pass
	Adjacent	2442			
	High	2480	1.008	0.851	Pass
	Adjacent	2479			

BDR - Low Channel

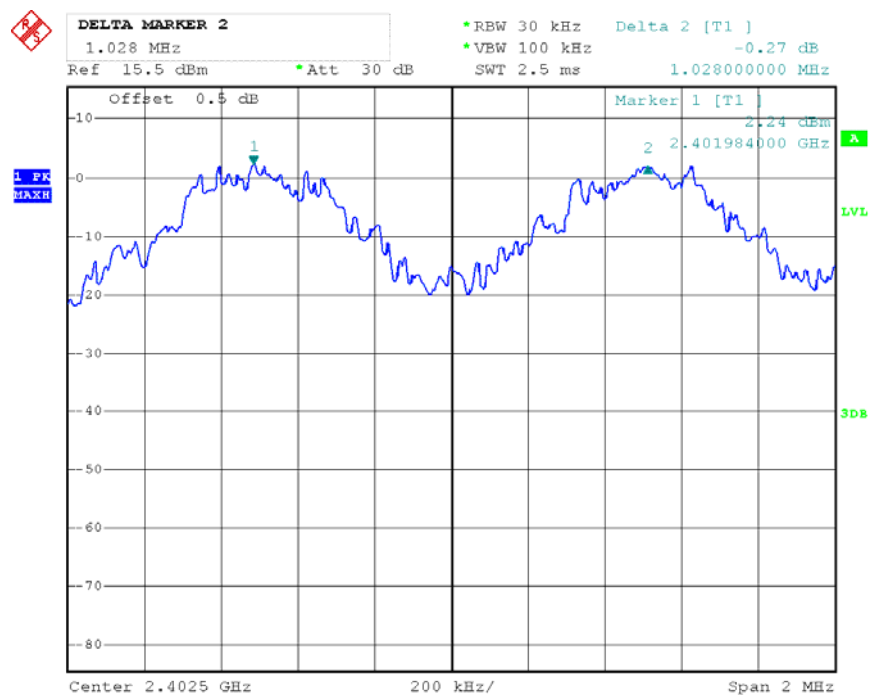


Date: 17.JUL.2012 12:06:04

BDR - Middle Channel

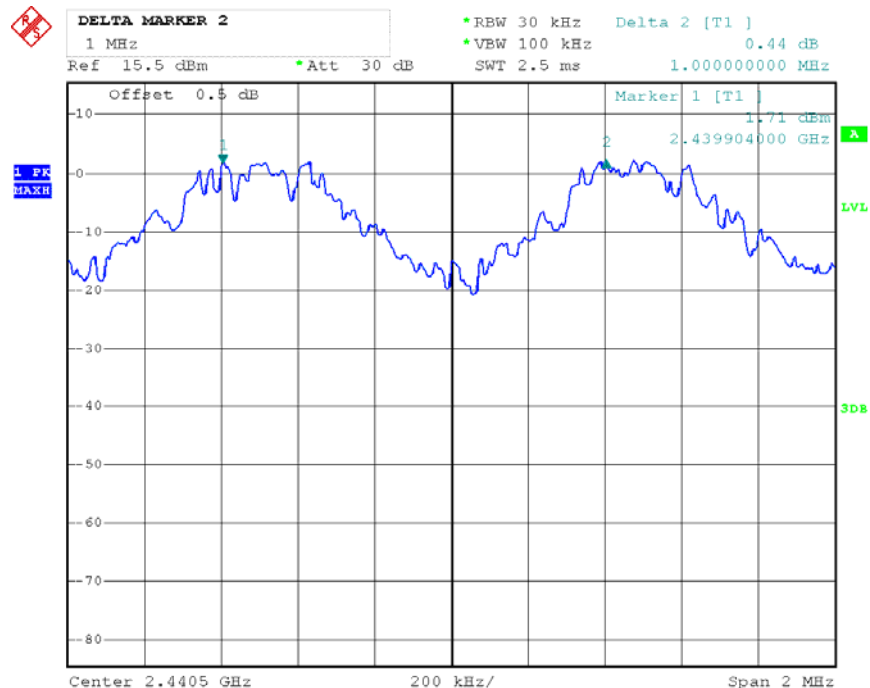


Date: 17.JUL.2012 12:08:34

BDR - High Channel

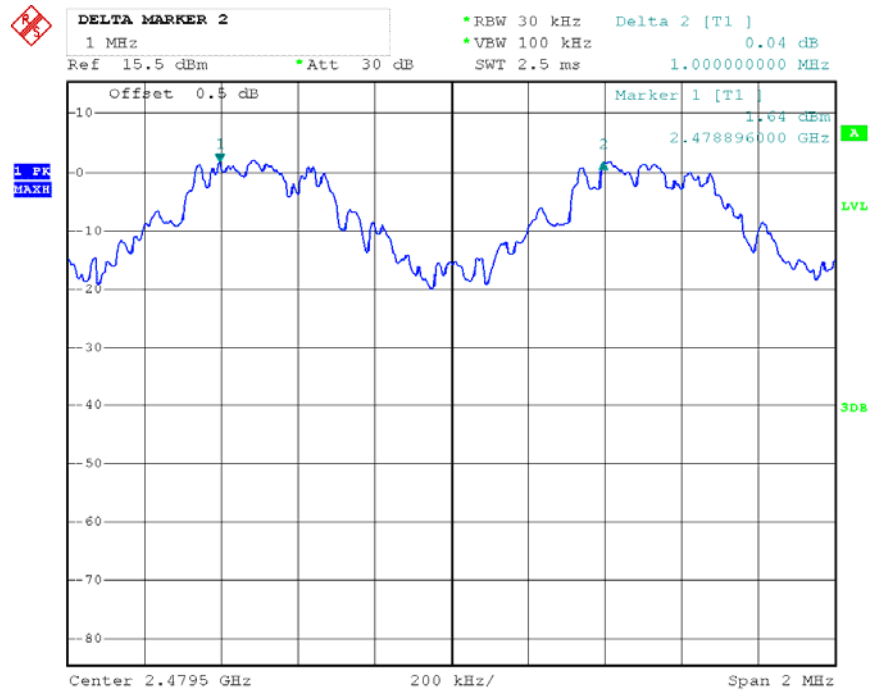


Date: 17.JUL.2012 12:10:39


EDR ($\pi/4$ -DQPSK) - Low Channel

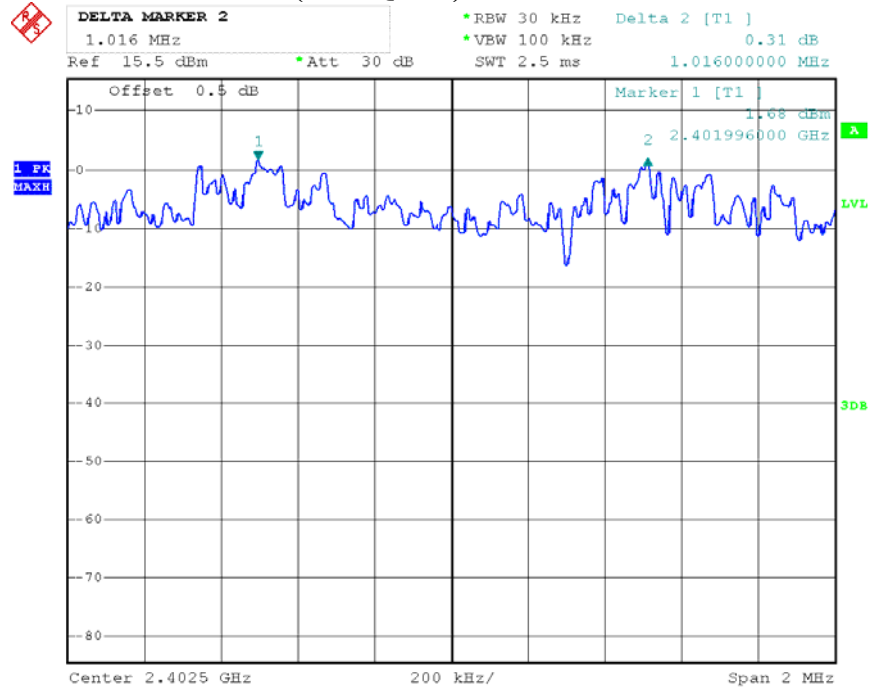

Date: 17.JUL.2012 12:21:30

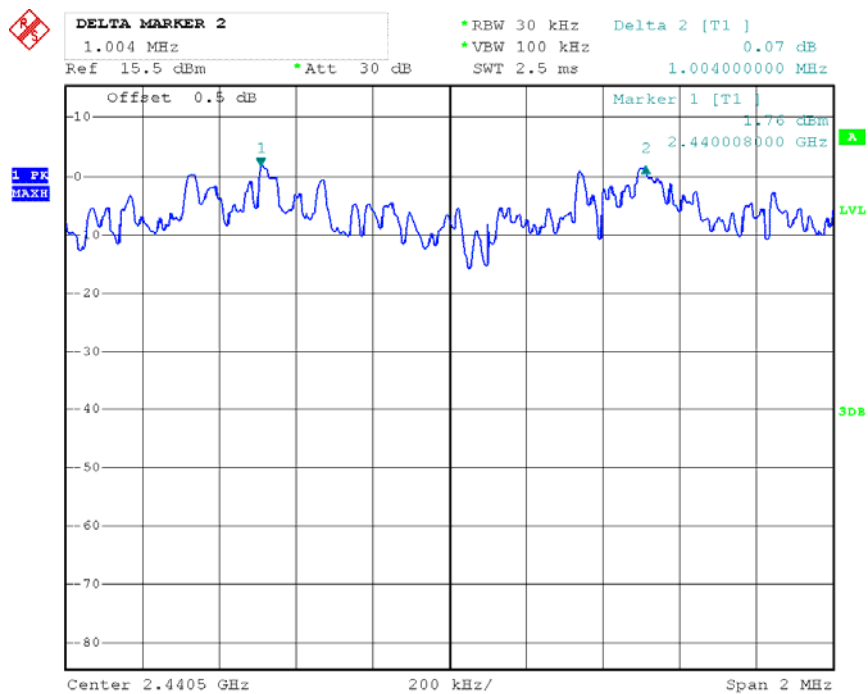
EDR ($\pi/4$ -DQPSK) - Middle Channel

Date: 17.JUL.2012 12:22:22

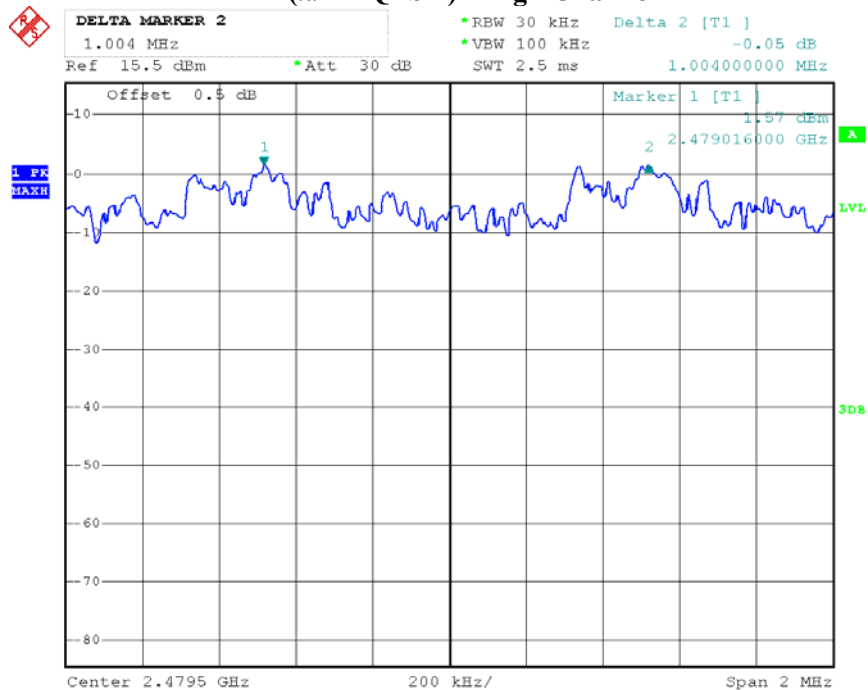EDR ($\pi/4$ -DQPSK) - High Channel


Date: 17.JUL.2012 12:24:36

EDR (8DPSK) - Low Channel

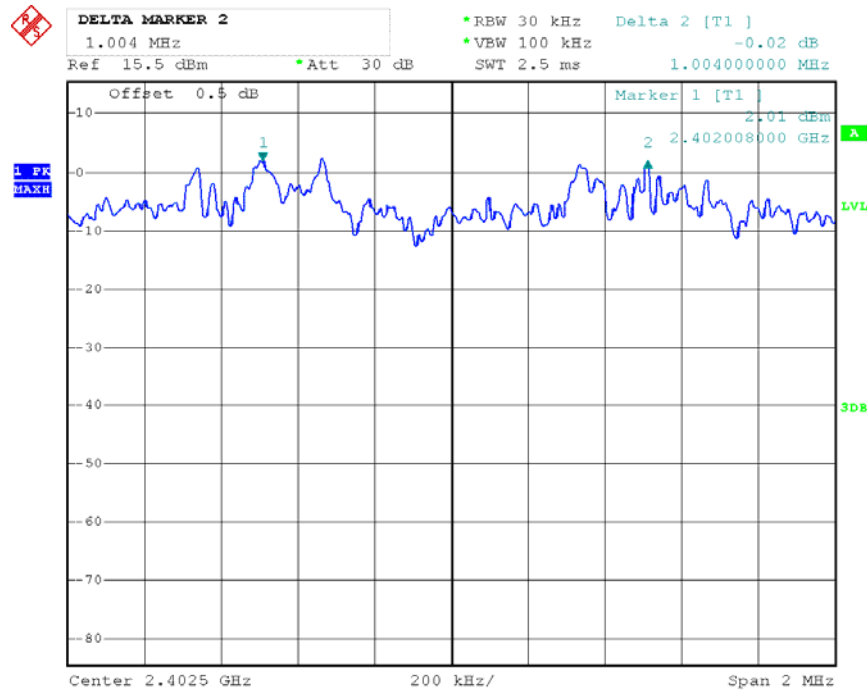


Date: 17.JUL.2012 12:33:34

EDR (8DPSK) - Middle Channel

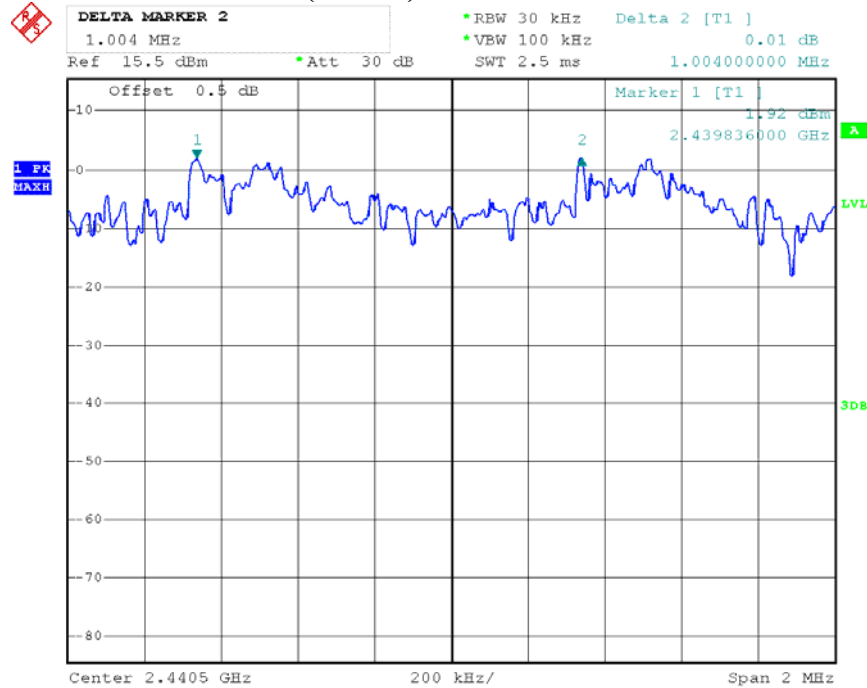

Date: 17.JUL.2012 12:31:32

EDR (8DPSK) - High Channel

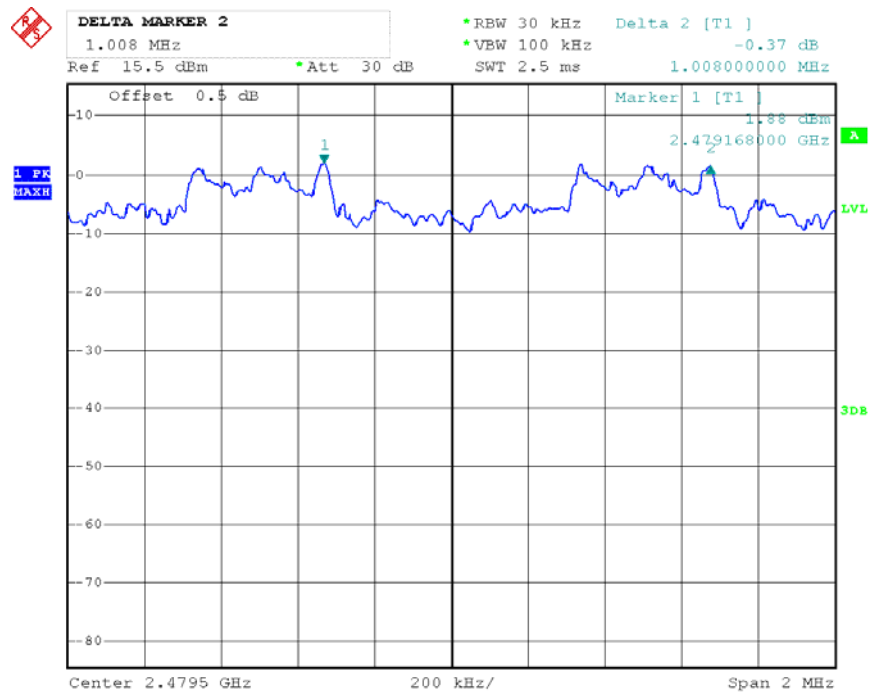

Date: 17.JUL.2012 12:30:28

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Ares Liu on 2012-07-17.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.872
	Middle	2441	0.996
	High	2480	0.988
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.244
	Middle	2441	1.304
	High	2480	1.312
EDR Mode (8DPSK)	Low	2402	1.248
	Middle	2441	1.264
	High	2480	1.264

Please refer to the following plots.

BDR - Low Channel

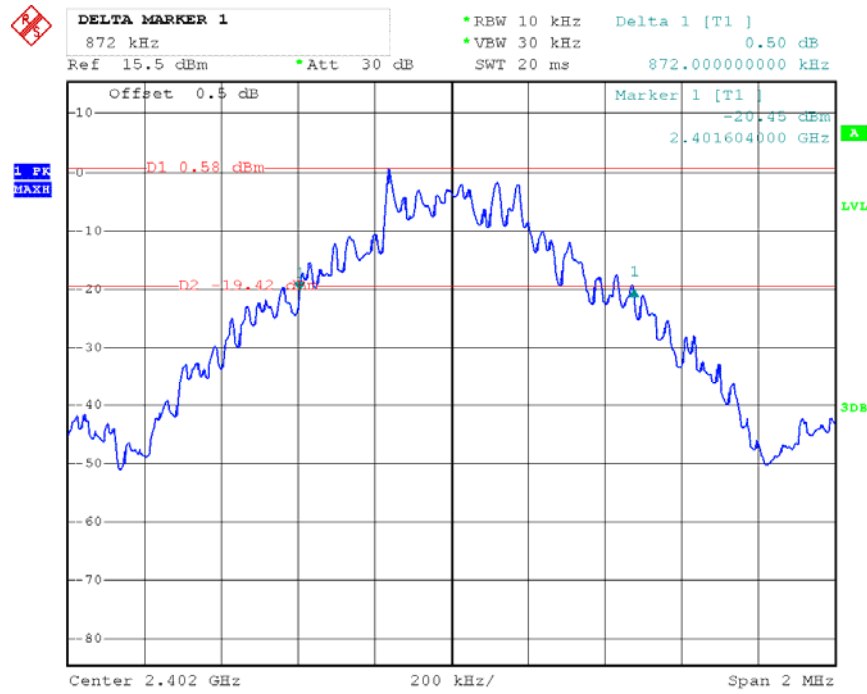

Date: 17.JUL.2012 11:27:44


BDR - Middle Channel




Date: 17.JUL.2012 11:24:49

BDR - High Channel


Date: 17.JUL.2012 11:18:25

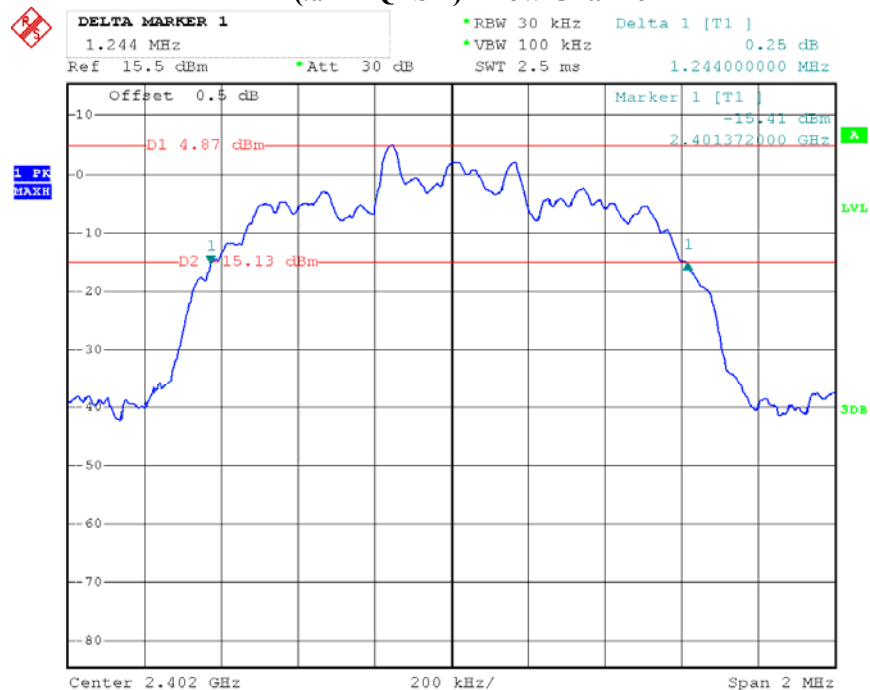EDR ($\pi/4$ -DQPSK) - Low Channel

Date: 17.JUL.2012 11:33:49

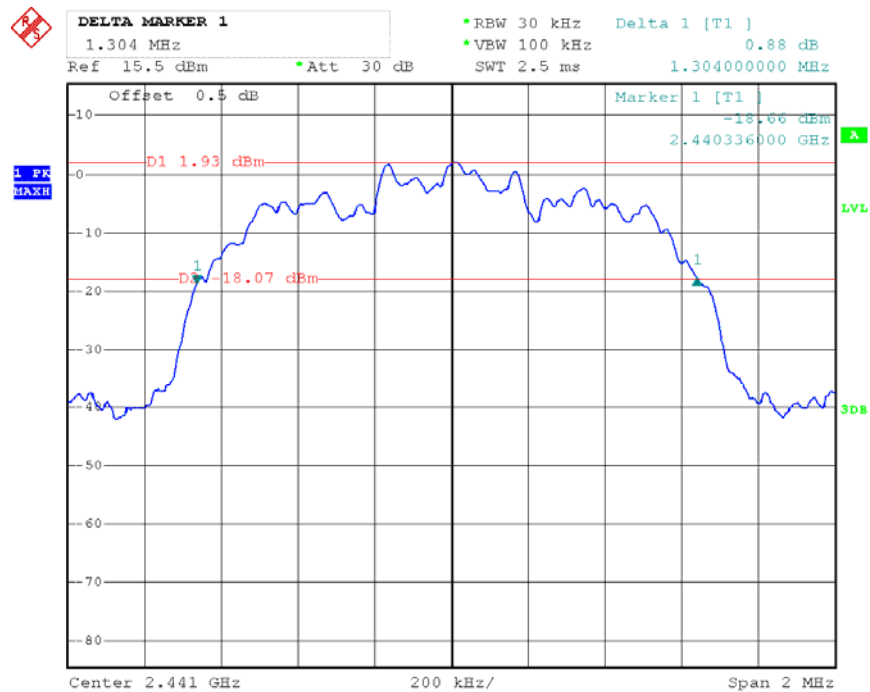
EDR ($\pi/4$ -DQPSK) - Middle Channel

Date: 17.JUL.2012 11:38:54

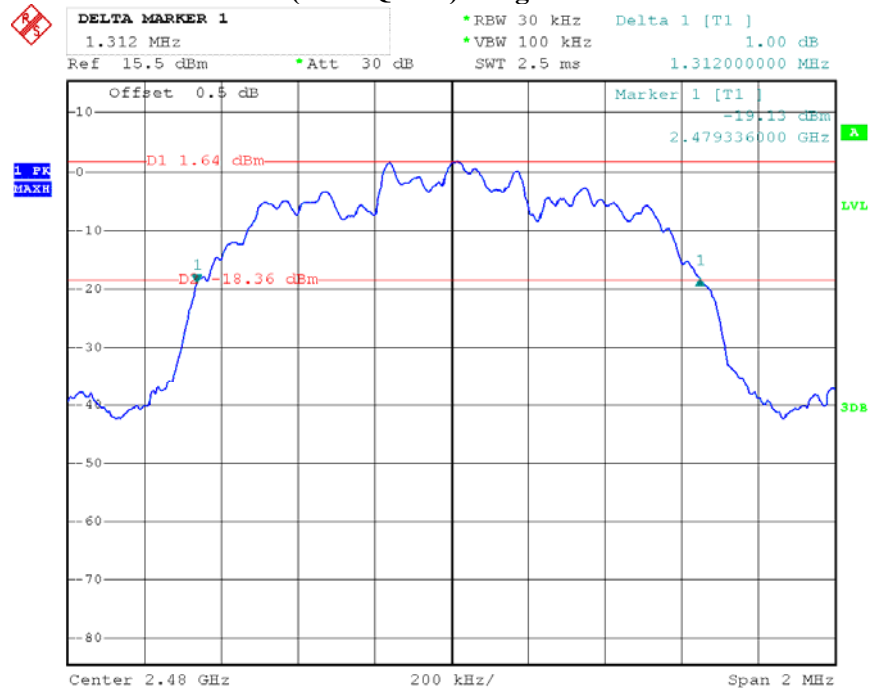EDR ($\pi/4$ -DQPSK) - High Channel


Date: 17.JUL.2012 11:40:06

EDR (8DPSK) - Low Channel

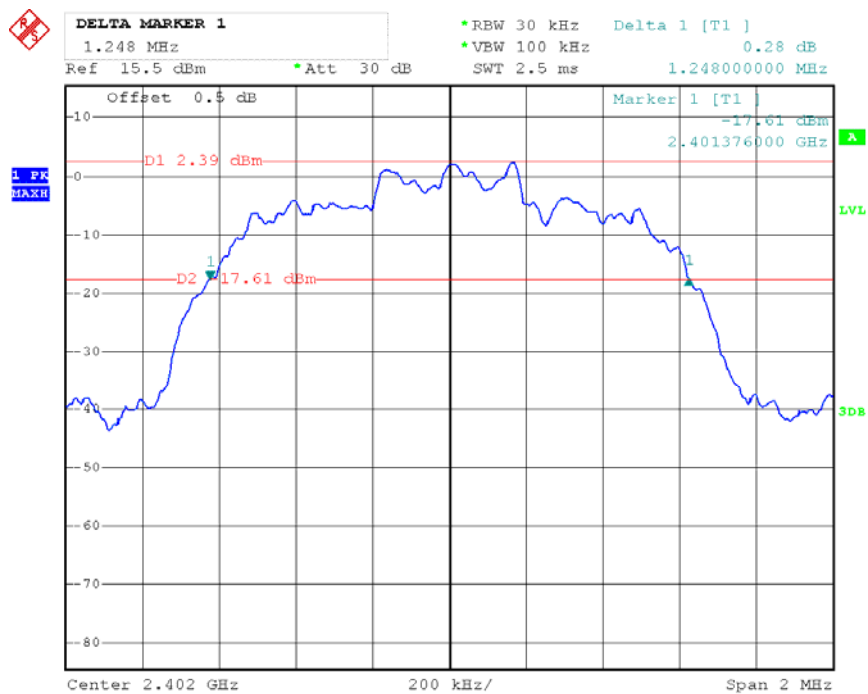


Date: 17.JUL.2012 11:59:48

EDR (8DPSK) - Middle Channel

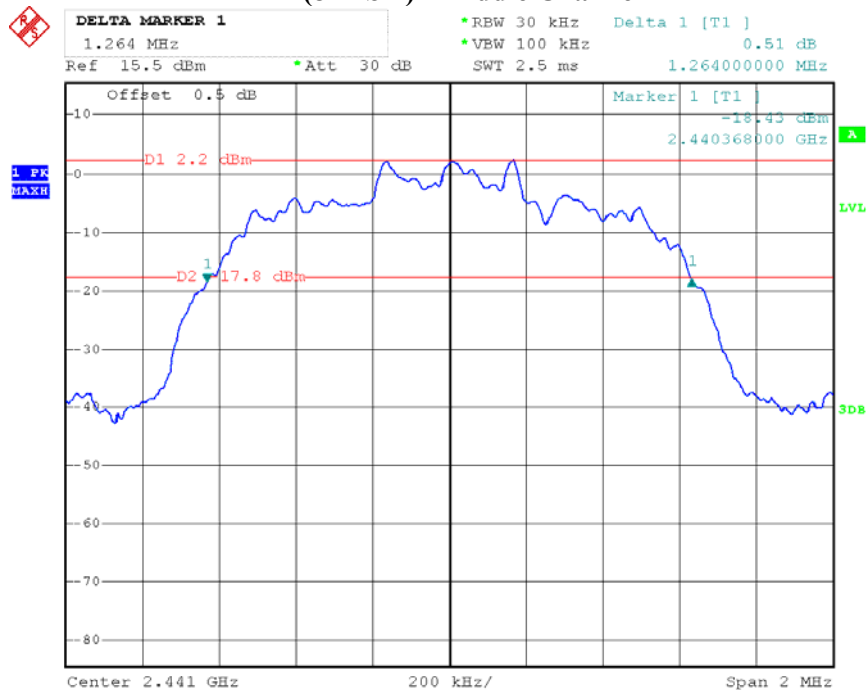

Date: 17.JUL.2012 11:58:19

EDR (8DPSK) - High Channel

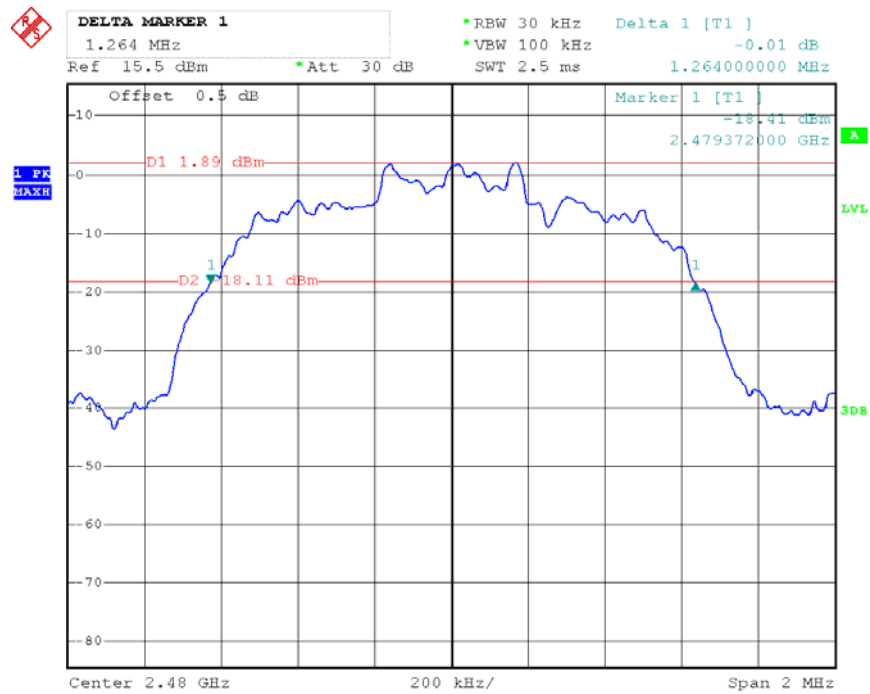

Date: 17.JUL.2012 11:45:09

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa


The testing was performed by Ares Liu on 2012-07-17.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting (BDR & EDR)

Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
BDR	2400-2483.50	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.50	79	≥ 15
EDR (8DPSK)	2400-2483.50	79	≥ 15

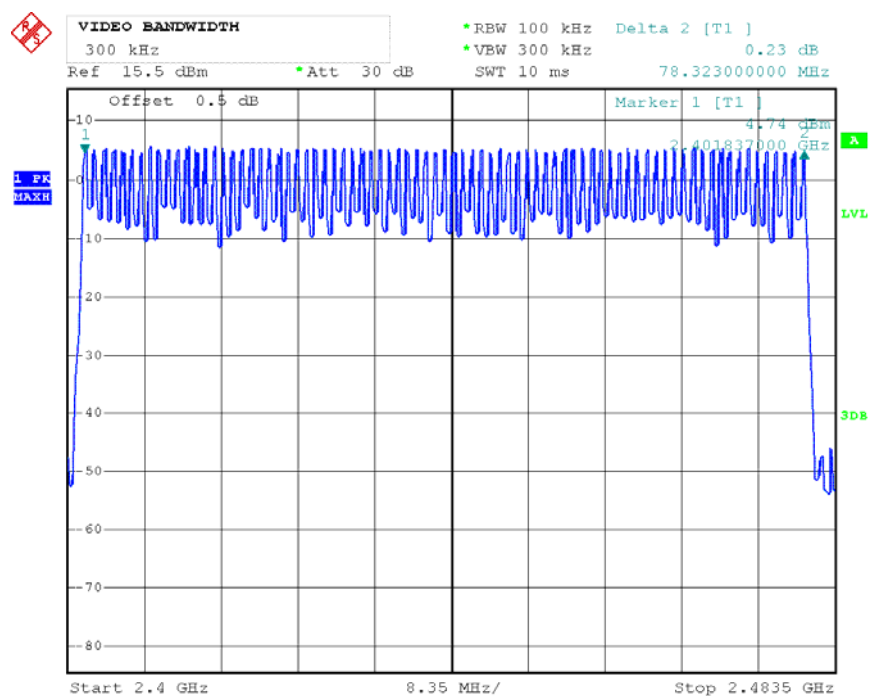BDR - Number of Hopping Channels


Date: 17.JUL.2012 12:17:25

EDR ($\pi/4$ -DQPSK) - Number of Hopping Channels

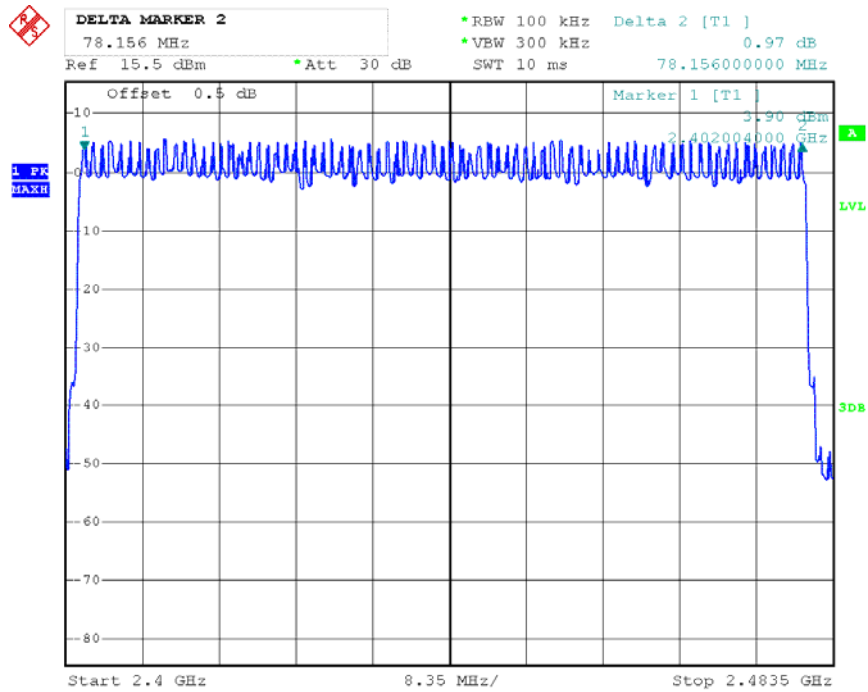

Date: 17.JUL.2012 12:19:57

EDR (8DPSK) - Number of Hopping Channels

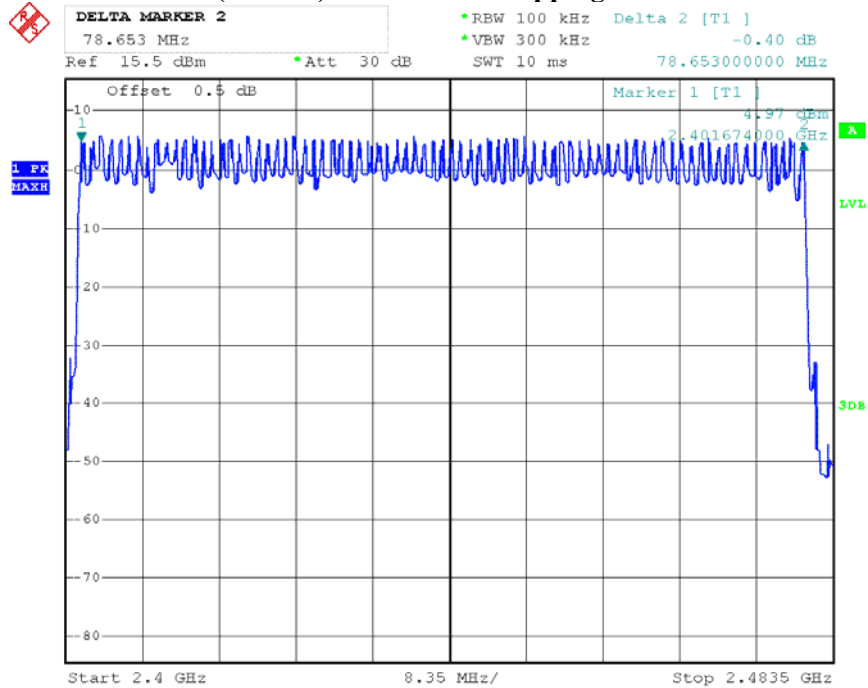

Date: 17.JUL.2012 12:35:34

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ 26	8386001028	2011-11-24	2012-12-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shezneh) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa


* The testing was performed by Ares Liu on 2012-07-17.

Test Result: Compliance.

Please refer to following tables and plots


DH1:*Test Mode: Transmitting*

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR Mode (GFSK)	Low	0.461	0.148	0.4	Pass
	Middle	0.471	0.151	0.4	Pass
	High	0.476	0.152	0.4	Pass
	Note: Dwell time = Pulse time*(1600/2/79)*31.6S				
EDR Mode ($\pi/4$ -DQPSK)	Low	0.466	0.149	0.4	Pass
	Middle	0.476	0.152	0.4	Pass
	High	0.476	0.152	0.4	Pass
	Note: Dwell time = Pulse time*(1600/2/79)*31.6S				
EDR Mode (8DPSK)	Low	0.475	0.152	0.4	Pass
	Middle	0.465	0.149	0.4	Pass
	High	0.465	0.149	0.4	Pass
	Note: Dwell time = Pulse time*(1600/2/79)*31.6S				

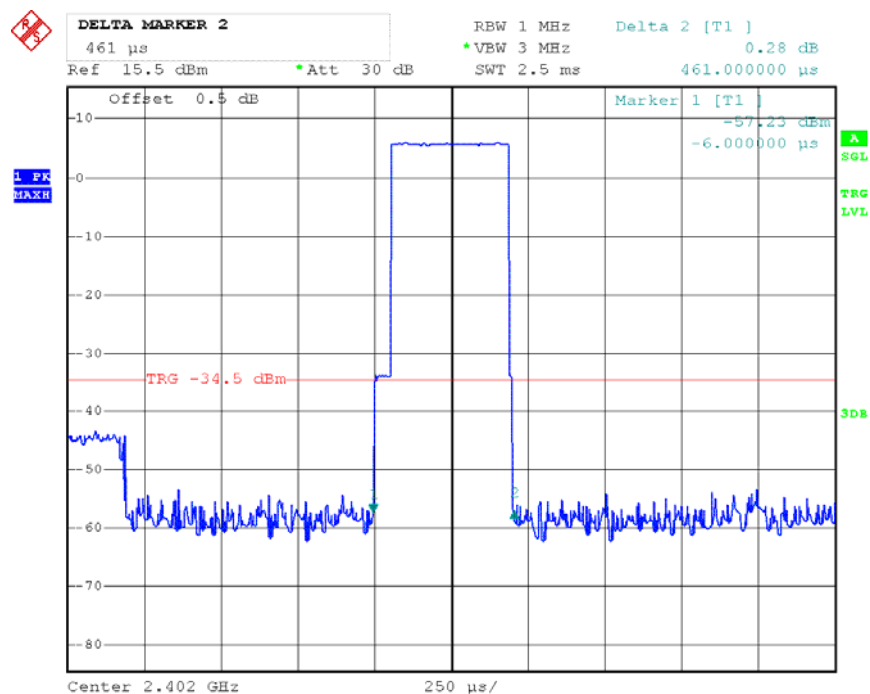BDR - Low Channel


Date: 17.JUL.2012 12:48:26

BDR - Middle Channel

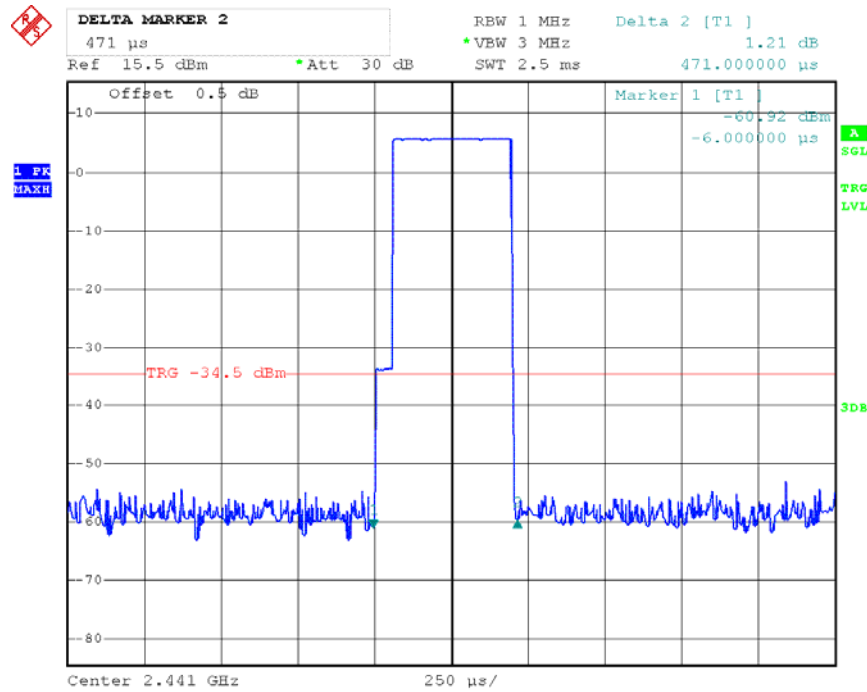


Date: 17.JUL.2012 12:48:49


BDR - High Channel

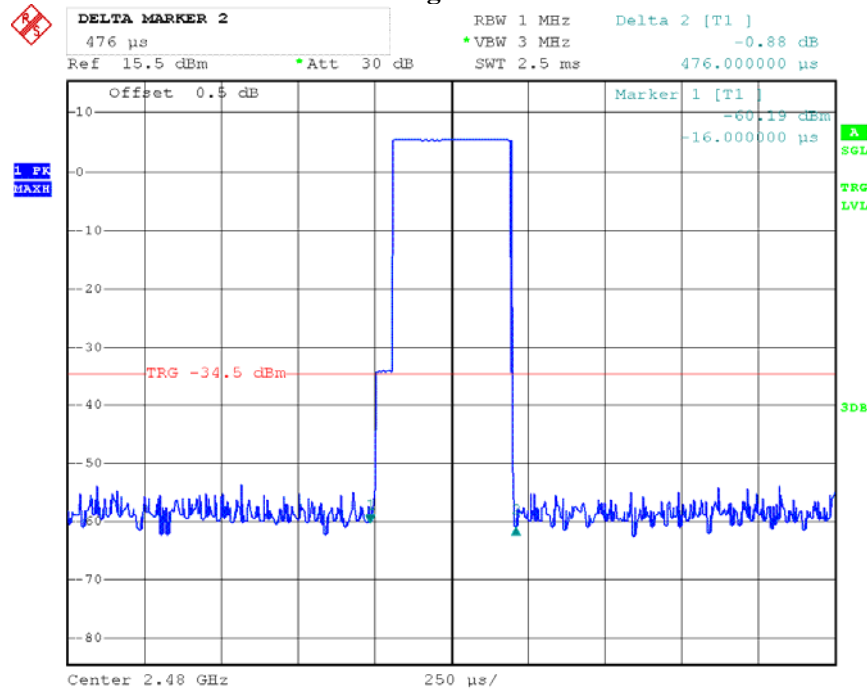


Date: 17.JUL.2012 12:49:08

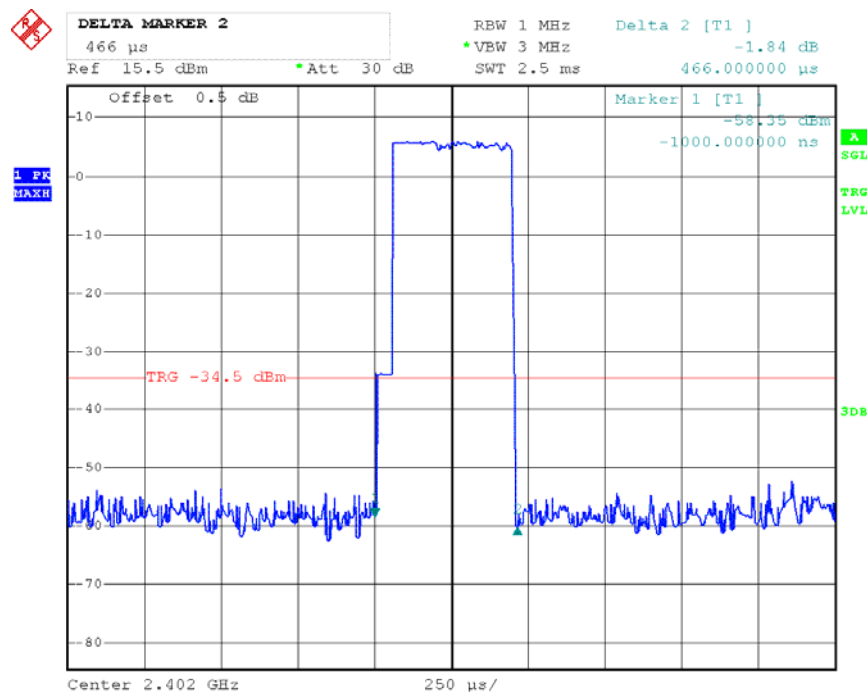EDR ($\pi/4$ -DQPSK) - Low Channel


Date: 17.JUL.2012 12:47:24

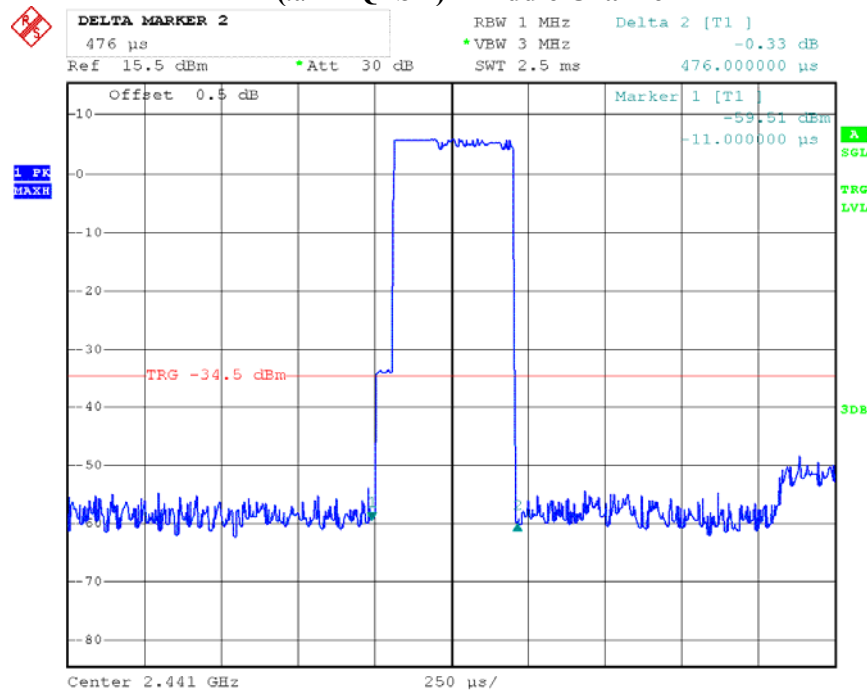EDR ($\pi/4$ -DQPSK) - Middle Channel

Date: 17.JUL.2012 12:47:04

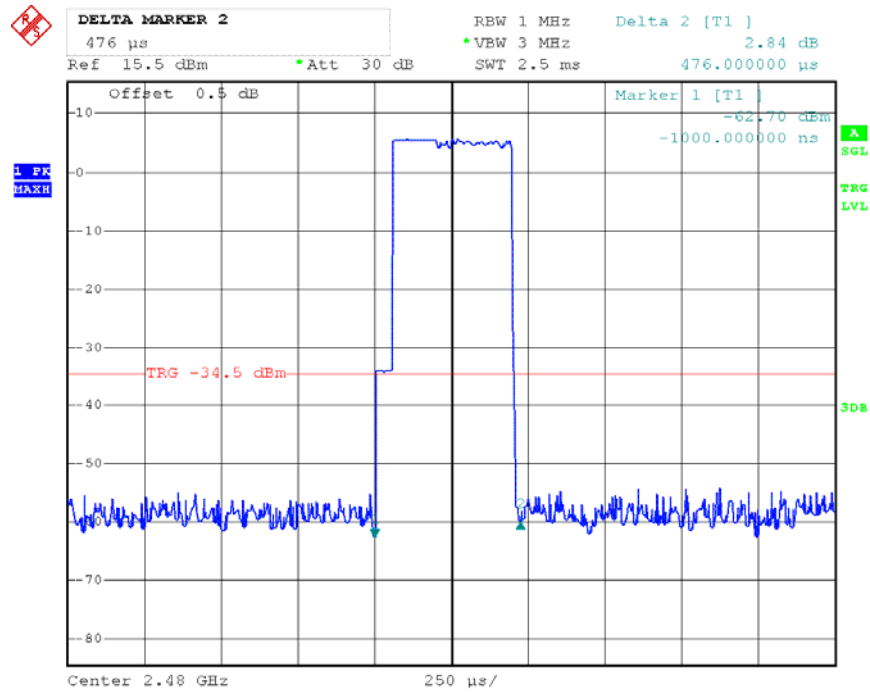
EDR ($\pi/4$ -DQPSK) - High Channel

Date: 17.JUL.2012 12:46:28

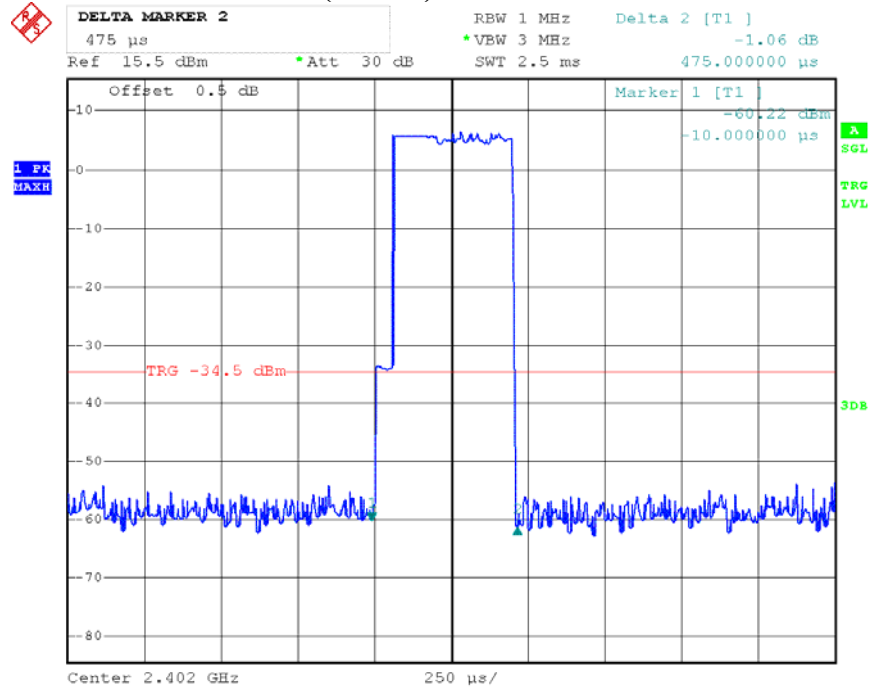EDR (8DPSK) - Low Channel


Date: 17.JUL.2012 12:37:16

EDR (8DPSK) - Middle Channel

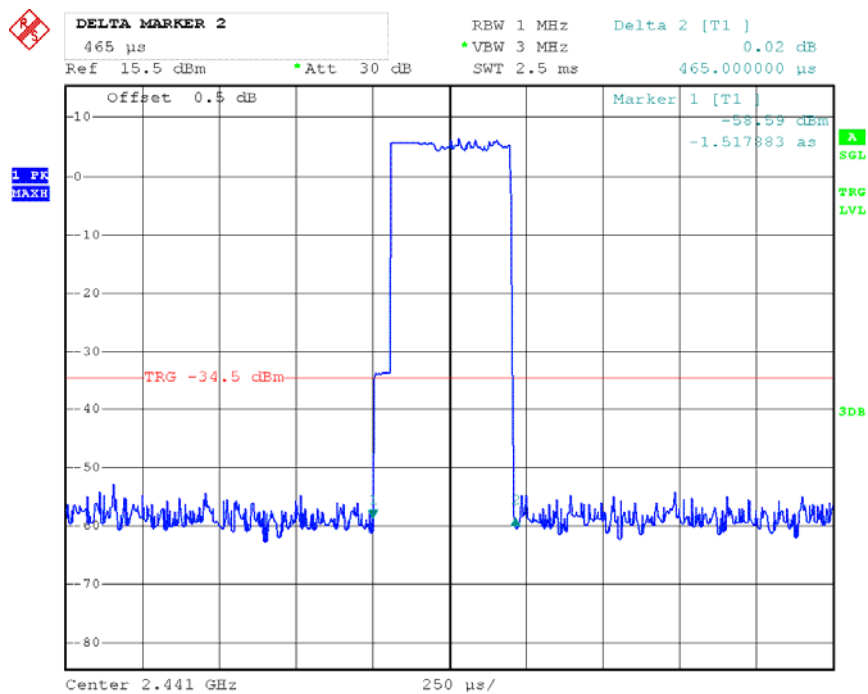

Date: 17.JUL.2012 12:37:34


EDR (8DPSK) - High Channel

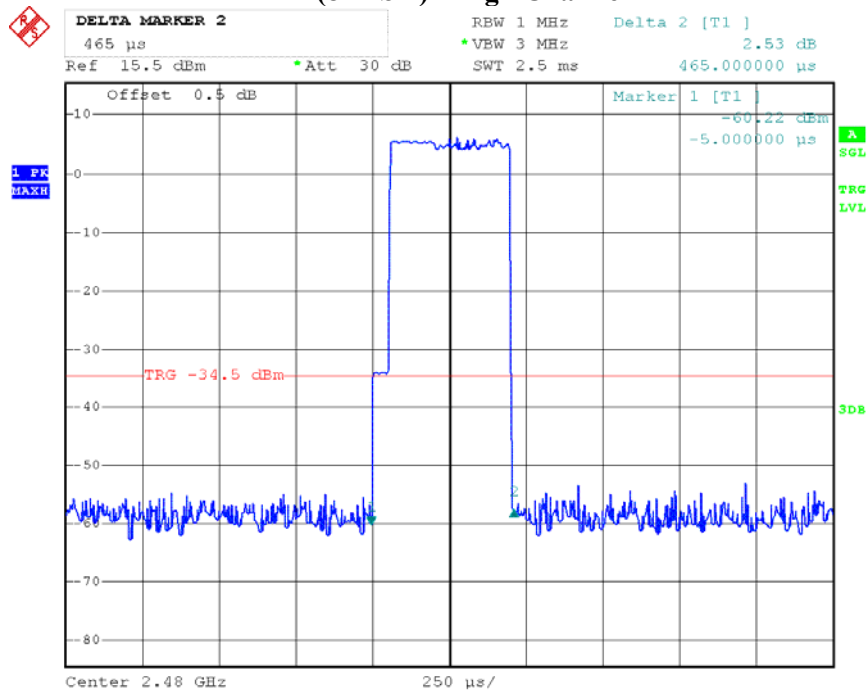

Date: 17.JUL.2012 12:37:55


DH3:*Test Mode: Transmitting*

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR Mode (GFSK)	Low	1.746	0.279	0.4	Pass
	Middle	1.726	0.276	0.4	Pass
	High	1.716	0.275	0.4	Pass
	<i>Note: Dwell time = Pulse time*(1600/4/79)*31.6S</i>				
EDR Mode ($\pi/4$ -DQPSK)	Low	1.738	0.278	0.4	Pass
	Middle	1.726	0.276	0.4	Pass
	High	1.736	0.278	0.4	Pass
	<i>Note: Dwell time = Pulse time*(1600/4/79)*31.6S</i>				
EDR Mode (8DPSK)	Low	1.725	0.276	0.4	Pass
	Middle	1.725	0.276	0.4	Pass
	High	1.725	0.276	0.4	Pass
	<i>Note: Dwell time = Pulse time*(1600/4/79)*31.6S</i>				

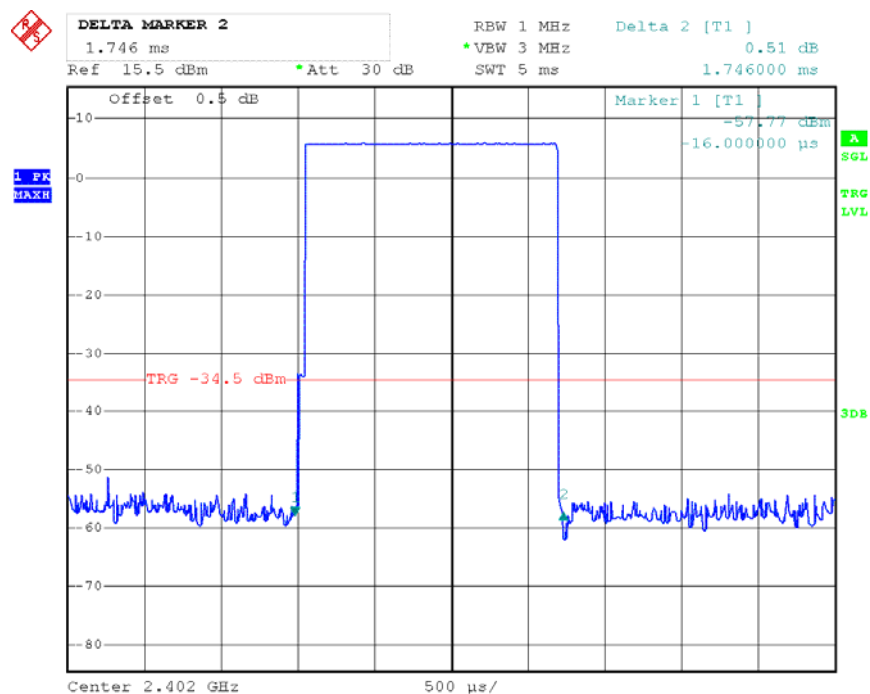BDR - Low Channel


Date: 17.JUL.2012 12:50:46

BDR - Middle Channel

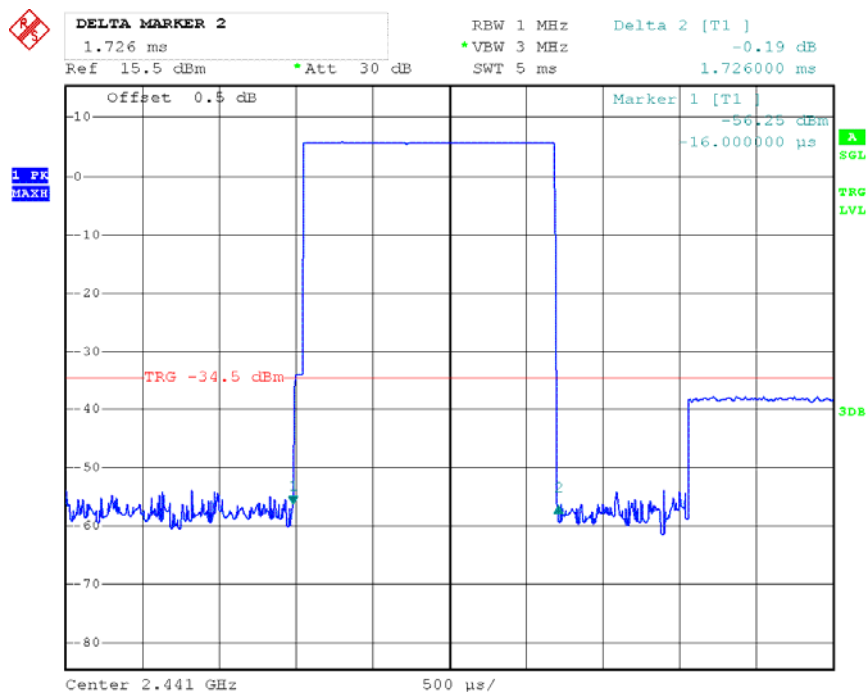


Date: 17.JUL.2012 12:50:23


BDR - High Channel

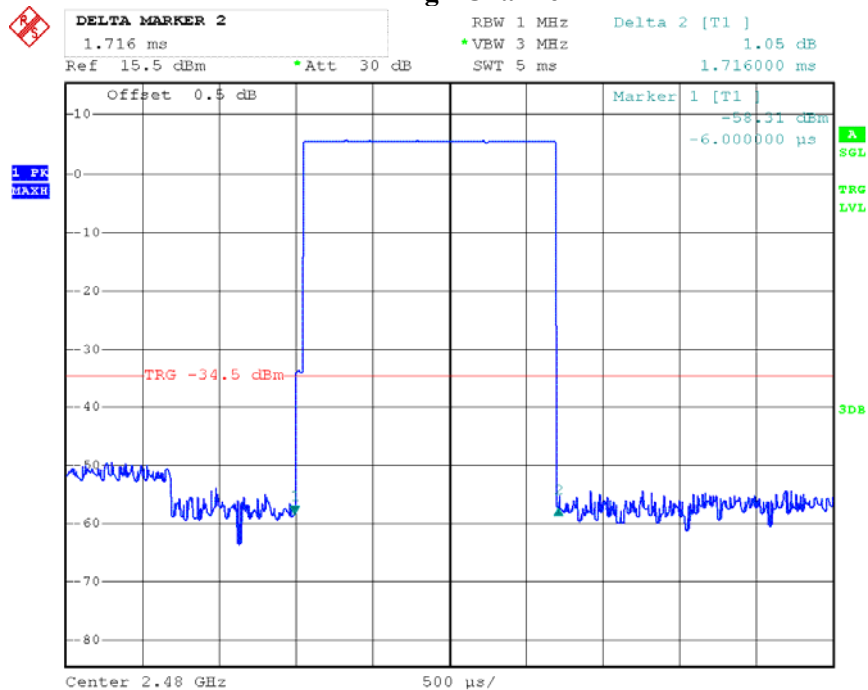


Date: 17.JUL.2012 12:50:00

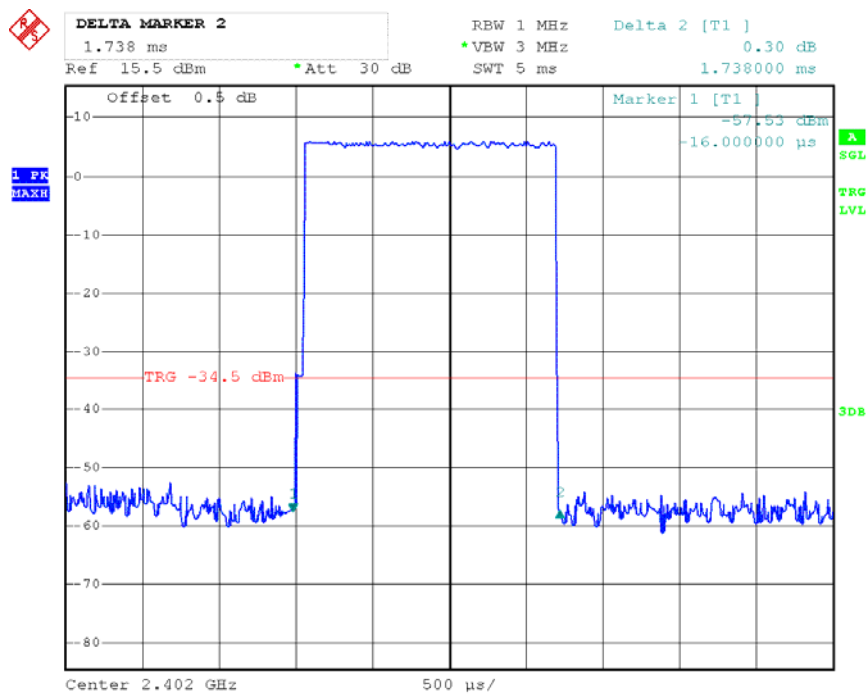EDR ($\pi/4$ -DQPSK) - Low Channel

Date: 17.JUL.2012 12:44:08

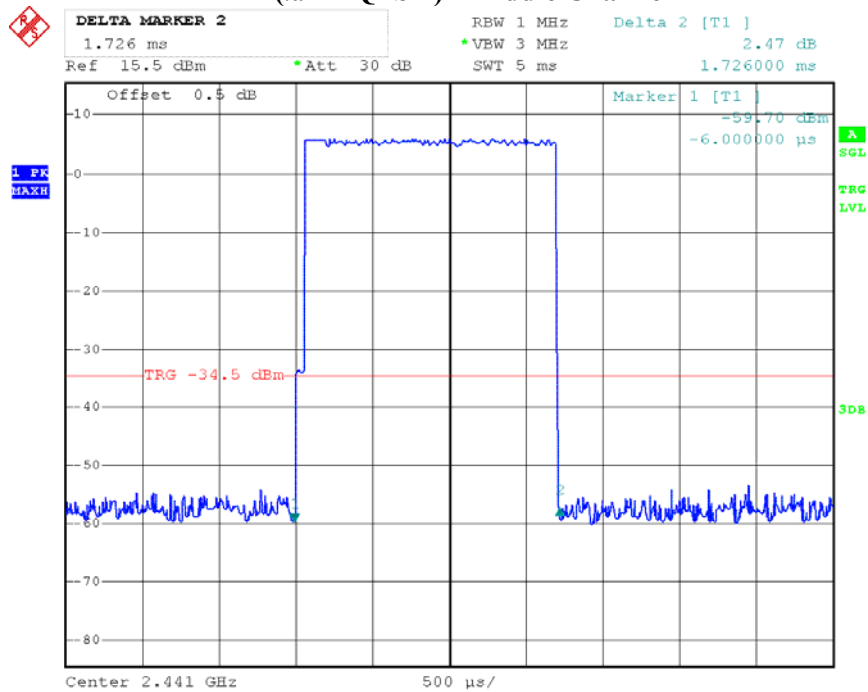
EDR ($\pi/4$ -DQPSK) - Middle Channel

Date: 17.JUL.2012 12:44:37

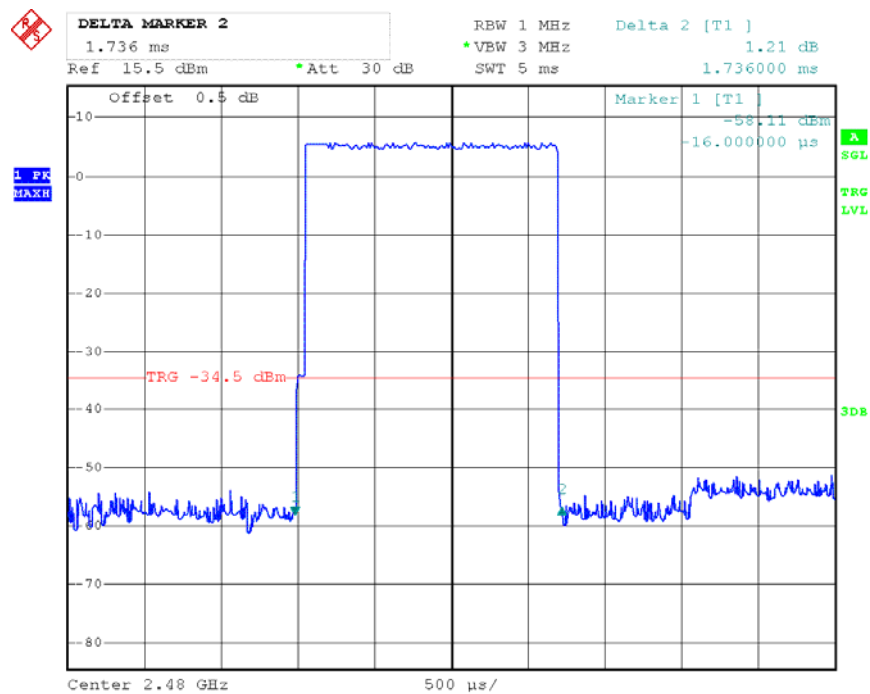EDR ($\pi/4$ -DQPSK) - High Channel


Date: 17.JUL.2012 12:45:28

EDR (8DPSK) - Low Channel

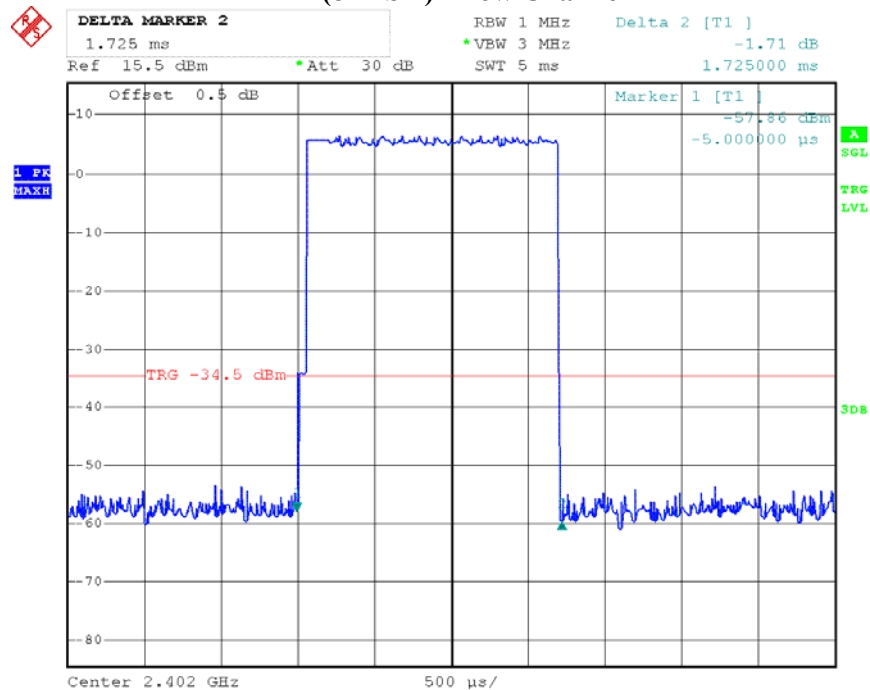


Date: 17.JUL.2012 12:39:33

EDR (8DPSK) - Middle Channel

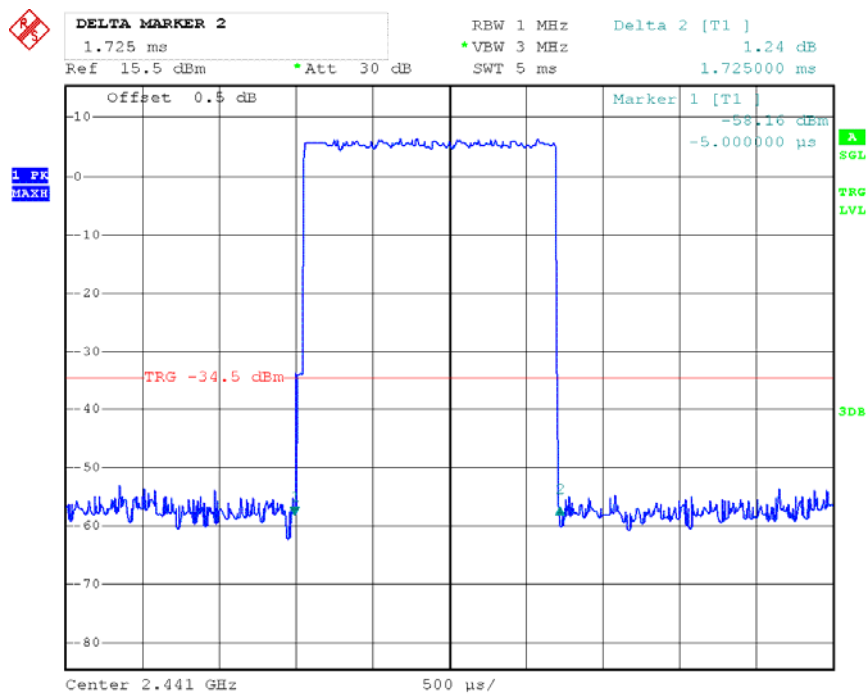

Date: 17.JUL.2012 12:39:18


EDR (8DPSK) - High Channel

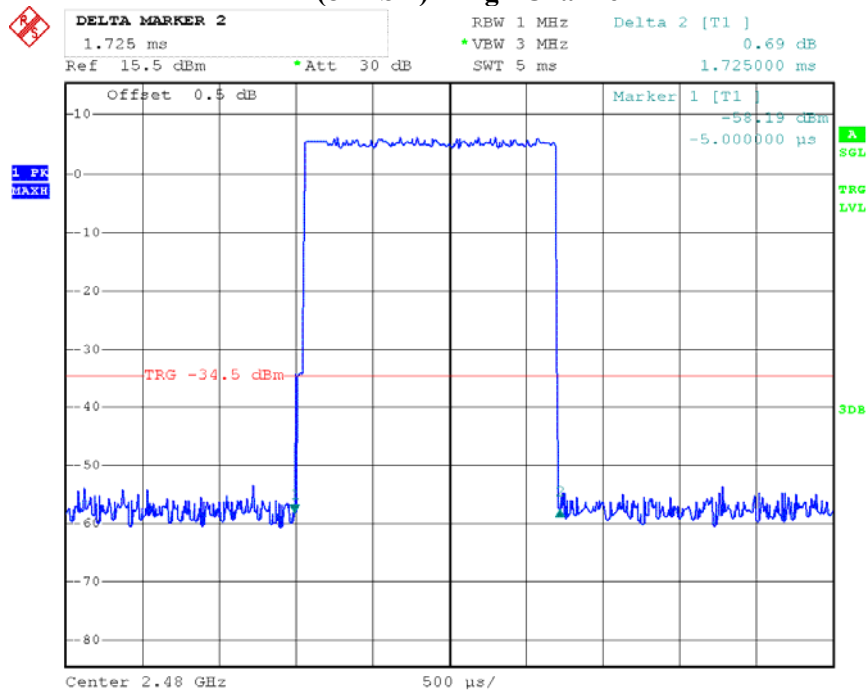


Date: 17.JUL.2012 12:39:04

DH5:*Test Mode: Transmitting*


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR Mode (GFSK)	Low	2.994	0.319	0.4	Pass
	Middle	3.010	0.321	0.4	Pass
	High	2.994	0.319	0.4	Pass
	Note: Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR Mode ($\pi/4$ -DQPSK)	Low	3.008	0.321	0.4	Pass
	Middle	3.024	0.323	0.4	Pass
	High	2.992	0.319	0.4	Pass
	Note: Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR Mode (8DPSK)	Low	2.989	0.319	0.4	Pass
	Middle	2.989	0.319	0.4	Pass
	High	3.008	0.321	0.4	Pass
	Note: Dwell time = Pulse time*(1600/6/79)*31.6S				

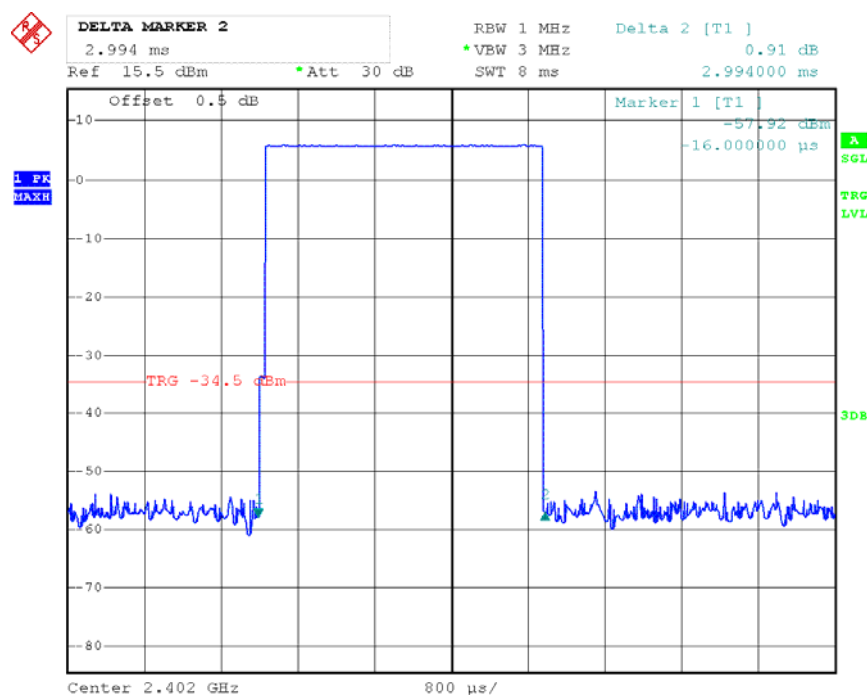BDR - Low Channel


Date: 17.JUL.2012 12:51:58

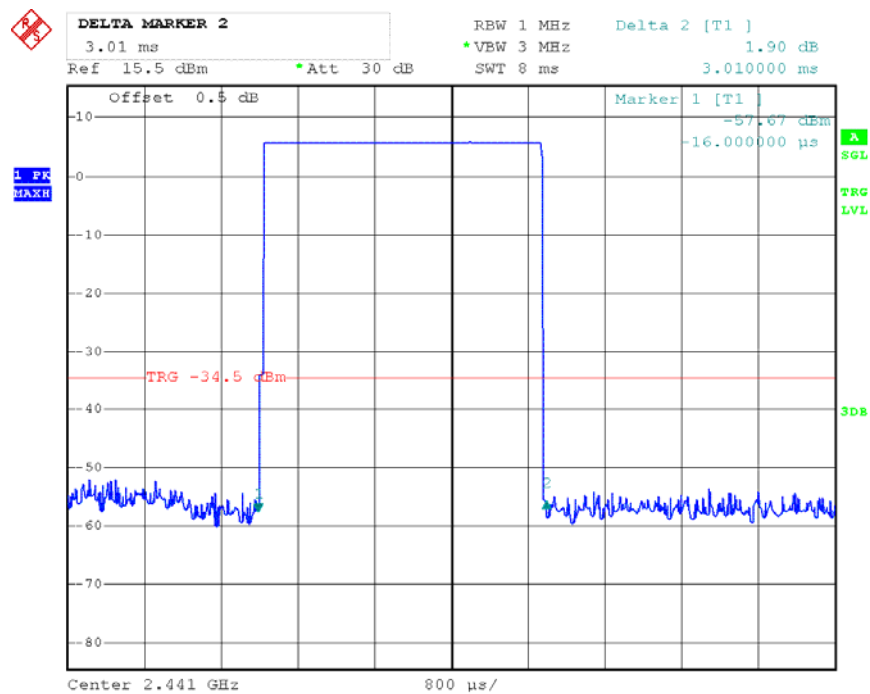BDR - Middle Channel


Date: 17.JUL.2012 12:52:29

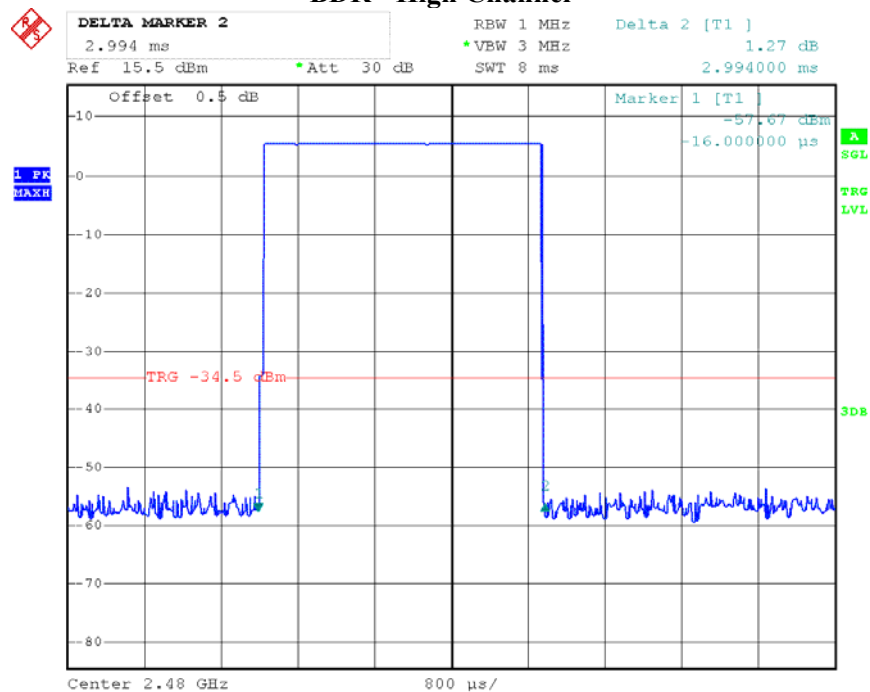BDR - High Channel


Date: 17.JUL.2012 12:52:51

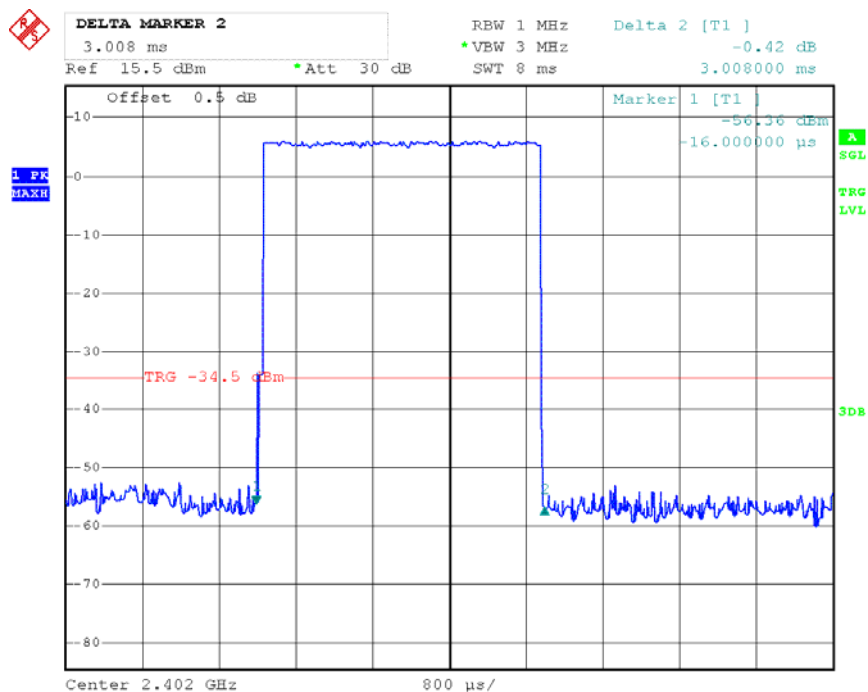EDR ($\pi/4$ -DQPSK) - Low Channel

Date: 17.JUL.2012 12:43:17

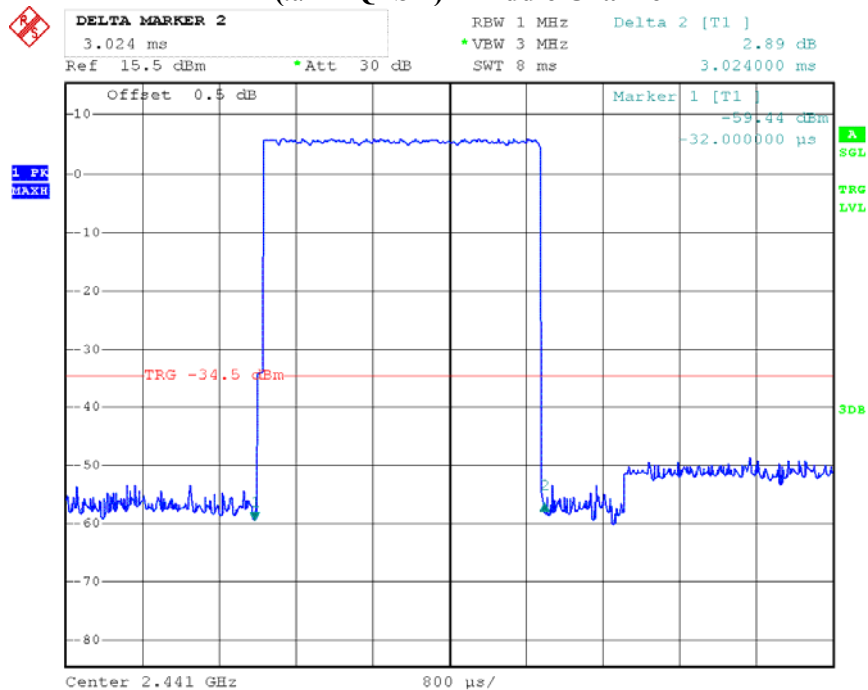
EDR ($\pi/4$ -DQPSK) - Middle Channel

Date: 17.JUL.2012 12:43:02

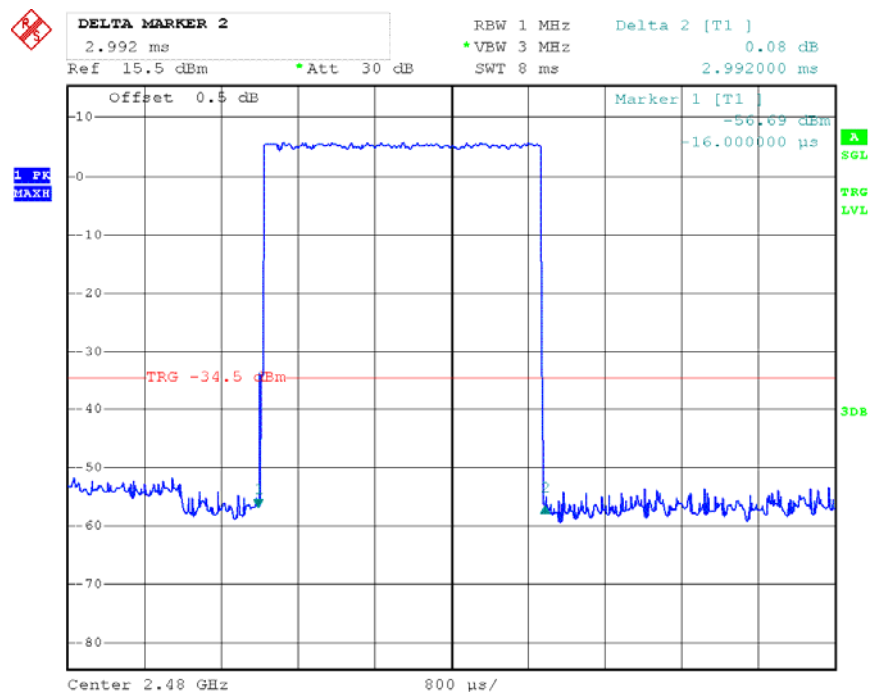EDR ($\pi/4$ -DQPSK) - High Channel


Date: 17.JUL.2012 12:42:38

EDR (8DPSK) - Low Channel

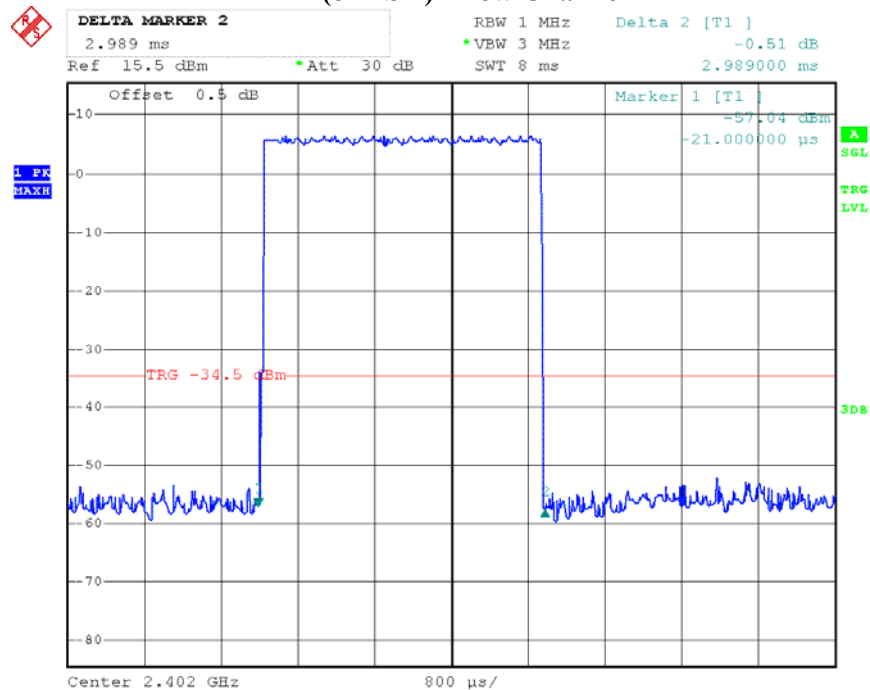


Date: 17.JUL.2012 12:40:35

EDR (8DPSK) - Middle Channel

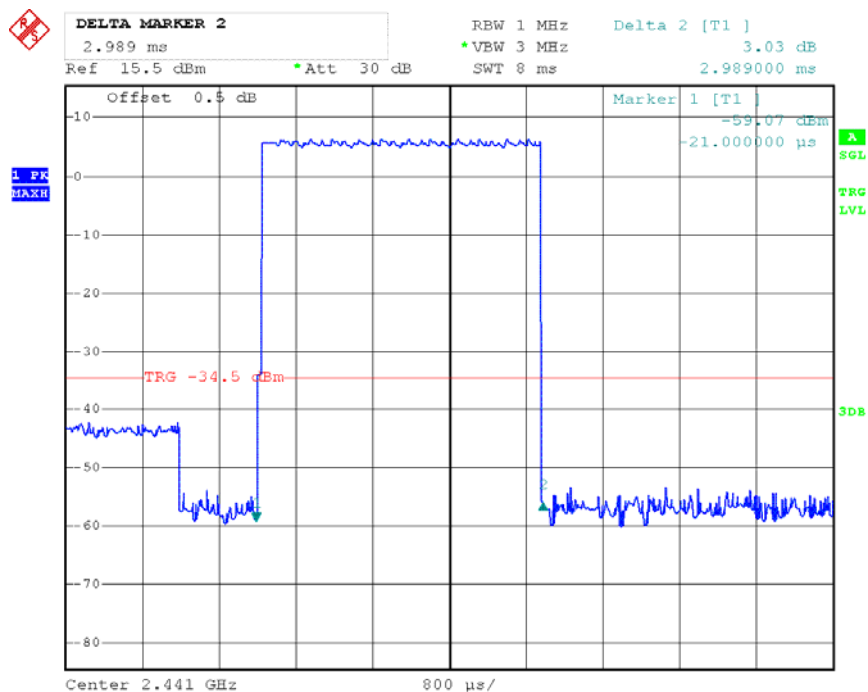

Date: 17.JUL.2012 12:40:49

EDR (8DPSK) - High Channel

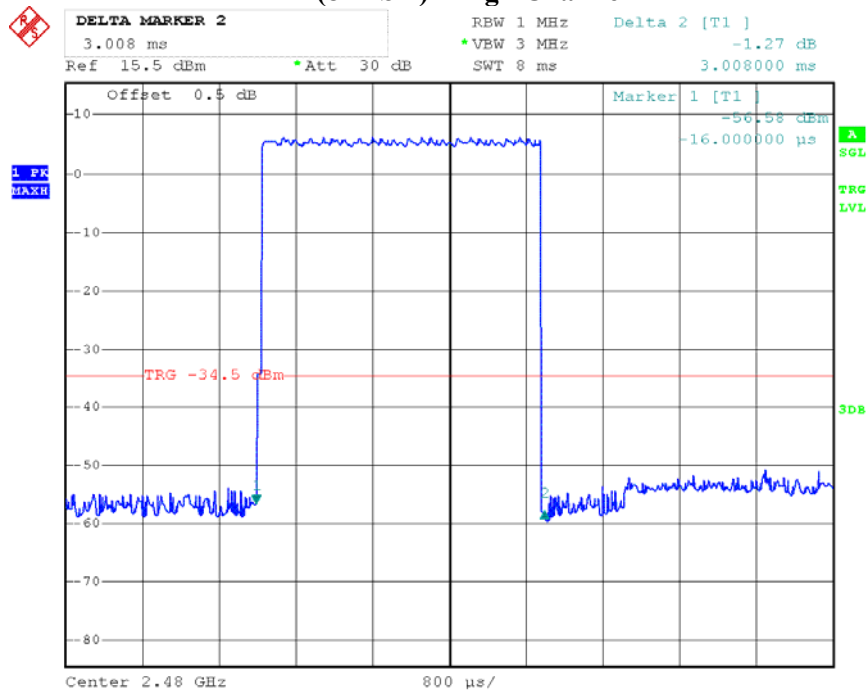

Date: 17.JUL.2012 12:41:32


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	100.8kPa


* The testing was performed by Ares Liu on 2012-07-17.

Test Result: Compliance.

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	5.94	30
	Middle	2441	5.88	30
	High	2480	5.81	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	6.8	30
	Middle	2441	6.61	30
	High	2480	6.31	30
EDR Mode (8DPSK)	Low	2402	7.03	30
	Middle	2441	7.09	30
	High	2480	6.84	30

Note: The data above was tested in conducted mode.

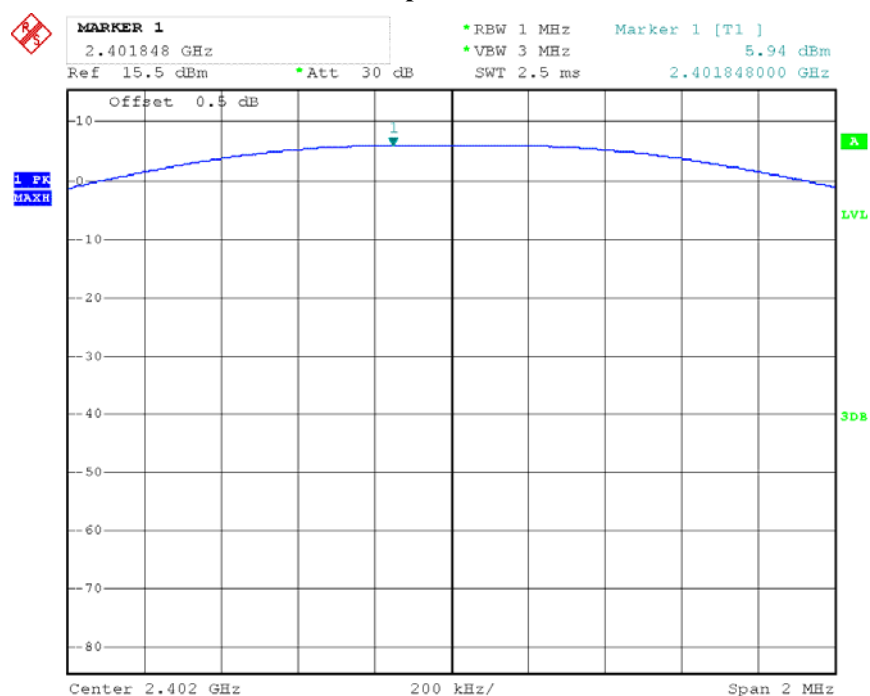BDR: Output Power, Low


Date: 17.JUL.2012 11:26:16

BDR: Output Power, Middle

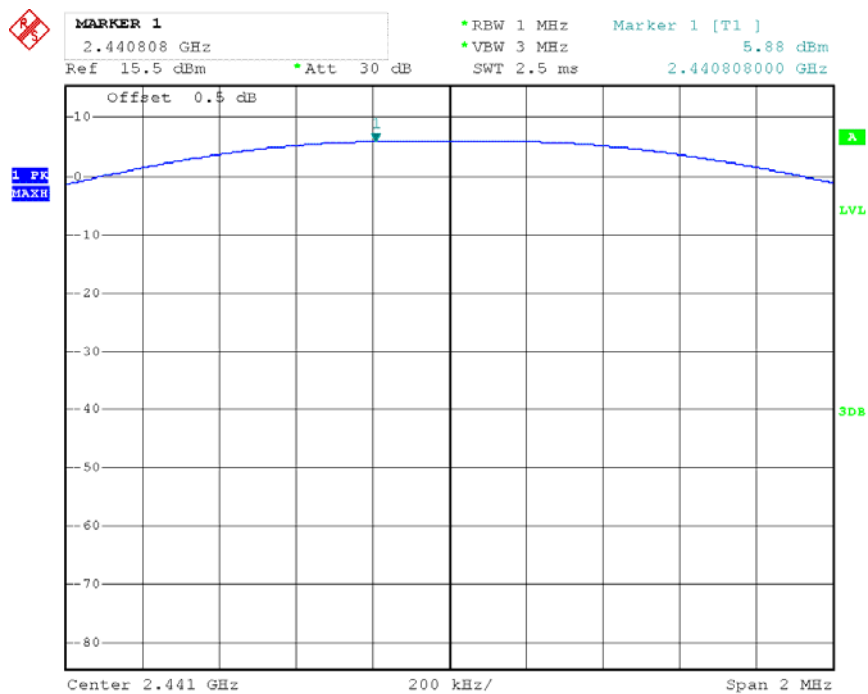


Date: 17.JUL.2012 11:25:31


BDR: Output Power, High

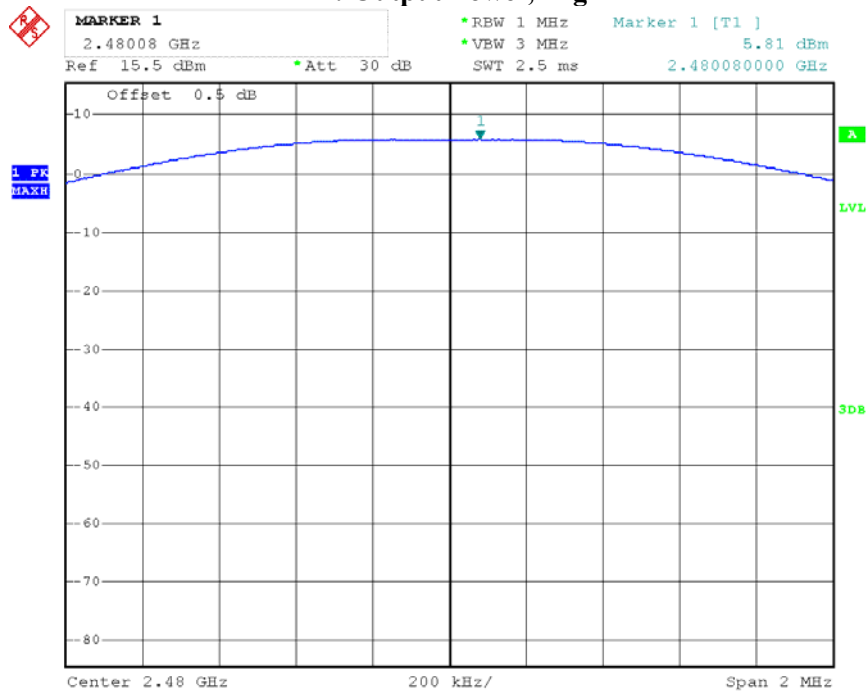


Date: 17.JUL.2012 11:15:19

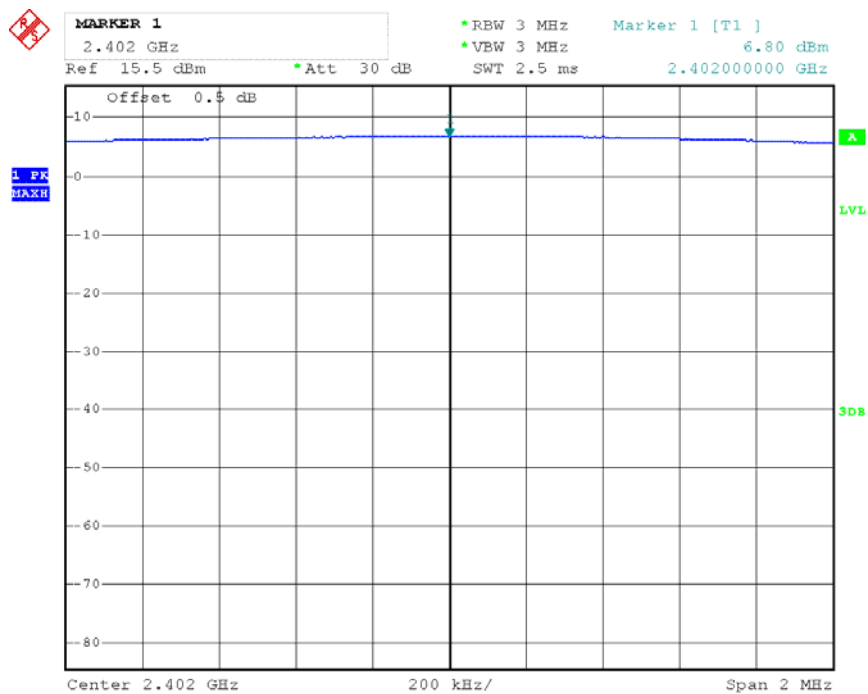EDR ($\pi/4$ -QPSK) : Output Power, Low


Date: 17.JUL.2012 11:34:57

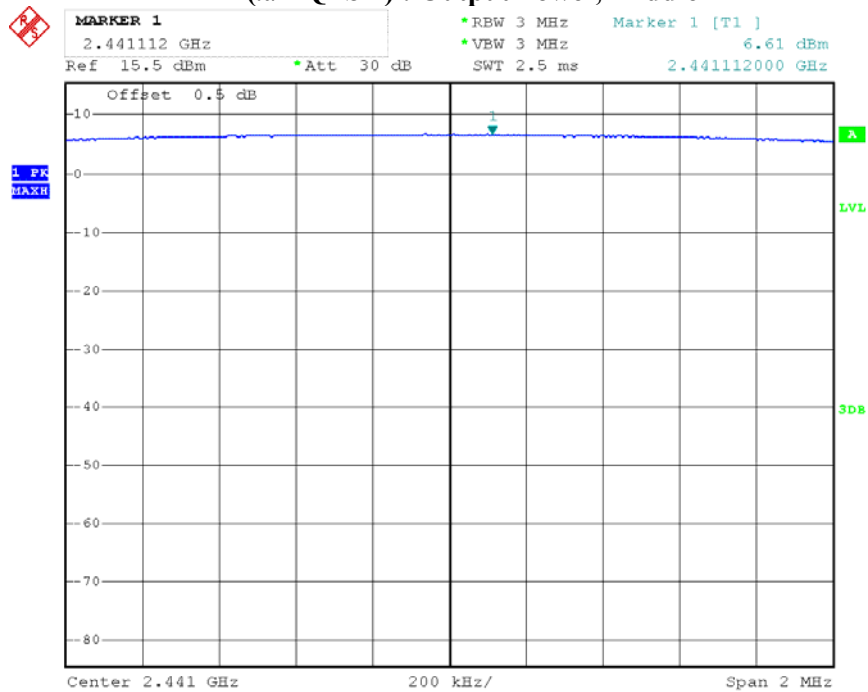EDR ($\pi/4$ -QPSK) : Output Power, Middle

Date: 17.JUL.2012 11:35:47

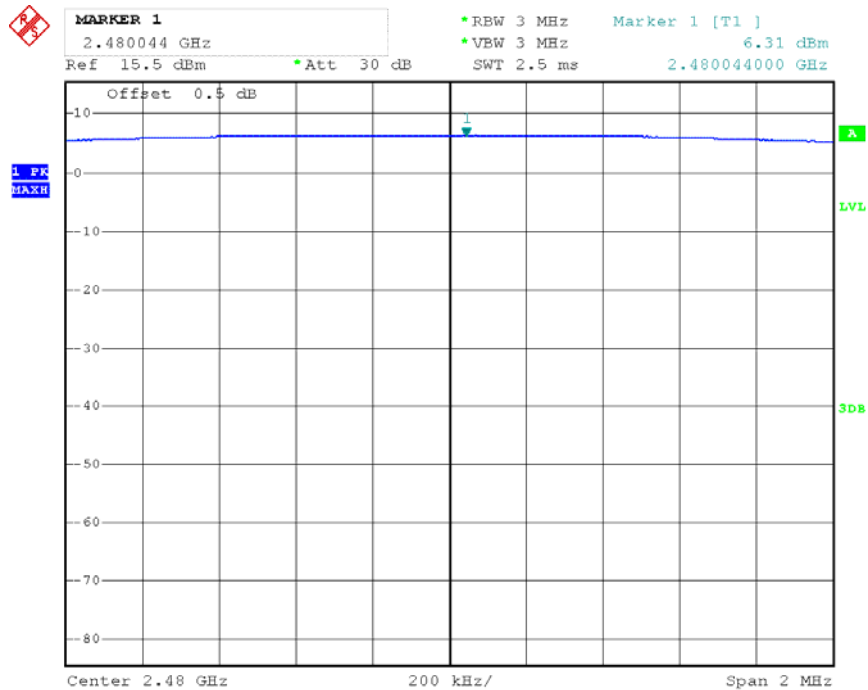
EDR ($\pi/4$ -QPSK) : Output Power, High

Date: 17.JUL.2012 11:40:31

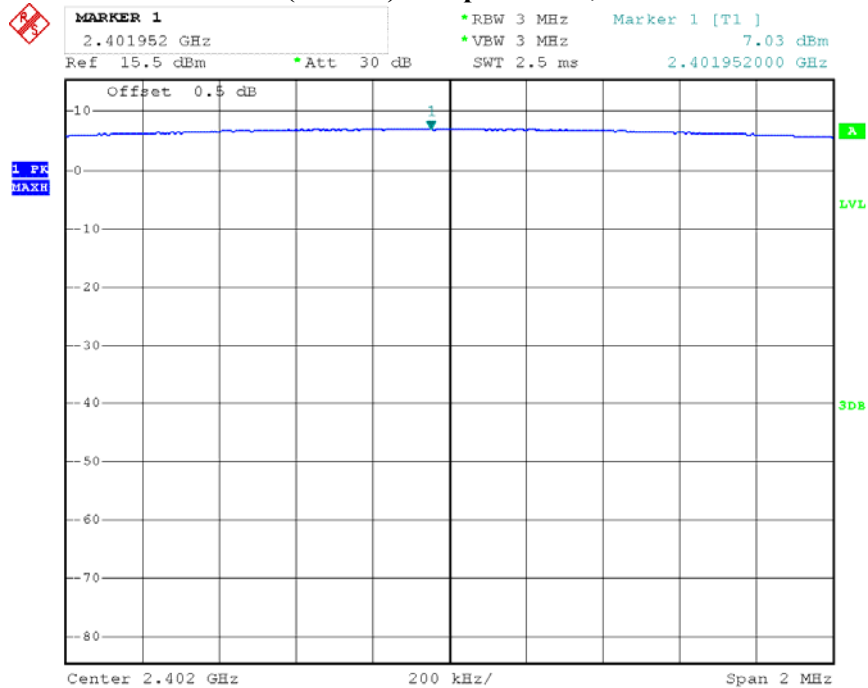EDR (8DPSK): Output Power, Low


Date: 17.JUL.2012 12:03:00

EDR (8DPSK): Output Power, Middle

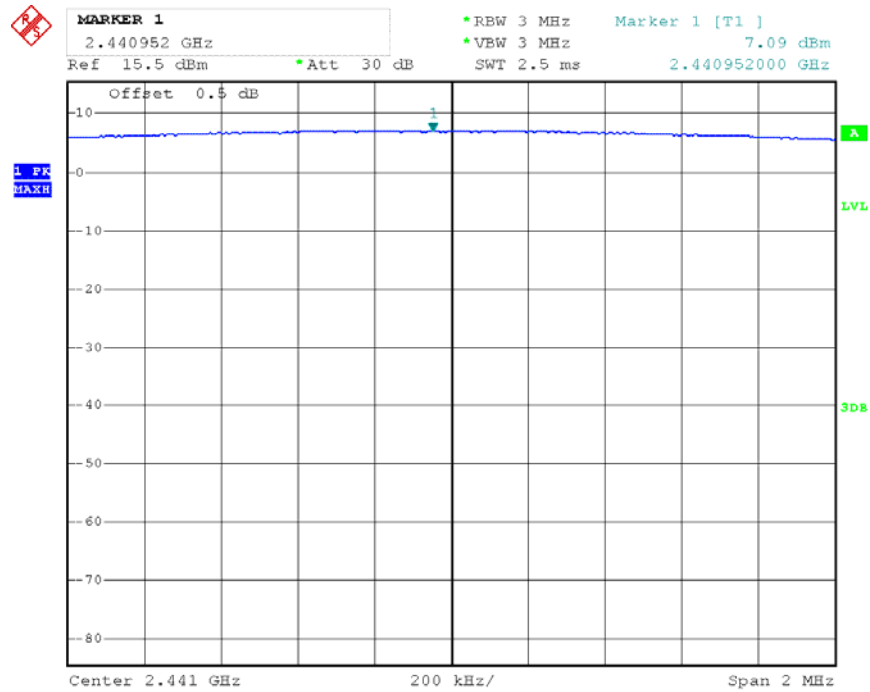

Date: 17.JUL.2012 11:56:52

EDR (8DPSK): Output Power, High

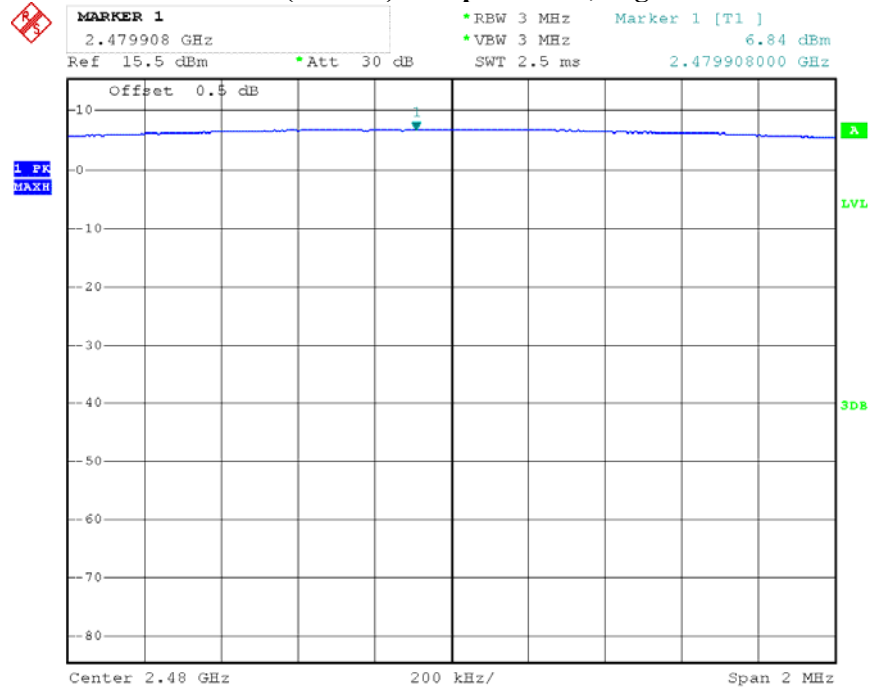

Date: 17.JUL.2012 11:45:43

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

*The testing was performed by Ares Liu on 2012-07-17.

BDR: Band Edge, Left Side



MARKER 4
 2.49318 GHz
 Ref 15.5 dBm *Att 30 dB SWT 2.5 ms 2.493180000 GHz

*RBW 100 kHz Marker 4 [T1] -45.76 dBm
 *VBW 300 kHz


Offset 0.5 dB

Marker 1 [T1] 5.49 dBm
 2.480150000 GHz
 Marker 2 [T1] -51.69 dBm
 2.483500000 GHz
 Marker 3 [T1] -52.74 dBm
 2.500000000 GHz


D1 5.49 dBm
 D2 -14.51 dBm
 F1

Start 2.478 GHz 2.2 MHz/ Stop 2.5 GHz


Date: 17.JUL.2012 11:21:57

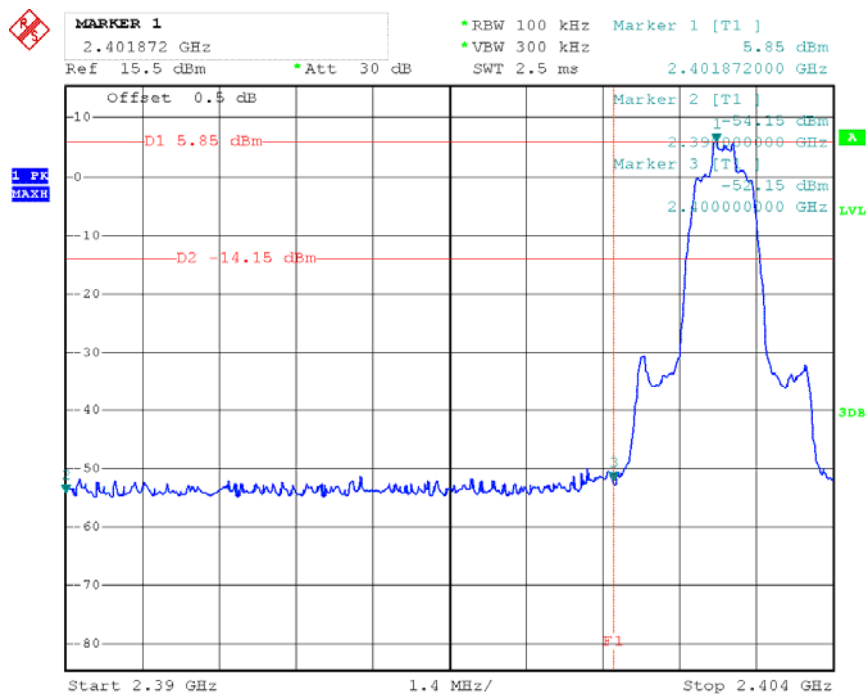EDR ($\pi/4$ -DQPSK) : Band Edge, Left Side


Date: 17.JUL.2012 11:32:38

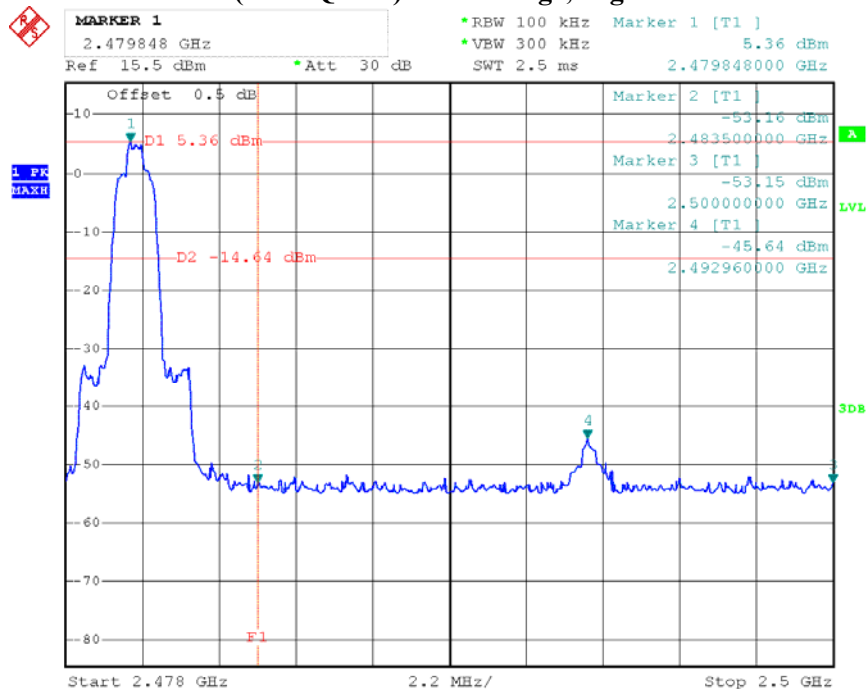EDR ($\pi/4$ -DQPSK) : Band Edge, Right Side

Date: 17.JUL.2012 11:41:54

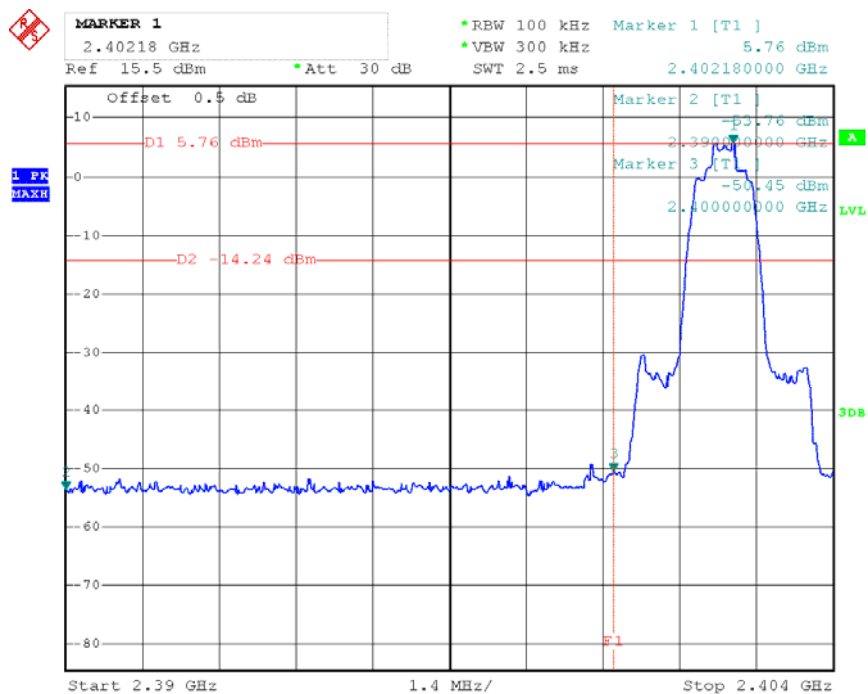EDR (8DPSK): Band Edge, Left Side

Date: 17.JUL.2012 12:02:22

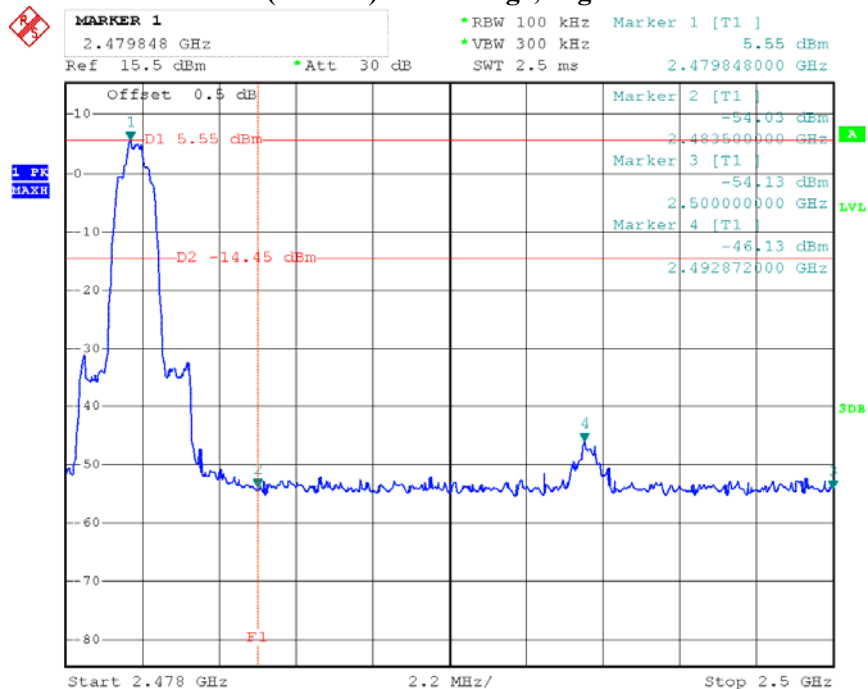EDR (8DPSK): Band Edge, Right Side

Date: 17.JUL.2012 11:43:55

***** END OF REPORT *****