
INFORMATION CONTAINED HEREIN IS PROPRIETARY TO AND CONSIDERED A TRADE SECRET OF ROHRBACK COSASCO SYSTEMS, AND IS SUBMITTED IN CONFIDENCE. REPRODUCTION OF THIS DOCUMENT, EITHER IN WHOLE OR IN PART, OR DISCLOSURE OF ANY OF THE CONTENTS THEREOF, IS FORBIDDEN UNLESS WITH PRIOR WRITTEN AUTHORIZATION OF ROHRBACK COSASCO SYSTEMS.

REVISIONS					
REV	ECN	DESCRIPTION	BY	APPD	DATE
Α	20574	initial release	K.C.	V.H.A.	02.NOV.17
В	20553	UPDATE MODEL P/N ON LABEL	K.C.	V.H.A.	14.NOV.17



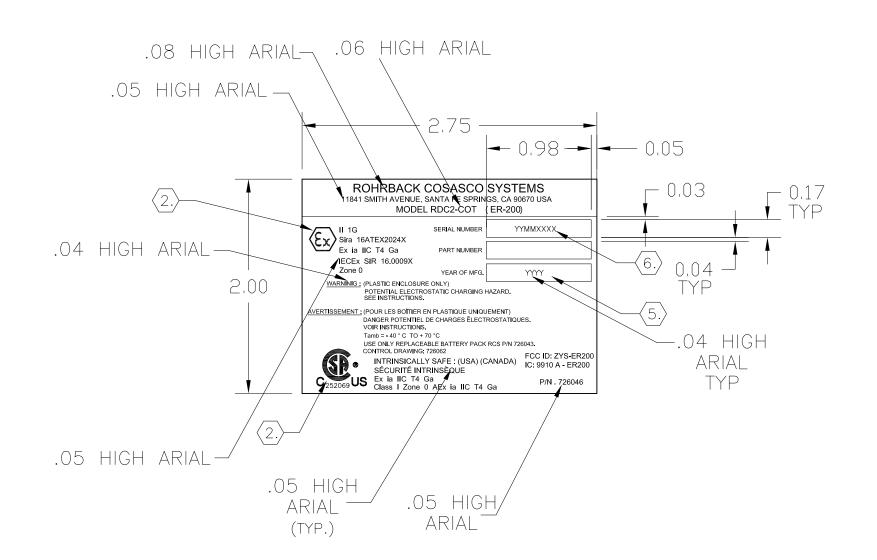

SAFETY CRITICAL COMPONENT

NO CHANGES OR DEVIATIONS WITHOUT THE PERMISSION OF THE Q.A. MANAGER

- (6.) SERIAL NUMBER FORMAT (TO BE FILLED BY COSASCO):
 YYMMXXXX (YY=YEAR, MM=MONTH, XXXX=SEQUENTIAL NUMBER)


 (5.) YEAR OF MANUFACTURE FORMAT (TO BE FILLED BY COSASCO):
 YYYY (YYYY=YEAR)

 (4.) 8-12 MIL THICK 1100-H18 ALUMINUM, 5% MAGNESIUM MAX BY WEIGHT.

 (3.) MATTE FINISH INTENSIFY WITH GOLD CHLORIDE SOLUTION 3M 467 ADHESIVE
- -40 °F TO +400 °F TEMPERATURE RANGE.

 (2.) COSASCO TO SUPPLY CERTIFICATE LOGO SAMPLES.
- 1. ALL CHARACTERS TO BE BLACK.

NOTES: UNLESS OTHERWISE SPECIFIED:

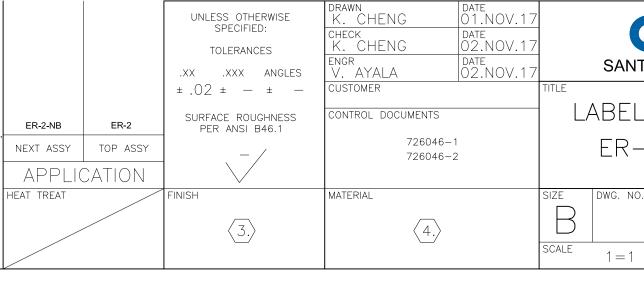



LABEL, INTRINSICALLY SAFE

ER-200 (RDC2-COT)

726046-4

1=1 DO NOT SCALE DRAWING

SHEET 1 OF 1