LED Level Shifting

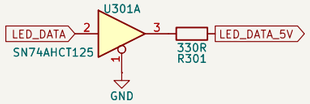



Unused SN74AHCT125 I/O

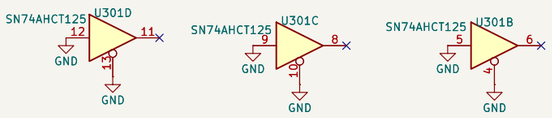



Carrier / Brain I/O

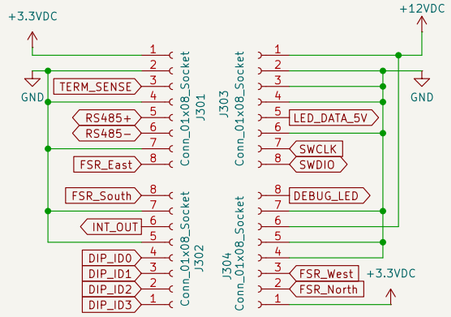

+3.3VDC Power Regulation

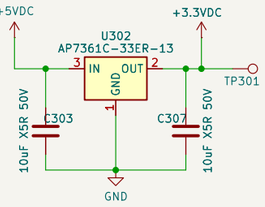

Microcontroller

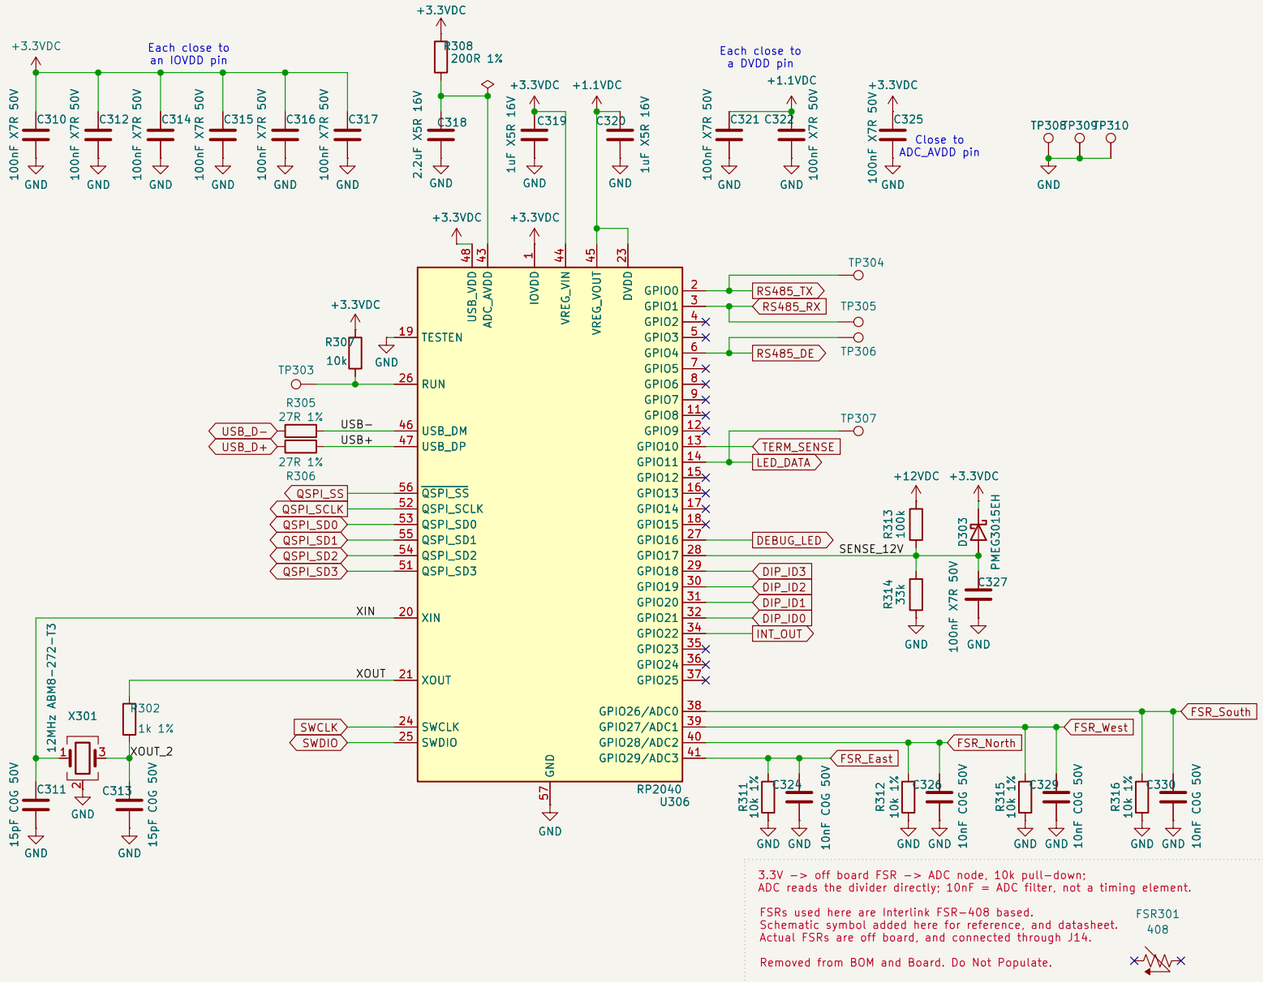

3.3V –> off board FSR –> ADC node, 10k pull-down;
ADC reads the divider directly; 10nF = ADC filter, not a timing element.

FSRs used here are Interlink FSR-408 based.
Schematic symbol added here for reference, and datasheet.
Actual FSRs are off board, and connected through J14.

Removed from BOM and Board. Do Not Populate.

FSR301
408

+5VDC Power Regulation

D12/D23 is a fallback diode OR if U8 breaks or doesn't work.
For fallback: remove u8, and populate D12/D23.

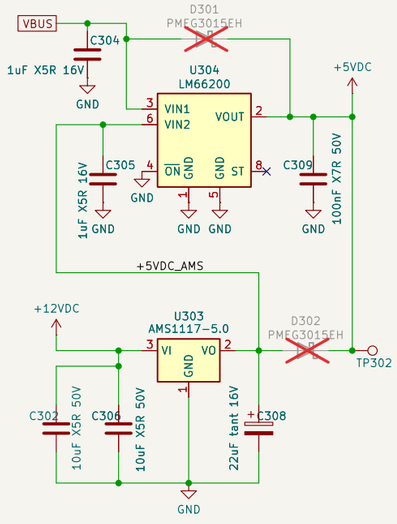

USB

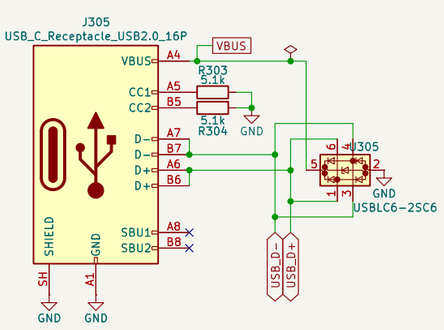

QSPI Flash

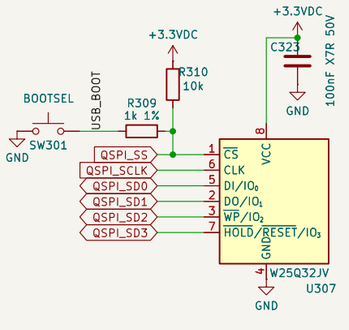

RS-485 Receive & Transmit

No external bus biasing: THVD1429 has integrated open/short/idle failsafe.

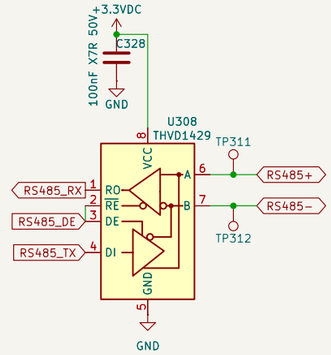

Seeded 2026-07-27 from panel-pcb rev 1.0 – strip to role
MCU/power/comms – RP2040, flash, crystal, RS-485, LDO cascade

Sheet: /
File: brain.kicad_sch

Title: KrakenPad Dual-Panel: brain sheet

Size: A3	Date: 2026-07-11	**Rev: 0.1**
KiCad E.D.A. 10.0.4		Id: 1/1