



Power

Main voltage regulator

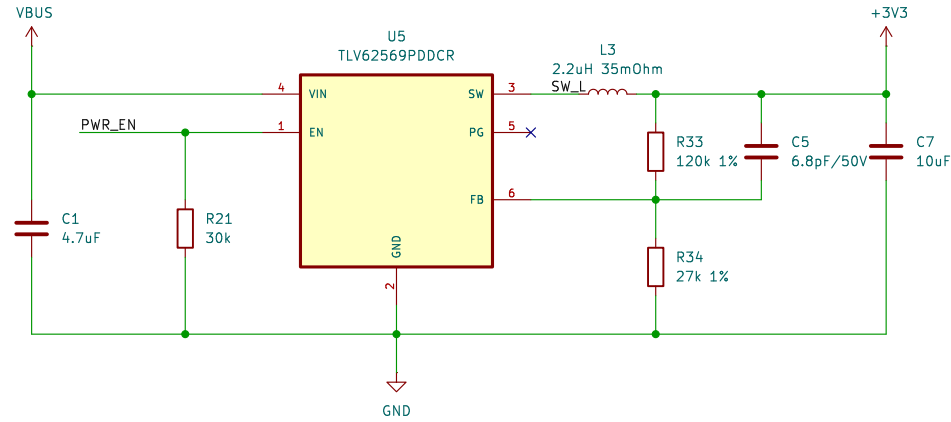


LiPo charger

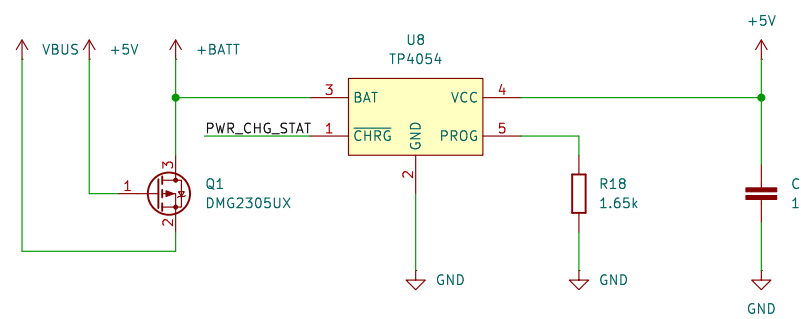


LCD backlight boost


$$V_{LCD_A} = 0.6V \cdot (1 + R1/R16)$$

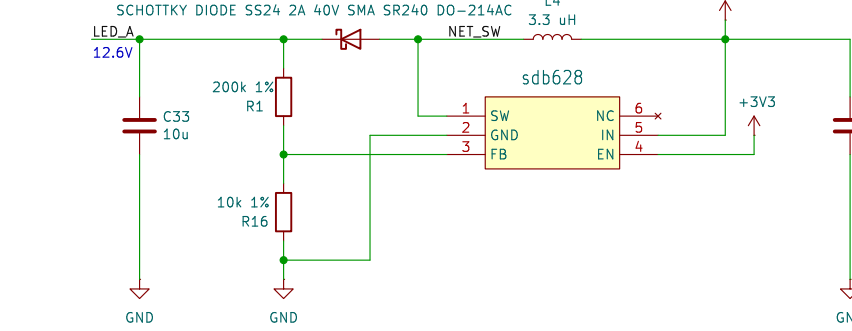


LCD backlight PWM




Bat Con




bootsel

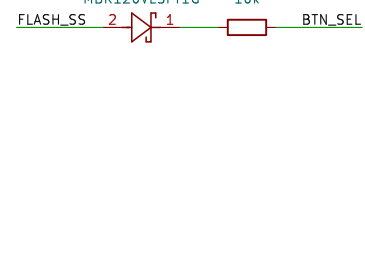


USB power con

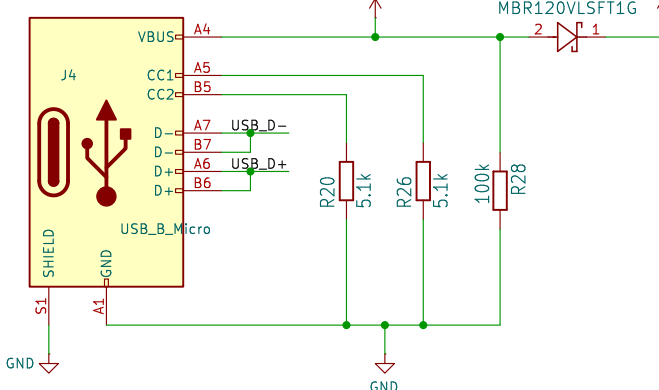


Bat power measurement

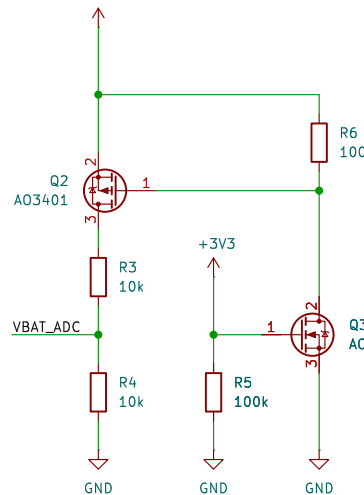


MCU

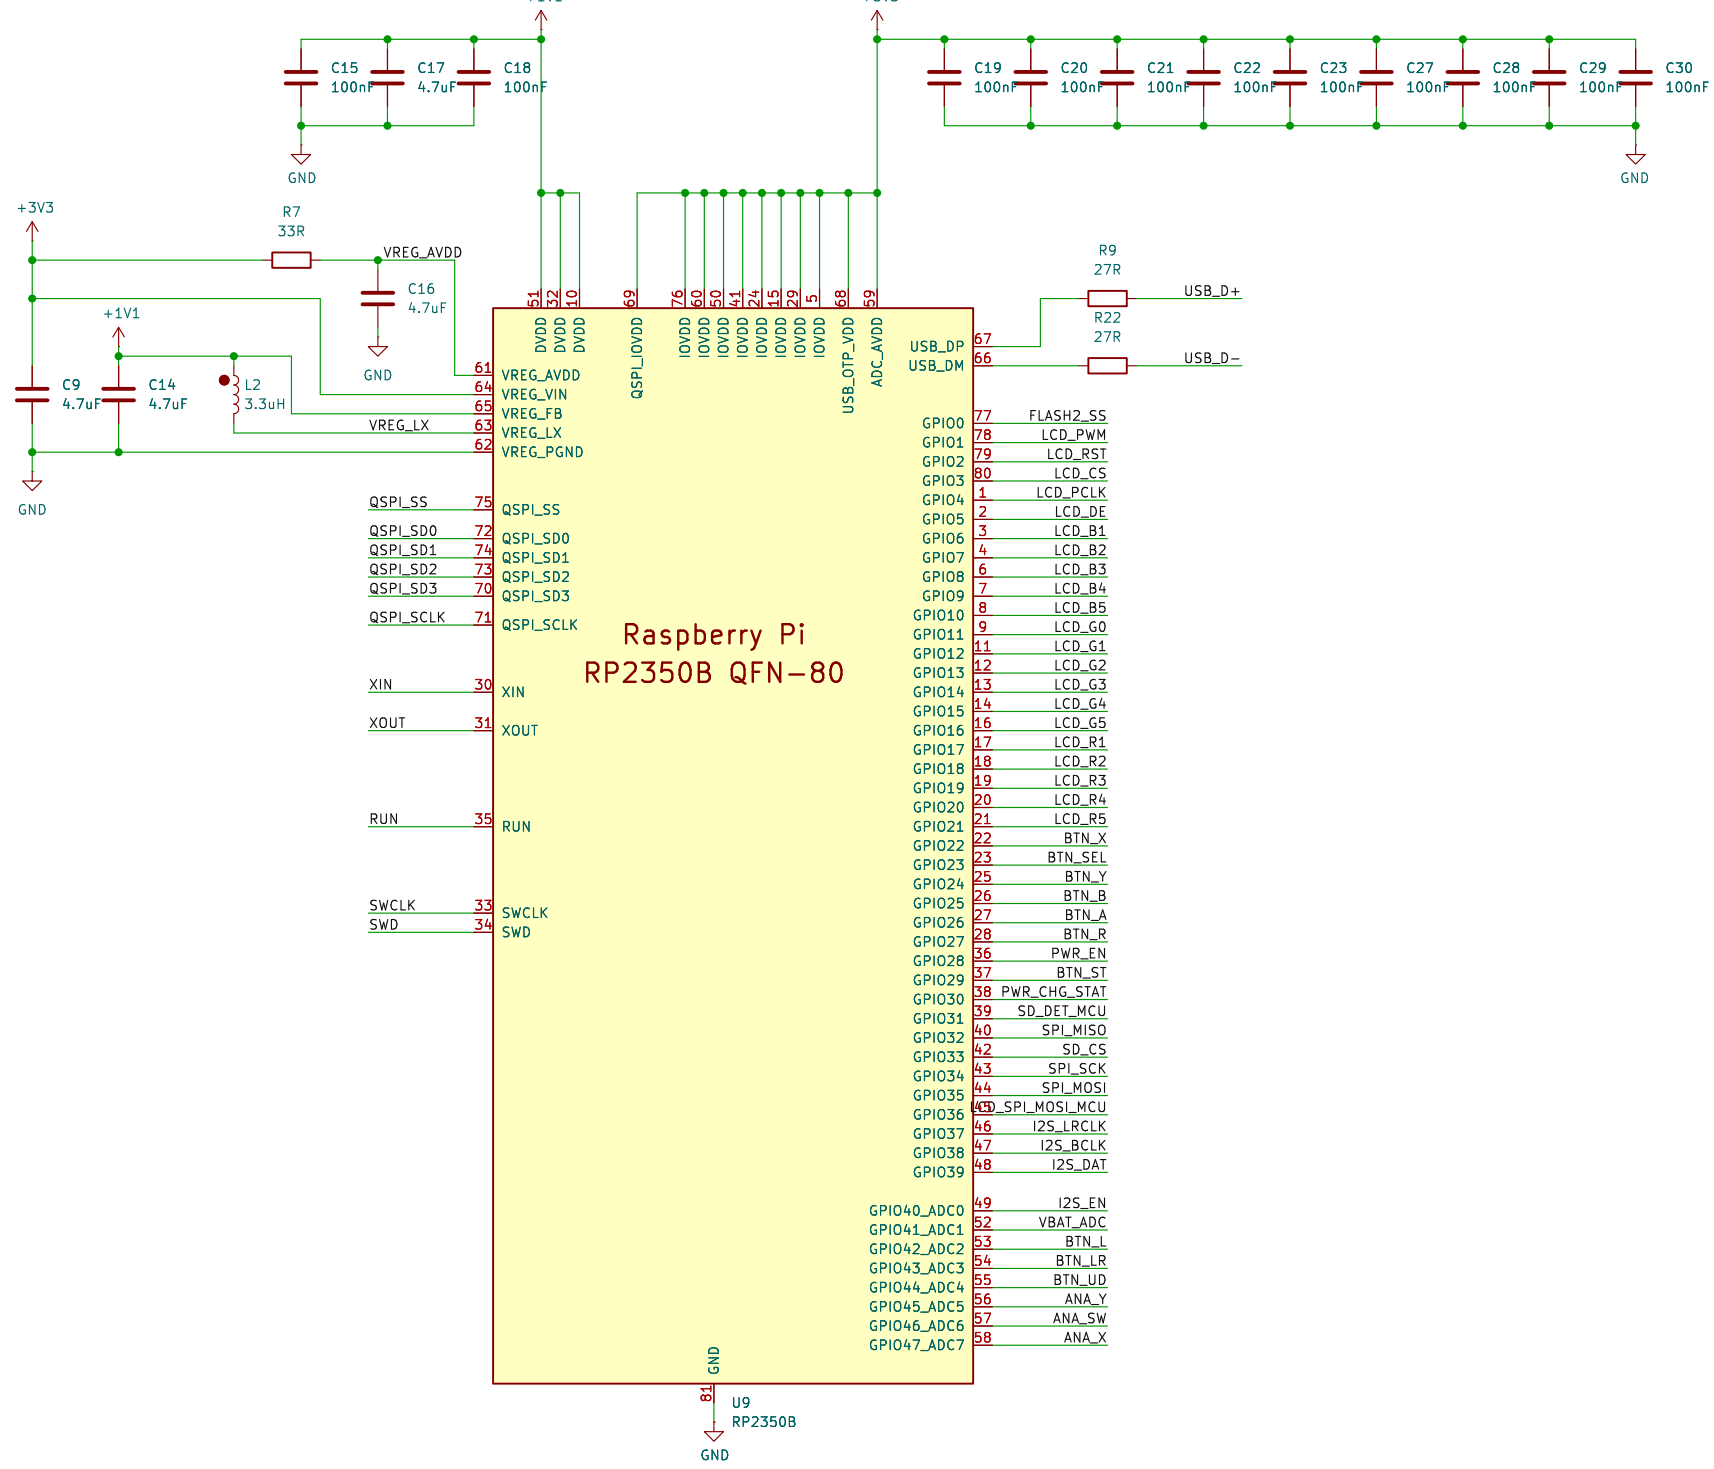


LCD connector

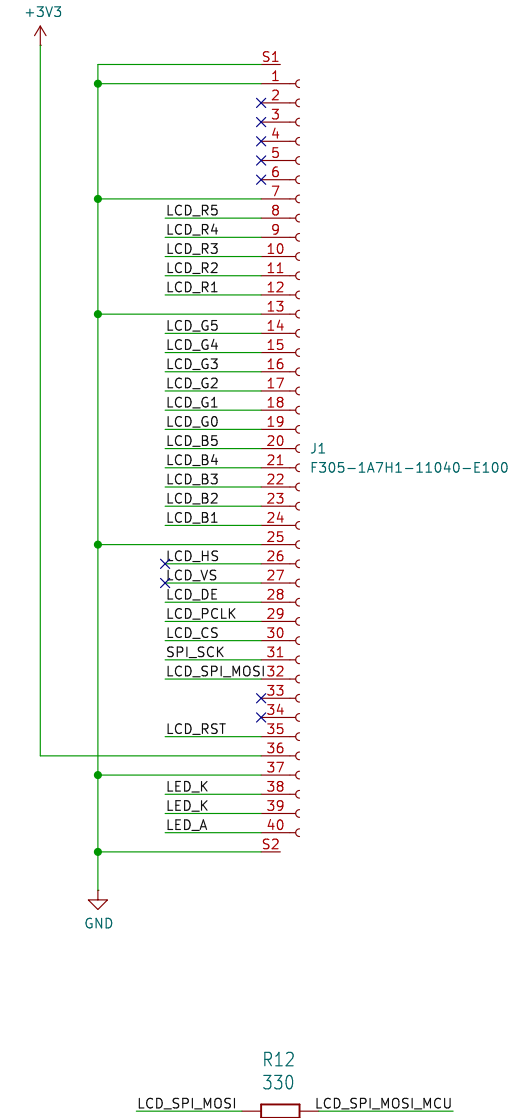


Buttons

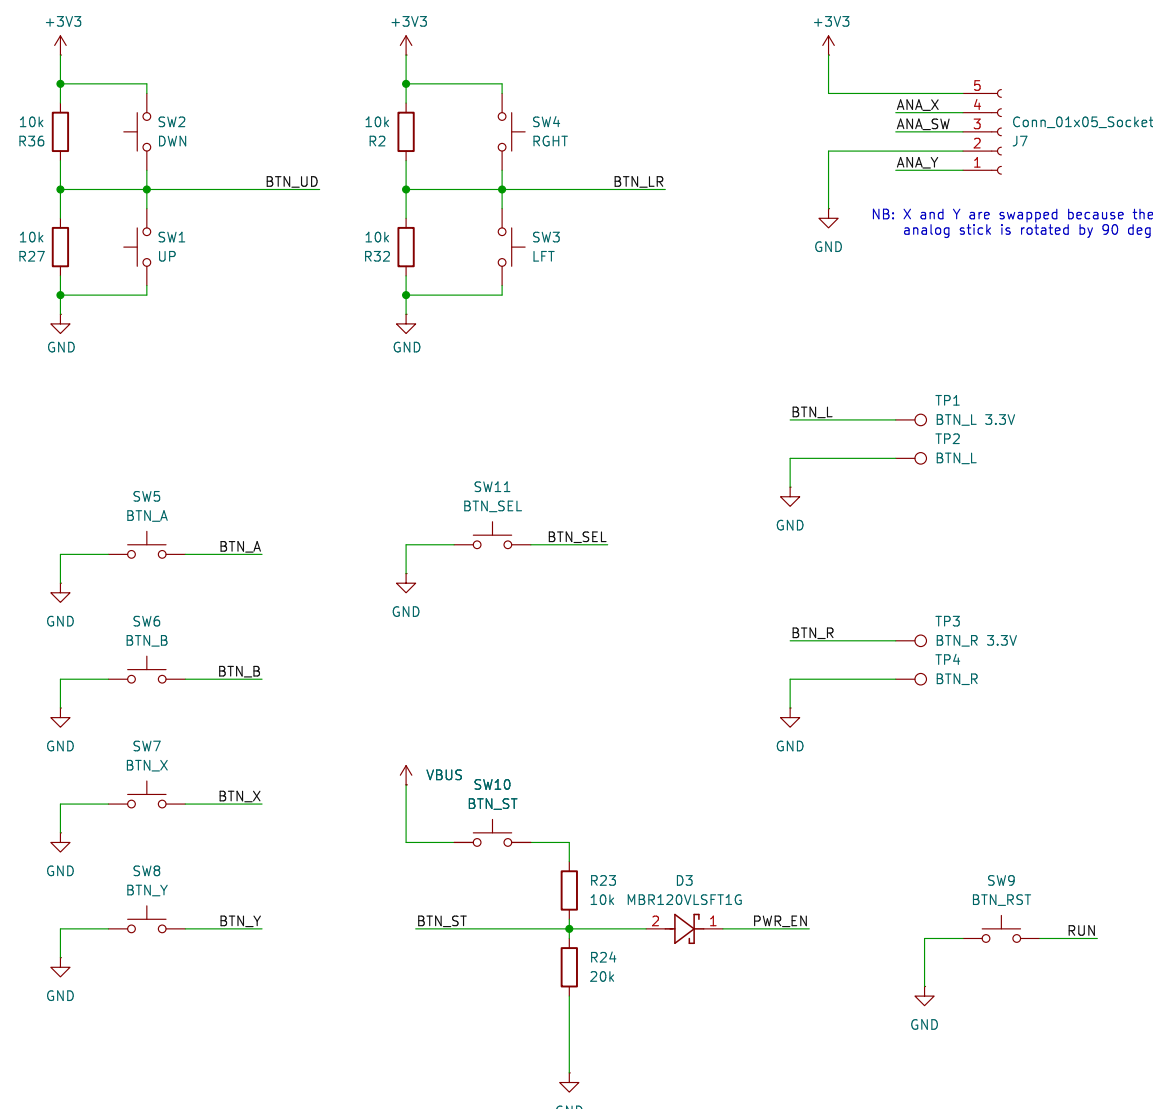


uSD slot

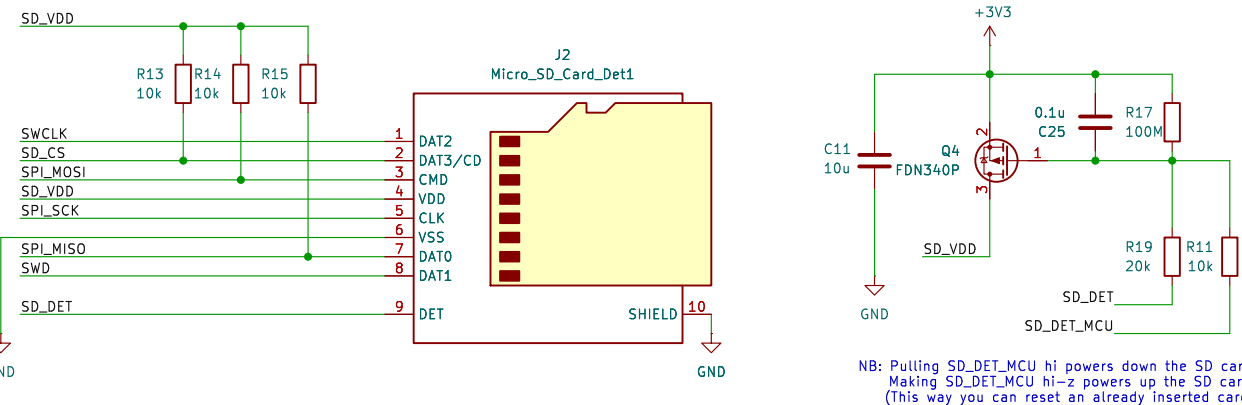


Inrush protection

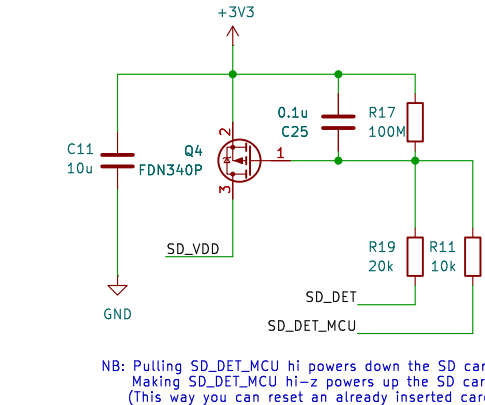


Audio codec/amp

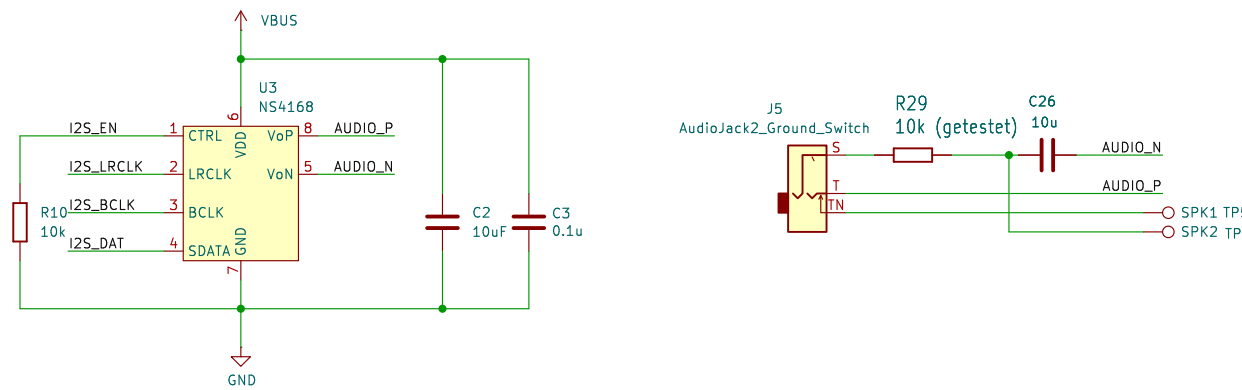


Primary Flash

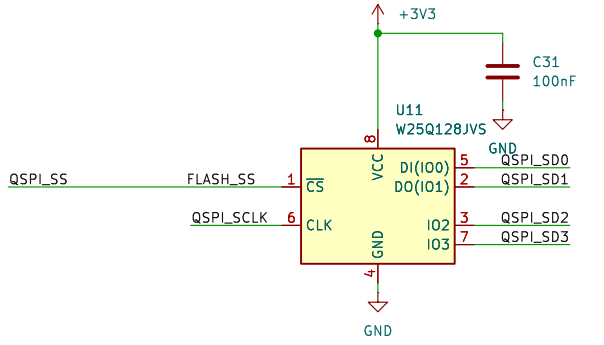


PSRAM

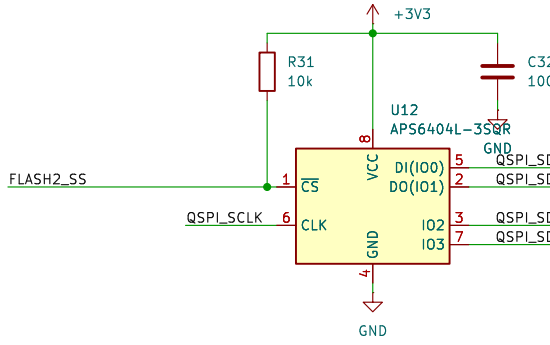

12MHz Crystal

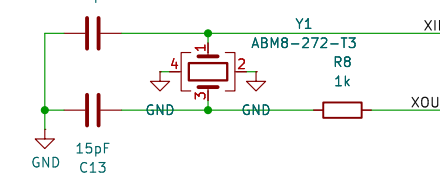

Debug

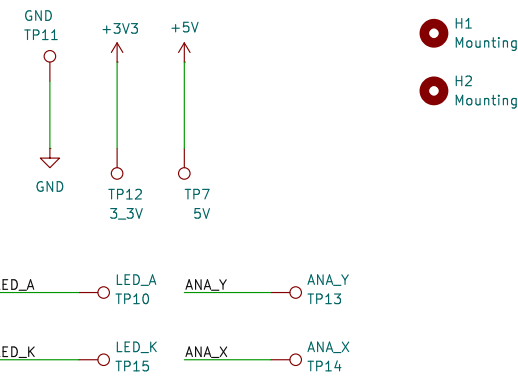

Mouting

