



Power

Main power switch

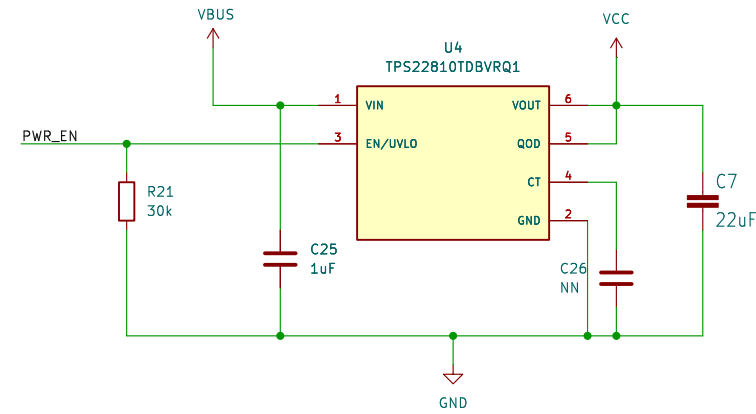


Main voltage regulator

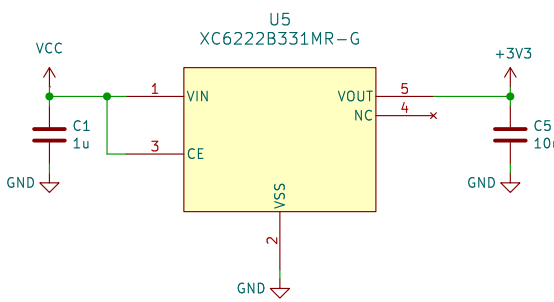


LCD backlight boost


$$V_{LCD_A} = 0.6V \cdot (1 + R1/R2)$$

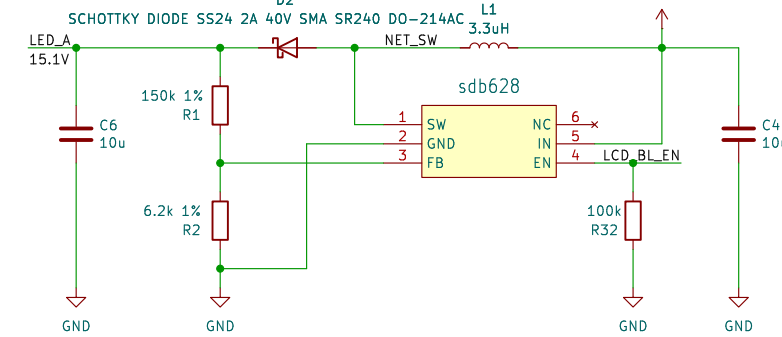


LCD Reset




LCD 10VCC

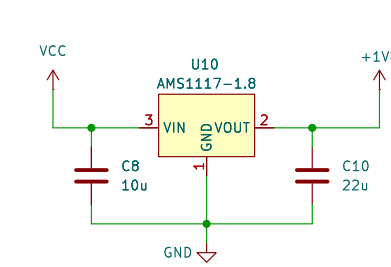


Testing

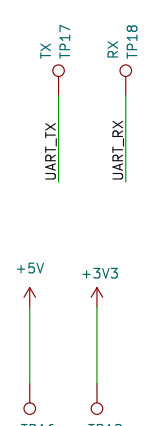


Mouting

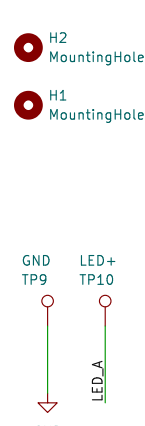


LiPo charger

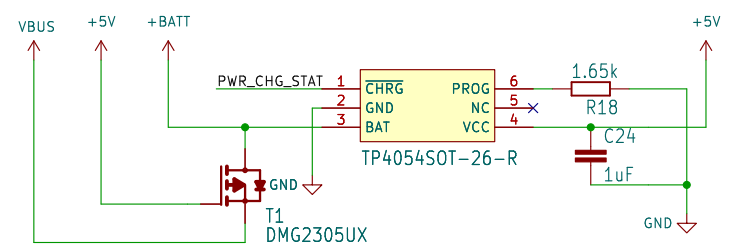


USB power con

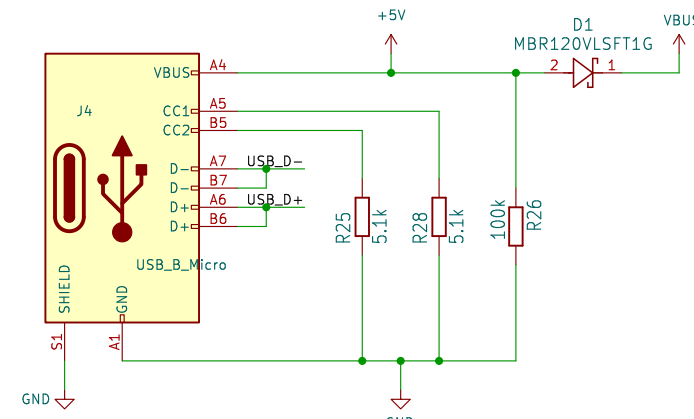


LCD backlight PWM

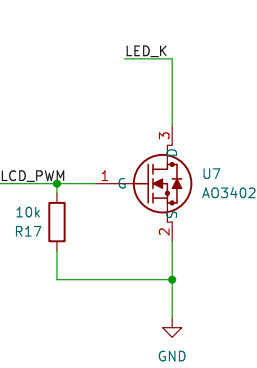


Bat power measurement

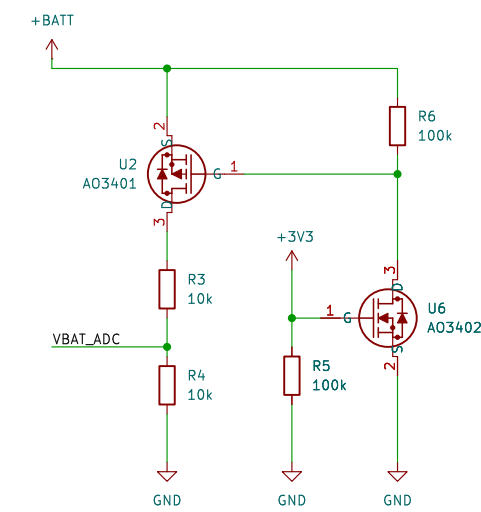


Reset Button




Pwr src det




Bat Con




Buttons

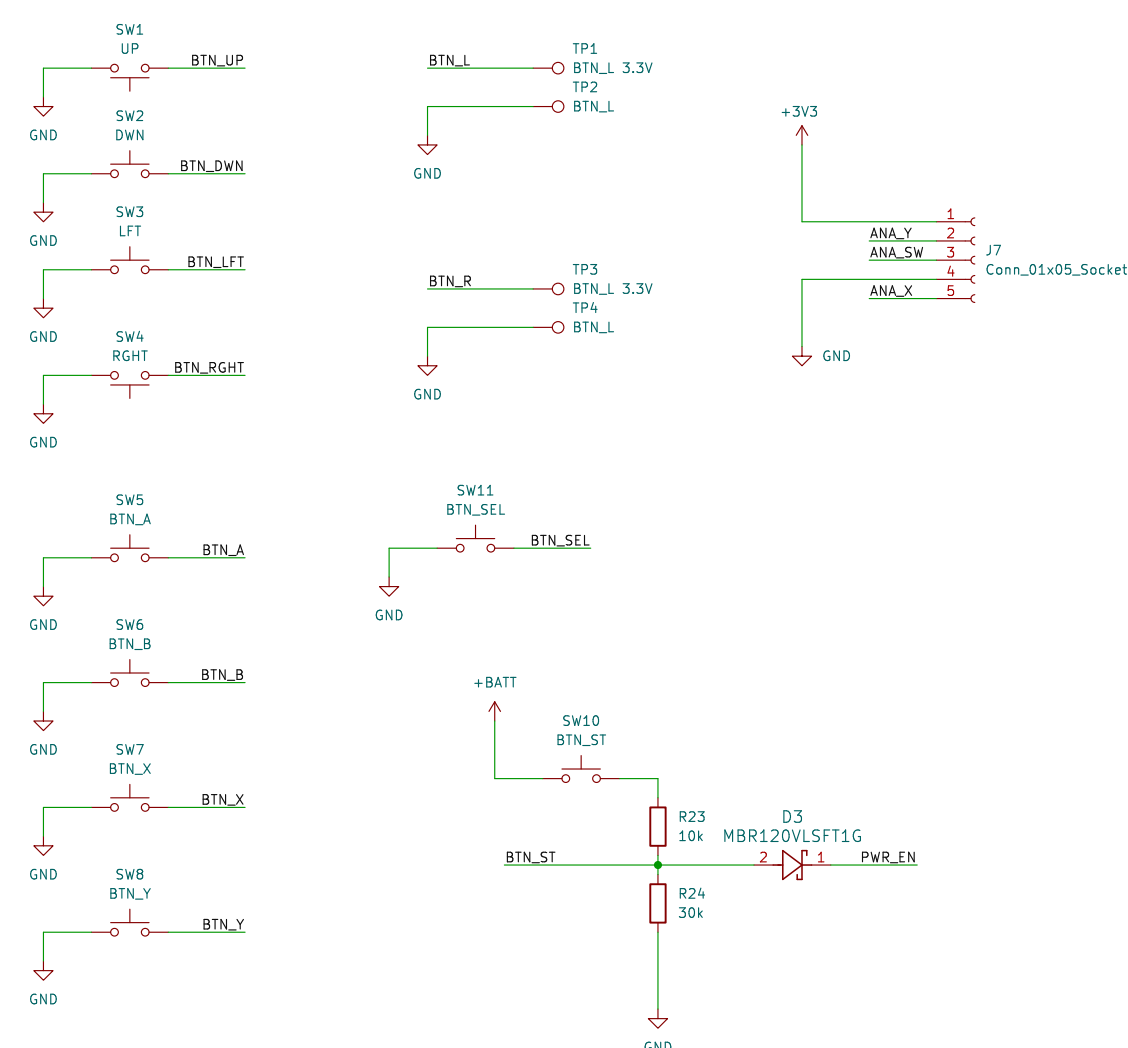


LCD connector

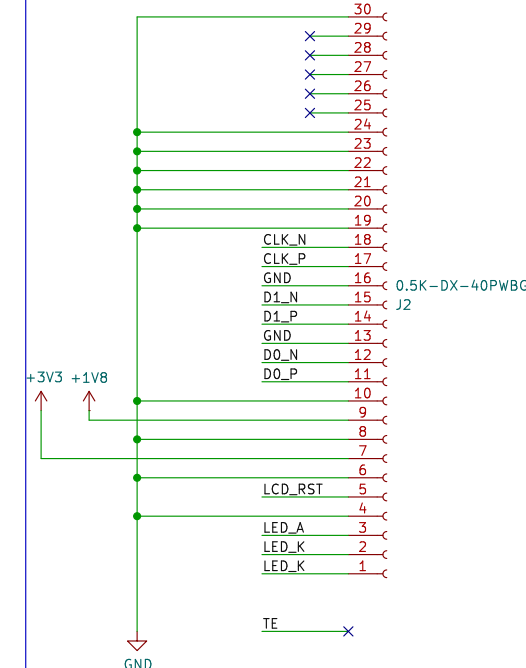


Audio codec/amp

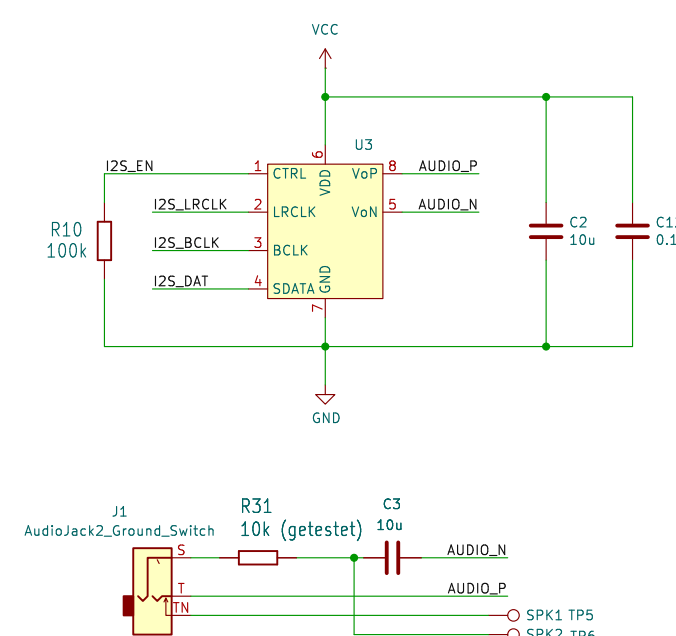

uSD slot

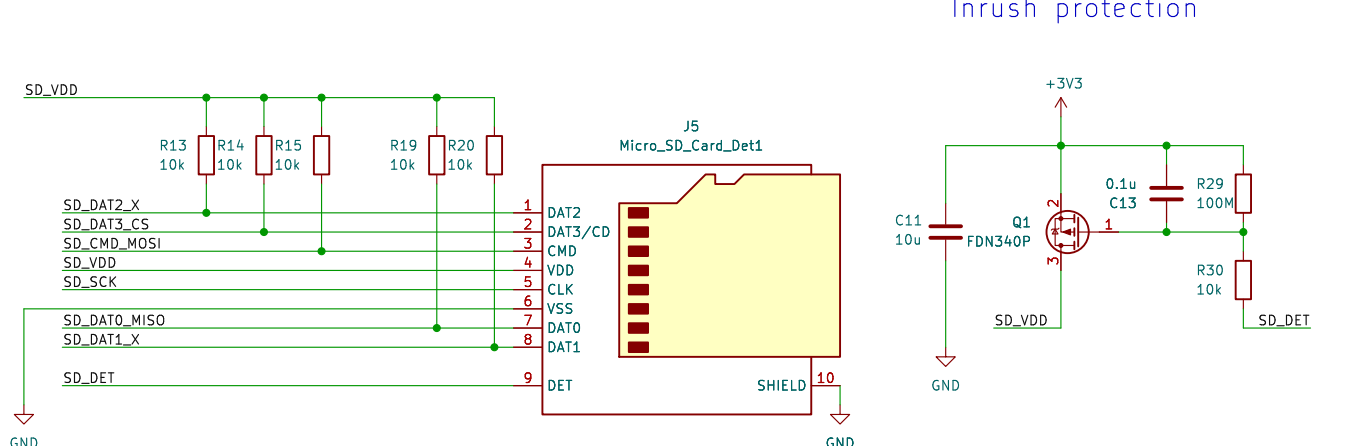

Inrush protection

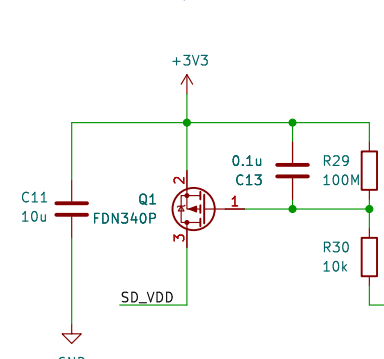

uC

