

## TOILET SHROUD ASSEMBLY - REMOVAL/INSTALLATION

*EFFECTIVITY: ALL*

1. General

- A. This section gives the procedures to remove/install the toilet shroud assembly.
- B. The procedures in this section are given in the sequence below. The tasks identified with (◆) are part of the Scheduled Maintenance Requirements Document (SMRD).

TASK NUMBER	DESCRIPTION	EFFECTIVITY
25-40-04-000-801-A	TOILET SHROUD ASSEMBLY - REMOVAL	ALL
25-40-04-400-801-A	TOILET SHROUD ASSEMBLY - INSTALLATION	ALL

TASK 25-40-04-000-801-A

EFFECTIVITY: ALL

## 2. TOILET SHROUD ASSEMBLY - REMOVAL

### A. General

(1) This task gives the procedure to remove the toilet shroud assembly.

(2) The toilet shroud assembly is installed in the lavatory, at zone 262.

### B. Zones and Accesses

Not Applicable

### C. Tools and Equipment

Not Applicable

### D. Auxiliary Items

Not Applicable

### E. Consumable Materials

Not Applicable

### F. Expandable Parts

Not Applicable

### G. Persons Recommended

QTY	FUNCTION	PLACE
1	Does the task	Lavatory

### H. Removal ([Figure 401](#))

#### SUBTASK 020-002-A

(1) Lift the toilet seat assembly (1).


(2) Release the Dzus fastener (3) of the toilet shroud assembly (2).

(3) Lift the toilet shroud assembly (2) and pull to remove it.

EFFECTIVITY: ALL

Toilet Shroud Assembly - Removal/Installation

Figure 401

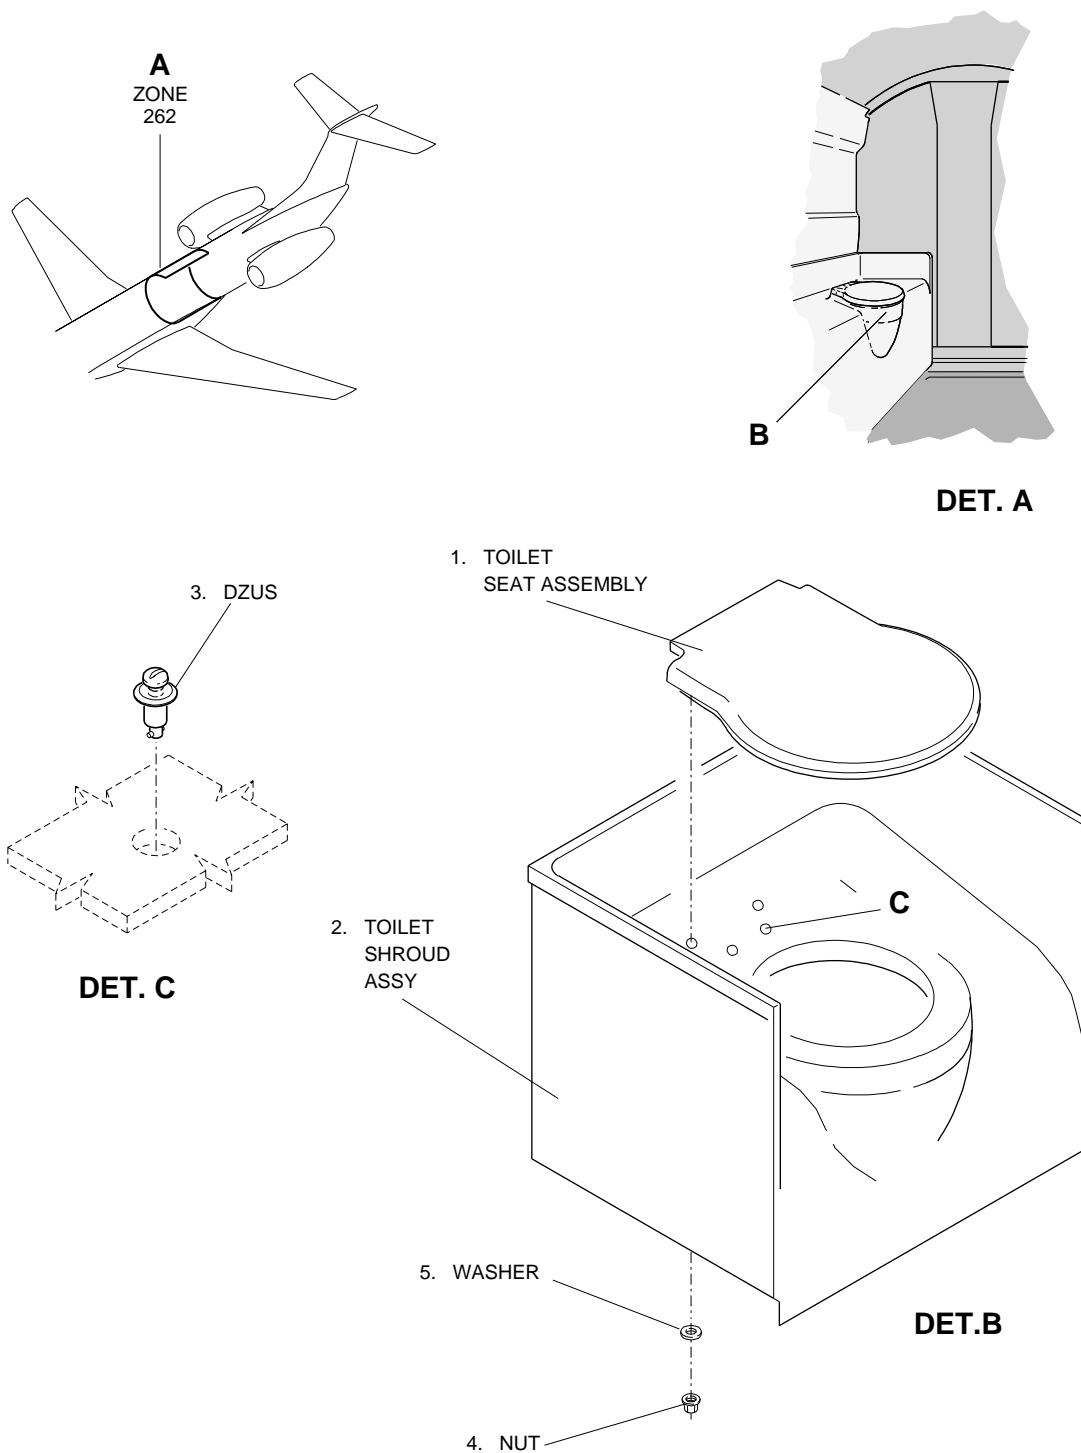

145AMM250624.MCE

TASK 25-40-04-400-801-A

*EFFECTIVITY: ALL*

### 3. TOILET SHROUD ASSEMBLY - INSTALLATION

#### A. General

- (1) This task gives the procedures to install the toilet shroud assembly.
- (2) The toilet shroud assembly is installed in the lavatory, at zone 262.

#### B. Zones and Accesses

Not Applicable

#### C. Tools and Equipment

Not Applicable

#### D. Auxiliary Items

Not Applicable

#### E. Consumable Materials

Not Applicable

#### F. Expandable Parts

Not Applicable

#### G. Persons Recommended

<i>QTY</i>	<i>FUNCTION</i>	<i>PLACE</i>
1	Does the task	Lavatory

#### H. Installation (Figure 401)

##### *SUBTASK 420-002-A*

- (1) If you removed the toilet seat assembly (1), install it again as follows:
  - (a) Install the toilet seat assembly (1) at the correct position.
  - (b) Tighten the nut (4) and washer (5).
- (2) Put the toilet shroud assembly (2) in its installation position.
- (3) Attach the toilet shroud assembly (2) with the Dzus fastener (3).
- (4) Close the toilet seat assembly (1).