

EXHAUST HOSES - MAINTENANCE PRACTICES

EFFECTIVITY: ALL

1. General

- A. This section gives the procedure to replace the exhaust hoses of the forward electronic compartment.
- B. The two exhaust hoses are installed at the forward electronic-compartment air exhaustion system (between frames 5 and 6). The replacement procedure is applicable to the two exhaust hoses.
- C. The procedures in this section are given in the sequence below. The tasks identified with (♦) are part of the Scheduled Maintenance Requirements Document (SMRD).

TASK NUMBER	DESCRIPTION	EFFECTIVITY
21-26-08-960-801-A ♦	EXHAUST HOSES - REPLACE	ALL

TASK 21-26-08-960-801-A

EFFECTIVITY: ALL

2. EXHAUST HOSES - REPLACE

A. General

(1) This task gives the procedure to replace the exhaust hoses.

B. References

REFERENCE	DESIGNATION
AMM TASK 21-26-08-000-801-A/400	EXHAUST HOSES - REMOVAL
AMM TASK 21-26-08-400-801-A/400	EXHAUST HOSES - INSTALLATION

C. Zones and Accesses

ZONE	PANEL/DOOR	LOCATION
113	113CZ	Nose-landing-gear compartment

D. Tools and Equipment

Not Applicable

E. Auxiliary Items

Not Applicable

F. Consumable Materials

Not Applicable

G. Expandable Parts

Not Applicable

H. Persons Recommended

QTY	FUNCTION	PLACE
1	Does the task	Forward electronic compartment

I. Discard Exhaust Hoses of the Electronic Bay Compartment ([Figure 201](#))


SUBTASK 960-002-A

- (1) Remove the exhaust hoses ([AMM TASK 21-26-08-000-801-A/400](#)).
- (2) Discard the exhaust hoses.
- (3) Install new exhaust hoses ([AMM TASK 21-26-08-400-801-A/400](#)).

EFFECTIVITY: ALL

Exhaust Hoses - Replacement

Figure 201

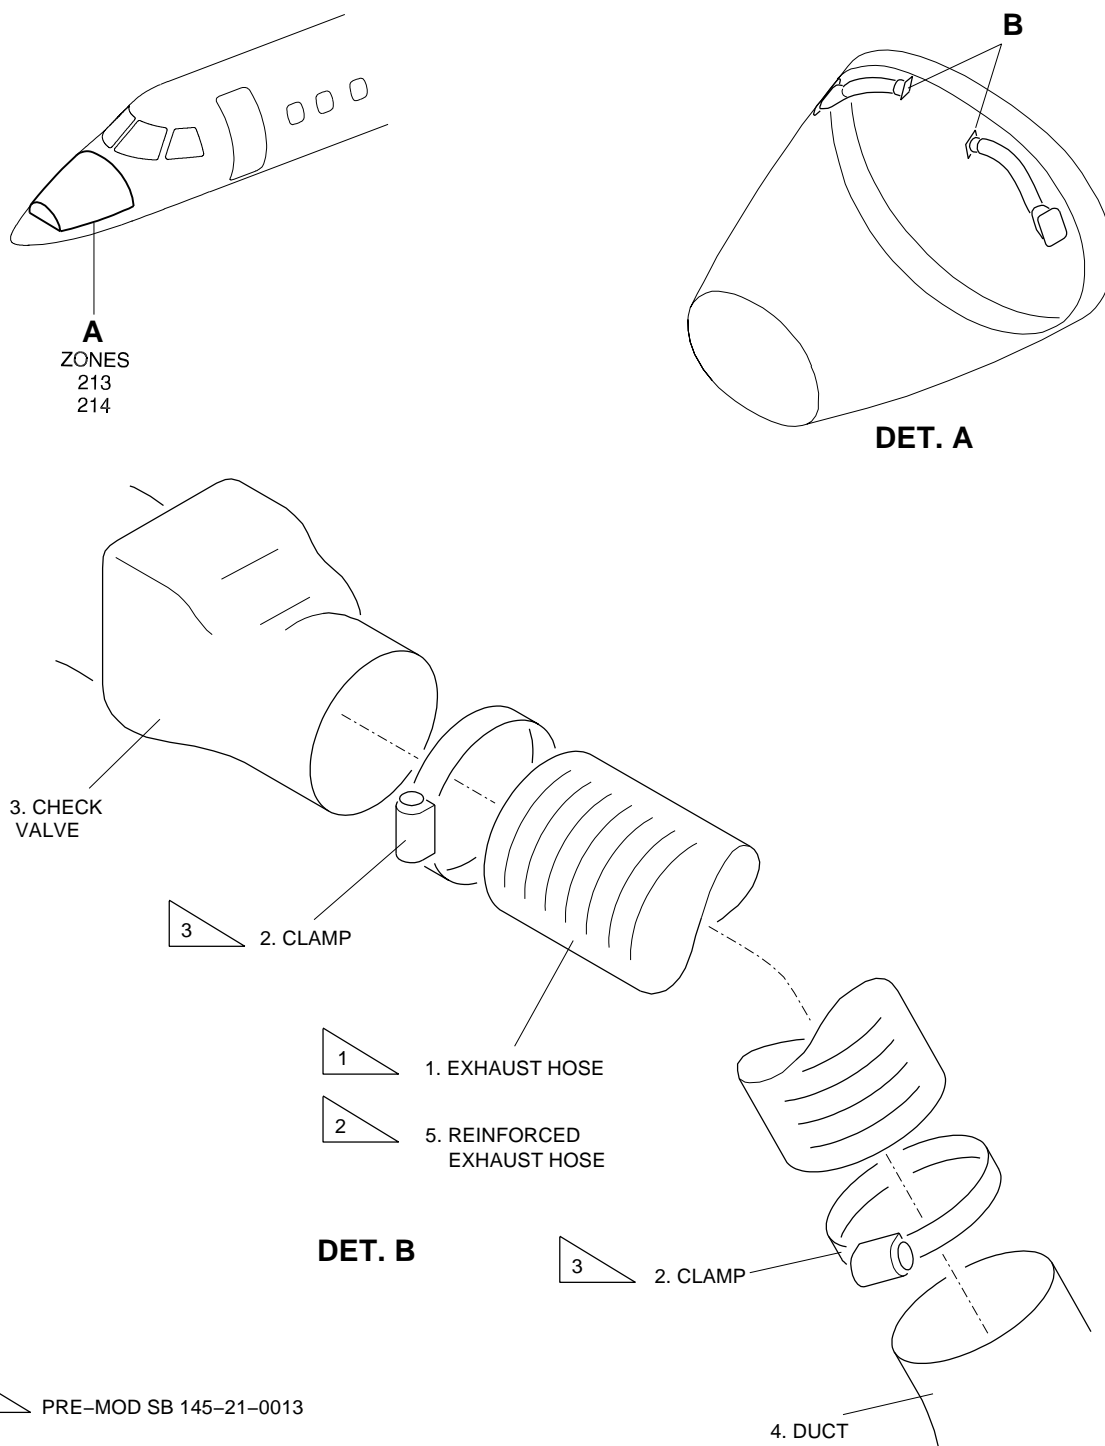

145AMM210227B.MCE

