

MAGNETIC CHIP WARNING SYSTEM - INSPECTION/CHECK

EFFECTIVITY: ALL

1. General

- A. This section gives the procedures to do the inspection of the MFD for "ENG1(2) OIL DEBRIS" maintenance message.
- B. The procedures in this section are given in the sequence below. The tasks identified with (♦) are part of the Scheduled Maintenance Requirements Document (SMRD).

TASK NUMBER	DESCRIPTION	EFFECTIVITY
79-34-00-200-801-A ♦	MFD MAINTENANCE MESSAGE - INSPECTION	ALL

TASK 79-34-00-200-801-A

EFFECTIVITY: ALL

2. MFD MAINTENANCE MESSAGE - INSPECTION

A. General

- (1) This task is done during the routine inspection of the aircraft.

B. References

REFERENCE	DESIGNATION
AMM MPP 71-00-00/200	- MAINTENANCE PRACTICES
AMM TASK 20-40-01-860-801-A/200	ENERGIZATION OF THE AIRCRAFT WITH AN EXTERNAL POWER SOURCE

C. Zones and Accesses

Not Applicable

D. Tools and Equipment

Not Applicable

E. Auxiliary Items

Not Applicable

F. Consumable Materials

Not Applicable

G. Expandable Parts

Not Applicable

H. Persons Recommended

QTY	FUNCTION	PLACE
1	Does the task	Cockpit

I. Preparation

SUBTASK 841-002-A

WARNING: BEFORE YOU DO THE TASK, OBEY THE SAFETY PRECAUTIONS GIVEN IN ([AMM MPP 71-00-00/200](#)) TO PREVENT INJURY TO THE PERSONS AND DAMAGE TO THE MATERIAL.

- (1) Make sure that the aircraft is safe for maintenance.
- (2) Energize the aircraft with the DC Power Supply ([AMM TASK 20-40-01-860-801-A/200](#)).

J. Inspect Multi-Function Display for ENG1(2) OIL DEBRIS Maintenance Message ([Figure 601](#))

SUBTASK 212-002-A

- (1) On the MFD select the maintenance page.

- (2) Examine the maintenance page for the absence of the message "ENG1(2) OIL DEBRIS".
- (3) Return the MFD to the normal condition.

K. Follow-on



SUBTASK 842-002-A

- (1) Remove the DC Power Supply ([AMM TASK 20-40-01-860-801-A/200](#)) from the aircraft.

EFFECTIVITY: ALL

MFD Maintenance Page - Components Location

Figure 601

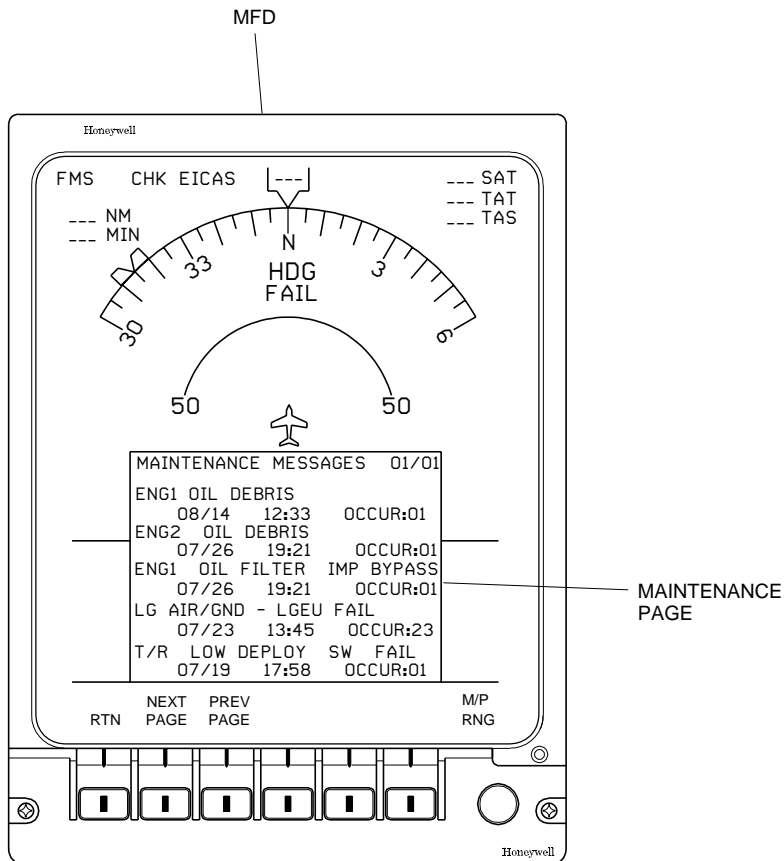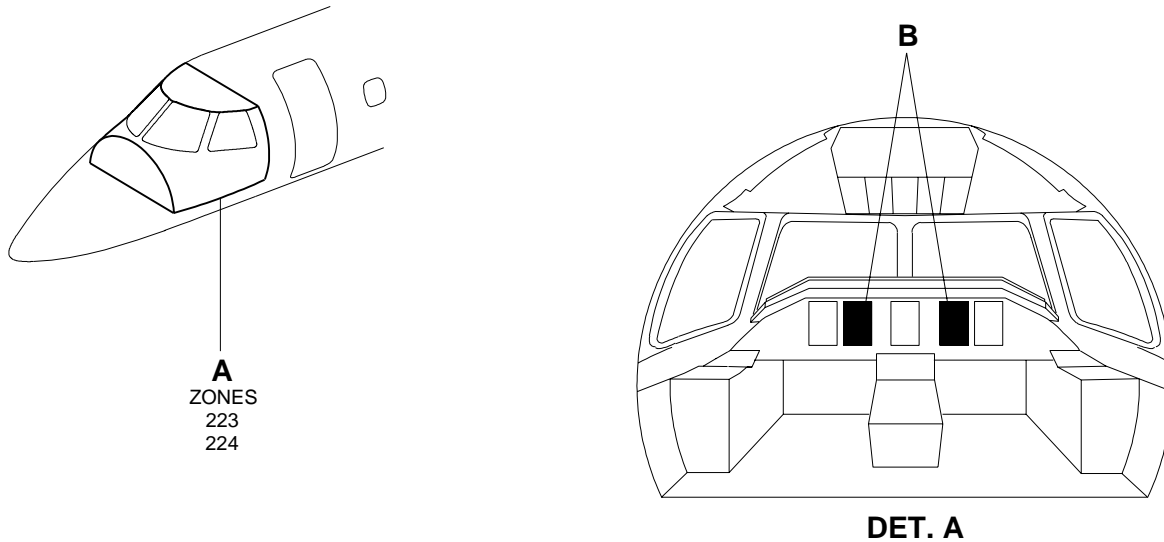

DET. B

145AMM720001.MCE A