

## TOILET GASPER-HOSE FILTER - REMOVAL/INSTALLATION

*EFFECTIVITY: AIRCRAFT WITH TOILET GASPER-HOSE FILTER INSTALLED*

### 1. General

- A. This section gives the procedures for the removal/installation of the toilet gasper-hose filter.
- B. The toilet gasper-hose filter is installed at the toilet, behind of the amenity dispenser.
- C. The procedures in this section are given in the sequence below. The tasks identified with (◆) are part of the Scheduled Maintenance Requirements Document (SMRD).

TASK NUMBER	DESCRIPTION	EFFECTIVITY
21-23-05-000-801-A	TOILET GASPER-HOSE FILTER - REMOVAL	AIRCRAFT WITH TOILET GASPER-HOSE FILTER INSTALLED
21-23-05-400-801-A	TOILET GASPER-HOSE FILTER - INSTALLATION	AIRCRAFT WITH TOILET GASPER-HOSE FILTER INSTALLED

TASK 21-23-05-000-801-A

EFFECTIVITY: AIRCRAFT WITH TOILET GASPER-HOSE FILTER INSTALLED

## 2. TOILET GASPER-HOSE FILTER - REMOVAL

### A. General

(1) This task gives the procedures to remove the toilet gasper-hose filter.

### B. References

REFERENCE	DESIGNATION
AMM TASK 25-40-01-000-801-A/400	-

### C. Zones and Accesses

Not Applicable

### D. Tools and Equipment

Not Applicable

### E. Auxiliary Items

Not Applicable

### F. Consumable Materials

Not Applicable

### G. Expandable Parts

Not Applicable

### H. Persons Recommended

QTY	FUNCTION	PLACE
1	Does the task	In the toilet

### I. Preparation

#### SUBTASK 841-002-A

- (1) On the overhead circuit breaker panel, open the GASPER FAN circuit breaker and attach a DO-NOT-CLOSE tag to it (Location tip: DC BUS 2 / AIR COND / PNEU).
- (2) Remove the mirror and the amenity dispenser. Refer to AMM TASK 25-40-01-000-801-A/400.

### J. Removal of the Toilet Gasper-Hose Filter (Figure 401)


#### SUBTASK 020-002-A

- (1) Release the clamps (2) of the conditioned air hoses (3). Refer to Figure 401 DET. B.
- (2) Remove the conditioned air hoses (3) of the toilet gasper-hose filter (1). Refer to Figure 401 DET. B.
- (3) Remove the toilet gasper-hose filter (1) of the support (ref.). Refer to Figure 401 DET. B.

**EFFECTIVITY: AIRCRAFT WITH TOILET GASPER-HOSE FILTER INSTALLED**

Toilet Gasper - Hose Filter - Removal/Installation

Figure 401

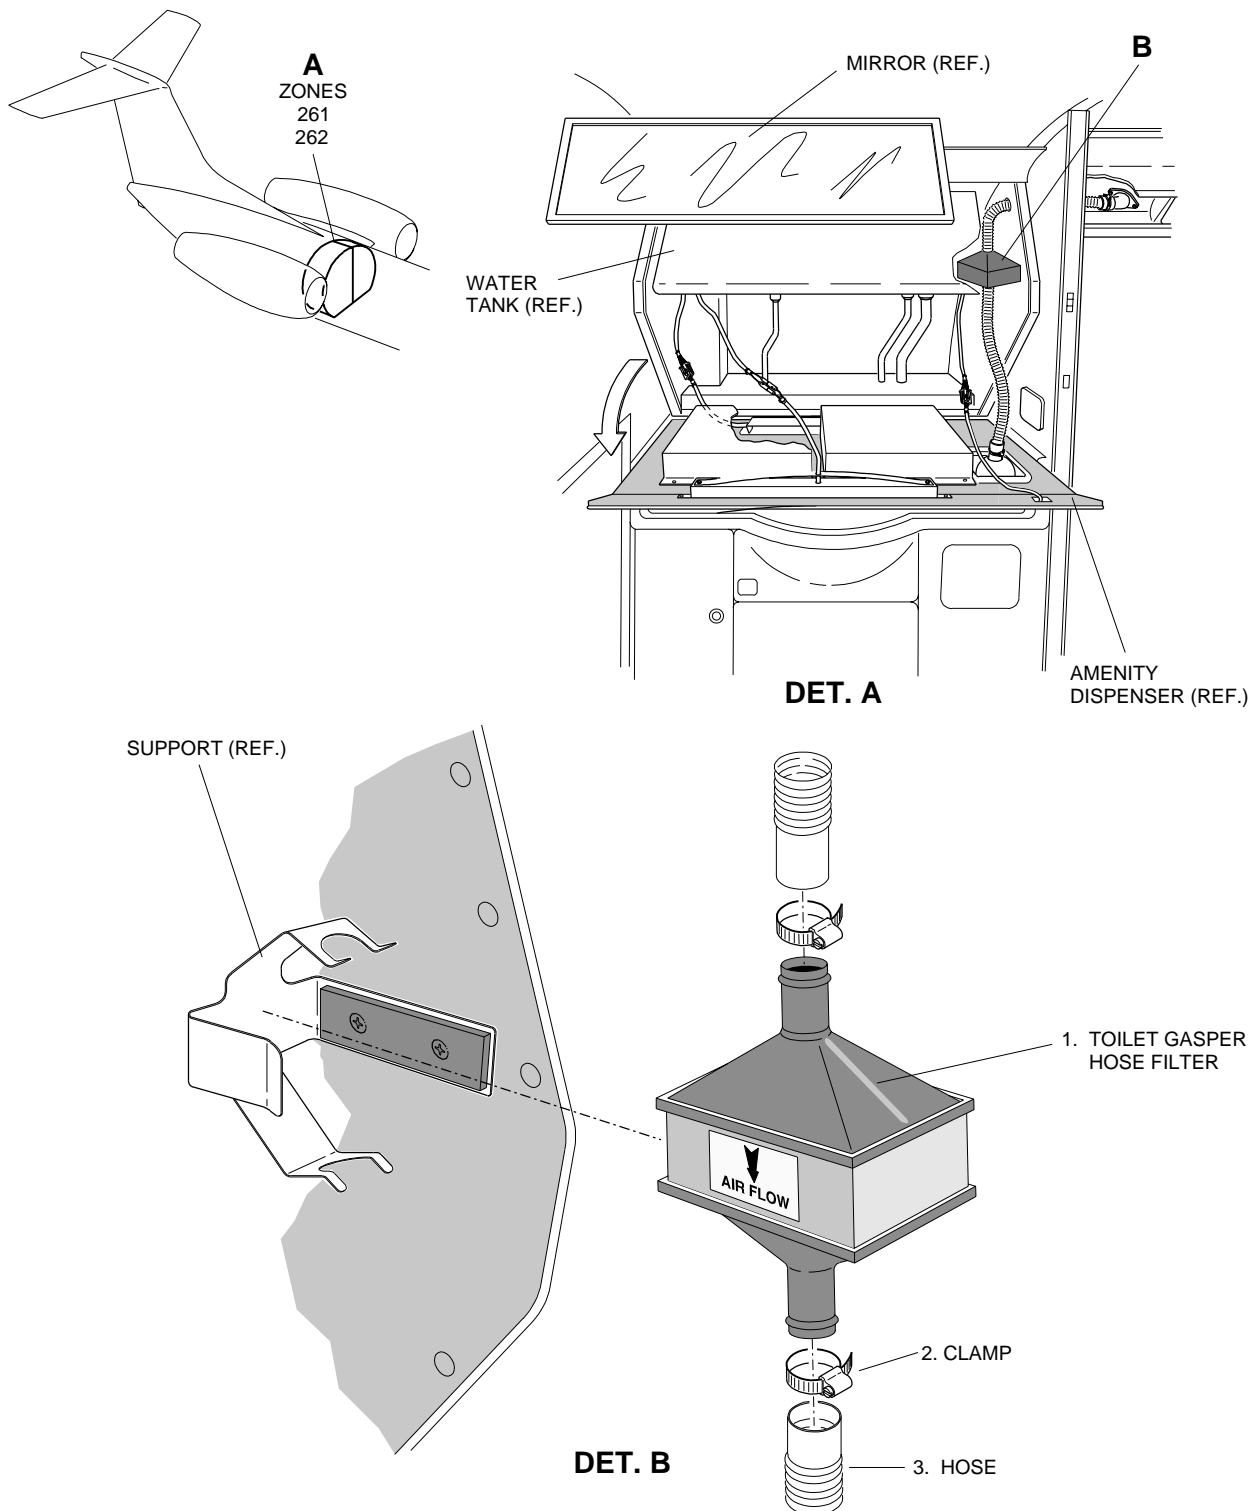

145AMM210628.MCE

TASK 21-23-05-400-801-A

*EFFECTIVITY: AIRCRAFT WITH TOILET GASPER-HOSE FILTER INSTALLED*

### 3. TOILET GASPER-HOSE FILTER - INSTALLATION

#### A. General

(1) This task gives the procedures to install the toilet gasper-hose filter.

#### B. References

REFERENCE	DESIGNATION
AMM TASK 25-40-01-400-801-A/400	-

#### C. Zones and Accesses

Not Applicable

#### D. Tools and Equipment

Not Applicable

#### E. Auxiliary Items

Not Applicable

#### F. Consumable Materials

Not Applicable

#### G. Expandable Parts

Not Applicable

#### H. Persons Recommended

QTY	FUNCTION	PLACE
1	Does the task	In the Toilet

#### I. Installation of the Toilet Gasper-Hose Filter (Figure 401)

*SUBTASK 420-002-A*

**CAUTION:** TO PREVENT CONTAMINATION OF THE SYSTEM, BEFORE THE INSTALLATION, MAKE SURE THAT THERE ARE NO FOREIGN MATERIALS IN THE HOSES OR IN THE TOILET GASPER-HOSE FILTER.

**CAUTION:** TO PREVENT MALFUNCTION OF THE TOILET GASPER-HOSE FILTER, SEE THE CORRECT AIRFLOW DIRECTION BEFORE THE FILTER INSTALLATION.

- (1) Install the toilet gasper-hose filter (1) at the support (ref.). Refer to (Figure 401) DET. B.
- (2) Install the conditioned air hoses (3) at the toilet gasper-hose filter (1). Refer to (Figure 401) DET. B.
- (3) Tighten the clamps (2) . Refer to (Figure 401) DET. B.

J. Follow-on

*SUBTASK 842-002-A*

- (1) Install the amenity dispenser and the mirror. Refer to AMM TASK 25-40-01-400-801-A/400.
- (2) On the overhead circuit breaker panel, close the GASPER FAN circuit breaker and remove the DO-NOT-CLOSE tag.

