
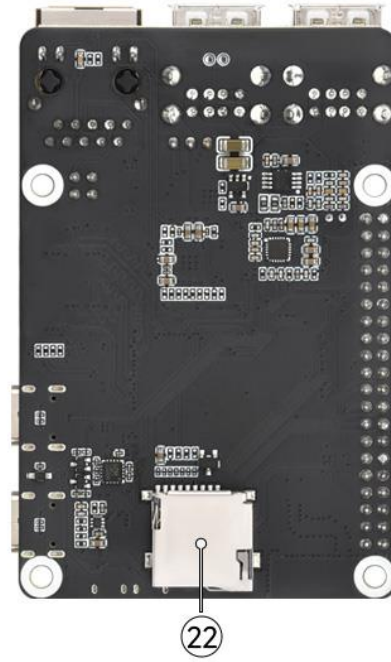


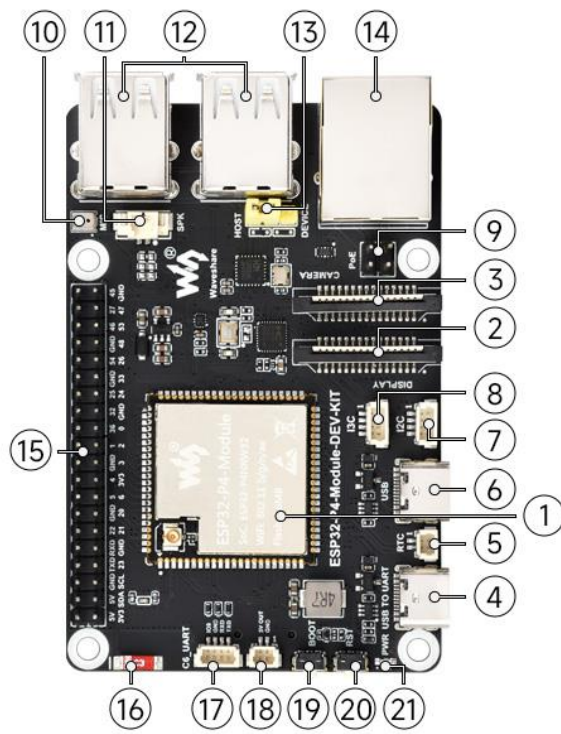

1. ESP32-P4-Module

Built-in ESP32-P4NRW32, ESP32-C6,
16MB Nor Flash

2. Display screen interface

MIPI-2lane

3. Camera interface

MIPI 2-lane

4. Type-C interface

Used for power supply, program
flashing, debugging

5. RTC holder

SH1.0 2P connector,Connecting the
rechargeable RTC battery (only
rechargeable RTC batteries are
supported)

6. Type-C interface

Used for power supply and program
flashing

7. I2C interface

SH1.0 4P connector

8. I3C interface

SH1.0 4P connector

9. PoE module interface

Supports external PoE module,
powered by PoE

10. SMD microphone

11. Speaker interface

MX1.25 2P connector, supporting 8Ω
2W speaker

12. Type-A interface

USB OTG 2.0 High Speed interface,
which can be switched through
jumper caps

13. USB OTG function switch pin header

The USB port can be expanded by
switching the HOST

14. 100MB RJ45 network port

15. 40PIN pin header

16. ESP32-C6 SMD antenna

SDIO interface protocol, extending
Wi-Fi 6 and Bluetooth 5

17. ESP32-C6 UART terminal

SH1.0 4P connector

18. 5V power terminal

SH1.0 2P connector

19. BOOT button

Press when powering on or
resetting to enter download mode

20. RST button

Reset Button

21. Power indicator

22. TF card slot

SDIO 3.0 interface protocol

