

### 14.2mm(0.56INCH) FOUR DIGIT NUMERIC DISPLAY

Part Number: CA56-11GWA

Green


### **Features**


- 0.56 INCH DIGIT HEIGHT.
- LOW CURRENT OPERATION.
- EXCELLENT CHARACTER APPEARANCE.
- EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- I.C. COMPATIBLE.
- MECHANICALLY RUGGED.
- STANDARD :GRAY FACE, WHITE SEGMENT.
- UL RATING:HB.
- RoHS COMPLIANT.

# Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

# **Package Dimensions& Internal Circuit Diagram**

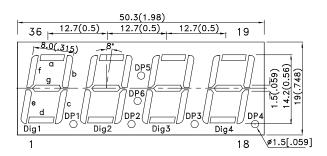

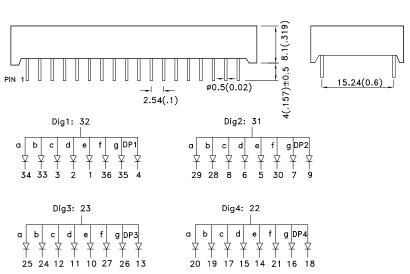



SPEC NO: DSAA3959

**APPROVED: WYNEC** 

1. All dimensions are in millimeters (inches), Tolerance is  $\pm 0.25 (0.01")$  unless otherwise noted.

2. Specifications are subject to change without notice.

**REV NO: V.9 CHECKED:** Joe Lee DATE: MAY/25/2007 DRAWN: Y.L.LI



PAGE: 1 OF 4 ERP: 1304000070

# Kingbright

# **Selection Guide**

Part No.	Dice	Lens Type	Iv (ucd) [1] @ 10mA		Description
			Min.	Тур.	•
CA56-11GWA	Green (GaP)	WHITE DIFFUSED	3000	13000	Common Anode, Rt. Hand Decimal.

#### Note:

# Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lR	Reverse Current	Green		10	uA	V <sub>R</sub> =5V

#### Notes:

# Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units		
Power dissipation	62.5	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating / Storage Temperature	-40°C To +85°C			
Lead Solder Temperature[2]	260°C For 3-5 Seconds			


1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.

SPEC NO: DSAA3959 **REV NO: V.9** DATE: MAY/25/2007 PAGE: 2 OF 4 **CHECKED:** Joe Lee APPROVED: WYNEC DRAWN: Y.L.LI ERP: 1304000070

<sup>1.</sup> Luminous intensity/ luminous Flux: +/-15%.


<sup>1.</sup>Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.


# **Kingbright**

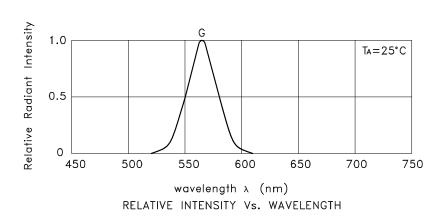



# Green

# **CA56-11GWA**










SPEC NO: DSAA3959 APPROVED: WYNEC REV NO: V.9 CHECKED: Joe Lee DATE: MAY/25/2007 DRAWN: Y.L.LI PAGE: 3 OF 4 ERP: 1304000070

# **Kingbright**

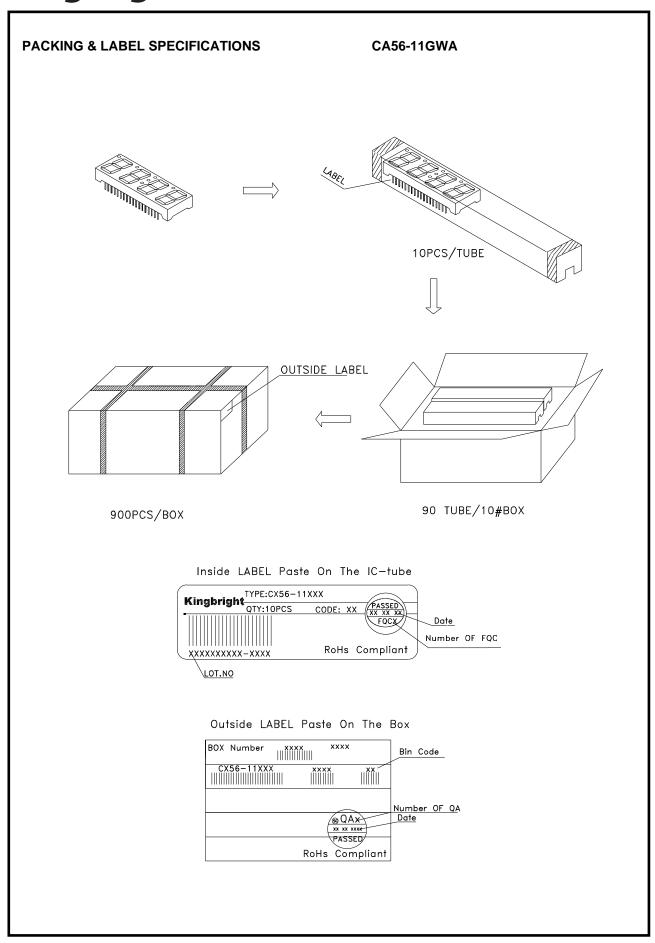

SPEC NO: DSAA3959 APPROVED: WYNEC REV NO: V.9 CHECKED: Joe Lee DATE: MAY/25/2007 DRAWN: Y.L.LI PAGE: 4 OF 4 ERP: 1304000070