

## Qty. Description

1 NK 80-160/167 AA2F2AESBQQEQW1



Note! Product picture may differ from actual product

Product No.: [98663370](#)

Non-self-priming, single-stage, centrifugal pump designed according to ISO 5199 with dimensions and rated performance according to EN 733. Flanges are PN 16 with dimensions according to EN 1092-2. The pump has an axial suction port, a radial discharge port and horizontal shaft. It is of the back pull-out design enabling removal of the motor, coupling, bearing bracket and impeller without disturbing the pump housing or pipework.

The unbalanced rubber bellows seal is according to DIN EN 12756.

The pump is fitted with a foot-mounted, fan-cooled asynchronous motor. Pump and motor are mounted on a common base frame.


The product's minimum efficiency index (MEI) is greater or equal to 0.70. This is by the Commission Regulation (EU) considered as an indicative benchmark for best-performing water pump available on the market as from 1 January 2013.

Pump and motor are mounted on a common steel base frame in accordance with ISO 3661.

The back pull-out design together with a spacer coupling makes it possible to service the pump without dismantling the pump housing and motor from the base frame.

This saves realignment of pump and motor after service.

- 1) Remove coupling.
- 2) Remove the bolts in the bearing bracket support foot.
- 3) Remove the bearing bracket from the pump housing.

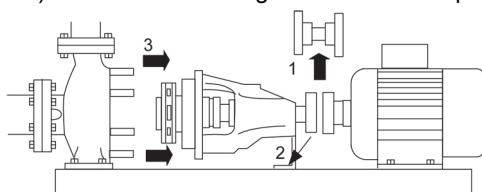

## Pump

The pump is fitted with an unbalanced rubber bellows seal with torque transmission across the spring and around the bellows. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft.



Seal faces:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: EPDM (ethylene-propylene rubber)


EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.

The shaft is made of stainless steel and has a diameter of 24 mm where the coupling is mounted.

The pump uses a spacer coupling between the pump and motor shaft.

## Qty. Description

1



The language on the pump nameplate is English.

### Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. Electrical tolerances comply with IEC 60034.

The motor efficiency is classified as IE3 in accordance with IEC 60034-30-1.

The motor has thermistors (PTC sensors) in the windings in accordance with DIN 44081/DIN 44082. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.

Thermal switches must be connected to an external control circuit in a way which ensures that the automatic reset cannot cause accidents. The motors must be connected to a motor-protective circuit breaker according to local regulations.

The motor can be connected to a variable speed drive for adjustment of pump performance to any duty point. Grundfos CUE offers a range of variable speed drives. Please find more information in Grundfos Product Center.

### Further product details

Cast-iron parts have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.

### Technical data

#### Controls:

Frequency converter: NONE

Pressure sensor: N

#### Liquid:

Pumped liquid: Water

Liquid temperature range: -25 .. 120 °C

Selected liquid temperature: 20 °C

Density: 998.2 kg/m<sup>3</sup>

#### Technical:

Pump speed on which pump data are based: 2950 rpm

Rated flow: 200.4 m<sup>3</sup>/h

Pump with motor (Yes/No): Y

Rated head: 28.56 m

Actual impeller diameter: 167 mm

Nominal impeller diameter: 160

Code for shaft seal: BQQE

Mechanical seal type: Single

Curve tolerance: ISO9906:2012 3B

Bearing design: Standard

#### Materials:

Pump housing: Cast iron


EN-GJL-250

ASTM class 35


Wear ring: Brass

| Qty. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | <p>Impeller: Cast iron<br/>EN-GJL-200<br/>ASTM class 30</p> <p>Internal pump house coating: CED</p> <p>Shaft: Stainless steel<br/>EN 1.4301<br/>AISI 304</p> <p>Installation:</p> <p>Maximum ambient temperature: 60 °C</p> <p>Maximum operating pressure: 16 bar</p> <p>Pipe connection standard: EN 1092-2</p> <p>Type of inlet connection: DIN</p> <p>Type of outlet connection: DIN</p> <p>Size of inlet connection: DN 100</p> <p>Size of outlet connection: DN 80</p> <p>Pressure rating for connection: PN 16</p> <p>Coupling type: Flexible w/spacer</p> <p>Base frame design: EN/ISO</p> <p>Code for base frame: 6</p> <p>Grouting (Yes/No): N</p> <p>Electrical data:</p> <p>Motor type: 180MB</p> <p>Rated power - P2: 22 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 3 x 380-415D/660-690Y V</p> <p>Rated current: 39.5/22.8 A</p> <p>Starting current: 830 %</p> <p>Cos phi - power factor: 0.90-0.90</p> <p>Rated speed: 2950 rpm</p> <p>IE Efficiency class: IE3</p> <p>Motor efficiency at full load: 92.7-92.7 %</p> <p>Motor efficiency at 3/4 load: 93.7-94.0 %</p> <p>Motor efficiency at 1/2 load: 94.4-94.1 %</p> <p>Number of poles: 2</p> <p>Enclosure class (IEC 34-5): 55 Dust/Jetting</p> <p>Insulation class (IEC 85): F</p> <p>Motor No: 87470022</p> <p>Bearing insulation type N-end: STEEL BEARING</p> <p>Others:</p> <p>Minimum efficiency index, MEI ≥: 0.70</p> <p>Net weight: 265 kg</p> <p>Gross weight: 280 kg</p> <p>Shipping volume: 0.499 m³</p> <p>Language on pump nameplate: GB</p> |


## 98663370 NK 80-160/167 AA2F2AESBQQEQW1 50 Hz

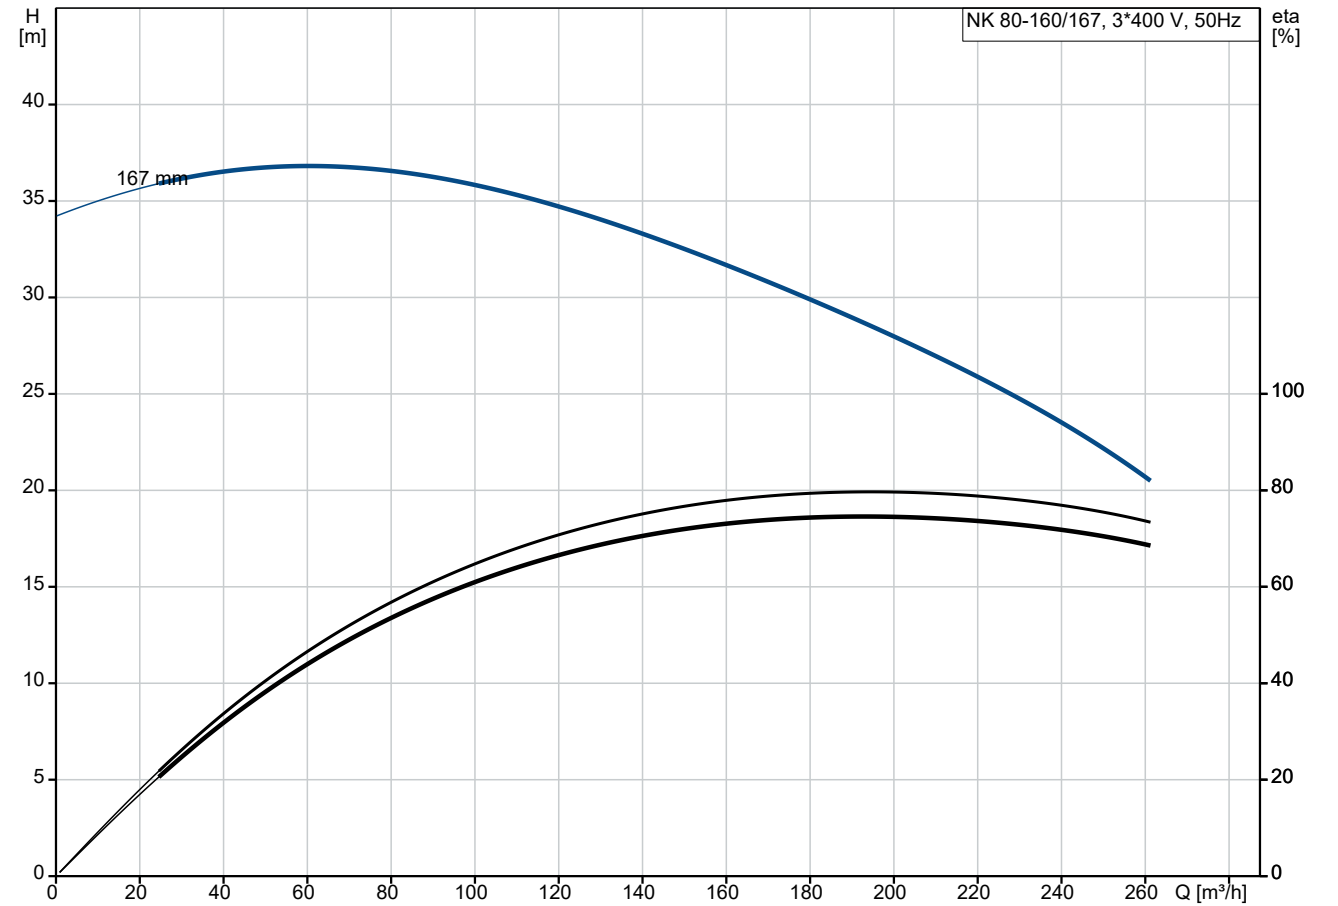




Pumped liquid = Water  
 Liquid temperature during operation = 20 °C  
 Density = 998.2 kg/m³

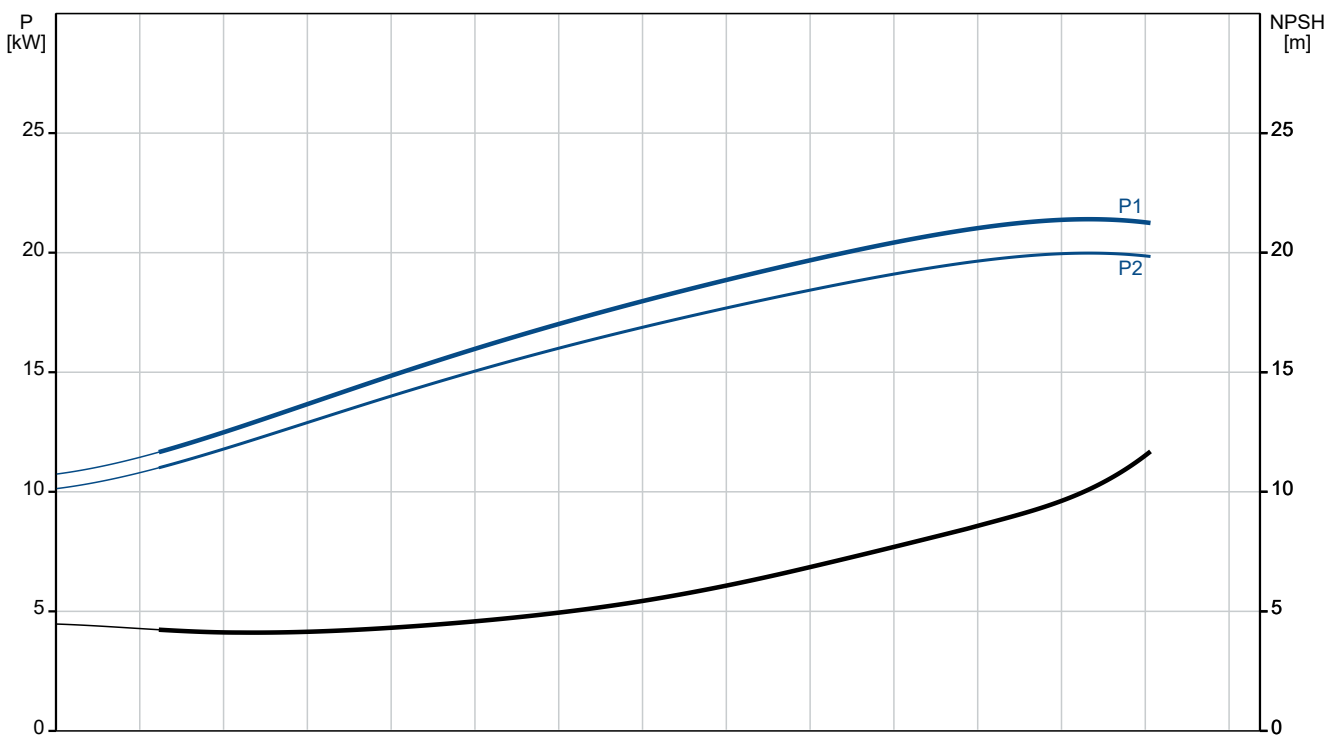

| Description                              | Value                            |
|------------------------------------------|----------------------------------|
| <b>General information:</b>              |                                  |
| Product name:                            | NK 80-160/167<br>AA2F2AESBQQEQW1 |
| Product No:                              | 98663370                         |
| EAN number:                              | 5711499165792                    |
| <b>Technical:</b>                        |                                  |
| Pump speed on which pump data are based: | 2950 rpm                         |
| Rated flow:                              | 200.4 m³/h                       |
| Pump with motor (Yes/No):                | Y                                |
| Rated head:                              | 28.56 m                          |
| Actual impeller diameter:                | 167 mm                           |
| Nominal impeller diameter:               | 160                              |
| Shaft diameter:                          | 24 mm                            |
| Code for shaft seal:                     | BQQE                             |
| Mechanical seal type:                    | Single                           |
| Curve tolerance:                         | ISO9906:2012 3B                  |
| Pump version:                            | A2                               |
| Bearing design:                          | Standard                         |
| <b>Materials:</b>                        |                                  |
| Pump housing:                            | Cast iron                        |
| Pump housing:                            | EN-GJL-250                       |
| Pump housing:                            | ASTM class 35                    |
| Wear ring:                               | Brass                            |
| Impeller:                                | Cast iron                        |
| Impeller:                                | EN-GJL-200                       |
| Impeller:                                | ASTM class 30                    |
| Internal pump house coating:             | CED                              |
| Material code:                           | A                                |
| Code for rubber:                         | E                                |
| Shaft:                                   | Stainless steel                  |
| Shaft:                                   | EN 1.4301                        |
| Shaft:                                   | AISI 304                         |
| <b>Installation:</b>                     |                                  |
| Maximum ambient temperature:             | 60 °C                            |
| Maximum operating pressure:              | 16 bar                           |
| Pipe connection standard:                | EN 1092-2                        |
| Type of inlet connection:                | DIN                              |
| Type of outlet connection:               | DIN                              |
| Size of inlet connection:                | DN 100                           |
| Size of outlet connection:               | DN 80                            |
| Pressure rating for connection:          | PN 16                            |
| Coupling type:                           | Flexible w/spacer                |
| Base frame design:                       | EN/ISO                           |
| Code for base frame:                     | 6                                |
| Grouting (Yes/No):                       | N                                |
| Connect code:                            | F                                |
| <b>Liquid:</b>                           |                                  |
| Pumped liquid:                           | Water                            |
| Liquid temperature range:                | -25 .. 120 °C                    |
| Selected liquid temperature:             | 20 °C                            |
| Density:                                 | 998.2 kg/m³                      |
| <b>Electrical data:</b>                  |                                  |
| Motor type:                              | 180MB                            |
| Rated power - P2:                        | 22 kW                            |
| Mains frequency:                         | 50 Hz                            |
| Rated voltage:                           | 3 x 380-415D/660-690Y V          |
| Rated current:                           | 39.5/22.8 A                      |

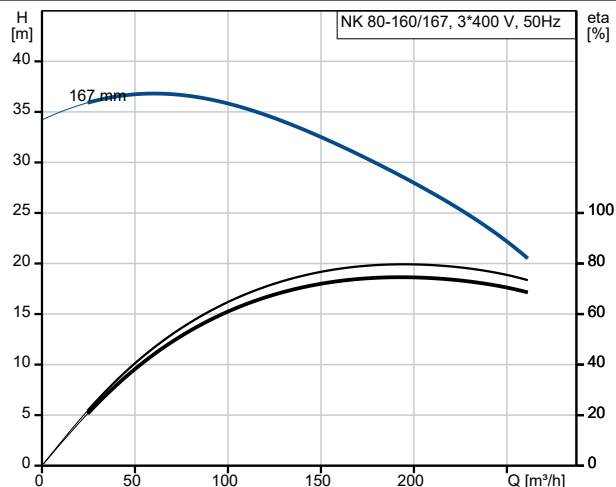

Pumped liquid = Water  
Liquid temperature during operation = 20 °C  
Density = 998.2 kg/m³

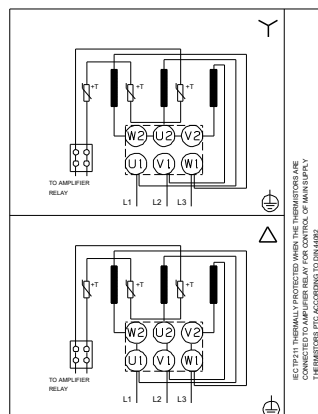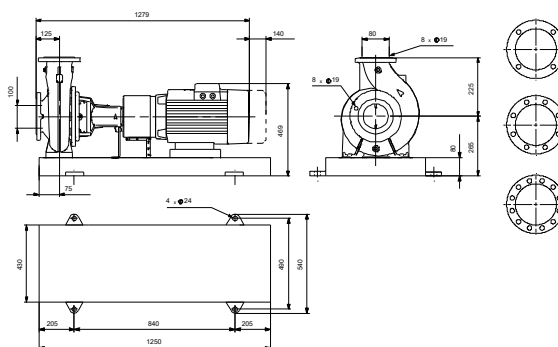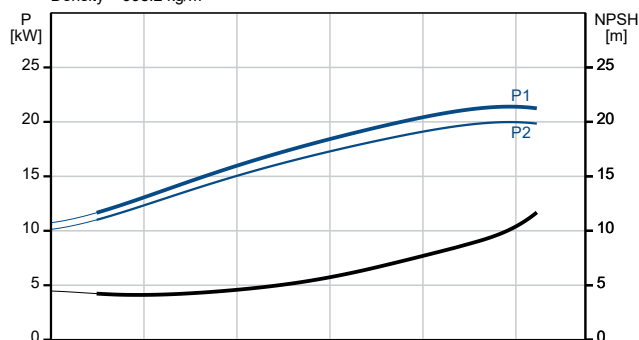



Company name:

Created by:


Phone:

Date:


10/10/2023

| Description                      | Value                |
|----------------------------------|----------------------|
| Starting current:                | 830 %                |
| Cos phi - power factor:          | 0.90-0.90            |
| Rated speed:                     | 2950 rpm             |
| IE Efficiency class:             | IE3                  |
| Motor efficiency at full load:   | 92.7-92.7 %          |
| Motor efficiency at 3/4 load:    | 93.7-94.0 %          |
| Motor efficiency at 1/2 load:    | 94.4-94.1 %          |
| Number of poles:                 | 2                    |
| Enclosure class (IEC 34-5):      | 55 Dust/Jetting      |
| Insulation class (IEC 85):       | F                    |
| Built-in motor protection:       | PTC                  |
| Motor No:                        | 87470022             |
| Bearing insulation type N-end:   | STEEL BEARING        |
| <b>Controls:</b>                 |                      |
| Frequency converter:             | NONE                 |
| Pressure sensor:                 | N                    |
| <b>Others:</b>                   |                      |
| Minimum efficiency index, MEI ≥: | 0.70                 |
| Net weight:                      | 265 kg               |
| Gross weight:                    | 280 kg               |
| Shipping volume:                 | 0.499 m <sup>3</sup> |
| Language on pump nameplate:      | GB                   |

## 98663370 NK 80-160/167 AA2F2AESBQQEQW1 50 Hz

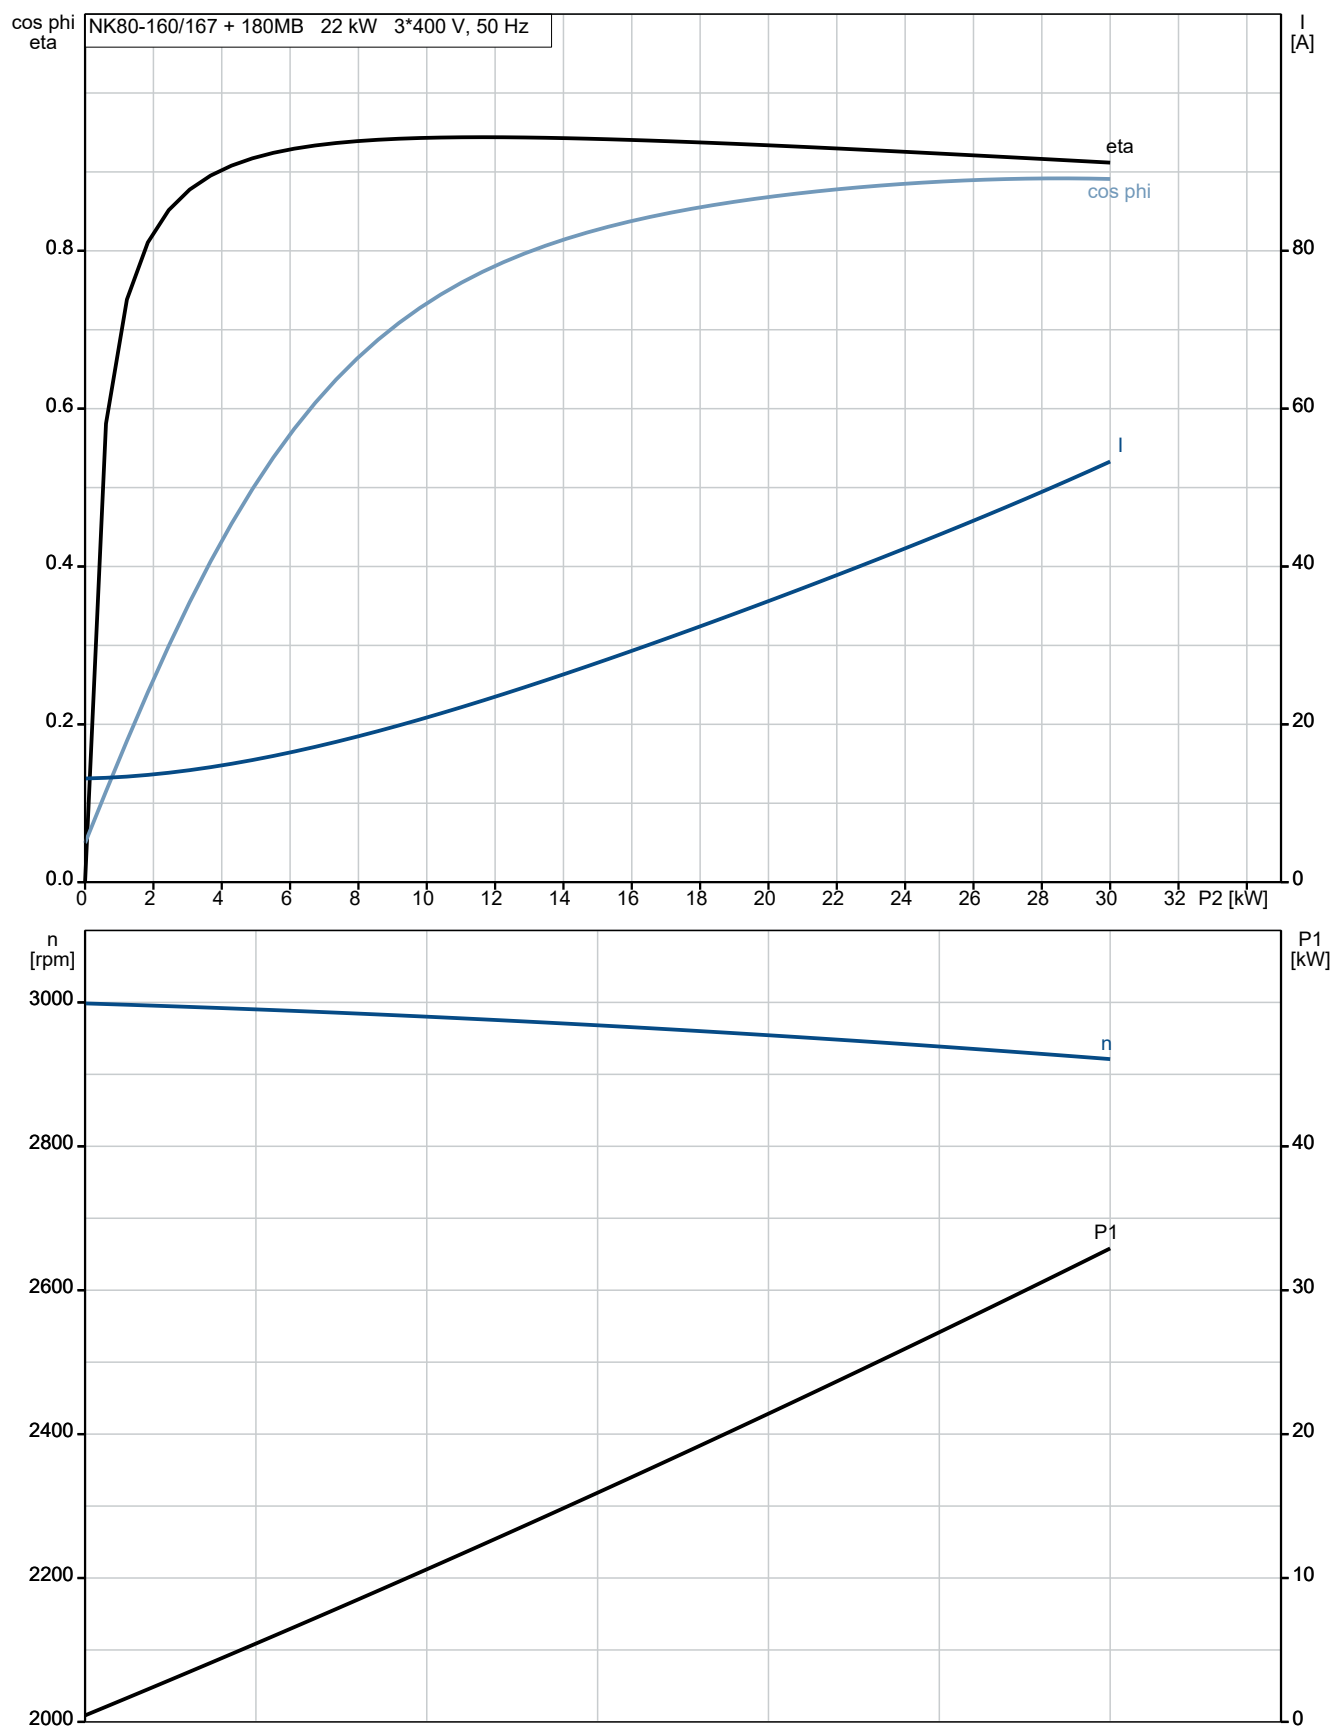


## 98663370 NK 80-160/167 AA2F2AESBQQEQW1 50 Hz

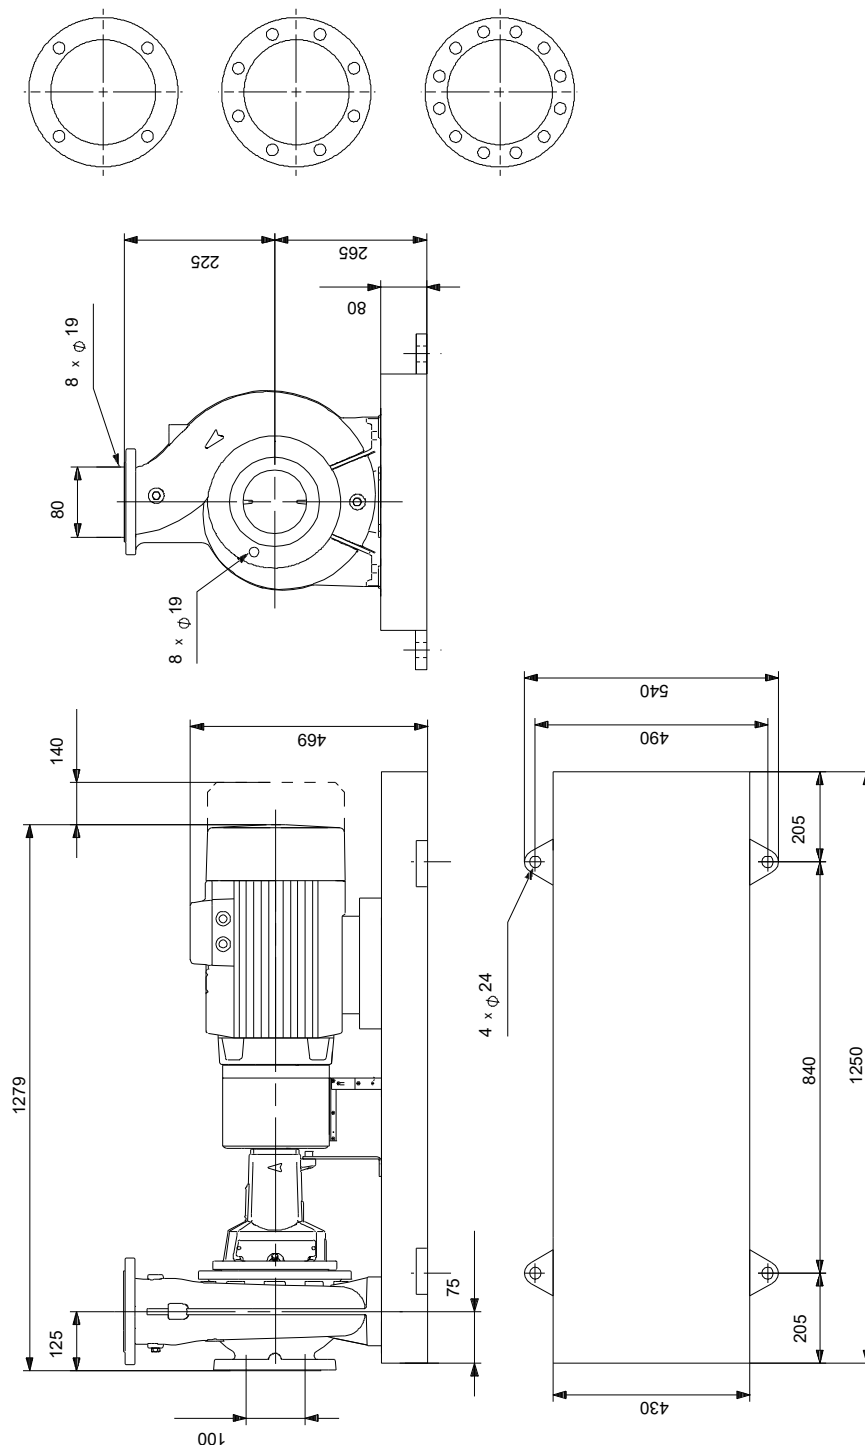

Note! All units are in [mm] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.


## 98663370 NK 80-160/167 AA2F2AESBQQEQW1 50 Hz

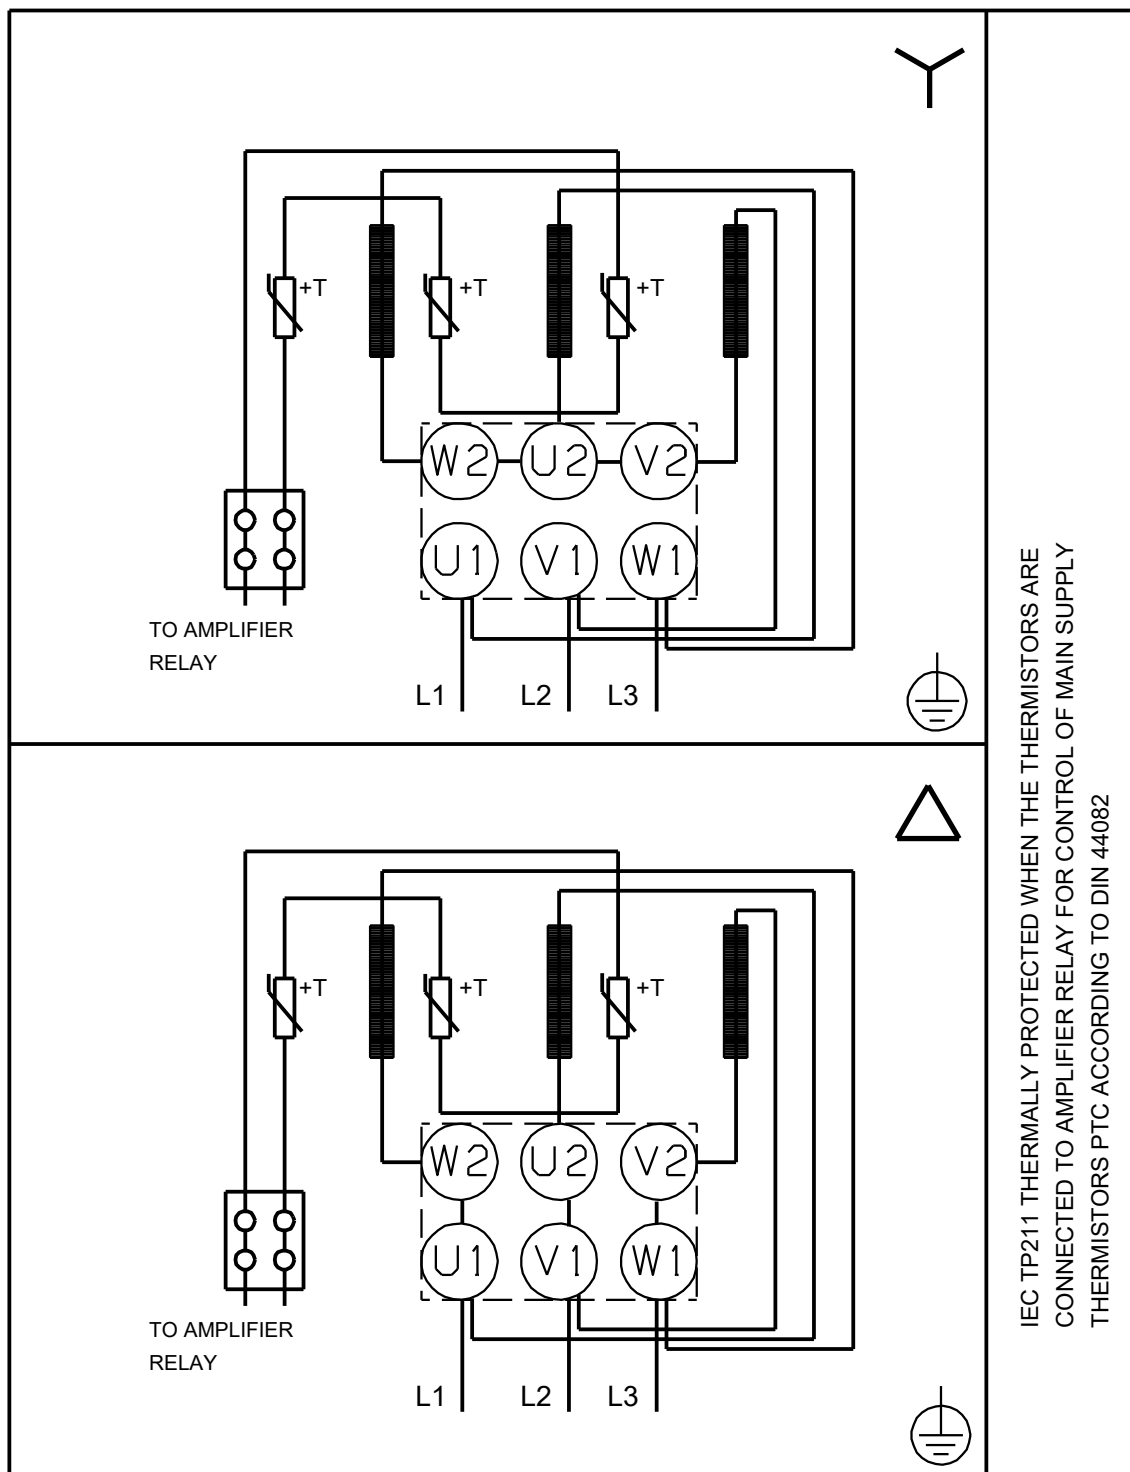

Note! All units are in [mm] unless others are stated.



( NK )

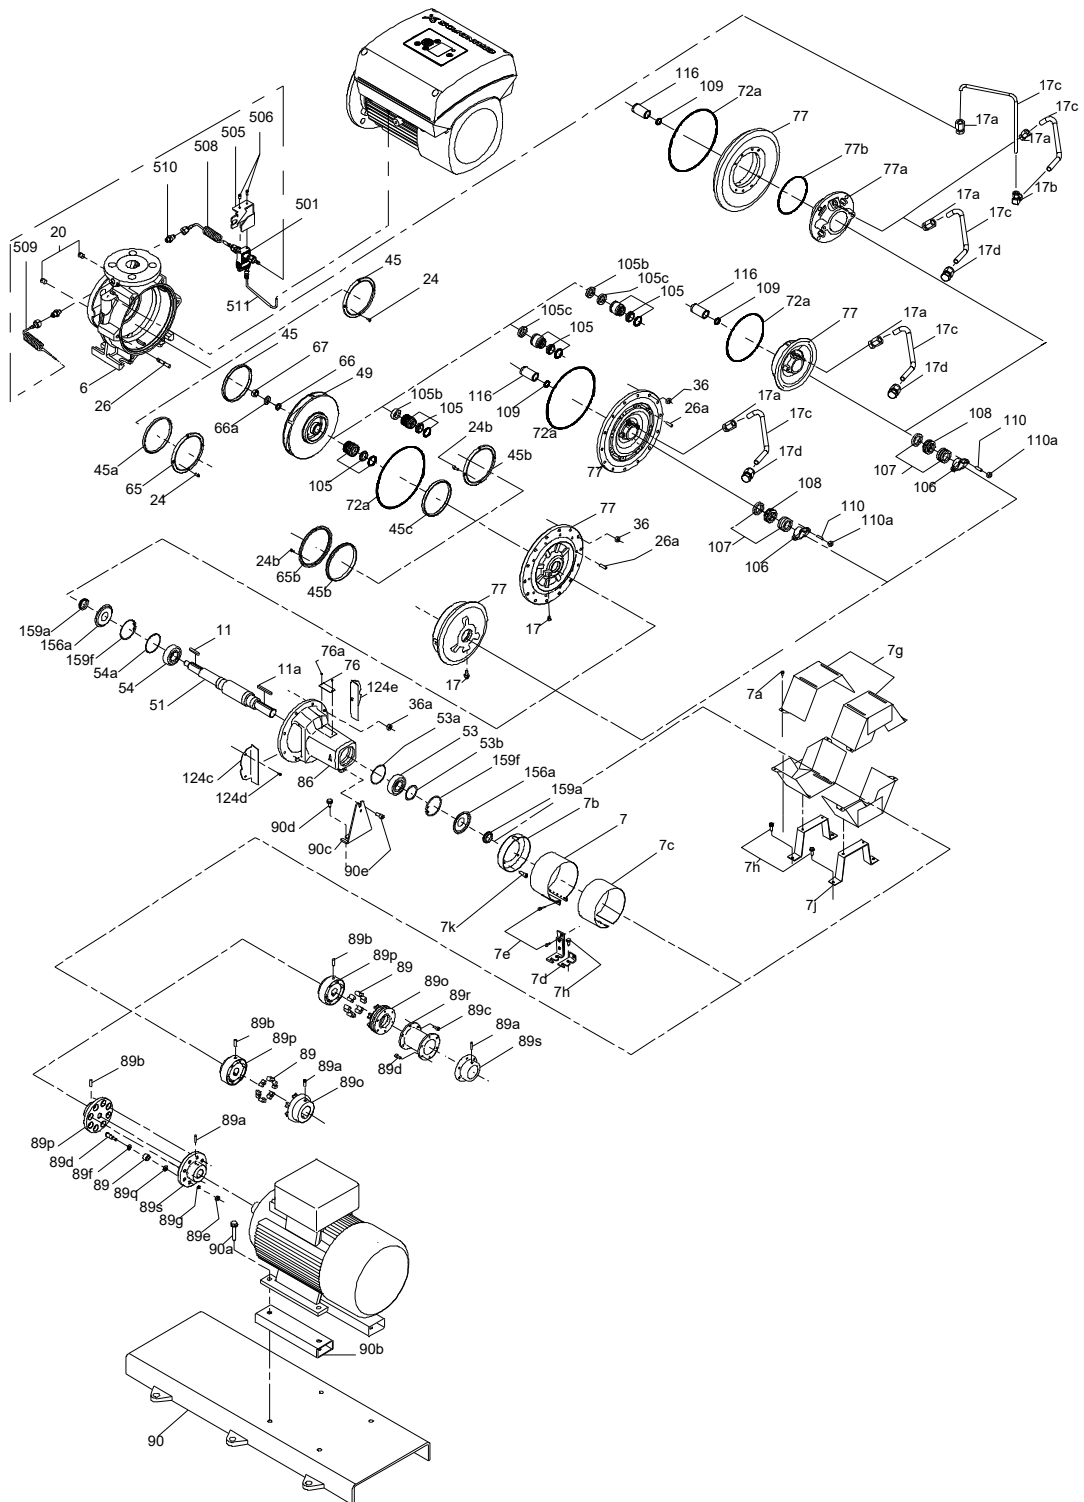

**Spare parts NK 80-160/167, Product No. 98663370**

**Produced After 1152 (production year and week number)**

| Pos  | Description                   | Annotation | Classification Data | Part no. | Qty. | Unit |
|------|-------------------------------|------------|---------------------|----------|------|------|
| -    | Kit, Bearing                  |            |                     | 96579598 | 1    | pcs  |
| 53   | Ball bearing                  |            |                     |          | 1    | pcs  |
| 54a  | O-ring                        |            | Diameter: 71,5      |          | 1    | pcs  |
|      |                               |            | Material type: EPDM |          |      |      |
|      |                               |            | Thickness: 3        |          |      |      |
| 54a  | O-ring                        |            | Diameter: 71,5      |          | 1    | pcs  |
|      |                               |            | Material type: EPDM |          |      |      |
|      |                               |            | Thickness: 3        |          |      |      |
| 54   | Ball bearing                  |            |                     |          | 1    | pcs  |
| 156a | Bearing cover                 |            |                     |          | 2    | pcs  |
| 159f | Retaining ring                |            |                     |          | 2    | pcs  |
| 159a | V-ring                        |            |                     |          | 2    | pcs  |
| -    | Kit, Bearing bracket          |            |                     | 95131793 | 1    | pcs  |
| 7k   | Hex socket head cap screw     |            | Length (mm): 10     |          | 4    | pcs  |
|      |                               |            | Thread: M6          |          |      |      |
| 36a  | Nut                           |            | Thread: M10         |          | 6    | pcs  |
| 76a  | Rivet                         |            |                     |          | 2    | pcs  |
| 86   | Bearing bracket               |            |                     |          | 1    | pcs  |
| 124e | Shaft guard                   |            |                     |          | 1    | pcs  |
| 124d | Pan head screw                |            |                     |          | 4    | pcs  |
| 124c | Shaft guard                   |            |                     |          | 1    | pcs  |
| -    | Kit, Coupling                 |            |                     | 96579755 | 1    | pcs  |
| - 8  | Coupling cpl.                 |            |                     |          | 1    | pcs  |
| 89r  | Spacer sleeve                 |            |                     |          | 1    | pcs  |
| 89b  | Socket set screw              |            | Length (mm): 8      |          | 1    | pcs  |
|      |                               |            | Thread: M6          |          |      |      |
| 89.s | Spacer ring                   |            |                     |          | 1    | pcs  |
| 89.p | Coupling female               |            |                     |          | 1    | pcs  |
| 89.o | Coupling part spacer side     |            |                     |          | 1    | pcs  |
| 89.d | Hex socket head cap screw     |            | Length (mm): 20     |          | 6    | pcs  |
|      |                               |            | Thread: M8          |          |      |      |
| 89   | Rubber blocks for coupling    |            |                     |          | 6    | pcs  |
| 11a  | Parallel key                  |            | Dimension: 8X7X40   |          | 1    | pcs  |
| -    | Kit, Coupling guard           |            |                     | 97945067 | 1    | pcs  |
| 7n   | Retainer for coupling guard   |            |                     |          | 1    | pcs  |
| 7k   | Hex socket head cap screw     |            | Length (mm): 10     |          | 4    | pcs  |
|      |                               |            | Thread: M6          |          |      |      |
| - 7  | Coupling guard cpl.           |            |                     |          | 1    | pcs  |
| 7e   | Hex socket head cap screw     |            |                     |          | 3    | pcs  |
| 7c   | Spacer f/coupling guard       |            |                     |          | 1    | pcs  |
| 7    | Coupling guard cpl.           |            |                     |          | 1    | pcs  |
| 94   | Lock nut                      |            | Thread: M6          |          | 2    | pcs  |
| -    | Kit, Cover                    |            |                     | 95131800 | 1    | pcs  |
| 18   | Plug                          |            |                     |          | 1    | pcs  |
| 36   | Nut                           |            | Thread: M10         |          | 6    | pcs  |
| 77   | Cover f/mech. seal            |            |                     |          | 1    | pcs  |
| -    | Kit, Foot for bearing bracket |            |                     | 96909162 | 1    | pcs  |
| 36   | Hex nut                       |            | Thread: M12         |          | 2    | pcs  |
| 66   | Washer                        |            |                     |          | 2    | pcs  |
| 90e  | Hex head screw                |            | Length (mm): 25     |          | 1    | pcs  |
|      |                               |            | Thread: M12         |          |      |      |
| 90d  | Hex head bolt                 |            | Length (mm): 100    |          | 2    | pcs  |
|      |                               |            | Thread: M12         |          |      |      |

| Pos  | Description                    | Annotation   | Classification Data              | Part no. | Qty. | Unit |
|------|--------------------------------|--------------|----------------------------------|----------|------|------|
| 90d  | Hex head bolt                  |              | Length (mm): 80<br>Thread: M12   |          | 2    | pcs  |
| 90d  | Hex head bolt                  |              | Length (mm): 55<br>Thread: M12   |          | 2    | pcs  |
| 90d  | Hex socket head cap screw      |              |                                  |          | 2    | pcs  |
| 90d  | Hex head screw                 |              | Length (mm): 35MM<br>Thread: M12 |          | 2    | pcs  |
| 90d  | Hex head screw                 |              | Length (mm): 30<br>Thread: M12   |          | 2    | pcs  |
| 90c  | Foot                           |              |                                  |          | 1    | pcs  |
| -    | Kit, Foot for coupling guard   |              |                                  | 96848498 | 1    | pcs  |
| 7h   | Hex head screw                 |              | Length (mm): 16<br>Thread: M8    |          | 2    | pcs  |
| -    | 7d                             | Foot cpl.    |                                  |          | 1    | pcs  |
| 7l   | Support f/coupling guard foot  |              |                                  |          | 1    | pcs  |
| 7h   | Hex socket head cap screw      |              |                                  |          | 2    | pcs  |
| 7d   | Foot for coupling guard        |              |                                  |          | 1    | pcs  |
| 66   | Washer                         |              |                                  |          | 2    | pcs  |
| -    | Kit, Nut                       |              |                                  | 96939128 | 1    | pcs  |
| 11   | Parallel key                   |              | Dimension: 6X6X35                |          | 1    | pcs  |
| -    | 36                             | Nut          |                                  |          | 1    | pcs  |
| 66a  | Spring lock washer             |              |                                  |          | 1    | pcs  |
| 66   | Washer                         |              |                                  |          | 1    | pcs  |
| 67   | Nut                            |              | Thread: M14                      |          | 1    | pcs  |
| -    | Kit, Pump housing              |              |                                  | 95131728 | 1    | pcs  |
| -    | 6                              | Pump housing |                                  |          | 1    | pcs  |
| 26   | Staybolt                       |              | Length (mm): 40<br>Thread: M10   |          | 6    | pcs  |
| 45   | Wear ring                      |              |                                  |          | 1    | pcs  |
| 20   | Plug                           |              |                                  |          | 2    | pcs  |
| 36   | Nut                            |              | Thread: M10                      |          | 6    | pcs  |
| -    | Kit, Rubber blocks f. coupling |              |                                  | 96480017 | 1    | pcs  |
| 89   | Rubber blocks for coupling     |              |                                  |          | 6    | pcs  |
| -    | Kit, Shaft                     |              |                                  | 96039654 | 1    | pcs  |
| 11a  | Parallel key                   |              | Dimension: 8X7X40                |          | 1    | pcs  |
| 11   | Parallel key                   |              | Dimension: 6X6X35                |          | 1    | pcs  |
| 51   | Shaft                          |              |                                  |          | 1    | pcs  |
| 66a  | Spring lock washer             |              |                                  |          | 1    | pcs  |
| 66   | Washer                         |              |                                  |          | 1    | pcs  |
| 67   | Nut                            |              | Thread: M14                      |          | 1    | pcs  |
| -    | Kit, Shaft cover               |              |                                  | 96809954 | 1    | pcs  |
| 124e | Shaft guard                    |              |                                  |          | 1    | pcs  |
| 124d | Pan head screw                 |              |                                  |          | 4    | pcs  |
| 124c | Shaft guard                    |              |                                  |          | 1    | pcs  |
| -    | Spare, Wear ring               |              |                                  | 96810106 | 1    | pcs  |
| 45   | Wear ring                      |              |                                  |          | 1    | pcs  |
| -    | Spare, Wear ring               |              |                                  | 96939585 | 1    | pcs  |
| 45   | Wear ring                      |              |                                  |          | 1    | pcs  |
| -    | V-ring                         |              |                                  | 96591314 | 1    | pcs  |
| 159a | V-ring                         |              |                                  |          | 1    | pcs  |
| -    | Motor                          |              |                                  |          | 1    | pcs  |
| -    | Kit, Bearing cpl.              |              | Designation: 6310.Z.C4-6310.Z.C4 | 96796811 | 1    | pcs  |
| 153  | Ball bearing                   |              |                                  |          | 1    | pcs  |
| 154  | Ball bearing                   |              |                                  |          | 1    | pcs  |
| 158  | Waved washer                   |              |                                  |          | 1    | pcs  |
| -    | Kit, Bearing plate             |              |                                  | 96796809 | 1    | pcs  |
| 155a | Cover                          |              |                                  |          | 1    | pcs  |
| 208a | Gasket                         |              |                                  |          | 3    | pcs  |

| Pos   | Description                             | Annotation | Classification Data | Part no. | Qty. | Unit |
|-------|-----------------------------------------|------------|---------------------|----------|------|------|
| 208   | Hex socket head cap screw               |            | Designation: DIN912 |          | 3    | pcs  |
|       |                                         |            | Length (mm): 40     |          |      |      |
|       |                                         |            | Thread: M5          |          |      |      |
| -     | Kit, End shield                         |            |                     | 96796805 | 1    | pcs  |
| 156.b | End shield DE                           |            |                     |          | 1    | pcs  |
| 159.b | Seal ring                               |            |                     |          | 1    | pcs  |
| 185b  | Nut                                     |            |                     |          | 4    | pcs  |
| 185   | Hex socket head cap screw               |            |                     |          | 4    | pcs  |
| 186   | Drain plug                              |            |                     |          | 3    | pcs  |
| 195a  | Grease nipple                           |            |                     |          | 1    | pcs  |
| -     | Kit, Eyebolt                            |            |                     | 96796712 | 1    | pcs  |
| 189   | Eyebolt                                 |            |                     |          | 2    | pcs  |
| -     | Kit, Fan                                |            |                     | 96796652 | 1    | pcs  |
| 156.c | Retaining ring                          |            |                     |          | 1    | pcs  |
| 156   | Fan                                     |            |                     |          | 1    | pcs  |
| -     | Kit, fan cover, black                   |            |                     | 96796647 | 1    | pcs  |
| 151   | Fan cover                               |            |                     |          | 1    | pcs  |
| 152   | Pan head thread forming screw           |            |                     |          | 4    | pcs  |
| 196   | Nipple                                  |            |                     |          | 1    | pcs  |
| -     | Kit, fan cover, black/red               |            |                     | 92891507 | 1    | pcs  |
| 151   | Fan cover                               |            |                     |          | 1    | pcs  |
| 152   | Pan head thread forming screw           |            |                     |          | 4    | pcs  |
| -     | Kit, Foot                               |            |                     | 96796804 | 1    | pcs  |
| 191.a | Foot                                    |            |                     |          | 1    | pcs  |
| 191   | Foot                                    |            |                     |          | 1    | pcs  |
| 192   | Hex socket head cap screw               |            |                     |          | 4    | pcs  |
| 194   | Lock washer                             |            |                     |          | 4    | pcs  |
| 194   | Nut                                     |            |                     |          | 4    | pcs  |
| -     | Kit, Gaskets                            |            |                     | 96798508 | 1    | pcs  |
| 184   | O-ring                                  |            | Diameter: 235       |          | 2    | pcs  |
| -     | Kit, Lubrication nipple                 |            |                     | 96796671 | 1    | pcs  |
| 195b  | Grease nipple                           |            |                     |          | 2    | pcs  |
| 195a  | Grease nipple                           |            |                     |          | 1    | pcs  |
| -     | Kit, ND-end shield cpl.                 |            |                     | 96796810 | 1    | pcs  |
| 156a  | End shield NDE                          |            |                     |          | 1    | pcs  |
| 158   | Waved washer                            |            |                     |          | 1    | pcs  |
| 159   | V-ring                                  |            |                     |          | 1    | pcs  |
| 185.c | Nut                                     |            |                     |          | 4    | pcs  |
| 185.a | Hex socket head cap screw               |            |                     |          | 4    | pcs  |
| 195b  | Grease nipple                           |            |                     |          | 1    | pcs  |
| -     | Kit, Shaft seal                         |            |                     | 96843460 | 1    | pcs  |
| 159.b | V-ring                                  |            |                     |          | 1    | pcs  |
| 159   | V-ring                                  |            |                     |          | 1    | pcs  |
| -     | Kit, Terminal board                     |            |                     | 96796657 | 1    | pcs  |
|       | Terminal connection                     |            |                     |          | 3    | pcs  |
|       | Washer                                  |            |                     |          | 12   | pcs  |
| 36    | Hex nut                                 |            |                     |          | 12   | pcs  |
| 173   | Torx Screw                              |            |                     |          | 1    | pcs  |
| 176.d | Terminal board                          |            |                     |          | 1    | pcs  |
| 176   | Terminal board                          |            |                     |          | 1    | pcs  |
| 177   | Torx Screw                              |            |                     |          | 1    | pcs  |
| -     | Kit, Terminal box cover                 |            |                     | 96796659 | 1    | pcs  |
| 164   | Terminal box cover w/gasket             |            |                     |          | 1    | pcs  |
| 166   | Pan head thread forming screw           |            |                     |          | 4    | pcs  |
| -     | Spare, Key                              |            |                     | 96796817 | 1    | pcs  |
| 171   | Parallel key                            |            |                     |          | 1    | pcs  |
| 7k    | Bulk, Hex socket head cap screw (20 PC) |            | Length (mm): 10     | 97506946 | 4    | pcs  |
|       |                                         |            | Thread: M6          |          |      |      |

| Pos  | Description                  | Annotation | Classification Data                                   | Part no. | Qty. | Unit |
|------|------------------------------|------------|-------------------------------------------------------|----------|------|------|
| 28   | Bulk, Hex head screw (20 PC) |            | Length (mm): 50 MM<br>Thread: M12                     | 96620477 | 4    | pcs  |
| 28   | Bulk, Hex head screw (20 PC) |            | Length (mm): 30<br>Thread: M12                        | 92673889 | 2    | pcs  |
| 28   | Hex head screw               |            | Length (mm): 25<br>Thread: M12                        | 99522923 | 1    | pcs  |
| 36   | Bulk, Nut (20 PC)            |            | Thread: M10                                           | 96620484 | 6    | pcs  |
| 36   | Nut                          |            | Thread: M10                                           | 92766626 | 6    | pcs  |
| 49   | Impeller                     |            |                                                       | 98451561 | 1    | pcs  |
| 53.b | Spacer ring                  |            |                                                       | 96938908 | 1    | pcs  |
| 54a  | Bulk, O-ring (10 PC)         |            | Diameter: 71,5<br>Material type: EPDM<br>Thickness: 3 | 97511807 | 2    | pcs  |
| 67   | Bulk, Nut (5 PC)             |            | Thread: M14                                           | 92526531 | 1    | pcs  |
| 72a  | Bulk, O-ring (5 PC)          |            |                                                       | 92547662 | 1    | pcs  |
| 72a  | Bulk, O-ring (5 PC)          |            |                                                       | 92526508 | 1    | pcs  |
| 72a  | Bulk, O-ring (10 PC)         |            |                                                       | 97511824 | 1    | pcs  |
| 72a  | O-ring                       |            |                                                       | 97757659 | 1    | pcs  |
| 77a  | Bulk, Pan head screw (20 PC) |            |                                                       | 99266550 | 4    | pcs  |
| 105  | Bulk, Shaft seal (5 PC)      |            |                                                       | 99380916 | 1    | pcs  |
| 105  | Shaft seal                   |            |                                                       | 98434904 | 1    | pcs  |
| 156a | Bulk, Bearing cover (10 PC)  |            |                                                       | 97506936 | 2    | pcs  |