

Brand Identity Guidelines

SCIENTIFIC INTELLIGENCE IN MOTION

BRAND ESSENCE


Scientific Intelligence **in Motion**

HeatOn develops advanced computational technologies at the intersection of science, medicine and intelligent systems.

01 Science is our method.


02 Technology is our tool.

03 Complex problems are our territory.

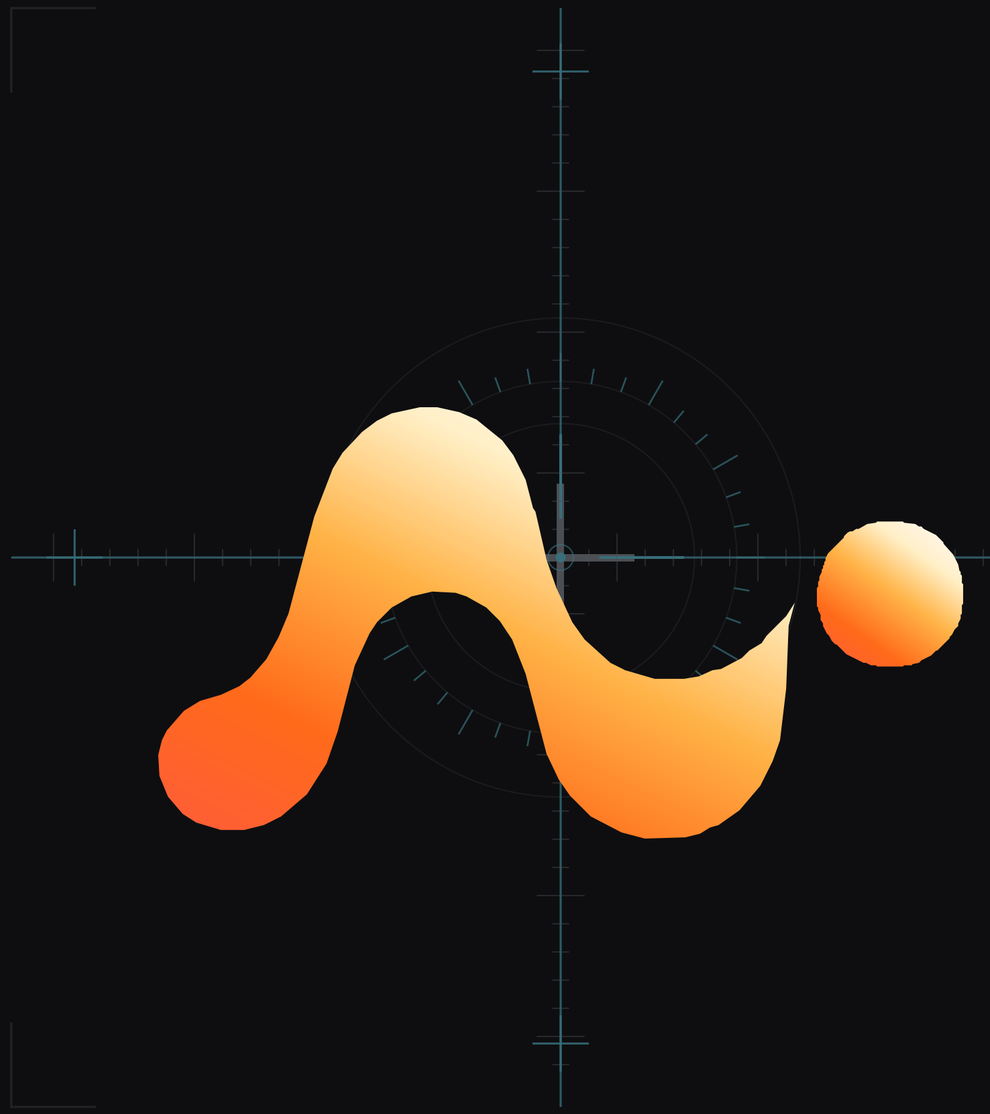

BRAND TERRITORY

Where HeatOn operates

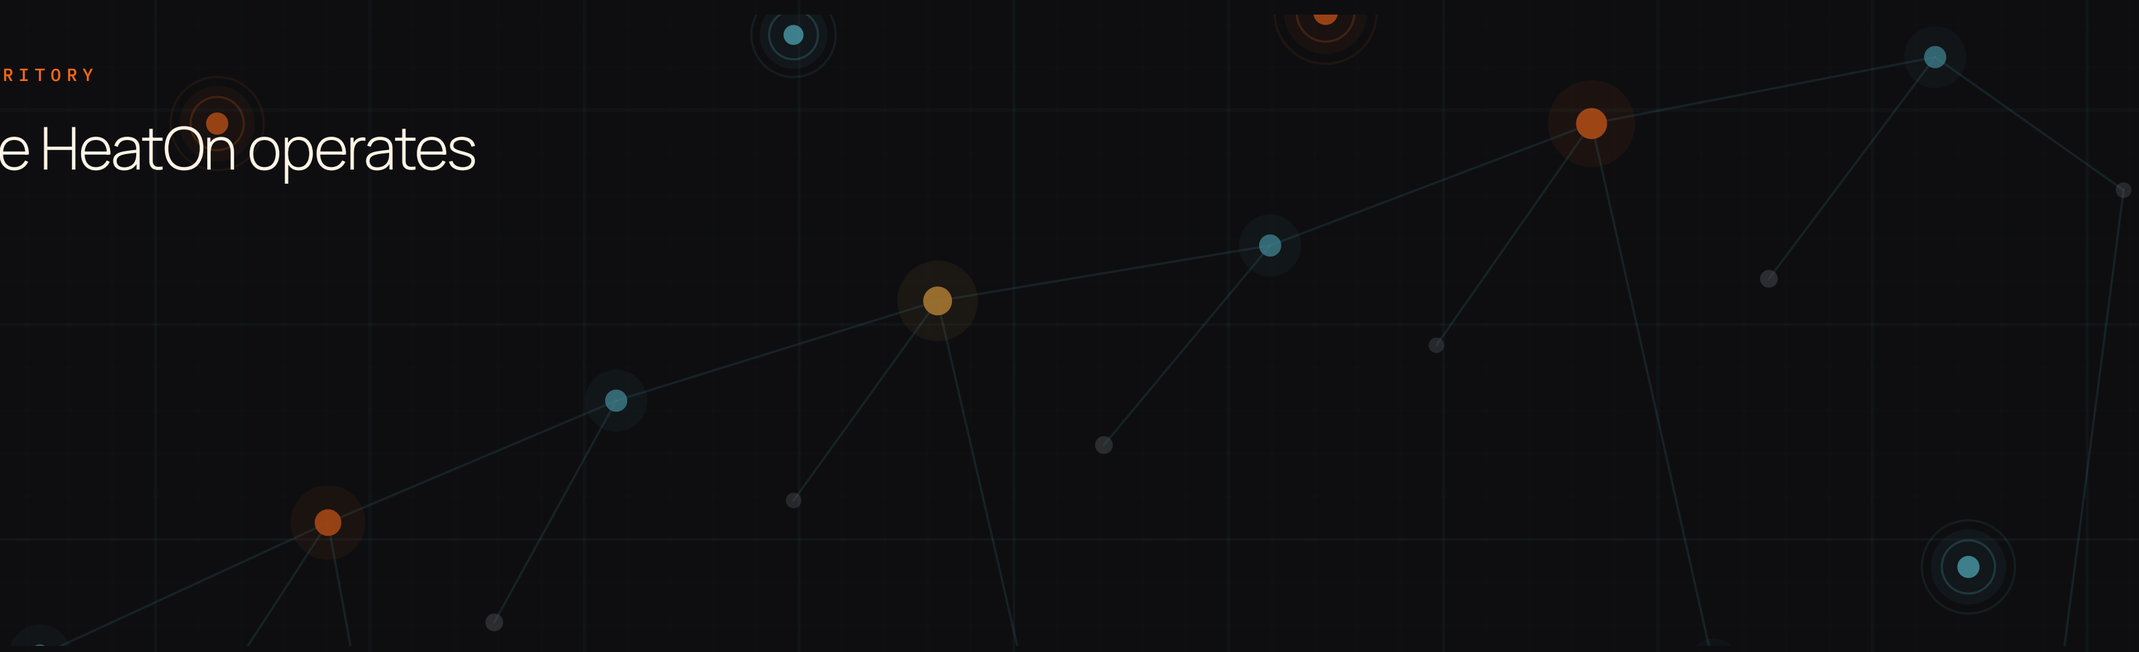

Science × Technology × Medicine × Computation × Intelligence

FIELD

A single territory, not five verticals. Every discipline informs the next.

METHOD

Measurement first. Computation second. Interpretation last.


OUTPUT

Systems that turn signal into evidence, and evidence into decisions.

THERMAL PULSE

Thermal Pulse Meets Science

Heat is the trace that computation leaves behind. The pulse is how HeatOn shows a system thinking.

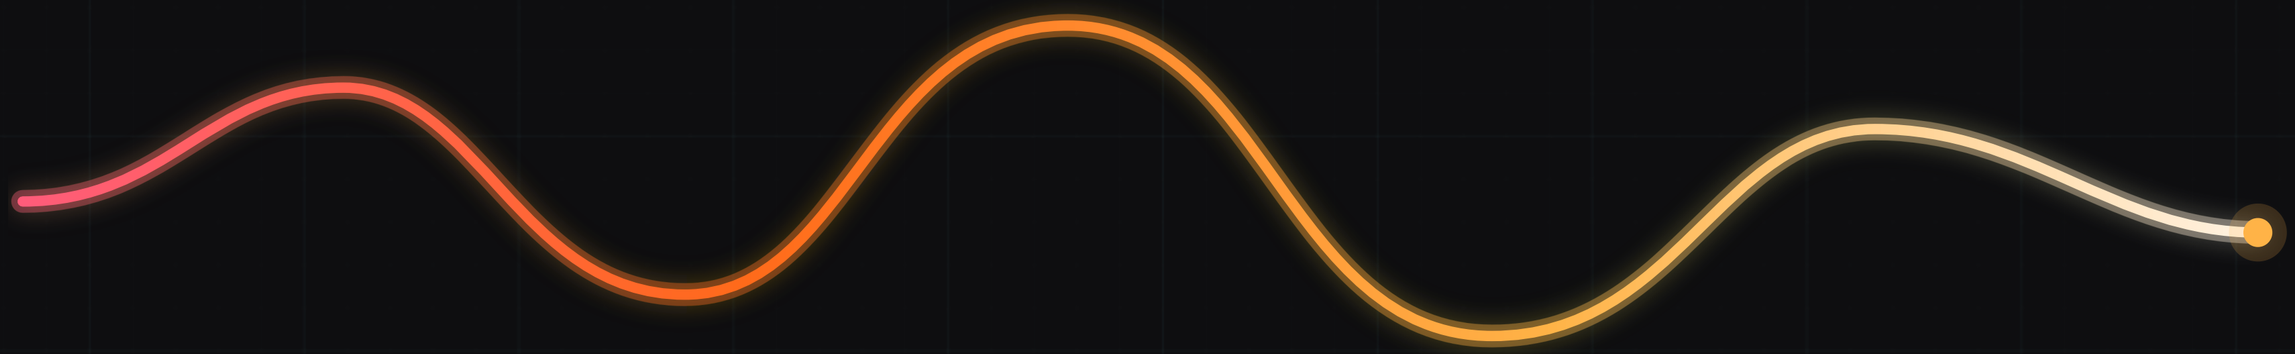

01
Signal
RAW MEASUREMENT

02
Energy
PHYSICAL ACTIVITY

03
Computation
MODEL IN MOTION

04
Activity
LIVE PROCESSING

05
Insight
ACTIONABLE RESULT

BRAND PRINCIPLES

Five commitments

01

Scientific Rigor

Claims follow evidence. Methods are stated, results are reproducible.

02

Computational Intelligence

Models earn their place by improving a decision, not by existing.

03

Human Impact

Technology is measured by what it changes for a person.

04

Precision

Every number carries a unit, a range and a reason.

05

Exploration

Hard problems are chosen deliberately, not avoided.

PRINCIPLES GOVERN DECISIONS BEFORE THEY GOVERN DESIGN.

LOGO SYSTEM

Primary logo

The horizontal colour lockup is the master signature of the brand. It is used wherever space and contrast allow.



ASSET	FORMAT	RATIO	PRIMARY BACKGROUND
HeatOn_logo_horizontal_color	SVG / vector master	1848 : 351	Deep Carbon #0E0E10

LOGO SYSTEM

Anatomy

Two elements, read left to right: a thermal waveform that resolves into a single node, followed by the wordmark. The geometry is fixed.

SYMBOL

WORDMARK



Signal → Computation → Insight

THE SYMBOL READS AS A PROCESS, NOT AN IMAGE.

LOGO SYSTEM

Primary colour logic



HEAT

Cream

#FFF4E6

Information — the constant, legible half of the name.

ON

Heat Orange

#FF6A1A

Activity — the state that is switched on.

SYMBOL

Thermal Gradient

#FF5C3A → #FFF4E6

Energy resolving into clarity, as defined in the master file.

LOGO SYSTEM


Monochrome lockups

Three approved single-colour masters. Use them when colour is restricted, when contrast demands it, or when the logo sits inside dense information.



CREAM #FFF4E6

Dark surfaces, photography, video end-frames.

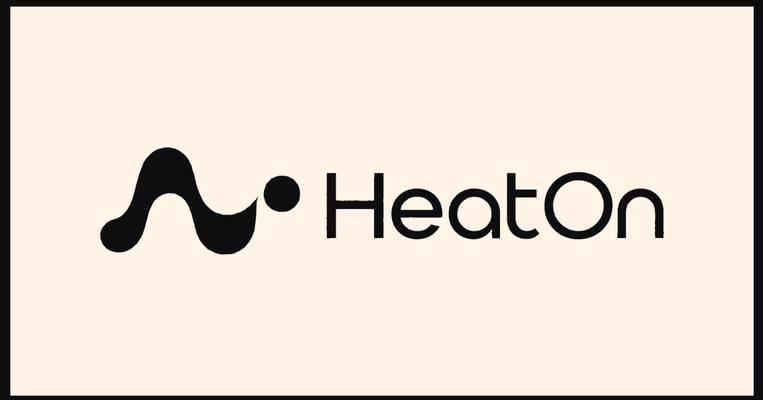

DEEP #0E0E10

Light surfaces, print, documents, scientific reports.



ORANGE #FF6A1A

Single-colour production, stamps, restricted output.

LOGO SYSTEM

Stacked lockup

The vertical master is used where horizontal space is constrained or where the mark must sit on a centred axis.

USE FOR

Square formats, avatars, badges, signage, event stages, merchandise.

AVOID FOR

Narrow horizontal bars, app headers, dense interface chrome.

CLEAR SPACE

The same unit x applies. Measure it from the outer edge of the symbol and of the wordmark.

MINIMUM SIZE

160 px wide on screen. Below that, use the symbol alone.



STACKED MASTER / RATIO 1107 : 790

LOGO SYSTEM

Wordmark

The wordmark stands alone where the symbol is already present in context, or where the signature must be reduced to type only.

HeatOn

COLOUR

HeatOn

MONOCHROME — DEEP

HeatOn


RULES

Never re-set the wordmark in a system font. It is a vector master with fixed letterforms and spacing.

LOGO SYSTEM

Symbol

A waveform that rises, resolves and releases a single node. Used as the reductive mark across icons, avatars and micro-surfaces.

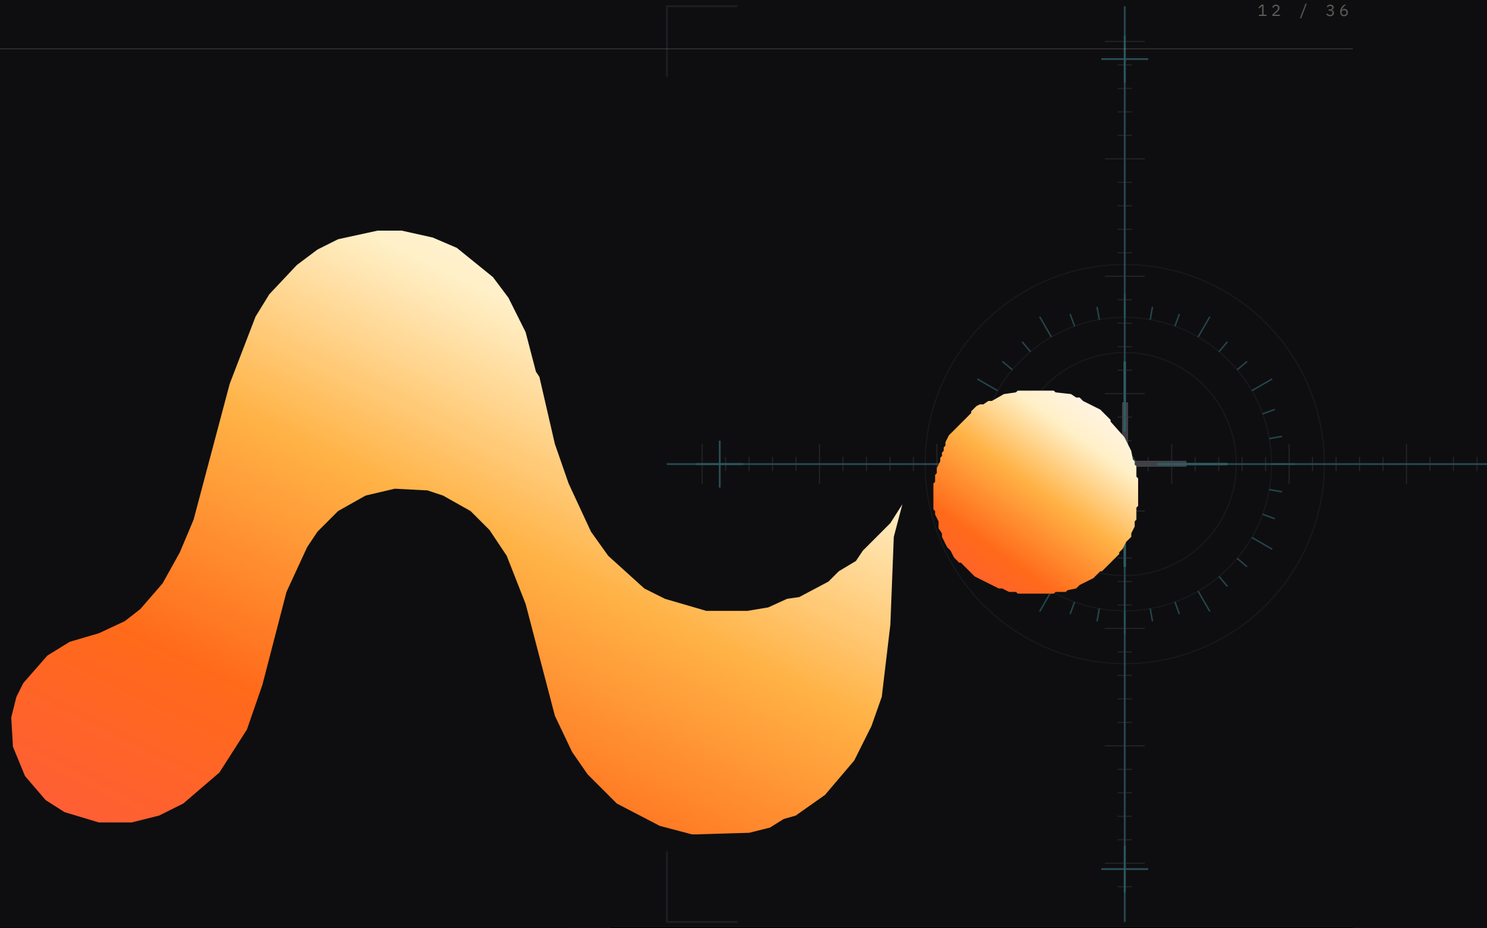




THERMAL GRADIENT



CREAM

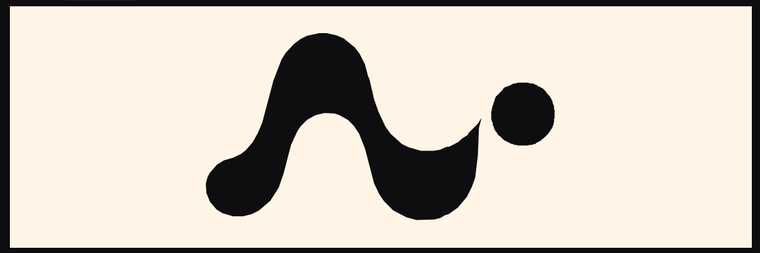

DEEP

LOGO SYSTEM

Scientific signature



INSTITUTIONAL USE

Corporate decks, scientific posters, partnership material, letterheads.

FIXED LOCKUP

The line is part of the master file. Do not re-typeset, re-space or translate it.

ONE TAGLINE

Scientific Intelligence in Motion is the only endorsement line in the system.

LOGO SYSTEM

Approved backgrounds

Three surfaces cover almost every application. The logo itself never changes — only which master is selected.



WHITE #FFFFFF

Deep monochrome master



DEEP CARBON #0E0E10

Primary colour master



CREAM #FFF4E6

Deep monochrome master


NEVER PLACE THE COLOUR MASTER ON A LIGHT SURFACE — THE CREAM HALF OF THE WORDMARK WILL DISAPPEAR.

LOGO SYSTEM

Clear space

The clear-space unit x is the diameter of the node in the symbol. Nothing enters the field: no type, no rules, no image edges.

1×	Absolute minimum. Dense interface chrome only.
1.5×	Standard digital and document use.
2×	Preferred. Covers, signage, hero applications.

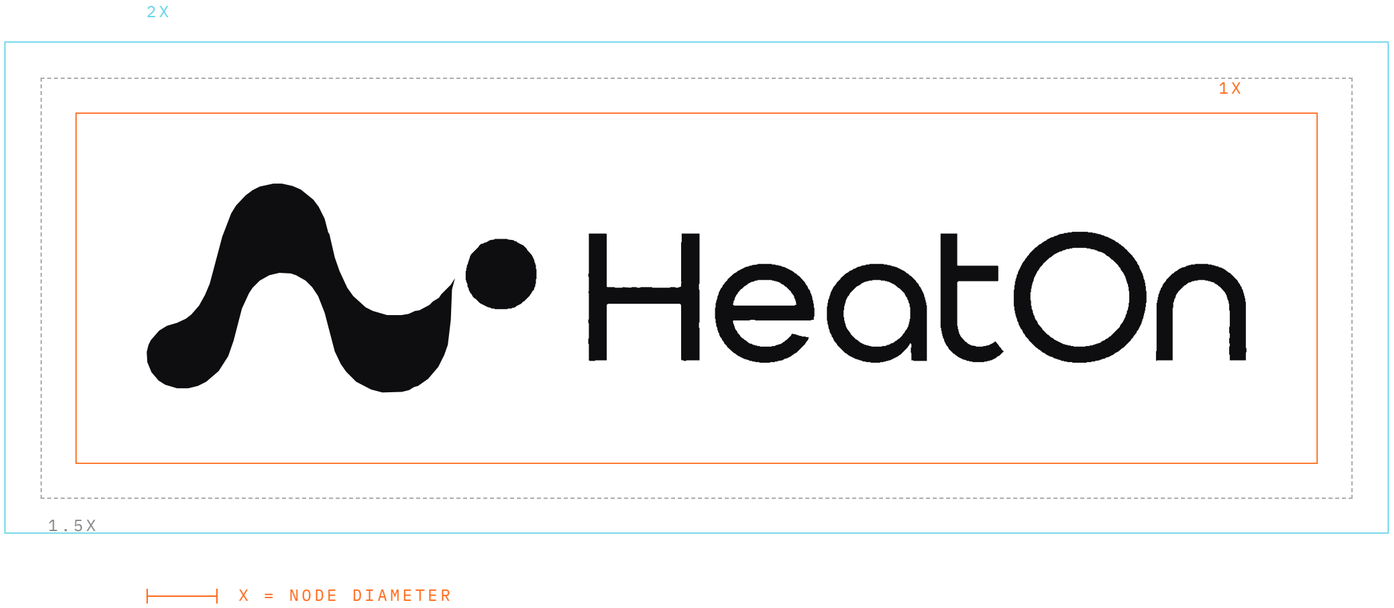

LOGO SYSTEM

Minimum size

Below 120 px of logo width the wordmark stops being legible. At that point the symbol replaces the full lockup.



240 px
FULL LOGO



160 px
FULL LOGO



120 px
FULL LOGO

SWITCH POINT



80 px
SYMBOL



48 px
SYMBOL



32 px
SYMBOL

BELOW THE SWITCH POINT THE SYMBOL REPLACES THE FULL LOCKUP.

PRINT EQUIVALENT — FULL LOGO NOT BELOW 32 MM WIDTH; SYMBOL NOT BELOW 8 MM.

DIGITAL

App icon

A single approved master. The symbol sits on Deep Carbon with fixed optical placement — never re-centred, never re-cropped.





180 px



128 px



96 px



64 px



48 px

MASTER	HeatOn_app_icon_vector.svg
CANVAS	1024 × 1024
CORNER	Fixed in master

DIGITAL

Favicon & micro icon

Two masters: a transparent symbol for surfaces that supply their own background, and a dark tile for browser chrome.

TRANSPARENT MASTER



DEEP CREAM WHITE

DARK TILE MASTER



150 64 48 32 24 16

DELIVERY

SVG for modern browsers; ICO / PNG generated from the same master at 16, 24, 32, 48 and 64 px.

AT 16 PX

Only the waveform and the node survive. Do not add an outline or a background to compensate.

NEVER

Do not substitute the full logo, the wordmark, or a letterform monogram.

COLOUR SYSTEM

Core palette

01

Deep Carbon

#0E0E10
RGB 14 14 16

STRUCTURE

Ground for every dark surface. Never used as an accent.

02

Cream

#FFF4E6
RGB 255 244 230

INFORMATION

Primary text and light surfaces. Carries meaning, not emphasis.

03

Heat Orange

#FF6A1A
RGB 255 106 26

ACTIVITY

The brand colour. Reserved for what is on, live or processing.

04

Amber

#FFB347
RGB 255 179 71

TRANSITION

The middle of the thermal range. Secondary heat only.

05

Coral

#FF5C7A
RGB 255 92 122

EDGE

Signal boundaries and exceptions. Used sparingly.

06

Scientific Cyan

#61D4E8
RGB 97 212 232




MEASUREMENT

Reference, axes, scales. Never the dominant colour.

COLOUR SYSTEM

Colour behaviour

Colour in HeatOn is a state, not a decoration. Each hue answers one question about what the system is doing.

Orange	ACTIVITY	Something is running, heating, computing or newly true.	
Cyan	MEASUREMENT	Something is being observed, referenced or scaled.	
Cream	INFORMATION	Something is being stated. The default voice of the system.	
Deep Carbon	STRUCTURE	Something holds everything else. Silent by design.	

CYAN NEVER COMPETES WITH ORANGE. WHEN BOTH ARE PRESENT, ORANGE LEADS.

COLOUR SYSTEM

Thermal gradient

The gradient is a physical statement: energy entering, resolving and cooling into clarity. It is defined once, in the logo master, and reused verbatim.



ENERGY	Deep orange at the origin — the moment work begins.
ACTIVITY	Amber through the body — sustained processing.
PROCESSING	Cream at the end — the result, legible and cool.

APPLIED — SYMBOL MASTER



Use the gradient on the symbol, on thin signal strokes and on single hero surfaces. It is never a page background and never sits behind text.

TYPOGRAPHY

Three voices

One family speaks for the brand, one for the product, one for the data. They are never interchangeable.

01 BRAND / DISPLAY

Manrope

ABCDEFGHIJKLMNOP
abcdefghijklmnop
0123456789

Headlines, brand statements, the voice of the company.

WEIGHTS 200 300 400 500 600 700 800

02 PRODUCT / INTERFACE

Inter

ABCDEFGHIJKLMNOP
abcdefghijklmnop
0123456789

Interface, body copy, documentation, every product surface.

WEIGHTS 300 400 500 600 700

03 SCIENTIFIC / DATA

IBM Plex Mono

ABCDEFGHIJKLM
0123456789 +−×÷

Coordinates, identifiers, measurements, metadata, labels.

WEIGHTS 300 400 500 600

THE THREE TOGETHER

Measurement before interpretation

Every model is validated against the measurement that produced it.

MODEL_ID	HTO-042
CONFIDENCE	0.942
STATUS	ACTIVE

TYPOGRAPHY / BRAND

Manrope

ABCDEFGHIJKLMNOPQRSTUVWXYZ

abcdefghijklmnopqrstuvwxyz

0123456789 & @ % — ›

ROLE

Brand / Display / Headlines

Manrope carries the company voice. Set it large, light and tight. It is not a body face and is never used for data.

LIGHT 300	Scientific Intelligence
REGULAR 400	Scientific Intelligence
MEDIUM 500	Scientific Intelligence
SEMIBOLD 600	**Scientific Intelligence**
BOLD 700	**Scientific Intelligence**

DISPLAY −0.03EM / HEADLINE −0.02EM

DISPLAY SETTING

Scientific Intelligence in Motion

TYPOGRAPHY / PRODUCT

Inter

ABCDEFGHIJKLMNOPQRSTUVWXYZ

abcdefghijklmnopqrstuvwxyz

0123456789 & @ % — ›

ROLE

Interface / Body / Product

Inter is the working face of the system. Neutral at every size, dense enough for tables, quiet enough for long text.

LIGHT 300	HeatOn Interface
REGULAR 400	HeatOn Interface
MEDIUM 500	**HeatOn Interface**
SEMIBOLD 600	**HeatOn Interface**
BOLD 700	**HeatOn Interface**

BODY 16–18 PX / LEADING 1.6 / TRACKING 0

INTERFACE APPLICATION

Scientific intelligence for complex systems.

Advanced computational technology for medicine, science and intelligent systems.

SYSTEM STATUS

Optimal

All systems running within tolerance.

TYPOGRAPHY / SCIENTIFIC

IBM Plex Mono

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
0123456789 ± × ÷ − ° μ •

LIGHT 300	Scientific Intelligence in Motion
REGULAR 400	Scientific Intelligence in Motion
MEDIUM 500	**Scientific Intelligence in Motion**
SEMIBOLD 600	**Scientific Intelligence in Motion**

ROLE

Scientific / Data / Measurement

Every number that carries a unit, an identifier or a coordinate is set in Plex Mono. It signals that a value was measured, not written.

SCIENTIFIC DATA LANGUAGE

MODEL_ID	HTO-042
CONFIDENCE	0.942
STATUS	ACTIVE
AXIAL	084
Z_POSITION	+24.68 mm
DATASET	MRI_T1W

LABELS UPPERCASE / TRACKING 0.18EM

MODEL_ID / HTO-042 CONFIDENCE / 0.942 STATUS / ACTIVE AXIAL / 084 Z POSITION / +24.68 mm

TYPOGRAPHY

Hierarchy

DISPLAY	Scientific Intelligence in Motion	Manrope ExtraLight 72 / 76
H1	**Computational technology for medicine**	Manrope SemiBold 44 / 52
H2	Measurement before interpretation	Manrope Medium 30 / 40
BODY	HeatOn builds systems that turn signal into evidence, and evidence into decisions.	Inter Regular 18 / 30
LABEL	SYSTEM STATUS	Inter SemiBold 13 / 18 uppercase
METADATA	HEATON / BRAND IDENTITY / 26	Plex Mono Regular 13 / 20
SCIENTIFIC DATA	CONFIDENCE 0.942 Z_POSITION +24.68 mm	Plex Mono Medium 17 / 26

ONE DISPLAY LEVEL PER PAGE. TWO HEADING LEVELS PER DOCUMENT. NEVER MORE.

GRAPHIC SYSTEM

Scientific grid

The measurement field the brand is built on. A fine minor grid for texture, a cyan major grid every fifth division for reference.

MINOR DIVISION	40 units / #8A8F98 18%
MAJOR DIVISION	200 units / #61D4E8 28%
BEHAVIOUR	Background only — never above content

THE THREE DETAIL CROPS ARE SHOWN AT RAISED CONTRAST SO THE GEOMETRY READS IN PRINT. TRUE OPACITIES ARE LISTED ABOVE.





DETAIL ×4



DETAIL ×1.5




FULL FIELD

GRAPHIC SYSTEM

Measurement

Crosshairs and reference rings state that a position was chosen deliberately. They mark, they do not decorate.

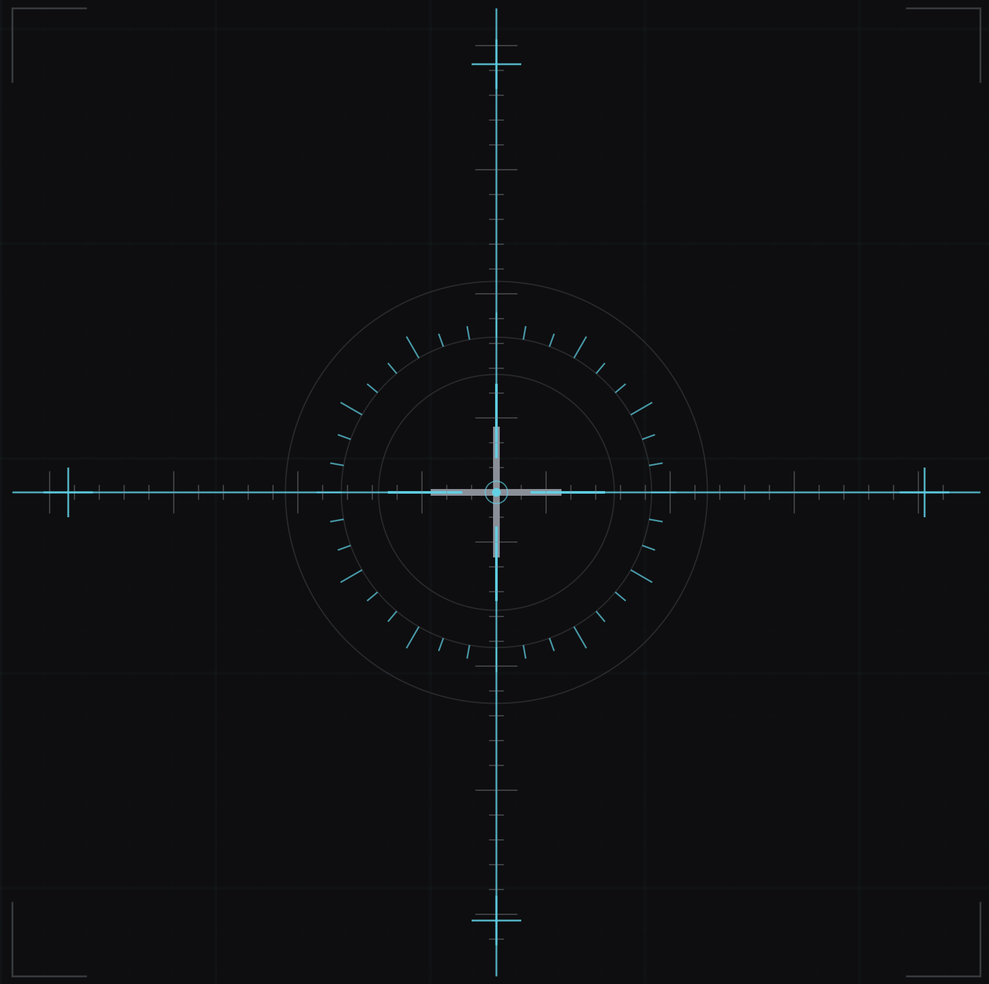

PRECISION

The mark is thin, centred and unambiguous.

MEASUREMENT

Rings carry scale; the centre carries the value.

REFERENCE

Cyan indicates an observed frame, not an active one.

POSITION

Coordinates are always set in Plex Mono beside the mark.


CROSSHAIR & MEASUREMENT MARKS / MASTER ASSET

X 1024.00 Y 0768.00 Z +24.68 mm REF AXIAL / 084

GRAPHIC SYSTEM

Signal

One continuous line carries the whole idea: something was measured, something processed it, something came out the other side.

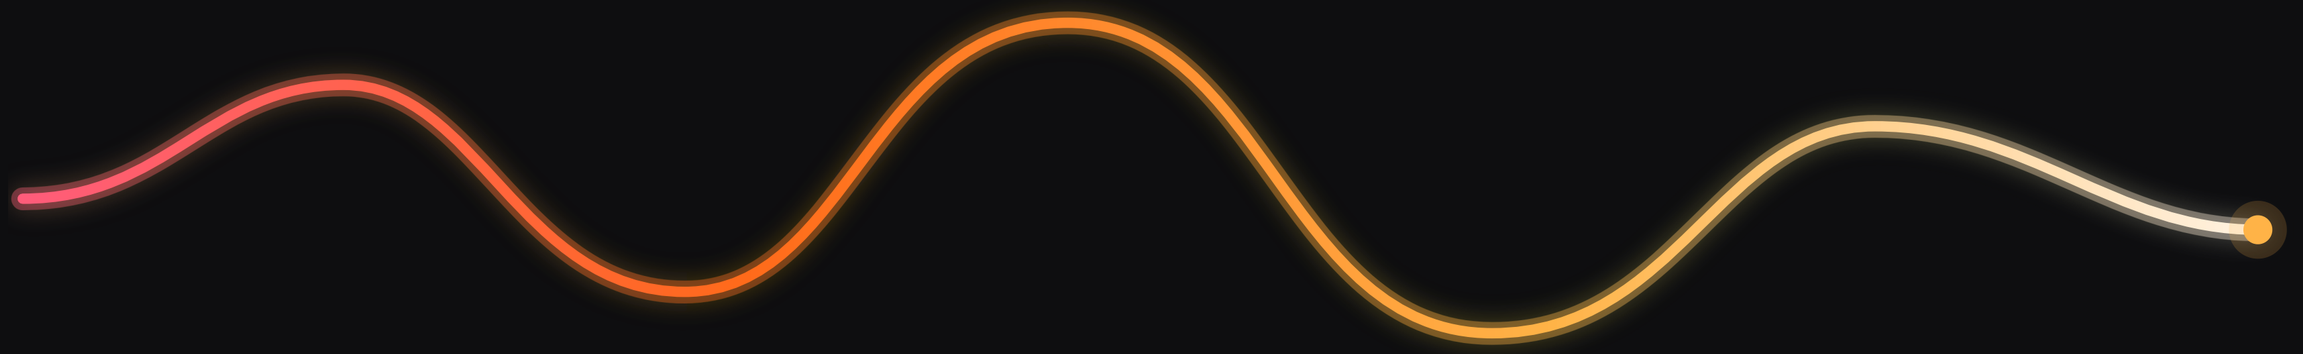

Signal → Processing → Insight


The line always travels left to right and always ends on a node. It is never mirrored, looped or used as a border.

GRADIENT #FF5C7A → #FF6A1A → #FFB347 → #FFF4E6 / TERMINAL NODE #FFB347

GRAPHIC SYSTEM

Nodes

A node is a data point with a state. The state is carried by colour and halo, never by shape.

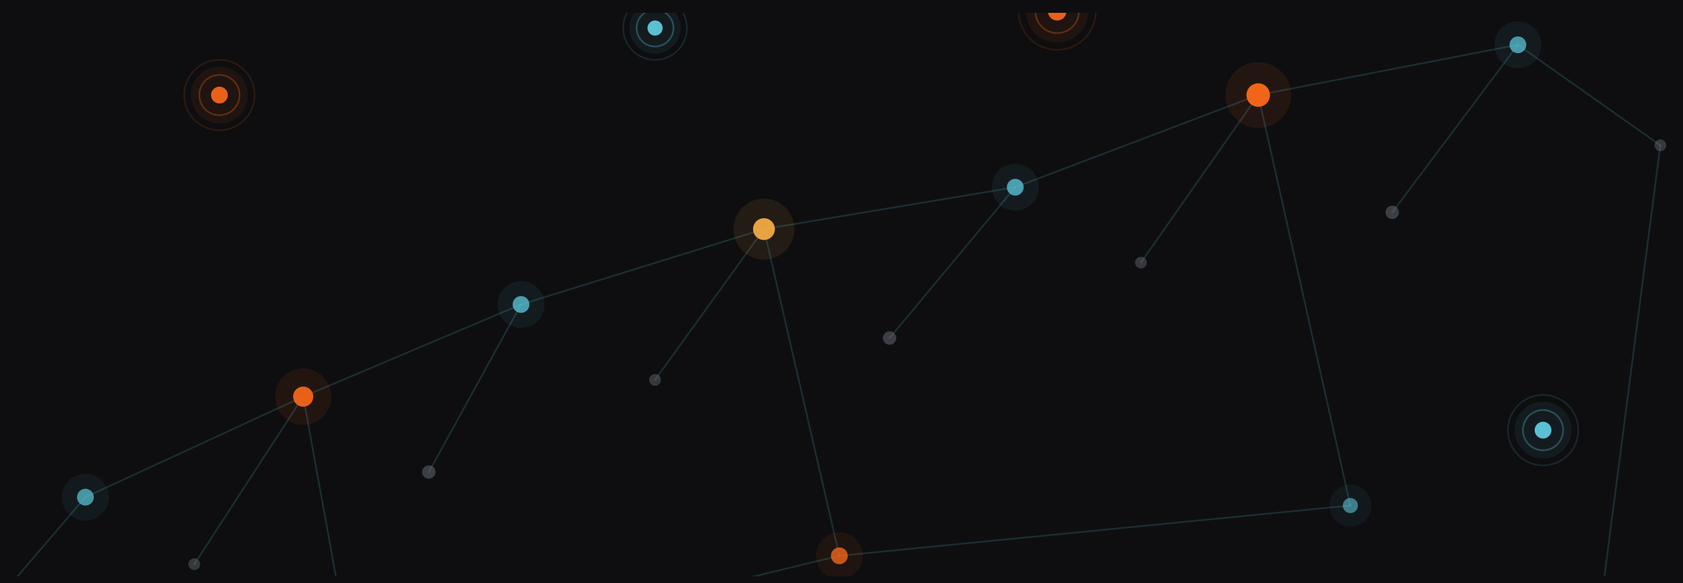



Inactive

#8A8F98

A point exists but carries no current reading.



Measurement

#61D4E8

A value is being observed or referenced.



Active

#FF6A1A

The point is live and changing.



Important event


#FF6A1A

Something happened that requires attention.

GRAPHIC SYSTEM

Scientific field

Contour lines describe a field that has been sampled. They sit furthest back in every composition.

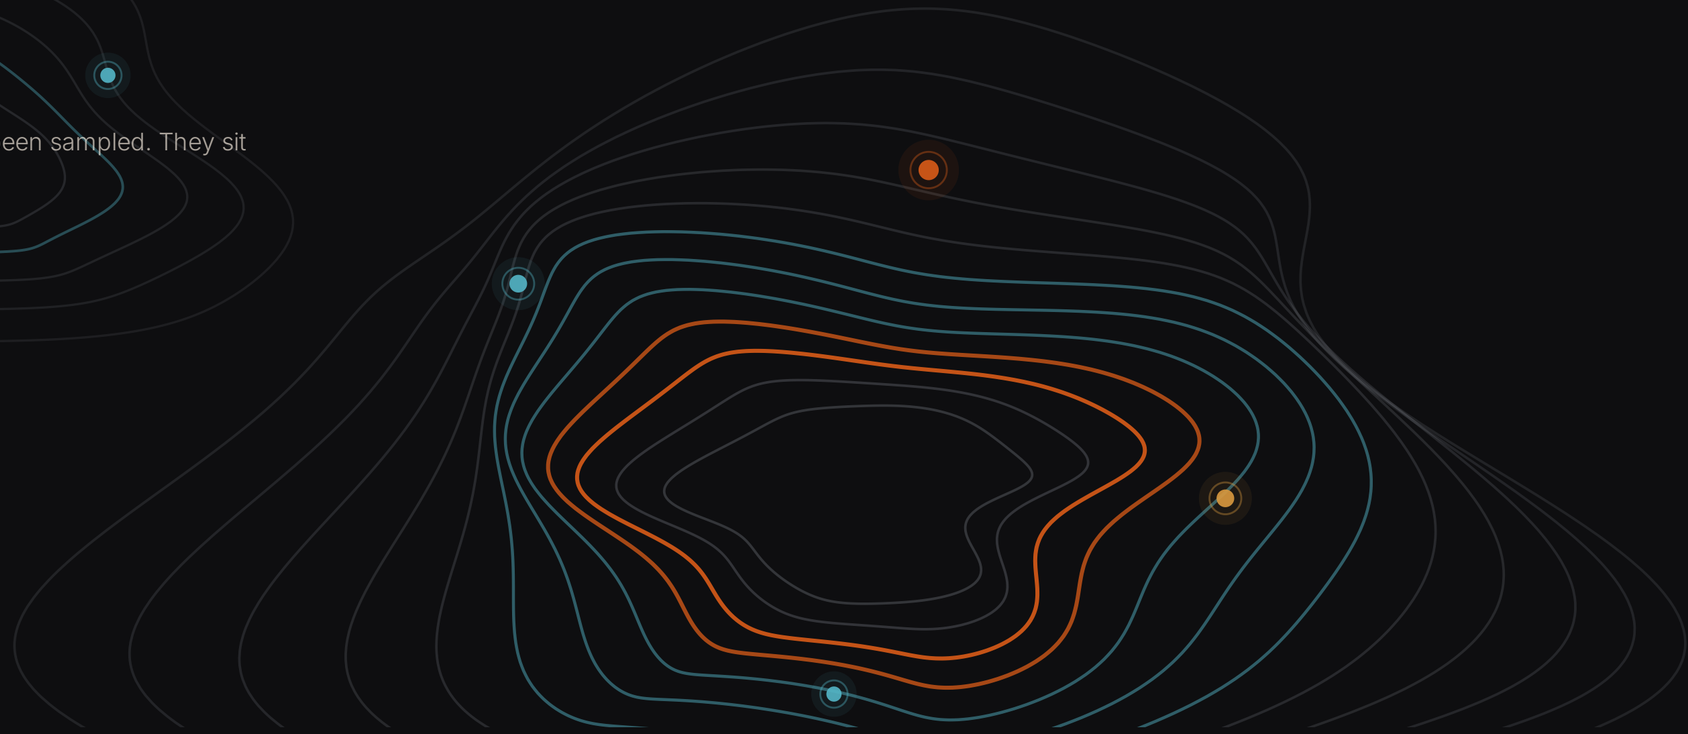

LAYER ORDER

Contour → grid → nodes → signal → content. Never reversed.

OPACITY CEILING

The field never rises above the legibility of the text in front of it.

NEVER


Not a pattern, not a fill, not a repeating motif on collateral.

GRAPHIC SYSTEM

Iconography

A single stroke weight, square terminals, no fills. Colour carries state exactly as it does everywhere else in the system.

GRAY #6E7074	Inactive — structure and container geometry
ORANGE #FF6A1A	Active — the element that is doing something
CYAN #61D4E8	Scientific — measurement, reference, sampling

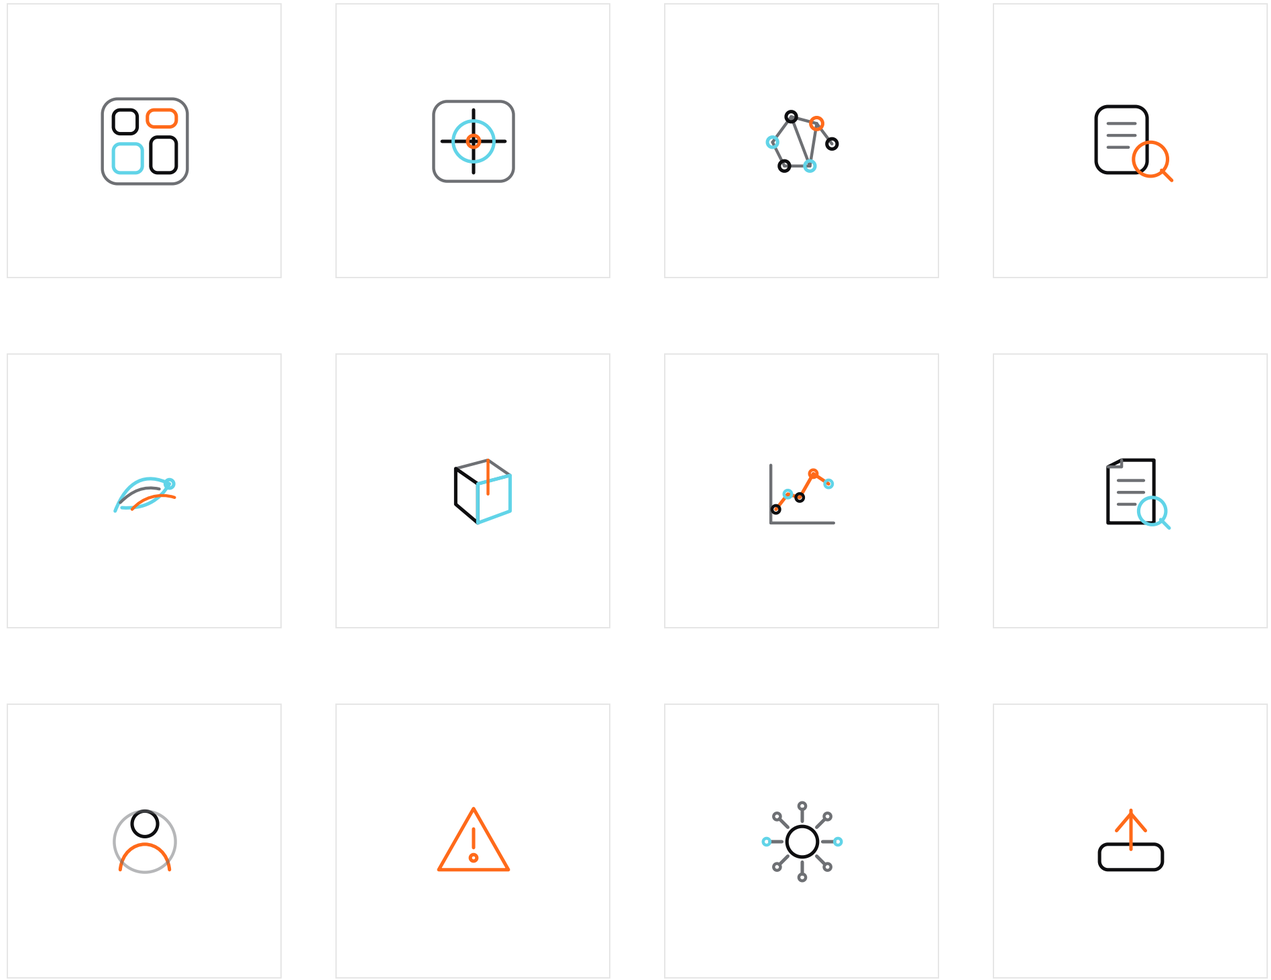

ICONOGRAPHY SET / MASTER ASSET / 12 CORE SYMBOLS

BRAND BEHAVIOUR

Quiet until **relevant.**

The identity spends most of its time doing nothing. Emphasis is a finite resource; it is spent when the system has something to say.

WHEN NORMAL

Neutral surfaces, no accent, no motion.

Quiet

WHEN ACTIVE

One element takes the brand colour. One only.

Orange

WHEN MEASURED

Reference marks appear beside the value.

Cyan

WHEN IT MATTERS


A single ring expands once. It does not loop.

Pulse

BRAND BEHAVIOUR


Do & don't

Do

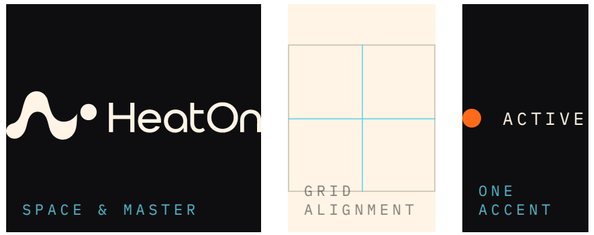

- Let negative space carry the composition.
- Align everything to the scientific grid.
- Spend orange on one active element at a time.
- Use cyan only for measured or referenced information.
- Place the approved master, unmodified, at the right size.
- Hold contrast above the legibility threshold on every surface.

Don't

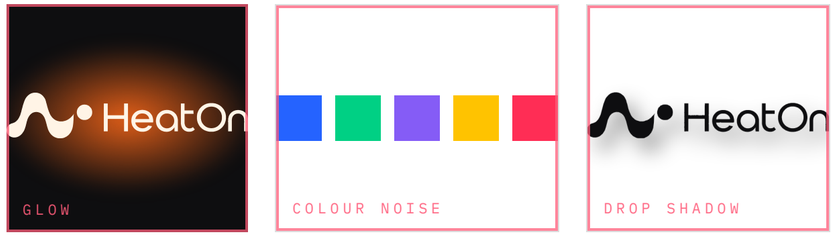

- Do not add glow, bloom or neon to any master.
- Do not redraw, re-space or re-typeset the logo.
- Do not stretch, rotate or distort the mark.
- Do not apply drop shadows, bevels or strokes.
- Do not add medical clichés — crosses, hearts, DNA, stethoscopes.
- Do not run more than two accent colours at once.
- Do not use the graphic system as decoration without meaning.

BRAND BEHAVIOUR

Three levels of expression




Functional 01

PRODUCT & DOCUMENTATION

Maximum legibility. No glow, no field, no gradient behind information. The grid may be present at the lowest opacity.

PULSE INTENSITY 15%

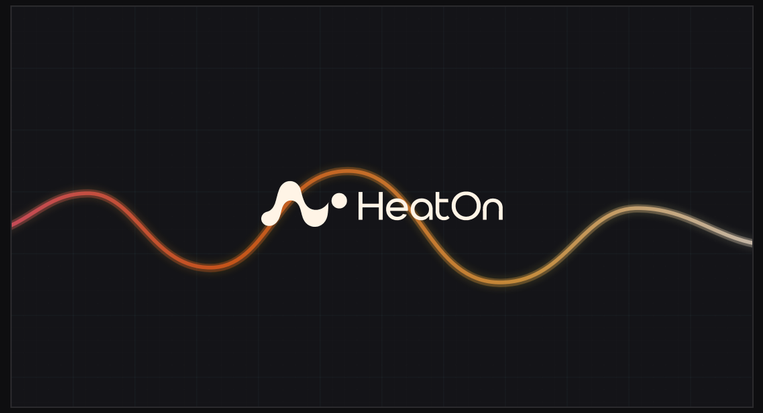


Expressive 02

WEBSITE & PRESENTATION

The thermal pulse becomes visible. Signal lines, nodes and one gradient surface per view.

PULSE INTENSITY 55%

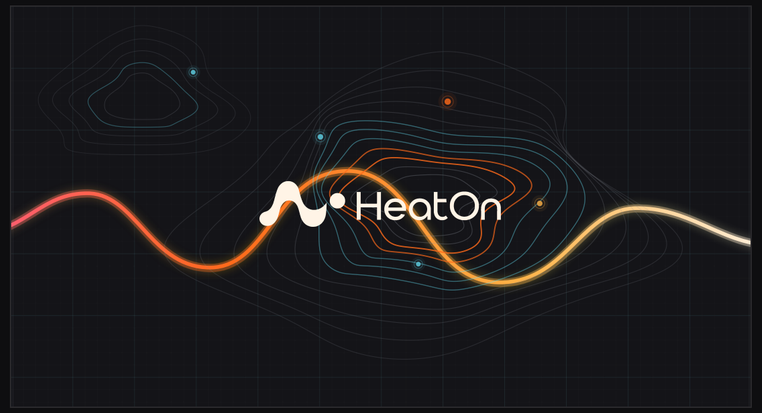

Immersive 03

LAUNCH, EVENTS & CAMPAIGNS

Full scientific field: contour, grid, signal and motion together, with the mark held quiet at the centre.

PULSE INTENSITY 100%

HeatOn

SCIENTIFIC INTELLIGENCE IN MOTION

Science is our method.

Technology is our tool.

Complex problems are our territory.