

TEST REPORT

Report No.: 8427EU011624E

Applicant: NiceRF Wireless Technology Co., Ltd.

Address: 309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

Product Name: LoRa Wireless Module

Model No.: LoRa 2021-868

Trademark: 

Test Standard(s): ETSI EN 301489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.3.2 (2023-01)
ETSI EN 301 489-17 V3.3.1 (2024-09)

Test Results: Pass

Date of Receipt: Jan. 17, 2026

Test Date: Jan. 17, 2026 – Mar. 05, 2026

Date of Issue: Mar. 20, 2026

ISSUED BY:

SHENZHEN EU TESTING LABORATORY LIMITED



Prepared by:



Landon Qiu/ Engineer

Reviewed and Approved by:



Sally Zhang/ Manager

Revision Record

Report Version	Issued Date	Description	Status
V0	Mar. 20, 2026	Original	Valid



Table of Contents

1	COVER PAGE	1
2	GENERAL INFORMATION	4
2.1	APPLICANT INFORMATION.....	4
2.2	MANUFACTURER INFORMATION.....	4
2.3	FACTORY INFORMATION.....	4
2.4	GENERAL DESCRIPTION OF E.U.T.....	4
2.5	TECHNICAL INFORMATION OF E.U.T.....	4
3	TEST SUMMARY	5
3.1	TEST STANDARD	5
3.2	TEST VERDICT.....	5
3.3	TEST LABORATORY	6
4	TEST CONFIGURATION.....	7
4.1	TEST ENVIRONMENT	7
4.2	TEST EQUIPMENT	7
4.3	DESCRIPTION OF SUPPORT UNIT	8
4.4	TEST MODE	8
4.5	MEASUREMENT UNCERTAINTY	8
5	EMISSION TEST	9
5.1	RADIATED SPURIOUS EMISSION	9
5.1.1	Test Requirement.....	9
5.1.2	Test Setup Diagram	10
5.1.3	Test Procedure.....	11
5.1.4	Test Data.....	11
6	IMMUNITY TEST	15
6.1	ELECTROSTATIC DISCHARGE IMMUNITY TEST	18
6.1.1	Test Requirement.....	18
6.1.2	Test Setup Diagram	18
6.1.3	Test Procedure.....	18
6.1.4	Test Data.....	19
6.2	RF FIELD STRENGTH SUSCEPTIBILITY TEST	20
6.2.1	Test Requirement.....	20
6.2.2	Test Setup Diagram	20
6.2.3	Test Procedure.....	20
6.2.4	Test Data.....	21
ANNEX A	TEST SETUP PHOTOS	22
ANNEX B	EXTERNAL PHOTOS	23
ANNEX C	INTERNAL PHOTOS	25

2 General Information

2.1 Applicant Information

Applicant	NiceRF Wireless Technology Co., Ltd.
Address	309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

2.2 Manufacturer Information

Manufacturer	NiceRF Wireless Technology Co., Ltd.
Address	309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

2.3 Factory Information

Factory	NiceRF Wireless Technology Co., Ltd.
Address	309-314, 3/F, Bldg A, Hongdu Business building, Zone 43, Baoan Dist., Shenzhen 518101, China

2.4 General Description of E.U.T.

Product Name	LoRa Wireless Module
Model No. Under Test	LoRa 2021-868
List Model No.	N/A
Description of Model differentiation	N/A
Rating(s)	Input: 6VDC (Powered by AA*4)
Test Sample No.	-1/2(Normal Sample), -2/2(Engineering Sample)
Hardware Version	v1.0
Software Version	v1.0
Remark	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.5 Technical Information of E.U.T.

Network and Wireless Connectivity	LoRa 2.4G ISM Band (GFSK modulation)
Classification of equipment	Class B

3 Test Summary

3.1 Test Standard

The tests were performed according to following standards:

No.	Identity	Document Title
1	ETSI EN 301 489-1 V2.2.3 (2019-11)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility
2	ETSI EN 301 489-3 V2.3.2 (2023-01)	Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz
3	ETSI EN 301 489-17 V3.3.1 (2024-09)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband and Wideband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility

Remark:

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

3.2 Test Verdict

Emission			
Test Items	Standard	Basic Standard	Results
Conducted Emission (Power Line)	ETSI EN 301 489-1 V2.2.3 Clause 8.3 & 8.4	EN 55032	N/A
Radiated Emission	ETSI EN 301 489-1 V2.2.3 Clause 8.2	EN 55032	PASS
Harmonic Current Emission	ETSI EN 301 489-1 V2.2.3 Clause 8.5	EN IEC 61000-3-2	N/A
Voltage Fluctuations&Flicker	ETSI EN 301 489-1 V2.2.3 Clause 8.6	EN 61000-3-3	N/A
Immunity			
Test Items	Standard	Basic Standard	Results
Electrostatic Discharge	ETSI EN 301 489-1 V2.2.3 Clause 9.3	EN 61000-4-2	PASS
RF Electromagnetic Field☆	ETSI EN 301 489-1 V2.2.3 Clause 9.2	EN 61000-4-3	PASS
Fast transients, common mode	ETSI EN 301 489-1 V2.2.3 Clause 9.4	EN 61000-4-4	N/A
Surges	ETSI EN 301 489-1 V2.2.3 Clause 9.8	EN 61000-4-5	N/A
Radio frequency, common mode ☆	ETSI EN 301 489-1 V2.2.3 Clause 9.5	EN 61000-4-6	N/A
Volt. Interruptions Volt. Dips	ETSI EN 301 489-1 V2.2.3 Clause 9.7	EN 61000-4-11	N/A
Transients and surges in the vehicular environment	ETSI EN 301 489-1 V2.2.3 Clause 9.6	ISO 7637-2	N/A
Note:			
(1) "N/A" denotes test is not applicable in this Test Report.			
(2) The test item marked with "☆" is subcontracted to Shenzhen PSI Testing Co., Ltd., which has gained the customer's approval.			

3.3 Test Laboratory

Test Laboratory	Shenzhen EU Testing Laboratory Limited
Address	101, Building B1, Fuqiao Fourth Area, Qiaotou Community, Fuhai Subdistrict, Baoan District, Shenzhen, Guangdong, China



4 Test Configuration

4.1 Test Environment

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	30% to 60%	
Atmospheric Pressure	86 kPa to 106 kPa	
Temperature	NT (Normal Temperature)	+15°C to +35°C
Working Voltage of the EUT	NV (Normal Voltage)	6.0VDC

4.2 Test Equipment

Radiated Emission Test					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	EE-006	2026/01/07	2027/01/06
Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	EE-007	2026/01/13	2029/01/12
Double Ridged Horn Antenna	A-INFOMW	LB-10180-NF	EE-008	2026/01/11	2029/01/10
Pre-amplifier	Agilent	8447D	EE-009	2026/01/07	2027/01/06
Pre-amplifier	Agilent	8449B	EE-010	2026/01/07	2027/01/06
MXA Signal Analyzer	Agilent	N9020A	EE-011	2026/01/07	2027/01/06
MXG RF Vector Signal Generator	Agilent	N5182A	EE-012	2026/01/07	2027/01/06
Test Software	Farad	EZ-EMC	EE-015	N.C.R	N.C.R

Electrostatic Discharge Test					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
ESD Simulators	NoiseKen	ESS-B3011	EE-013	2026/01/07	2027/01/06

4.3 Description of Support Unit

No.	Title	Manufacturer	Model No.	Serial No.
1	--	--	--	--

4.4 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

No.	Test Modes	Description
TM1	869.5MHz Mode	Keep the EUT in 869.5MHz Mode.
TM2	2.4G Mode	Keep the EUT in 2.4G Mode.

4.5 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test Item	Measurement Uncertainty
Radiated Emission (30MHz- 1GHz)	Ur = 2.70 dB (Horizontal)
	Ur = 2.70 dB (Vertical)
Radiated Emission (1GHz- 18GHz)	Ur = 3.50 dB (Horizontal)
	Ur = 3.50 dB (Vertical)
Radiated Emission (18GHz- 40GHz)	Ur = 5.15 dB (Horizontal)
	Ur = 5.24 dB (Vertical)
Conducted Emission	Uc = 2.64 dB

5 Emission Test

5.1 Radiated Spurious Emission

5.1.1 Test Requirement

Test Standard	ETSI EN 301 489-1 Clause 8.2
Basic Standard	EN 55032

☐ **Limit for radiated emissions at frequencies up to 1 GHz for class A equipment**

Frequency (MHz)	Distance (Meters)	Limit (dB μ V/m)
30 ~ 230	3	50
230 ~ 1000	3	57
Remark: The lower limit shall apply at the transition frequencies.		

☐ **Limit for radiated emissions at frequencies above 1 GHz for class A equipment**

Frequency (MHz)	Distance (Meters)	Limit (dB μ V/m)	
		Peak	Average
1000 ~ 3000	3	76	56
3000 ~ 6000	3	80	60
Remark: The lower limit shall apply at the transition frequencies.			

☒ **Limit for radiated emissions at frequencies up to 1 GHz for class B equipment**

Frequency (MHz)	Distance (Meters)	Limit (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47
Remark: The lower limit shall apply at the transition frequencies.		



☒ **Limit for radiated emissions at frequencies above 1 GHz for class B equipment**


Frequency (MHz)	Distance (Meters)	Limit (dB μ V/m)	
		Peak	Average
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
Remark: The lower limit shall apply at the transition frequencies.			

☐ **Radiated emission test limit for FM receivers**

Frequency (MHz)	Distance (Meters)	Limit (dB μ V/m)	
		Fundamental	Harmonics
30 ~ 230	3	60	52
230 ~ 300	3	60	52
300 ~ 1000	3	60	56
Remark: The lower limit shall apply at the transition frequency.			

5.1.2 Test Setup Diagram

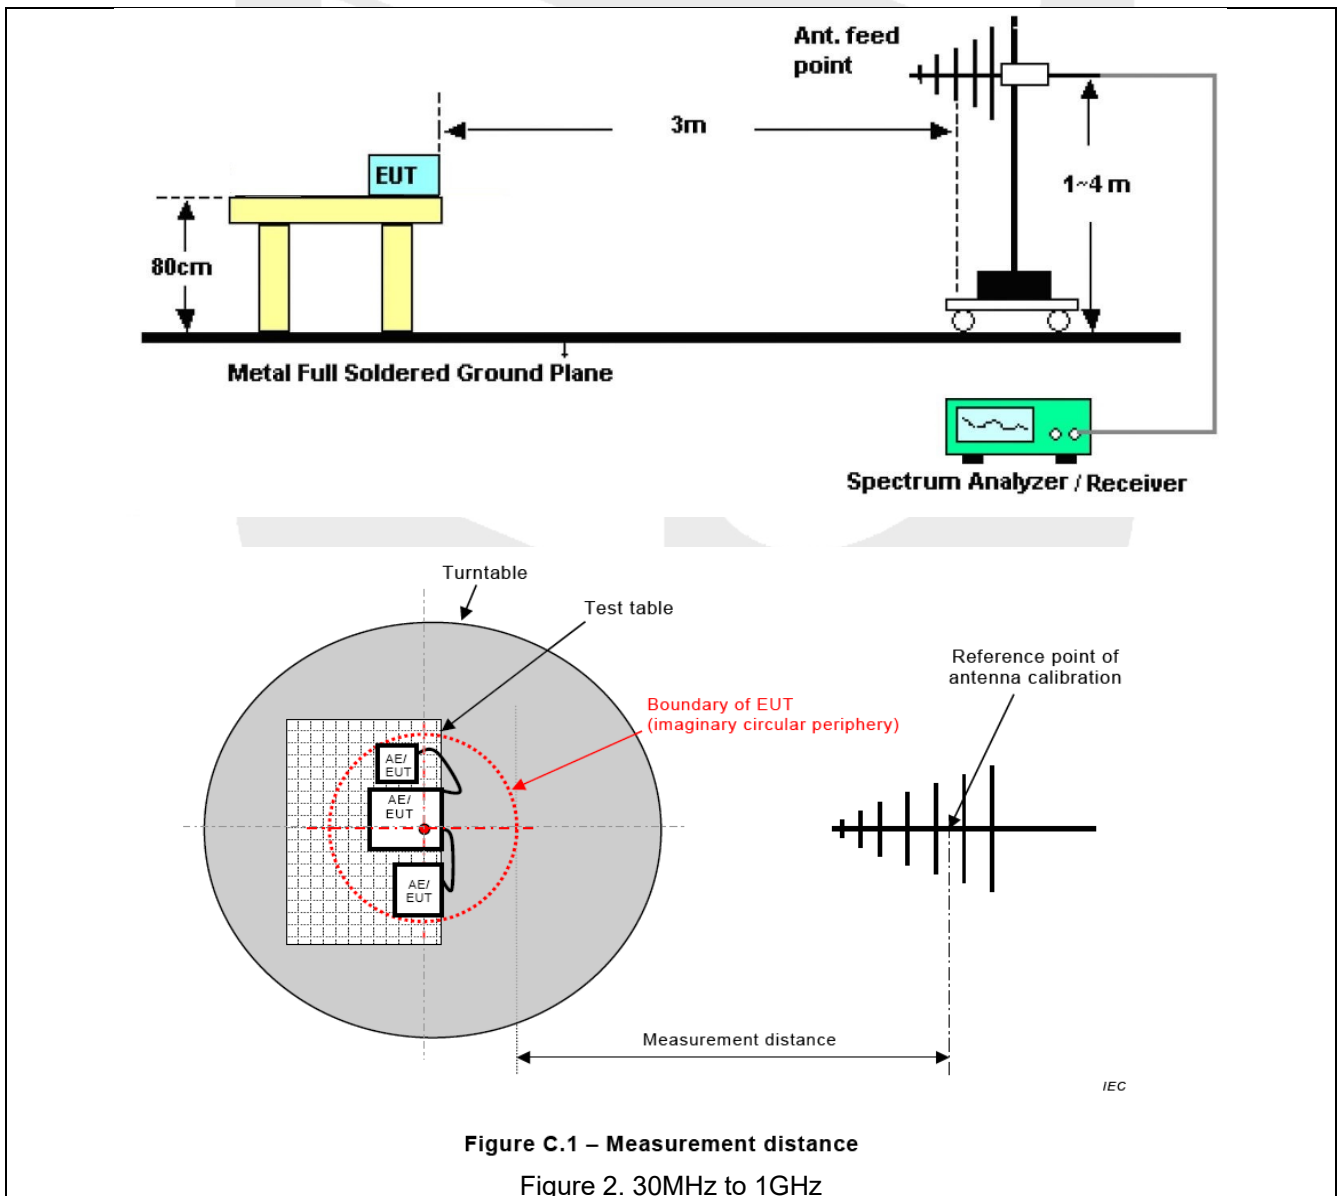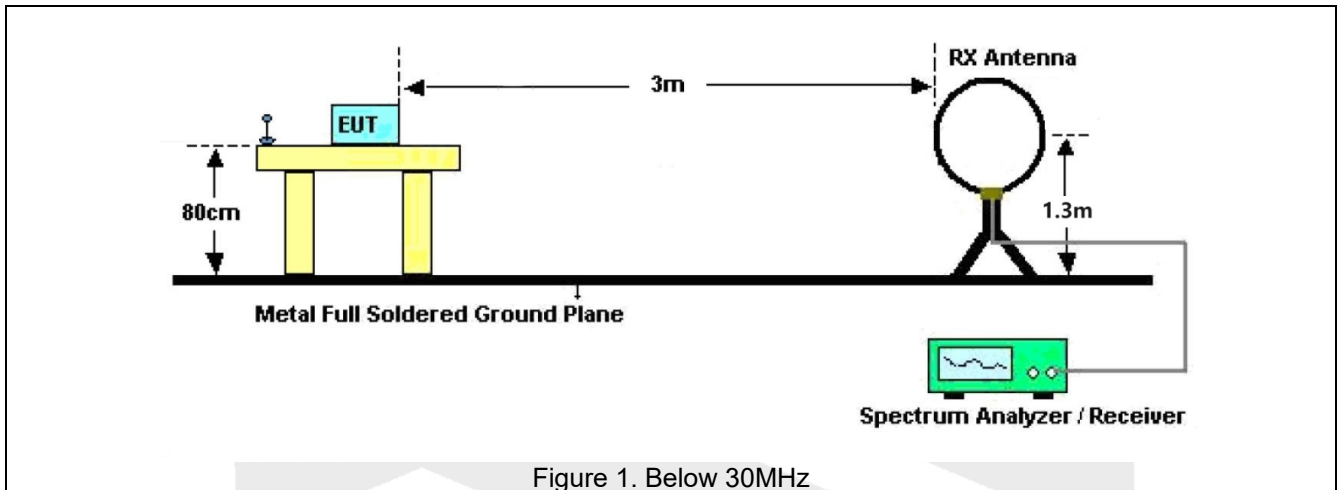

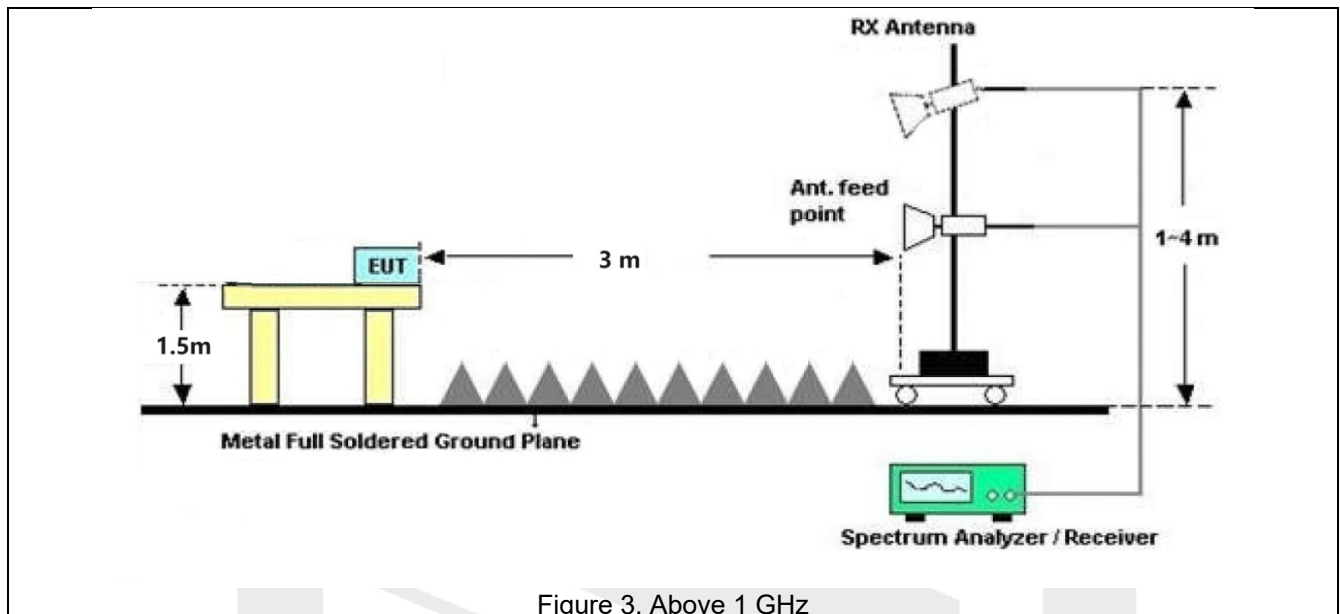

5.1.3 Test Procedure

The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter test site. The table was rotated 360 degrees to determine the position of the highest radiation.

The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.

The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak/Average detection at frequency above 1GHz.


5.1.4 Test Data

PASS.

Only the worst case data was showed in the report, please to see the following pages.

Radiated Emission Test Data (30-1000MHz)


Test item:	966 Chamber #1	Polarization:	Horizontal
Distance:	3m	Test Mode:	TM1

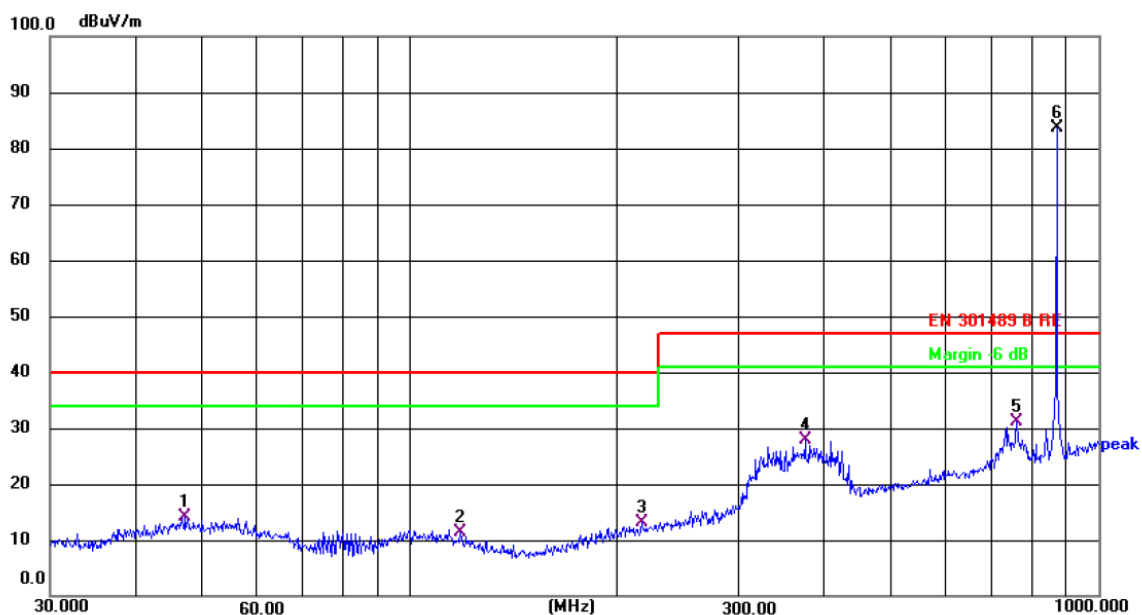

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	47.1599	28.24	-14.21	14.03	40.00	-25.97	QP	P	
2	118.1862	28.11	-16.81	11.30	40.00	-28.70	QP	P	
3	216.7828	27.61	-14.47	13.14	40.00	-26.86	QP	P	
4	374.6225	38.20	-10.42	27.78	47.00	-19.22	QP	P	
5	760.7036	35.65	-4.50	31.15	47.00	-15.85	QP	P	
6 *	869.1302	86.29	-2.66	83.63	47.00	36.63	peak	P	

Note: Level = Reading + Factor

Margin = Level - Limit

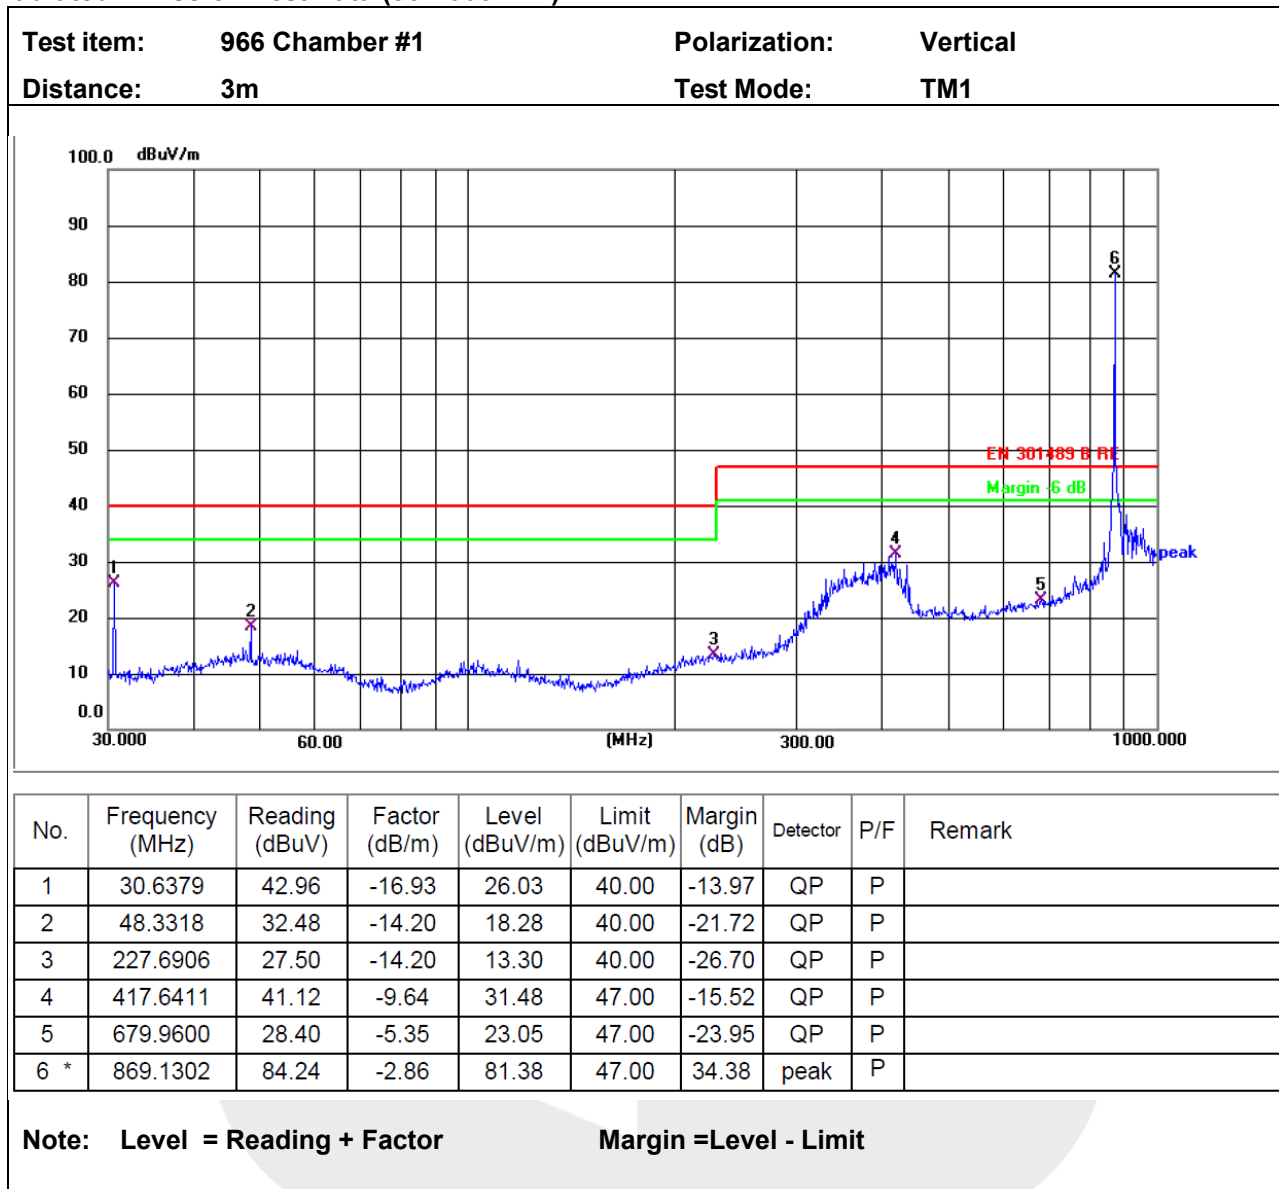Radiated Emission Test Data (30-1000MHz)


Note: The emission marked above the limit corresponds to the fundamental emission of the EUT and is therefore excluded from the spurious emission requirement.

Radiated Emission Test Data (1GHz-6GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Detector
1633.78	54.86	-2.98	51.88	70.00	-18.12	H	PEAK
1876.03	45.21	-2.44	42.77	70.00	-27.23	H	PEAK
2151.66	48.11	-3.81	44.30	70.00	-25.70	H	PEAK
4051.26	47.58	-5.16	42.42	74.00	-31.58	H	PEAK
4486.45	54.35	-4.77	49.58	74.00	-24.42	H	PEAK
5167.20	61.22	-5.46	55.76	74.00	-18.24	H	PEAK
1627.40	37.68	-2.98	34.70	50.00	-15.30	H	AVG
1867.88	39.30	-2.44	36.86	50.00	-13.14	H	AVG
2151.97	43.37	-3.81	39.56	50.00	-10.44	H	AVG
4057.80	39.74	-5.16	34.58	54.00	-19.42	H	AVG
4487.85	48.19	-4.77	43.42	54.00	-10.58	H	AVG
5161.80	37.92	-5.46	32.46	54.00	-21.54	H	AVG
1332.91	55.28	-2.80	52.48	70.00	-17.52	V	PEAK
2081.23	54.52	-2.96	51.56	70.00	-18.44	V	PEAK
2083.26	45.71	-4.40	41.31	70.00	-28.69	V	PEAK
3957.38	49.04	-5.26	43.78	74.00	-30.22	V	PEAK
4579.10	50.31	-5.36	44.95	74.00	-29.05	V	PEAK
4967.53	50.04	-5.34	44.70	74.00	-29.30	V	PEAK
1340.62	35.18	-2.80	32.38	50.00	-17.62	V	AVG
2074.32	43.34	-2.96	40.38	50.00	-9.62	V	AVG
2077.73	40.29	-4.40	35.89	50.00	-14.11	V	AVG
3948.15	46.90	-5.26	41.64	54.00	-12.36	V	AVG
4585.62	34.66	-5.36	29.30	54.00	-24.70	V	AVG
4965.79	43.67	-5.34	38.33	54.00	-15.67	V	AVG

Remark:

1. Level = Reading + Factor, Margin= Level – Limit.

6 Immunity Test

✧ Performance Criteria (ETSI EN 301489-1)

General Performance Criteria

Performance criteria for continuous phenomena

During the test, the equipment shall:

- continue to operate as intended;
- not unintentionally transmit;
- not unintentionally change its operating state;
- not unintentionally change critical stored data.

Performance criteria for transient phenomena

For all ports and transient phenomena with the exception described below, the following applies:

- The application of the transient phenomena shall not result in a change of the mode of operation (e.g. unintended transmission) or the loss of critical stored data.
- After application of the transient phenomena, the equipment shall operate as intended.

For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies:

- For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be otherwise restored. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.
- For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Note: For a 70 % residual voltage dip and voltage interruption tests in the case where the equipment is powered solely from the AC mains supply (without the use of a parallel battery back-up) , above Performance criteria for transient phenomena is not applicable. The following criteria are used to replace it:

- volatile user data may have been lost and if applicable the communication link need not to be maintained and lost functions should be recoverable by user or operator.
- no unintentional responses shall occur at the end of the test, when the voltage is restored to nominal.
- in the event of loss of function(s) or in the event of loss of user stored data, this fact shall be recorded.

✧ **Performance Criteria (ETSI EN 301489-3)**

General Performance Criteria

Type	During test	After test
Criterion A	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
Criterion B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
Criterion C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data

NOTE: For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

Performance criteria for Continuous phenomena

The performance criteria A shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur during the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur during the test.

Performance criteria for Transient phenomena

The performance criteria B shall apply, except for voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur as a result of the application of the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur as a result of the application of the test.

◇ **Performance Criteria (ETSI EN 301489-17)**

General Performance Criteria

Type	During test	After test
Criterion A	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
Criterion B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
Criterion C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data

NOTE: For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

Performance criteria for Continuous phenomena

The performance criteria A shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur during the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur during the test.

Performance criteria for Transient phenomena

The performance criteria B shall apply, except for voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur as a result of the application of the test.


Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur as a result of the application of the test.

6.1 Electrostatic Discharge Immunity Test

6.1.1 Test Requirement

Test Standard	ETSI EN 301 489-1 Clause 9.3
Basic Standard	EN 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Discharge Voltage	Air Discharge: 2kV/4kV/8kV Contact Discharge: 2kV/4kV/6kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode	Single Discharge
Discharge Period	1 second minimum

6.1.2 Test Setup Diagram

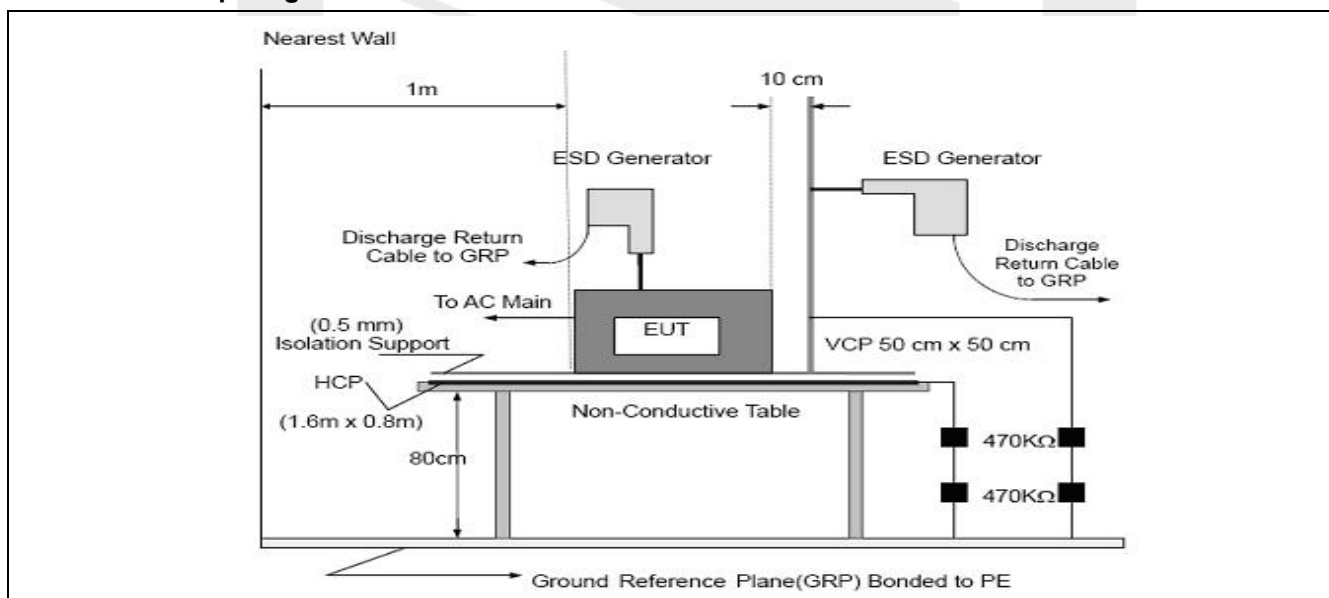

6.1.3 Test Procedure

TABLE-TOP EQUIPMENT:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940kohm total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT:

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

Contact discharge was applied to conductive surfaces and coupling planes of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

6.1.4 Test Data


Electrostatic Discharge Test Results		
Test Mode	All Modes	
Test Voltage	Coupling	Verdict
±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±4kV	Indirect Discharge HCP	Pass
±4kV	Indirect Discharge VCP	Pass
Remark: The performance complies with Performance criteria for Transient phenomena.		

6.2 RF Field Strength Susceptibility Test

6.2.1 Test Requirement

Test Standard	ETSI EN 301 489-1 Clause 9.3
Basic Standard	EN 61000-4-3
Frequency Range	80MHz to 6000MHz
Field Strength	3 V/m
Modulation	1kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of preceding frequency value
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.5 m
Dwell Time	at least 0.5s
Spot frequencies: 1800 MHz, 2600 MHz, 3500 MHz and 5000 MHz; Additional spot frequencies: 80 MHz, 120 MHz, 160 MHz, 230 MHz, 434 MHz, 460 MHz, 600 MHz, 863 MHz and 900 MHz.	

6.2.2 Test Setup Diagram

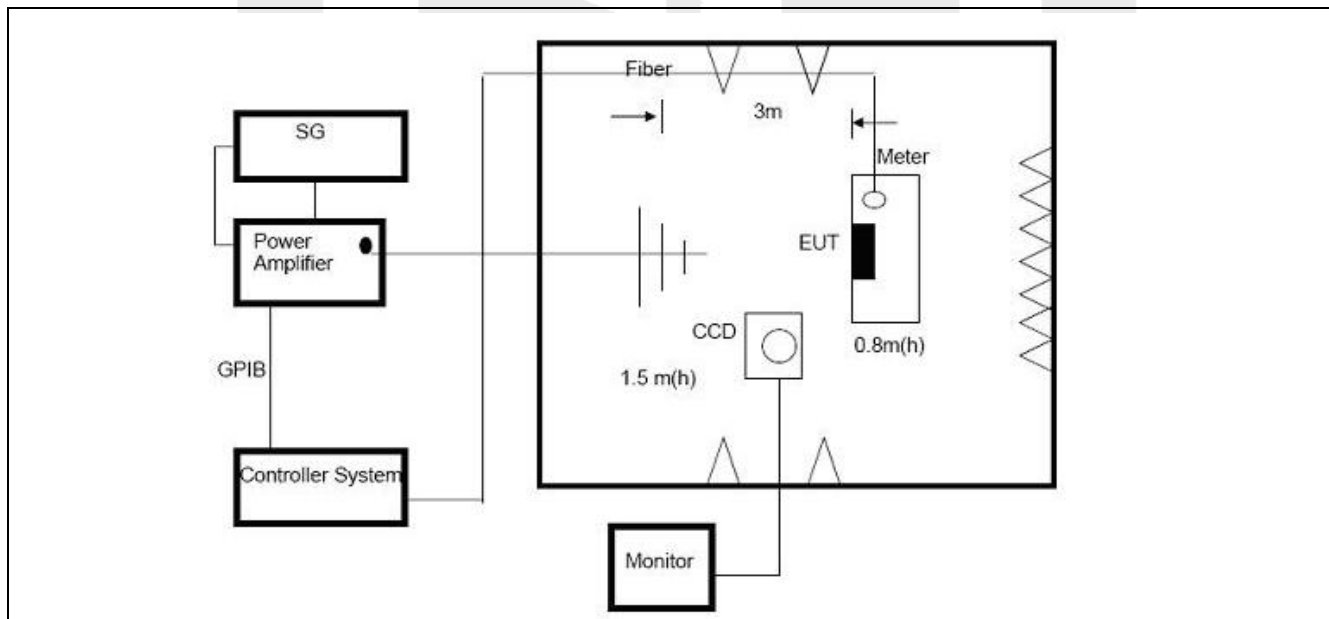

6.2.3 Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) The field strength level was 3V/m.
- 2) The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 3) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.
- 4) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

6.2.4 Test Data

Radiated, RF Electromagnetic Fields Test Results				
Test Mode	All Modes			
Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Verdict
80 ~ 6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	Pass
			Rear	Pass
			Left	Pass
			Right	Pass
Remark: 1) The performance complies with Performance criteria for Continuous phenomena. 2) This test item is subcontracted to Shenzhen PSI Testing Co., Ltd. 3) During the test, the PER of Bluetooth is less than 10%.				

ANNEX A TEST SETUP PHOTOS

PHOTO 1

Radiated Emission
Test


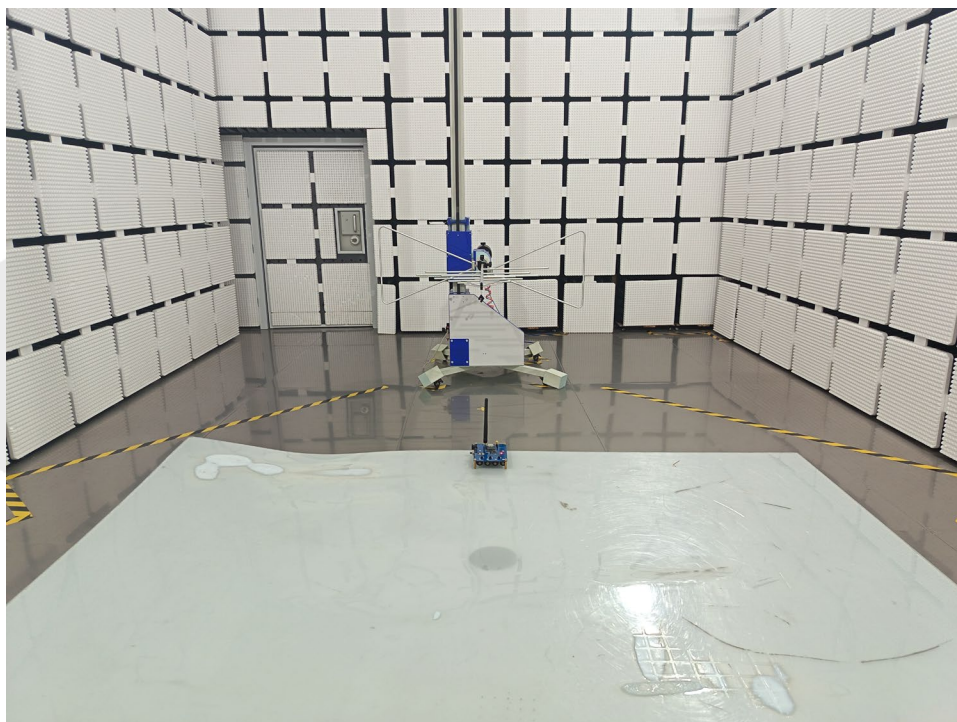


PHOTO 2

Electrostatic
Discharge Immunity
Test

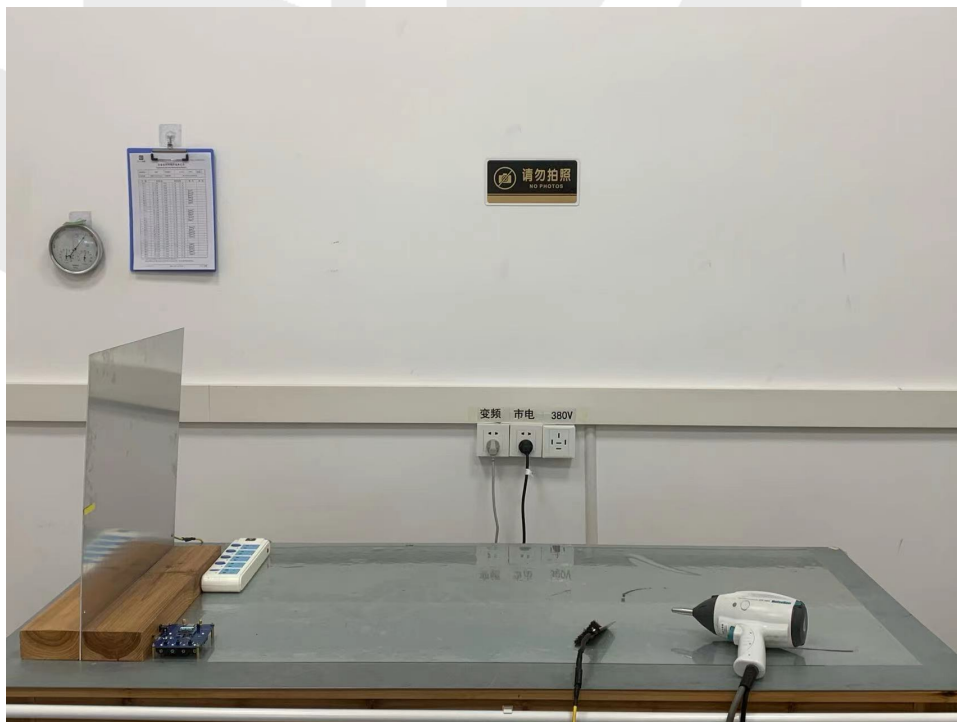

ANNEX B EXTERNAL PHOTOS

PHOTO 1

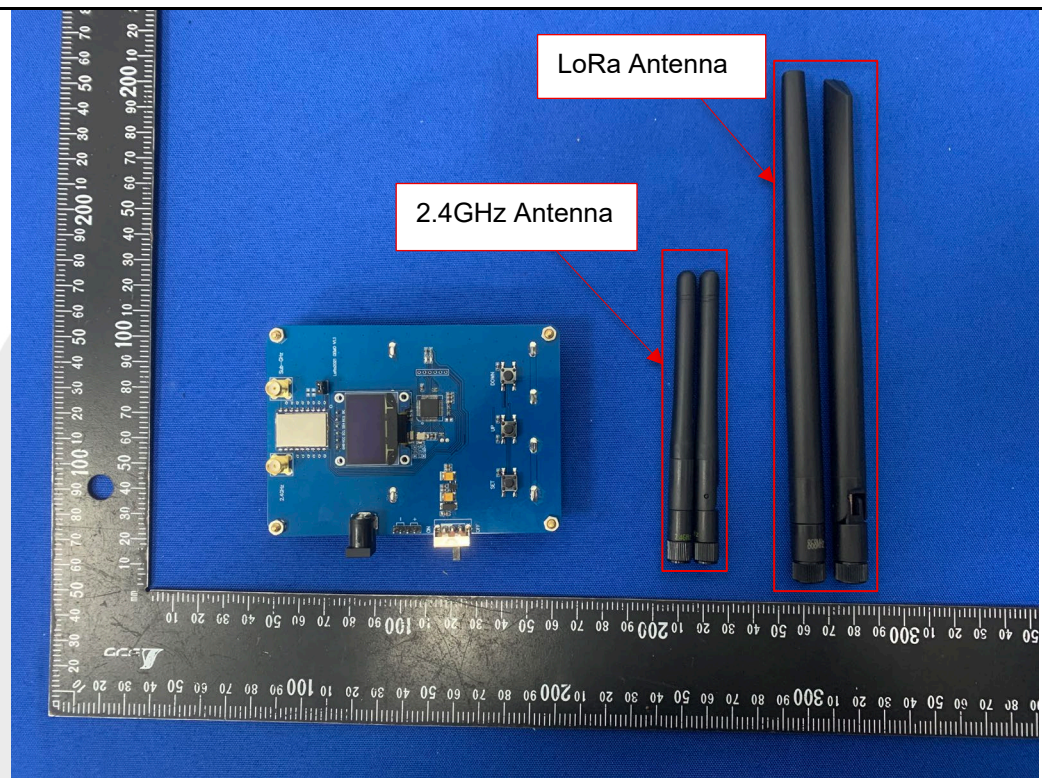


PHOTO 2


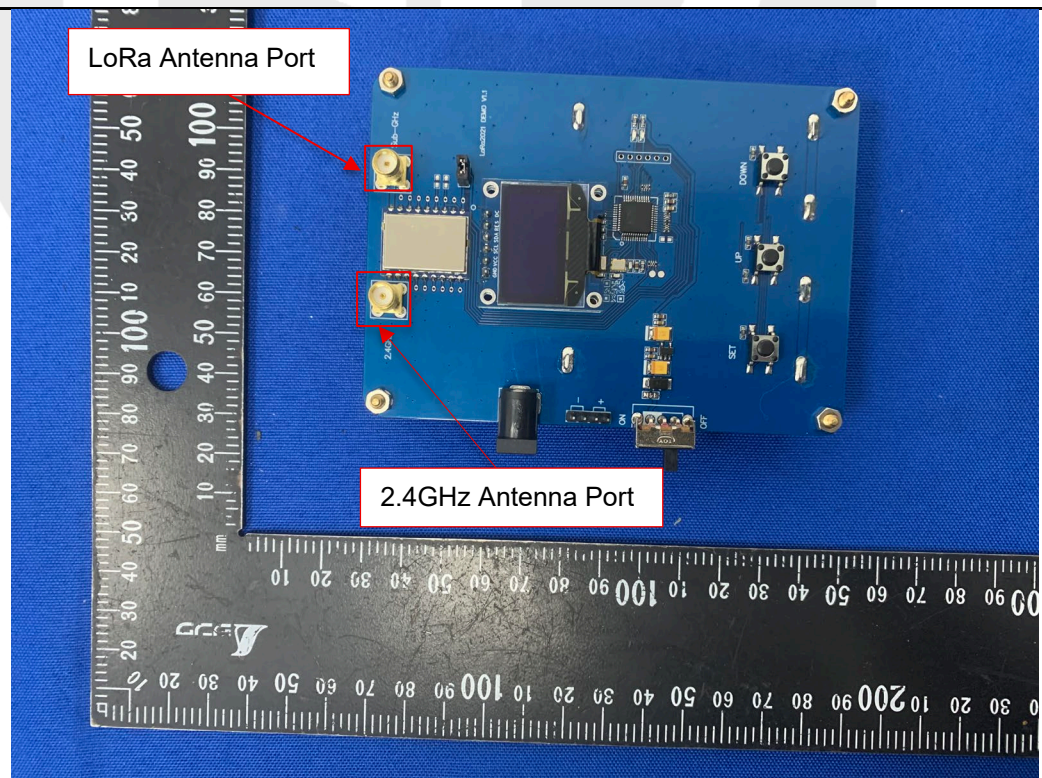


PHOTO 3

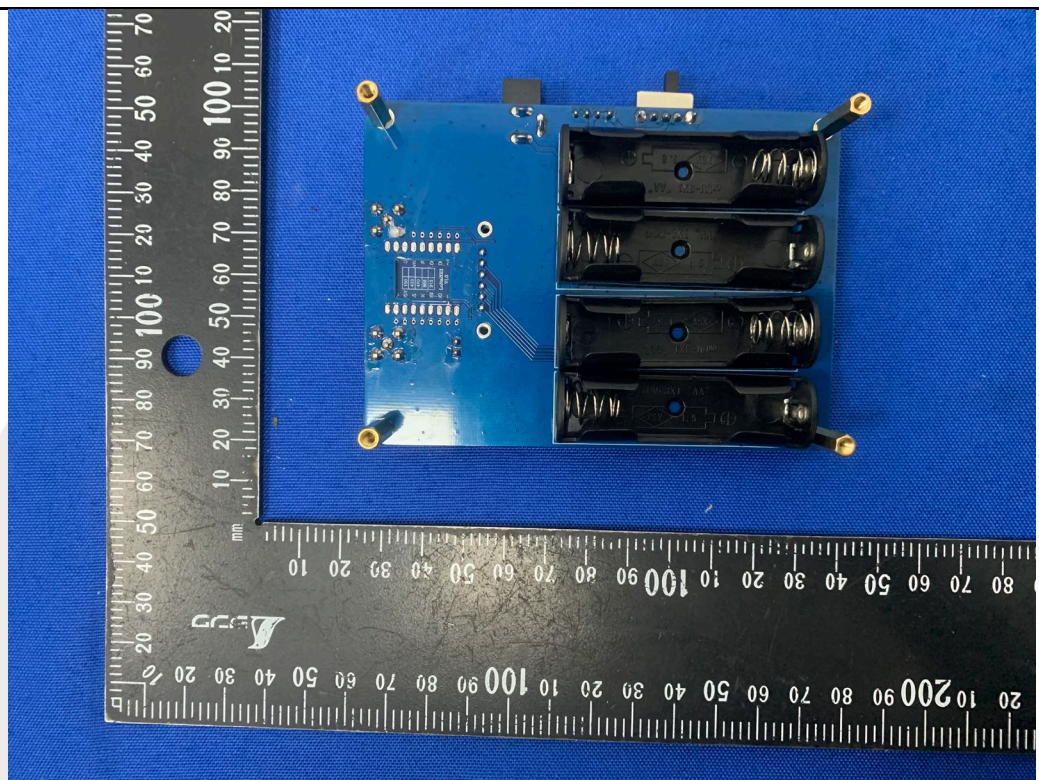

ANNEX C INTERNAL PHOTOS

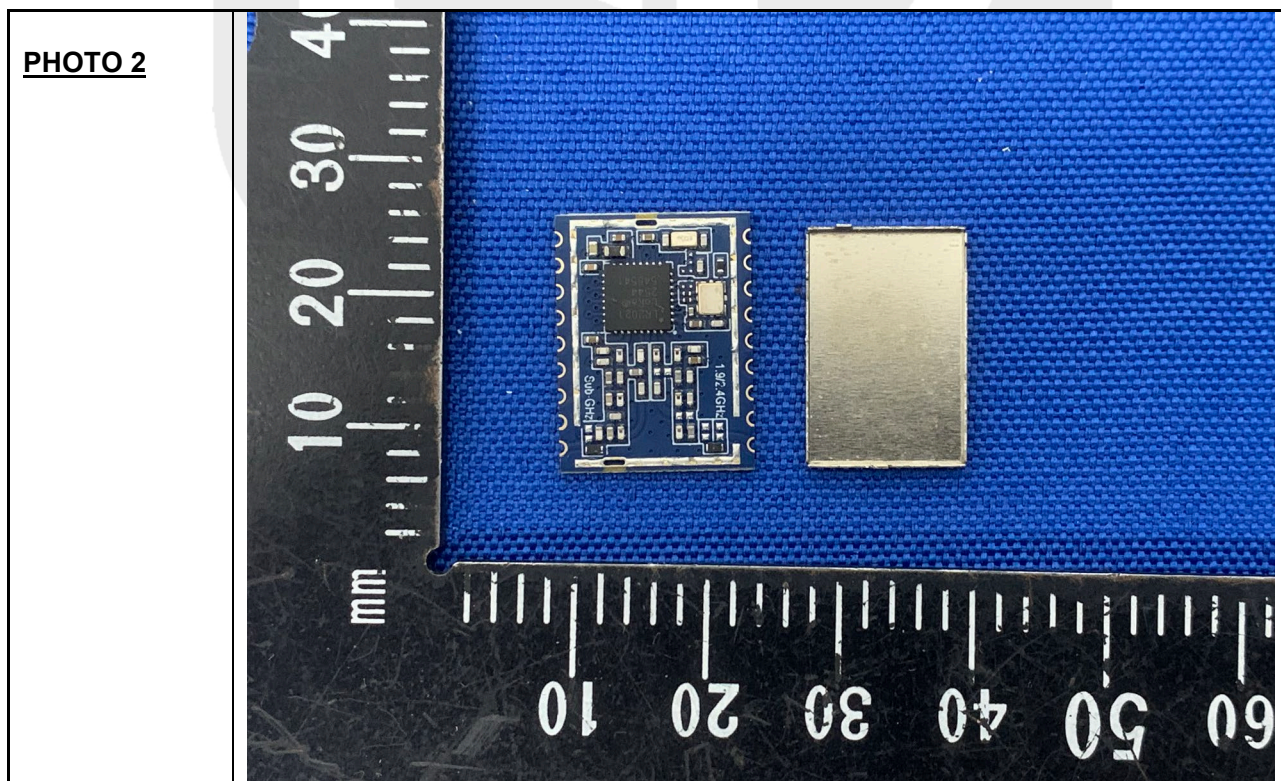
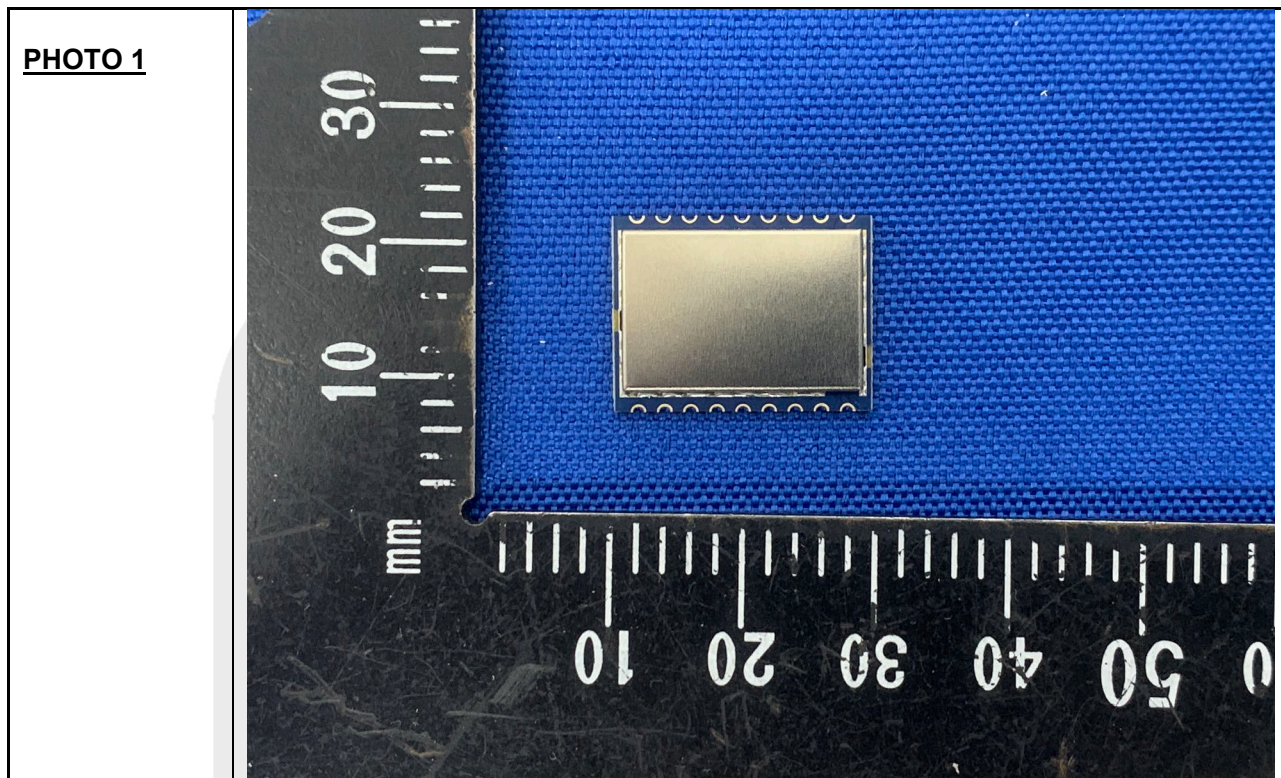


PHOTO 3


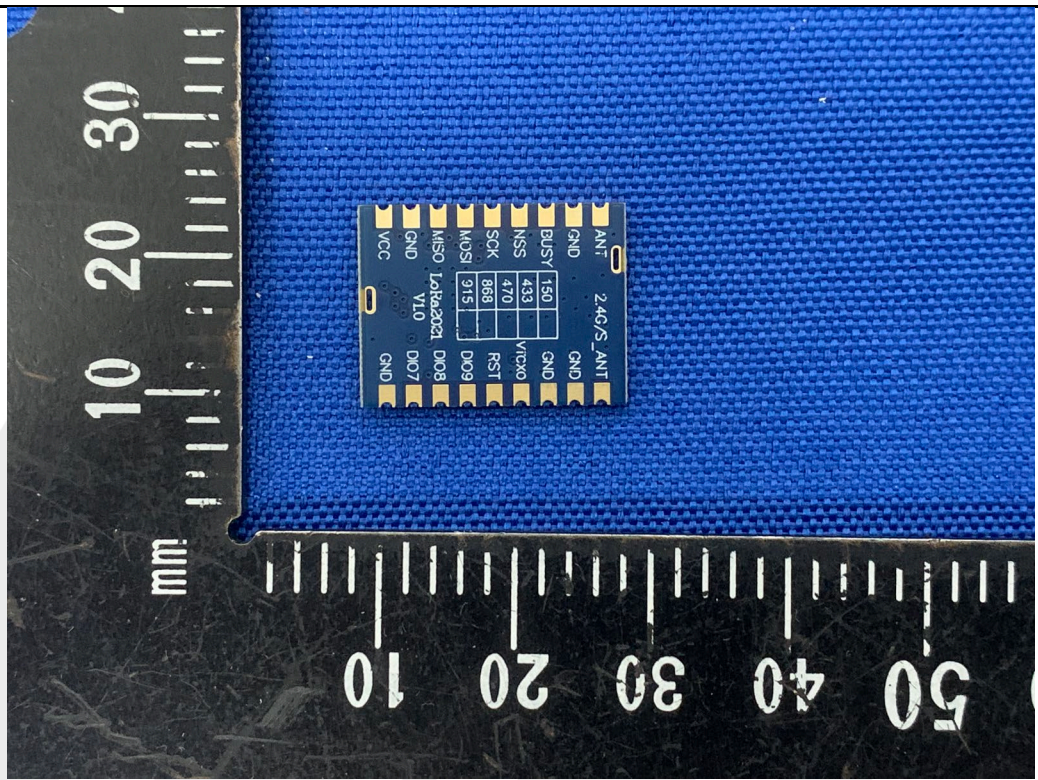


PHOTO 4

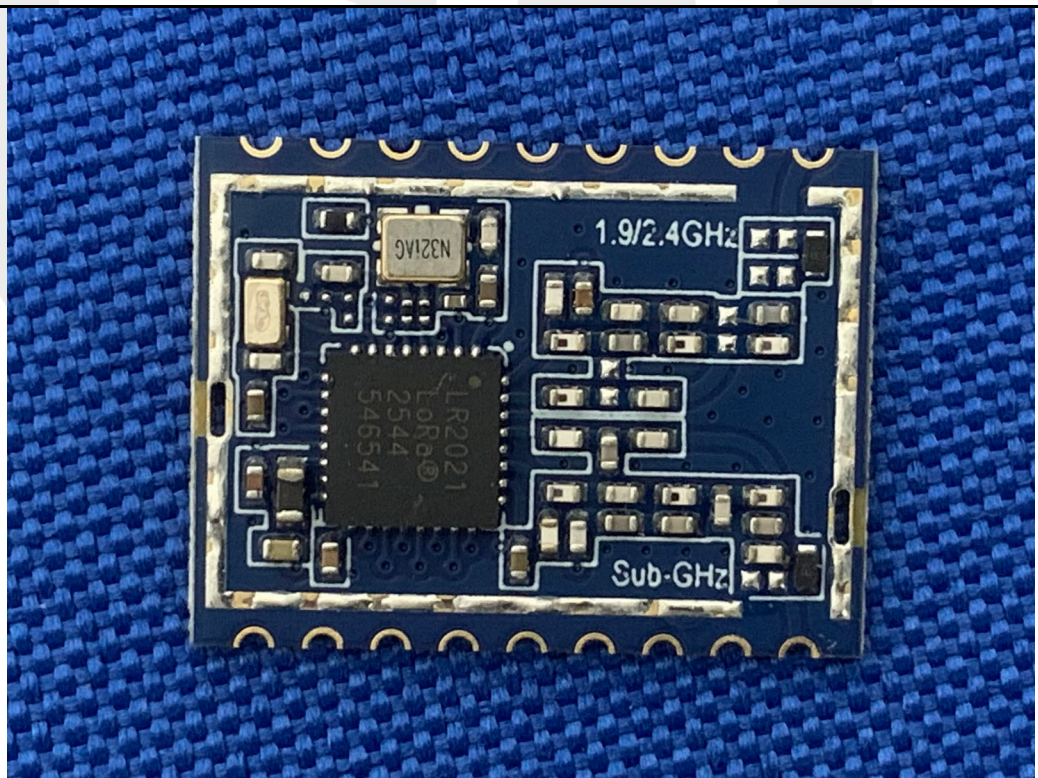

STATEMENT

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--- End of Report ---