

# Matrices de Confusión y otros

Dr. Félix Fernando González Navarro

April 15, 2024

## 1 Matriz de Confusión

		Predicted				
		1	2	3	4	5
Observed	1	349	6.3	0.1	0.5	0
	2	6	334	4.3	1	0.1
	3	1.7	7.1	315.4	2.4	0.3
	4	0.8	1.1	2.6	288.5	1.3
	5	0.6	0.7	0.8	1.9	315.1

Table 1: K-NN Metrics

## 2 Matriz de Confusión

		Predicted				
		1	2	3	4	5
Observed	1	349	6.3	0.1	0.5	0
	2	6	334	4.3	1	0.1
	3	1.7	7.1	315.4	2.4	0.3
	4	0.8	1.1	2.6	288.5	1.3
	5	0.6	0.7	0.8	1.9	315.1

Table 2: K-NN Metrics

### 3 Gráfica

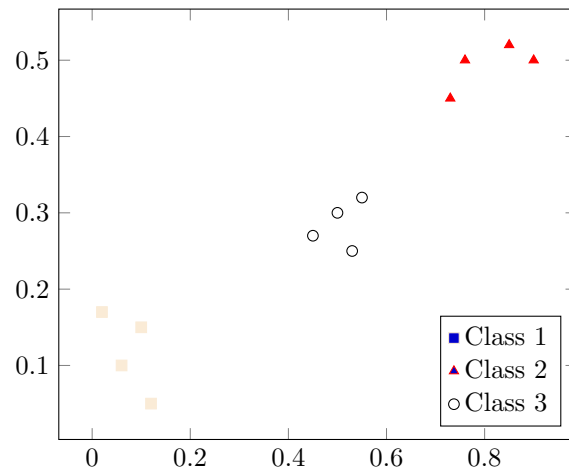


Figure 1: Scatter

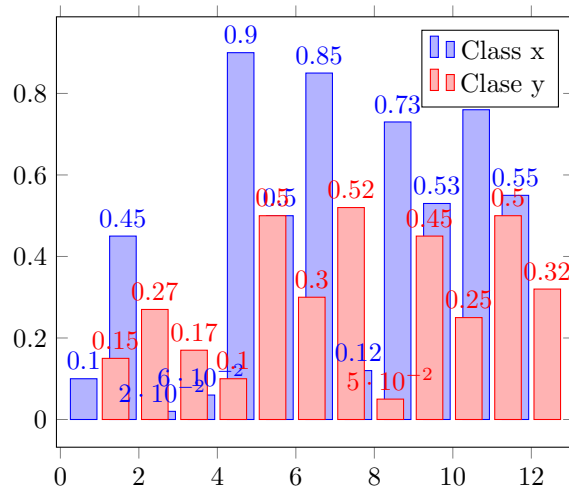


Figure 2: Barra

## 4 Diagrama





Figure 3: Diagrama

## 5 Tablas. Tabulary

<i>Name</i>	<i>Description</i>	<i>Unitary Price</i>	<i>Qty.</i>	<i>Total</i>
Cyclone V SoC 5CSXFC 6D6F31C6	Field-Programmable Gate Arrays-System On Chip (SoC) device. Designed specifically for Artificial Intelligence, Internet of Things apps and Medical equipment	240 USD	2	480 USD
ESP32-U4WDH	Single-core 32-bit LX6 microprocessor, compliant with Antique whitetooth v4.2 BR/EDR and BLE specifications. Incorporates the standard Wi-Fi: 802.11 b/g/n with 4 MB embedded flash (80 MHz)	2.63 USD	10	26.3 USD
RSA5065N Real-Time Spectrum Analyzer	Real time spectrum analyzer with vector network analysis @Frequency range: 9kHz to 6.5 GHz and VNA frequency range: 100kHz to 6.5 GHz	12,600 USD	1	12,600 USD

## 6 Diagrama de Actividades

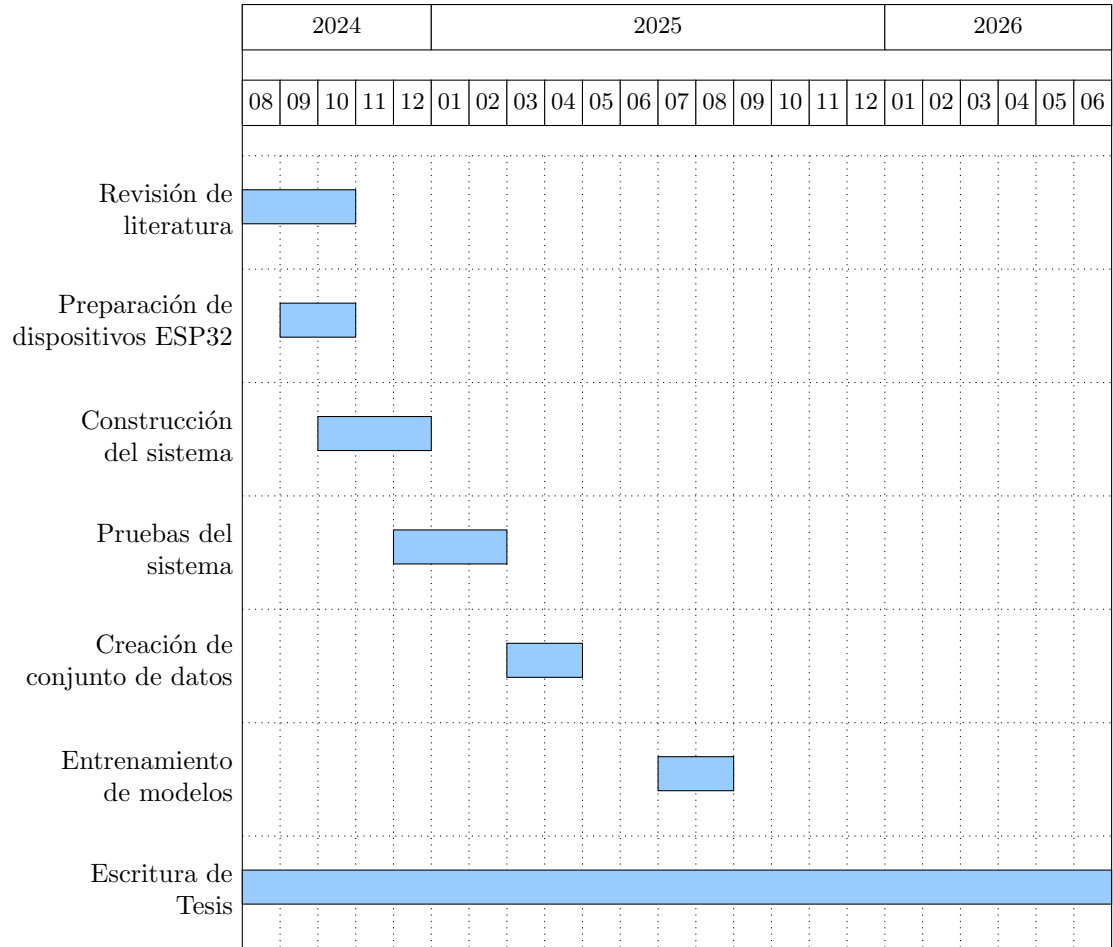

Gender	Weigth(lb)	Height	Age	Physical Disability
Female	154	5'28"	26	No
Female	121	5'49"	40	No
Male	198	5'60"	31	No
Male	165	5'80"	38	No

Table 3: Participants