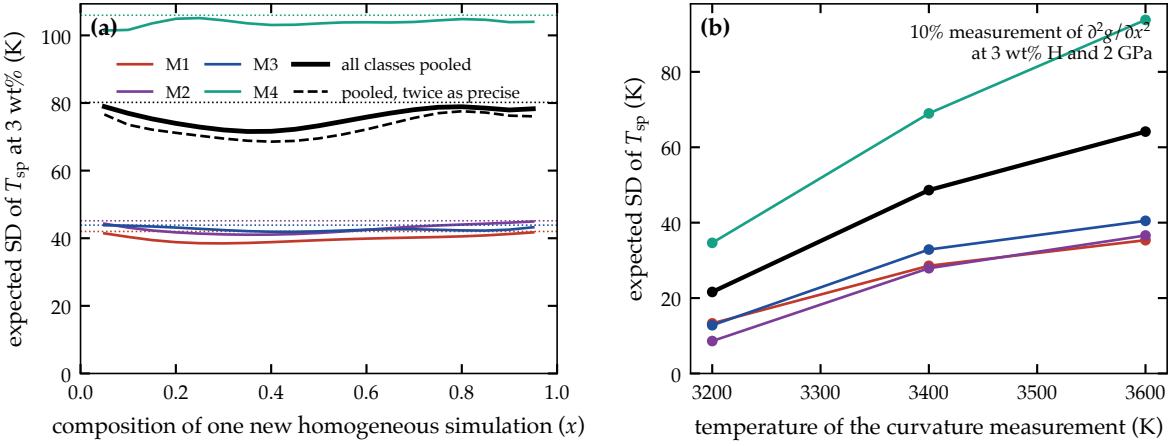
(a)
M1
M2
M3
M4
all classes pooled
pooled, twice as precise
expected SD of T_{sp} at 3 wt% (K)
composition of one new homogeneous simulation (x)
0
20
40
60
80
100
0.0
0.2
0.4
0.6
0.8
1.0
(b)
10% measurement of $\partial^2 g / \partial x^2$
at 3 wt% H and 2 GPa
expected SD of T_{sp} (K)
temperature of the curvature measurement (K)
0
20
40
60
80
3200
3300
3400
3500
3600