



Object-conditioned cross-channel reconfiguration architecture

Asynchronous perception thread (15 fps)

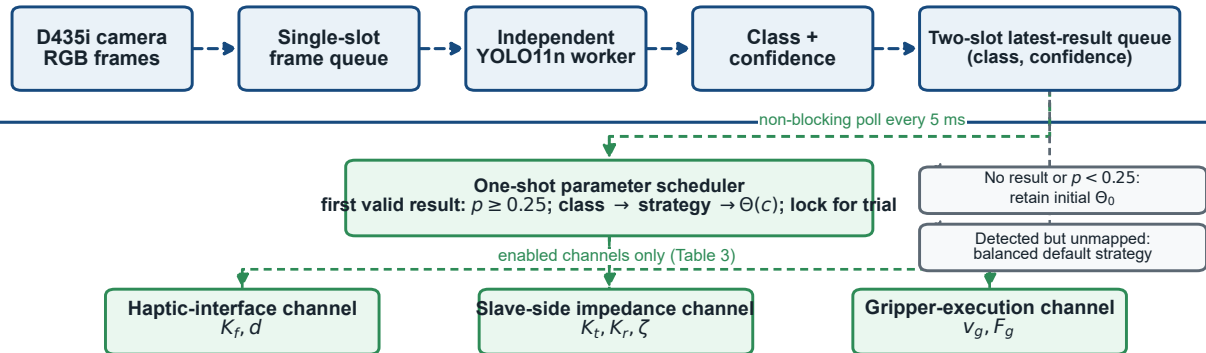

Human-in-the-loop teleoperation supervisor (nominal 200 Hz)

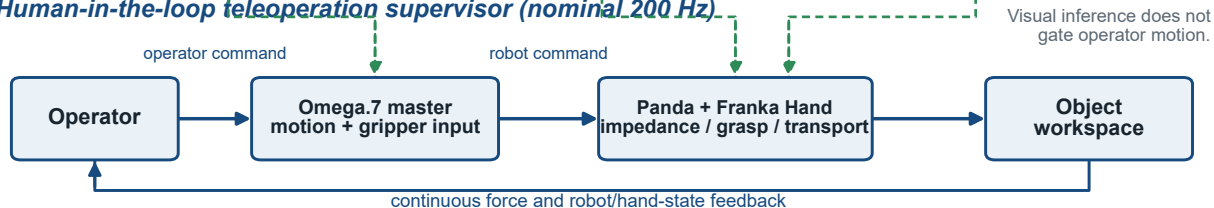

Dashed green: asynchronous perception and one-shot updates; solid blue: continuous teleoperation.